
# Service Manual

**Digital High Definition Plasma Television** 



TH-37PX50U TH-42PX50U TH-50PX50U

**GP8DU Chassis** 

### **Specifications**

Power Source AC 120 V, 50/60 Hz

**Power Consumption** 

Maximum 325 W (TX-37PX50U), 399 W (TH-42PX50U), 525 W (TH-50PX50U)

**Stand-by condition** 0.6 W (with CableCARD ™ : 18.0 W) (TX-37PX50U)

0.6 W (with CableCARD <sup>™</sup> : 22.0 W) (TH-42PX50U) 0.6 W (with CableCARD <sup>™</sup> : 22.0 W) (TH-50PX50U)

Plasma Display panel Drive method : AC type 37-inch , 16 : 9 aspect ratio (TX-37PX50U)

Drive method : AC type 42-inch , 16 : 9 aspect ratio (TH-42PX50U)

Drive method : AC type 50-inch , 16 : 9 aspect ratio (TH-50PX50U)

Screen Size  $32^{13}/_{64}$  " (818 mm) ×  $18^{5}/_{32}$  " (461 mm) ×  $36^{31}/_{32}$  " (939 mm) (TX-37PX50U) ( W × H × diagonal)  $36^{7}/_{32}$  " (920 mm) ×  $20^{25}/_{64}$  " (518 mm) ×  $41^{9}/_{16}$  " (1056 mm) (TX-42PX50U)

 $36^{7}/_{32}$  " (920 mm) × 20  $^{25}/_{64}$  " (518 mm) × 41  $^{9}/_{16}$  " (1056 mm) (TX-42PX50U) 43  $^{35}/_{64}$  " (1106 mm) × 24  $^{31}/_{64}$  " (622 mm) × 49  $^{61}/_{64}$  "(1269 mm) (TX-50PX50U)

**Dimensions**  $38^{7}/_{64}$  " (968 mm) ×  $25^{15}/_{64}$  " (641 mm) ×  $3^{51}/_{64}$  " (96.5 mm) (TX-37PX50U) ( **W** × **H** × **D** )  $42^{3}/_{64}$  " (1068 mm) ×  $27^{39}/_{64}$  " (701 mm) ×  $3^{51}/_{64}$  " (96.5 mm) (TX-42PX50U)

 $49^{31}/_{64}$  " (1257 mm) × 32  $^{3}/_{64}$  " (814 mm) × 3  $^{51}/_{64}$  " (96.5 mm) (TH-50PX50U)

Mass (Weight) 66.14lb. (30kg) (TX-37PX50U), 76.06lb. (34.5kg) (TX-42PX50U), 99.21lb. (45kg) (TX-50PX50U)

Channel Capability-ATSC/NTSC VHF/ UHF: 2-69, CATV:1-135

Sound

**Speaker**  $4^{23}/_{32}$  " (120 mm) ×  $2^{23}/_{64}$  " (60 mm) × 2 pcs,  $6\Omega$ 

FEATURES 3D Y/C FILTER HDMI Cable CARD TM Slot

CLOSED CAPTION V-Chip

Accessories Supplied Remote control: EUR7627Z60

F-type antenna adapter (5C-2V  $\times$  1)

AA Battery × 2
Pedestal
AC Cord

Cable clamper x 2

Operating Conditions Temperature : 32 °F - 104 °F (0 ° - 40 °C)



Humidity: 20 % - 80 % (non-condensing)

Connection Terminals AV INPUT 1- 2 VIDEO 1.0 Vp-p (75  $\Omega$ )

(Phono Jack Type)

S-VIDEO Y : 1.0 Vp-p (75  $\Omega$ ), C : 0.286 Vp-p (75  $\Omega$ )

(Mini DIN 4-pin)

AUDIO L-R 0.5 Vrms

(Phono Jack Type x 2)

AV PROG. OUT VIDEO 1.0 Vp-p (75  $\Omega$ )

(Phono Jack Type)

AUDIO L-R 0.5 Vrms

(Phono Jack Type × 2)

COMPONENT VIDEO Y 1.0 Vp-p (including synchronization)

INPUT1-2 PB / PR  $\pm$  0.35 Vp-p AUDIO L-R 0.5 Vrms

AUDIO L-R 0.5 (Phono Jack Type × 2)

HDMI HDMI type A Connector

AUDIO L-R 0.5 Vrms

(Phono Jack Type x 2)

DIGITAL AUDIO OUT PCM / Dolby Digital, Fiber Optic

#### Note:

Design and Specifications are subject change without notice.

Weight and Dimensions shown are approximate.

#### **⚠ WARNING**

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

### CONTENTS

Pag	Page
1 Applicable signals	6 6.14. Remove the SU-Board(50inch) 15
2 Safety Precautions	6.15. Remove the SD-Board(37inch) 15
2.1. General Guidelines	6 6.16. Remove the SD-Board(42inch) 16
3 Prevention of Electro Static Discharge (ESD) to	6.17. Remove the SD-Board(50inch) 16
Electrostatically Sensitive (ES) Devices	7 6.18. Remove the SC-Board(37, 42inch) 17
4 About lead free solder (PbF)	8 6.19. Remove the SC-Board(50inch) 17
5 Service Hint	9 6.20. Remove the SS2-Board(42, 50inch) 17
5.1. TH-37, 42PX50U	9 6.21. Remove the SS3-Board(42, 50inch) 17
5.2. TH-50PX50U1	6.22. Remove the SS-Board(37, 42inch) 18
6 Plasma panel replacement method1	1 6.23. Remove the SS-Board(50inch) 18
6.1. Remove the Back cover1	1 6.24. Remove the Fan 18
6.2. Remove the P-Board1	1 6.25. Remove the C1-Board(37, 42inch) 19
6.3. Remove the PB-Board ······1	1 6.26. Remove the C2-Board(37, 42inch) 19
6.4. Remove the D-Board1	1 6.27. Remove the C1-Board(50inch) 19
6.5. Remove the rear terminal cover1	2 6.28. Remove the C2-Board(50inch) 19
6.6. Remove the metal frame1	2 6.29. Remove the C3-Board(50inch) 20
6.7. Remove the DT-Board and DV-Board1	2 6.30. Remove the Speaker L, R20
6.8. Remove the DG-Board1	6.31. Remove the stand brackets 20
6.9. Remove the H-Board1	3 6.32. Remove the C3-Board(37, 42inch) 20
6.10. Remove the PA-Board1	3 6.33. Remove the C4-Board(37, 42inch)21
6.11. Remove the Z-Board1	3 6.34. Remove the C4-Board(50inch)21
6.12. Remove the SU-Board(37inch)1	4 6.35. Remove the C5-Board(50inch)21
6.13. Remove the SU-Board(42inch)1	4 6.36. Remove the C6-Board(50inch)21

	Remove the K-Board			C4-Board (42inch)	
6.38.	Remove the S-Board ·····	22		C1-Board (50inch)	
6.39.	Remove the Plasma panel section from the Front fram	ie		C2-Board (50inch)	
	(glass)	22		C3-Board (50inch)	
6.40.	Replace the plasma panel (finished)	23		C4-Board (50inch) ······	
7 Locati	ion of Lead Wiring·····	24	12.25.	C5-Board (50inch)	<del></del> 84
7.1.	Lead of Wiring (1)	<del></del> 24	12.26.	C6-Board (50inch)	<del></del> 85
7.2.	Lead of Wiring (2)	25	12.27.	SC-Board (37inch)	86
7.3.	Lead of Wiring (3)	26	12.28.	SC-Board (42inch)	89
7.4.	Lead of Wiring (4)	27	12.29.	SC-Board (50inch)	<del></del> 92
	Lead of Wiring (5)		12.30.	SU-Board (37inch)	95
7.6.	Lead of Wiring (6)	<del></del> 29		SU-Board (42inch)	
7.7.	Lead of Wiring (7)	30	12.32.	SU-Board (50inch)	<del></del> 97
	Lead of Wiring (8)			SD-Board (37inch)	
	Lead of Wiring (9)			SD-Board (42inch)	
	Lead of Wiring (10)			SD-Board (50inch)	
	heck Function			SS-Board (37inch)	
	How to access			SS, SS2 and SS3-Board (42inch) ······	
	Power LED Blinking timing chart			SS, SS2 and SS3-Board (50inch) ······	
	No Power			K and S-Board ·	
	No Picture			and Schematic Diagram	
	Local screen failure ······			Schematic Diagram Notes ·	
	ceman Mode ······			Main Block Diagram (37inch) ······	
	How to enter into Serviceman Mode			Main Block Diagram (42inch)	
	Cancellation ······			Main Block Diagram (50inch)	
	Contents of adjustment mode			P-Board Block Diagram (37inch)	
	Option			P-Board (1 of 6) Schematic Diagram (37inch)	
	tment Procedure ······				
	Driver Set-up			P-Board (2 of 6) Schematic Diagram (37inch)	
				P-Board (3 of 6) Schematic Diagram (37inch)	
	Initialization Pulse Adjust			P-Board (4 of 6) Schematic Diagram (37inch)	
	P.C.B. (Printed Circuit Board) exchange ·····			P-Board (5 of 6) Schematic Diagram (37inch)	
	Adjustment Volume Location			P-Board (6 of 6) Schematic Diagram (37inch)	
	Test Point Location ······			P-Board Block Diagram (42inch)	
	mode			P-Board (1 of 2) Schematic Diagram (42inch)	
	uctor View			P-Board (2 of 2) Schematic Diagram (42inch)	
	P-Board (37inch)			P-Board Block Diagram (50inch)	
	P-Board (42inch) ·····			P-Board (1 of 2) Schematic Diagram (50inch)	
	P-Board (50inch) ·····			P-Board (2 of 2) Schematic Diagram (50inch)	
	PA-Board ·····			PA and PB Board Block Diagram ·····	
	PB-Board ·····			PA-Board Schematic Diagram ·····	
	H-Board ·····			PB-Board Schematic Diagram	
	DT-Board ·····			H, K, S and Z-Board Block Diagram ·····	
	DV-Board ·····			H-Board (1 of 3) Schematic Diagram	
	DG-Board ·		13.23.	H-Board (2 of 3) Schematic Diagram	· 131
	Z-Board			H-Board (3 of 3) Schematic Diagram	
	D-Board (37, 42inch)			Z-Board Schematic Diagram	
	D-Board (50inch)			K and S-Board Schematic Diagram ·····	
	C1-Board (37inch)			DV-Board Block Diagram	
	C2-Board (37inch)			DV-Board Schematic Diagram	
	C3-Board (37inch)		13.29.	DT-Board Block Diagram	· 137
12.16.	C4-Board (37inch)	<del></del> 75	13.30.	DT-Board (1 of 5) Schematic Diagram	· 138
	C1-Board (42inch)		13.31.	DT-Board (2 of 5) Schematic Diagram	· 139
12.18.	C2-Board (42inch)	<del></del> 77	13.32.	DT-Board (3 of 5) Schematic Diagram	· 140
12.19.	C3-Board (42inch)	<del></del> 78	13.33.	DT-Board (4 of 5) Schematic Diagram	· 141

13.34. DT-Board (5 of 5) Schematic Diagram 142	13.88. SC-Board (1 of 2) Schematic Diagram (37inch) 196
13.35. DG-Board (1 of 2) Block Diagram143	13.89. SC-Board (2 of 2) Schematic Diagram (37inch) 197
13.36. DG-Board (2 of 2) Block Diagram 144	13.90. SC-Board Block Diagram (42inch)198
13.37. DG-Board (1 of 11) Schematic Diagram 145	13.91. SC-Board (1 of 2) Schematic Diagram (42inch)199
13.38. DG-Board (2 of 11) Schematic Diagram ······ 146	13.92. SC-Board (2 of 2) Schematic Diagram (42inch)200
13.39. DG-Board (3 of 11) Schematic Diagram 147	13.93. SC-Board Block Diagram (50inch)201
13.40. DG-Board (4 of 11) Schematic Diagram 148	13.94. SC-Board (1 of 2) Schematic Diagram (50inch) 202
13.41. DG-Board (5 of 11) Schematic Diagram149	13.95. SC-Board (2 of 2) Schematic Diagram (50inch) 203
13.42. DG-Board (6 of 11) Schematic Diagram150	13.96. SU-Board Block Diagram (37inch)204
13.43. DG-Board (7 of 11) Schematic Diagram151	13.97. SU-Board (1 of 2) Schematic Diagram (37inch) 205
13.44. DG-Board (8 of 11) Schematic Diagram152	13.98. SU-Board (2 of 2) Schematic Diagram (37inch)206
13.45. DG-Board (9 of 11) Schematic Diagram 153	13.99. SU-Board Block Diagram (42, 50inch)207
13.46. DG-Board (10 of 11) Schematic Diagram154	13.100SU-Board (1 of 2) Schematic Diagram (42inch)
13.47. DG-Board (11 of 11) Schematic Diagram 155	208
13.48. D-Board Block Diagram (37, 42inch) 156	13.101 SU-Board (2 of 2) Schematic Diagram (42inch)
13.49. D-Board Block Diagram (50inch) 157	209
13.50. D-Board (1 of 6) Schematic Diagram 158	13.102 SU-Board (1 of 2) Schematic Diagram (50inch)
13.51. D-Board (2 of 6) Schematic Diagram 159	210
13.52. D-Board (3 of 6) Schematic Diagram160	13.103. ······SU-Board (2 of 2) Schematic Diagram (50inch)
13.53. D-Board (4 of 6) Schematic Diagram 161	
13.54. D-Board (5 of 6) Schematic Diagram162	13.104. ····· SD-Board Block Diagram (37inch)
13.55. D-Board (6 of 6) Schematic Diagram163	
13.56. C1, C2, C3 and C4-Board Block Diagram (37, 42inch) · 164	13.105. ·····SD-Board (1 of 2) Schematic Diagram (37inch)
13.57. C1-Board (1 of 2) Schematic Diagram (37inch) 165	
13.58. C1-Board (2 of 2) Schematic Diagram (37inch) 166	13.106. ······SD-Board (2 of 2) Schematic Diagram (37inch)
13.59. C2-Board (1 of 2) Schematic Diagram (37inch) ······· 167	
13.60. C2-Board (2 of 2) Schematic Diagram (37inch) ············ 168	13.107. ······ SD-Board Block Diagram (42, 50inch)
13.61. C3-Board (1 of 2) Schematic Diagram (37inch) 169	
	13.108. ·····SD-Board (1 of 2) Schematic Diagram (42inch)
13.62. C3-Board (2 of 2) Schematic Diagram (37inch)	13.106
13.63. C4-Board (1 of 2) Schematic Diagram (37inch) 171 13.64. C4-Board (2 of 2) Schematic Diagram (37inch) 172	13.109SD-Board (2 of 2) Schematic Diagram (42inch)
13.65. C1-Board (1 of 2) Schematic Dlagram (42inch) 173	13.109
13.66. C1-Board (2 of 2) Schematic Diagram (42inch) 174	13.110 SD-Board (1 of 2) Schematic Diagram (50inch)
	13.110 3D-Board (1 or 2) Schematic Diagram (solitor)
13.67. C2-Board (1 of 2) Schematic Diagram (42inch) 175	
13.68. C2-Board (2 of 2) Schematic Diagram (42inch) 176	13.111. ······SD-Board (2 of 2) Schematic Diagram (50inch)
13.69. C3-Board (1 of 2) Schematic Diagram (42inch) 177	219
13.70. C3-Board (2 of 2) Schematic Diagram (42inch) 178	13.112SS-Board Block Diagram (37inch)
13.71. C4-Board (1 of 2) Schematic Diagram (42inch) 179	220
13.72. C4-Board (2 of 2) Schematic Diagram (42inch) 180	13.113. ······SS-Board Schematic Diagram (37inch)
13.73. C1, C2,C5 and C6-Board Block Diagram (50inch) 181	221
13.74. C3 and C4-Board Block Diagram (50inch) 182	13.114SS, SS2 and SS3-Board Block Diagram (42inch)
13.75. C1-Board (1 of 2) Schematic Diagram (50inch) 183	
13.76. C1-Board (2 of 2) Schematic Diagram (50inch) 184	13.115. ······ SS, SS2 and SS3-Board Schematic Diagram (42inch)
13.77. C2-Board (1 of 2) Schematic Diagram (50inch) 185	223
13.78. C2-Board (2 of 2) Schematic Diagram (50inch) 186	13.116. ·····SS, SS2 and SS3-Board Block Diagram (50inch)
13.79. C3-Board (1 of 2) Schematic Diagram (50inch) 187	
13.80. C3-Board (2 of 2) Schematic Diagram (50inch) 188	13.117:SS-Board (1 of 2), SS2 and SS3 Schematic Diagram
13.81. C4-Board (1 of 2) Schematic Diagram (50inch) 189	(50inch) 225
13.82. C4-Board (2 of 2) Schematic Diagram (50inch) 190	13.118. ····· SS-Board (2 of 2) Schematic Diagram (50inch)
13.83. C5-Board (1 of 2) Schematic Diagram (50inch) 191	226
13.84. C5-Board (2 of 2) Schematic Diagram (50inch) 192	14 Parts Location & Mechanical Replacement Parts List 227
13.85. C6-Board (1 of 2) Schematic Diagram (50inch) 193	14.1. Parts Location 227
13.86. C6-Board (2 of 2) Schematic Diagram (50inch) 194	14.2. Pcaking Exploded Views (1)228
13.87. SC-Board Block Diagram (37inch) 195	14.3. Pcaking Exploded Views (2)229

	TH-37PX50U / TH-42PX50U / TH-50PX50U
14.4. Pcaking Exploded Views (3)230	15.2. Electrical Replacement Parts List (TH-37PX50U) 234
14.5. Mechanical Replacement Parts List231	15.3. Electrical Replacement Parts List (TH-42PX50U) 262
15 Electrical Replacement Parts List233	15.4. Electrical Replacement Parts List (TH-50PX50U) 289

15.1. Replacement Parts List Notes ------233

### 1 Applicable signals

#### **VIDEO** input

	signal name	horizontal frequency(kHz)	vertical frequency(Hz)
1	NTSC	15.73	59.94

#### Applicable input signals (\* mark)

	signal name	horizontal frequency(kHz)	vertical frequency(Hz)	COMPONENT	HDMI
1	525 (480) /60i	15.73	59.94	*	*
2	525 (480) /60p	31.47	59.94	*	*
3	750 (720) /60p	45.00	59.94	*	*
4	1,125 (1,080) /60i	33.75	59.94	*	*

**Note:** Signals without above specification may not be displayed properly.

### 2 Safety Precautions

### 2.1. General Guidelines

- 1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
- 2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
- 3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

### 2.1.1. Leakage Current Cold Check

- Unplug the AC cord and connect a jumper between the two prongs on the plug.
- 2. Measure the resistance value, with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between  $1M\Omega$  and  $5.2M\Omega$ .

When the exposed metal does not have a return path to the chassis, the reading must be  $\infty$ .




Figure 1

### 2.1.2. Leakage Current Hot Check (See Figure 1.)

- Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
- 2. Connect a  $1.5k\Omega$ , 10 watts resistor, in parallel with a  $0.15\mu F$  capacitors, between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
- Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
- 4. Check each exposed metallic part, and measure the voltage at each point.
- Reverse the AC plug in the AC outlet and repeat each of the above measurements.
- 6. The potential at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 or equivalent) may be used to make the hot checks, leakage current must not exceed 1/2 milliamp. In case a measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

### 3 Prevention of Electro Static Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electro static discharge (ESD).

- 1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
- 2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as alminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
- 3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
- 4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
- 5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
- 6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, alminum foil or comparable conductive material).
- 7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

#### Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise hamless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

#### IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are imporant for safety.

These parts are marked by ⚠ in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

### 4 About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).

That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.


This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.

PCBs manufactured using lead free solder will have the PbF within a leaf Symbol 😥 stamped on the back of PCB.

#### Caution


- Pb free solder has a higher melting point than standard solder. Typically the melting point is  $50 \sim 70$  °F ( $30\sim40$  °C) higher. Please use a high temperature soldering iron and set it to  $700 \pm 20$  °F ( $370 \pm 10$  °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).

  If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

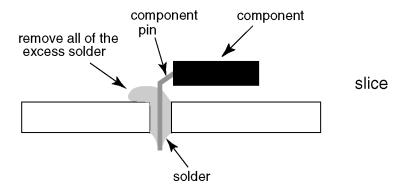


#### Suggested Pb free solder


There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

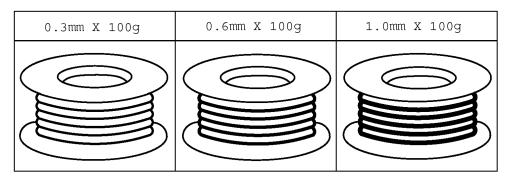


### 5 Service Hint

### 5.1. TH-37, 42PX50U

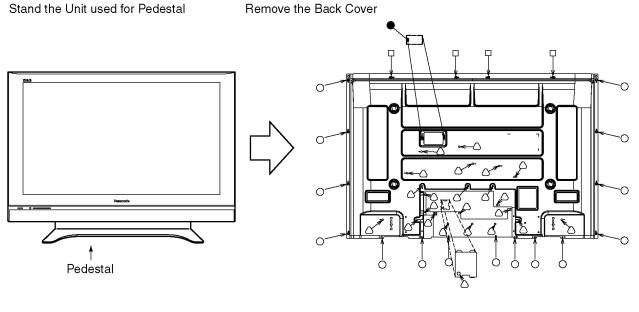


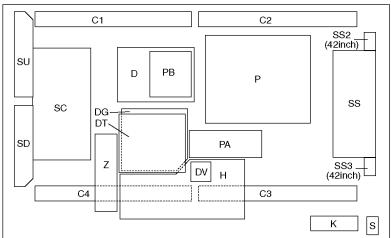



Board Name	Function	Board Name	Function
Р	Power Supply	C1	Data Driver (Up Left)
PA	DC-DC Converter, Power SOS	C2	Data Driver (Up Right)
PB	Audio Power, Fan Control	C3	Data Driver (Down Right)
Н	AV Terminal, AV Switch	C4	Data Driver (Down Left)
DT	ATSC Interface	SC	Scan Drive
DV	HDMI Interface	SU	Scan out (Up)
	None serviceable.	SD	Scan out (Down)
	DV-Board should be exchanged for service.	SS	Sustain Drive
DG	Digital Signal Processor	SS2	Sustain Connector (Up) (42inch only)
Z	Speaker out, Audio AMP	SS3	Sustain Connector (Down) (42inch only)
D	Format Converter, Plasma Al Processor	K	Remote receiver, Keyscan
		S	Power Switch

### 5.2. TH-50PX50U

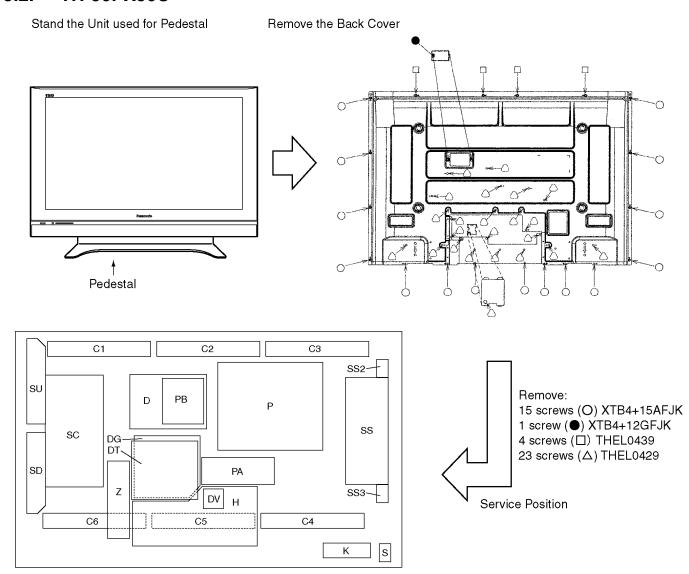

Board Name	Function	Board Name	Function
Р	Power Supply	C1	Data Driver (Up Left)
PA	DC-DC Converter, Power SOS	C2	Data Driver (Up Center)
PB	Audio Power, Fan Control	C3	Data Driver (Up Right)
Н	AV Terminal, AV Switch	C4	Data Driver (Down Right)
DT	ATSC Interface	C5	Data Driver (Down Center)
DV	HDMI Interface	C6	Data Driver (Down Left)
	None serviceable.	SC	Scan Drive
	DV-Board should be exchanged for service.	SU	Scan out (Up)
DG	Digital Signal Processor	SD	Scan out (Down)
Z	Speaker out, Audio AMP	SS	Sustain Drive
D	Format Converter, Plasma Al Processor	SS2	Sustain Connector (Up)
		SS3	Sustain Connector (Down)
		K	Remote receiver, Keyscan
<u> </u>		S	Power Switch

### 6 Plasma panel replacement method

#### 6.1. Remove the Back cover.


1. See Service hint (Section 5).

#### 6.2. Remove the P-Board.

#### Caution:


To remove P.C.B., wait 1 minute after power was off for discharge from electrolisis capacitors.

- 1. Disconnect the couplers (P2, P5, P9, P10, P11, P12, P23, P25 and P30).
- 2. Remove the screws (x5 -> ) and remove the P-Board.




### 6.3. Remove the PB-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (PB5, PB7, PB30, PB33 and PB34).
- 3. Remove the screws (x3 ⇒) and remove the PB-Board metal frame.
- 4. Remove the screws (x 4 → ) and remove the PB-Board.




### 6.4. Remove the D-Board

- 1. Remove the PB-Board.
- 2. Disconnect the couplers (D3, D5, D20 and D25) and
- 3. Disconnect the flexible cables (D33 and D34).
- 4. Remove the screws (x4 →) and remove the D-Board.




### 6.5. Remove the rear terminal cover

- 1. Remove the screws (x4 →).
- 2. Remove the rear terminal cover.




#### 6.6. Remove the metal frame

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (D3, D5, H7, P10 and PB7) and relay connector (SP-L and SP-R).
- 3. Remove the screws (x4 -> ) remove the metal frame.

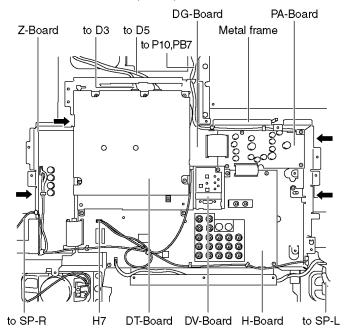


### 6.7. Remove the DT-Board and DV-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Remove the screws (x5 →).
- Remove the DT-Board and DV-Board unit.
   (Be careful the couplers (DV15 and DT22) when remove the DT-Board and DV-Board unit.)




- 4. Remove the screws (x1 ♣) and remove the DV-Board.
- 5. Remove the screws (x2 □ ) and Remove the screws (x5 □ ).
- 6. Remove the DT-Board metal cover and remove the DT-Board.




#### 6.8. Remove the DG-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (DG3 and DG5).
- 3. Disconnect the flexible cables (DG1, DG2 and DG20).
- 4. Remove the screws (x2 → ) and remove the DG-Board.




### 6.9. Remove the H-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the coupler (H7).
- 3. Disconnect the flexible cables (H1, H2, H30 and H50).
- 4. Remove the screws (x4 → ) and remove the H-Board.




#### 6.10. Remove the PA-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (PA7 and PA10).
- 3. Disconnect the flexible cables (PA20 and PA30).
- 4. Remove the screws (x4 → ) and remove the PA-Board.

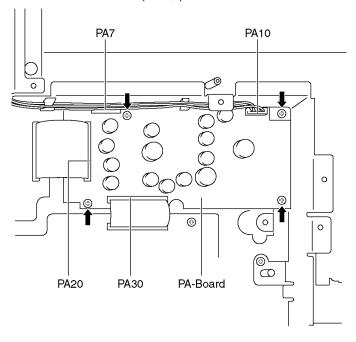


### 6.11. Remove the Z-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the coupler (Z2).
- 3. Disconnect the flexible cable (Z50).
- 4. Remove the screws (x2 →) and remove the Z-Board.




# 6.12. Remove the SU-Board (37inch)

- 1. Remove the screws (x2 →)
- Slide the SU-Board to the left to disconnect from a coupler (SC41 - SU41) on the SC-Board and disconnect a bridge connector (SU45 or SC45).




3. Disconnect the flexible cables (SU1, SU2, SU3) connected to the SU-Board, and remove the SU-Board.




# 6.13. Remove the SU-Board (42inch)

- 1. Remove the screws (x2 →).
- 2. Slide the SU-Board to the left to disconnect from a coupler (SC41 SU41) on the SC-Board and remove a coupler (SU45 or SC45).

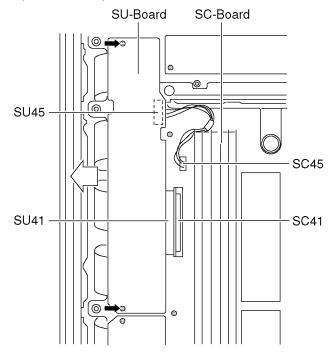


3. Remove the flexible cables (SU1, SU2, SU3, SU4) connected to the SU-Board, and remove the SU-Board.




# 6.14. Remove the SU-Board (50inch)

- 1. Remove the screws (x3 → ).
- Slide the SU-Board to the left to disconnect from a coupler (SC41 - SU41) on the SC-Board and remove a coupler (SU45 or SC45).

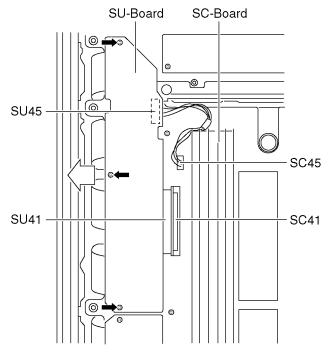


3. Remove the flexible cables (SU1, SU2, SU3, SU4) connected to the SU-Board, and remove the SU-Board.




# 6.15. Remove the SD-Board (37inch)

- 1. Remove the screws (x2 →)
- 2. Slide the SD-Board to the left to disconnect from a coupler (SC42 SD42) on the SC-Board and disconnect a bridge connector (SD46 or SC46).




3. Disconnect the flexible cables (SD1, SD2, SD3) connected to the SU-Board, and remove the SD-Board.




# 6.16. Remove the SD-Board (42inch)

- 1. Remove the screws (x2 →).
- 2. Slide the SD-Board to the left to disconnect from a coupler (SC42 SD42) on the SC-Board and remove a coupler (SD46 or SC46).




3. Remove the flexible cables (SD1, SD2, SD3, SD4) connected to the SD-Board, and remove the SD-Board.




# 6.17. Remove the SD-Board (50inch)

- 1. Remove the screws (x3 →).
- 2. Slide the SD-Board to the left to disconnect from a coupler (SC42 SD42) on the SC-Board and remove a coupler (SD46 or SC46).




3. Remove the flexible cables (SD1, SD2, SD3, SD4) connected to the SD-Board, and remove the SD-Board.




# 6.18. Remove the SC-Board (37, 42inch)

- 1. Disconnect the couplers (SC2, SC20, SC23).
- 2. Remove the screws (x6 →) and remove the SC-Board.




# 6.19. Remove the SC-Board (50inch)

- 1. Disconnect the couplers (SC2, SC20, SC23)
- 2. Remove the screws (x9 ) and remove the SC-Board.




# 6.20. Remove the SS2-Board (42, 50inch)

- 1. Disconnect the coupler (SS23) and disconnect the flexible cable (SS55).
- 2. Remove the screws (x2 ) and remove the SS2-Board.




# 6.21. Remove the SS3-Board (42, 50inch)

- 1. Disconnect the coupler (SS22) and disconnect the flexible cable (SS56).
- 2. Remove the screws ( $\times 2$   $\Longrightarrow$ ) and remove the SS3-Board.




# 6.22. Remove the SS-Board (37, 42inch)

- 1. Remove the SS2-Board and SS3-Board (42inch).
- 2. Disconnect the couplers (SS11, SS12, SS24, SS32 and SS34).
- 3. Disconnect the flexible cables (SS51, SS52, SS53 and SS54).
- 4. Remove the screws (x6 →), and remove the SS-Board.

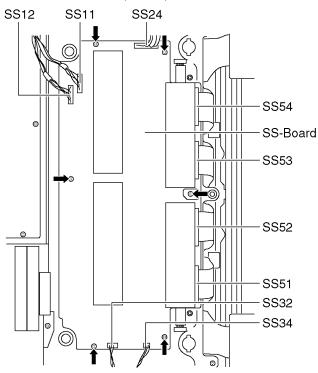


# 6.23. Remove the SS-Board (50inch)

- 1. Remove the SS2-Board and SS3-Board.
- 2. Disconnect the couplers (SS11, SS12, SS34, SS35, SS42 and SS44).
- 3. Disconnect the flexible cables (SS51, SS52, SS53 and SS54).
- 4. Remove the screws (x7 →) and remove the SS-Board.

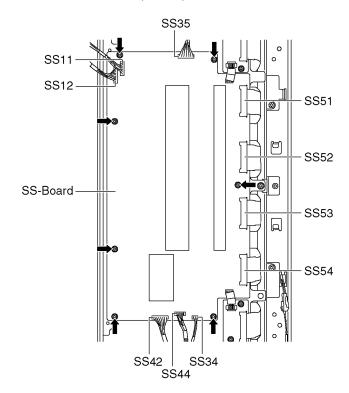


#### 6.24. Remove the Fan

1. Remove the screws (x3 → each) remove the fan and disconnect the relay coupler.



# 6.25. Remove the C1-Board (37, 42inch)


- 1. Remove the fan .
- 2. Disconnect the flexible cable holder fastening screws (x8 →) and disconnect the flexible cables (CA1 ~ CA4).

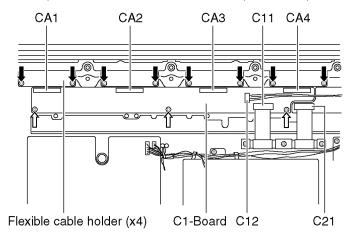

- 3. Disconnect the flexible cables (C11) and disconnect the coupler (C12) .
- 4. Remove the screws (x3 ⇒) and remove the C1-Board.


# 6.26. Remove the C2-Board (37, 42inch)

- 1. Remove the fan.
- Disconnect the flexible cable holder fastening screws (x8
   →) and remove the flexible cables (CA5 ~ CA8).
- 3. Disconnect the flexible cable (C21).
- 4. Remove the screws (x3 ⇒), the couplers (C22, C32) and remove the C2-Board.

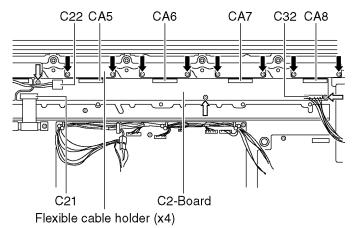


# 6.27. Remove the C1-Board (50inch)

- 1. Remove the fan.
- 2. Remove the flexible cables holder fastening screws (x6 →) and disconnect the flexible cables (CA1~CA3).
- 3. Disconnect the flexible cable (C10) and disconnect the coupler (C11).
- 4. Remove the screw (x5 →) and remove the C1-Board.

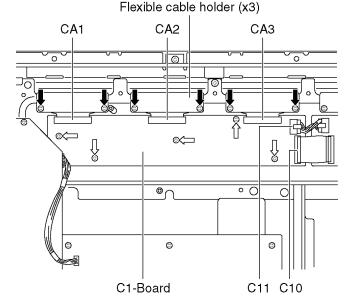


# 6.28. Remove the C2-Board (50inch)

- 1. Remove the fan.
- 2. Remove the flexible cables holder fastening screws (x8 → ) and disconnect the flexible cables (CA4~CA7).
- 3. Disconnect the Flexible cables (C20, C21, C24, C25) and disconnect the couplers (C22, C23).
- 4. Remove the screws (x5 ⇒) and remove the C2-Board.




# 6.29. Remove the C3-Board (50inch)

- 1. Remove the fan.
- 2. Remove the flexible cables holder fastening screws (x8 → ) and disconnect the flexible cables (CA8~CA11).
- 3. Disconnect the flexible cable (C31) and disconnect the couplers (C33, C35).
- 4. Remove the screws (x5 ⇒) and remove the C3-Board.




### 6.30. Remove the Speaker L, R

- Remove the screw (x8 →) and disconnect the relay connector L, R.
- 2. Remove the Speaker L, R.




#### 6.31. Remove the stand brackets.

- Remove the plasma panel section from the servicing stand and lay on a flat surface such as a table (covered), with the plasma panel surface facing downward.
  - Spread a soft cloth or similar on the table for protection, so the panel surface is not scratched.
- Remove the stand bracket (left, right) fastening screws (x4 each) and remove the stand brackets (left, right).




# 6.32. Remove the C3-Board (37, 42inch)

- 1. Remove the flexible cable holder fastening screws (x8), and disconnect the flexible cables (CB5, CB6, CB7, CB8).
- 2. Disconnect the couplers (C33, C42, C44), and disconnect the flexible cables (C31).
- 3. Remove the screws ( $\times$ 3  $\Rightarrow$ ), and remove the C3-Board.

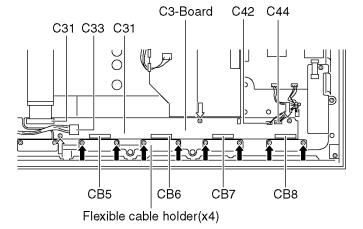


# 6.33. Remove the C4-Board (37, 42inch)

- 1. Remove the flexible cable holder fastening screws (x8 →) and disconnect the flexible cables (CB1, CB2, CB3).
- 2. Disconnect the coupler (C43) and disconnect the flexible cables (C41).
- 3. Remove the screws ( $\times$ 3  $\Longrightarrow$ ), and remove the C4-Board.




# 6.34. Remove the C4-Board (50inch)

- 1. Remove the flexible cables holder fastening screws (x8 →) and disconnct the flexible cables (CB8~CB11).
- 2. Release the speaker cables from clampers.
- 3. Disconnect the flexible cables (C41) and disconnect the couplers (C42, C43, C44).
- 4. Remove the screws (x5 ⇒) and remove the C4-Board.

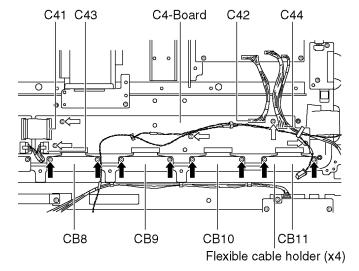


# 6.35. Remove the C5-Board (50inch)

- Remove the flexible cables holder fastening screws (x8
   →) and disconnect hte flexible cables (CB4~CB7).
- 2. Release the speaker cables from clampers.
- 3. Disconnect the flexible cables (C50, C51, C54, C55) and disconnect the couplers (C52, C53).
- 4. Remove the screws (x5 ⇒) and remove the C5-Board.




# 6.36. Remove the C6-Board (50inch)

- Remove the flexible cables holder fastening screws (x6
   →) and disconnect the flexible cables (CB1~CB3).
- 2. Release the speaker cables from clampers.
- 3. Disconnect the flexible cables (C60) and disconnect the coupler (C61).
- 4. Remove the screws (x5 ⇒) and remove the C6-Board.




### 6.37. Remove the K-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (H7 and SS34).
- 3. Remove the screws (x3 -> ) and remove the K-Board.




#### 6.38. Remove the S-Board

1. Remove the screw (x2 → ) and remove the S-Board unit.




- 2. Unlock the cable clampers to free the cable.
- 3. Disconnect the couplers (S1 and S2).
- 4. Remove the screws (x2 →) and remove the S-Board.




# 6.39. Remove the Plasma panel section from the Front frame (glass)

- 1. Remove the front frame and the plasma panel fastening screw (x8 → ).
- 2. Remove the front frame and the stand brackets fastening screw (x6 □ ).



3. For leaving the plasma panel from the front frame, pull the bottom of the front frame forward, lift, and remove.




# 6.40. Replace the plasma panel (finished).

- Place the new plasma panel (finished) on the flat surface of the table (covered by a soft cloth), with the plasma panel surface facing downward.
- 2. Attach the C1-Board and the C2-Board, connect the flexible cables (x7) from the Plasma panel to the C1-Board and C2-Board, and fix the flexible cable holders.
- 3. Attach the Hooks (left, right) and fit the stand brackets (left, right) to the new plasma panel.
- 4. Place the plasma panel section on the servicing stand.
- 5. Attach the front frame and the each P.C.Board and so on, to the new plasma panel.
  - \* When fitting the front frame, be careful not to allow any debris, dust or handling residues to remain between the front glass and plasma panel.

### 7 Location of Lead Wiring

### 7.1. Lead of Wiring (1)

TH-37PX50U

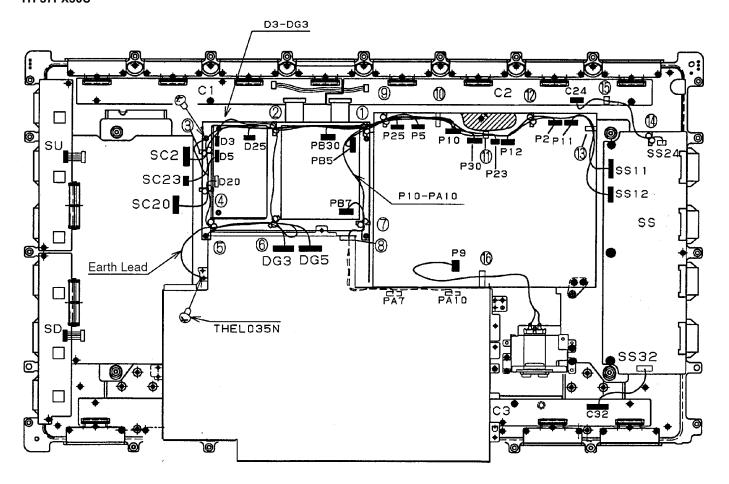

### 7.2. Lead of Wiring (2)


TH-37PX50U

Connector Connection:
P2,P5,P9,P10,P11,P12,P23,P25,P30,
D3,D5,D25
PB5,PB7,PB30,
SC2,SC20,SC23,
SS11,SS12,
DG3,DG5,
C24,C32

CON : No. — CON : No.	1	2	3	4	(5)	6	7	8	9	10	11)	(12)	13	14)	(15)	16
SC2 — P2	0	$\bigcirc$	$\bigcirc$						$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$				
SC23 — P23	0		$\bigcirc$						$\bigcirc$		$\bigcirc$					
SC20 — D20				$\bigcirc$												
DG3 — D3						$\bigcirc$										
DG5 D5				$\bigcirc$	$\bigcirc$	$\bigcirc$										
TUNER EARTH					$\bigcirc$	0										
D25 — P25	0	0														
PB5 — P5	0								$\bigcirc$							
PA7 — PB7							0	$\bigcirc$								
PA10 — P10							$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$						
PB30 — P30	0								$\bigcirc$	$\bigcirc$						
SS11 — P11													$\bigcirc$			
SS12 — P12												$\bigcirc$	$\bigcirc$			
AC INLET — P9																$\bigcirc$
SS24 — C24														$\bigcirc$	$\bigcirc$	

### 7.3. Lead of Wiring (3)

#### TH-42PX50U

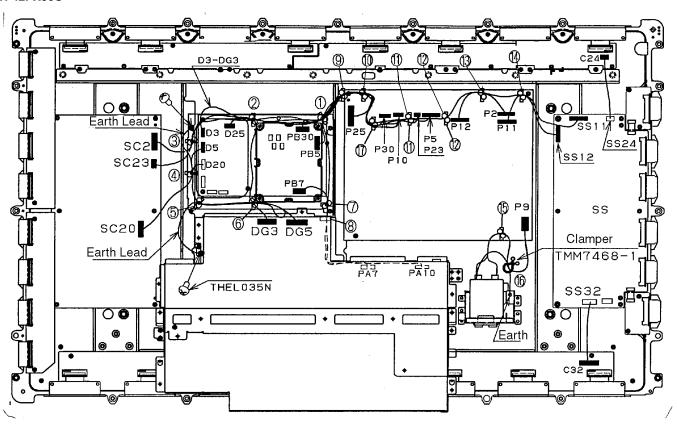

### 7.4. Lead of Wiring (4)


TH-42PX50U

Connector Connection: P2,P5,P9,P10,P11,P12,P23,P25,P30, D3,D5,D25 PB5,PB7,PB30, SC2,SC20,SC23, SS11,SS12, DG3,DG5, C24,C32

CON : No. —— CON : No	. 1	2	3	4	(5)	6	7	8	9	10	(11)	(12)	13	14)	15)	16	(17)
SC2 — P2		0							$\bigcirc$	0	$\bigcirc$	$\bigcirc$	$\bigcirc$				$\bigcirc$
SC23 — P23		0							0	0	0						$\bigcirc$
SC20 — D20				0													
DG3 — D3		0				0											
DG5 — D5				0	$\bigcirc$	0											
TUNER EARTH					$\bigcirc$	0											
D25 — P25		0							$\bigcirc$	$\bigcirc$							
PB5 — P5									$\bigcirc$	0	0						$\bigcirc$
PA7 — PB7							0	0									
PA10 — P10							$\bigcirc$	$\bigcirc$	$\bigcirc$	0							$\bigcirc$
SS11 — P11														$\bigcirc$			
SS12 — P12																	
AC INLET — P9															$\bigcirc$	$\bigcirc$	
PB30 — P30									$\bigcirc$	$\bigcirc$							$\bigcirc$

### 7.5. Lead of Wiring (5)

TH-50PX50U

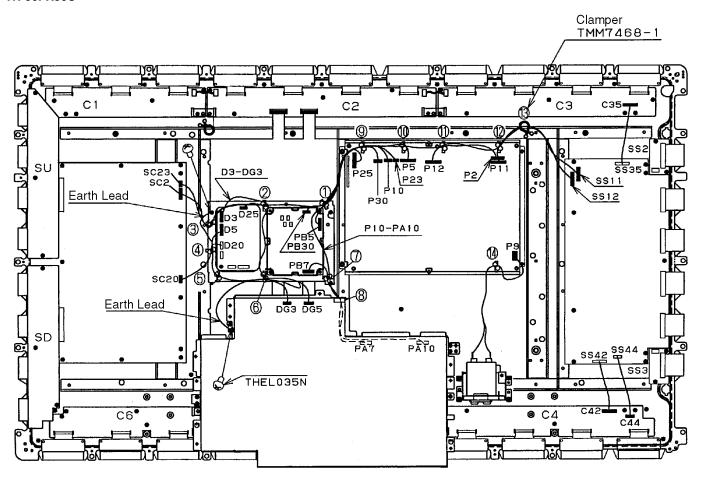


### 7.6. Lead of Wiring (6)

TH-50PX50U

Connector Connection:
P2,P5,P9,P10,P11,P12,P23,P25,P30,
D3,D5,D25
PB5,PB7,PB30,
SC2,SC20,SC23,
SS11,SS12,
DG3,DG5,
C35,C42,C44

CON : No	). ——	CON : No.	1	2	3	4	(5)	6	7	8	9	10	(11)	(12)	13)	14)
SC2		P2	0	0	$\bigcirc$						$\bigcirc$	0	$\bigcirc$			
SC23		P23	$\bigcirc$	$\bigcirc$	$\bigcirc$						$\bigcirc$					
SC20		D20				$\bigcirc$										
DG3		D3		0				0								
DG5		D5				$\bigcirc$	$\bigcirc$	0								
		TUNER EARTH						0								
D25		P25	0	$\bigcirc$												
PB5		P5	0								$\bigcirc$	0				
PA7		PB7							$\bigcirc$	$\bigcirc$						
PA10		P10	0						$\bigcirc$	0	$\bigcirc$					
SS11		P11												$\bigcirc$	$\bigcirc$	
SS12		P12											$\bigcirc$	$\bigcirc$	$\bigcirc$	
PB30		P30	$\bigcirc$								$\bigcirc$					
AC INL	ET—	P9														$\bigcirc$

### 7.7. Lead of Wiring (7)

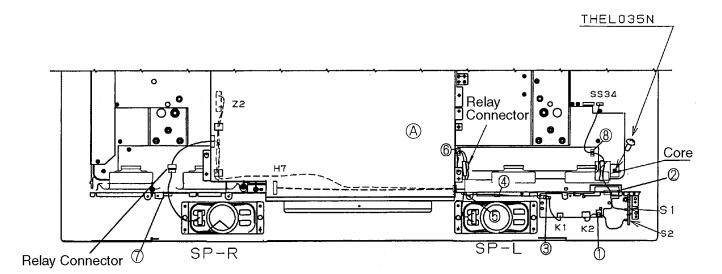


CON:NO	CON : NO.	①	0	(3)	<b>4</b>	(5)	6	<b>©</b>	(19)
S1	SS34		0						0
K1	H7			$\bigcirc$	$\bigcirc$	0	0		
SP L	Z2					0	0		
SP R	Z2							0	
S2	K2	$\bigcirc$							

Connector Connection; SS34, Relay Connector

### 7.8. Lead of Wiring (8)

TH-37PX50U

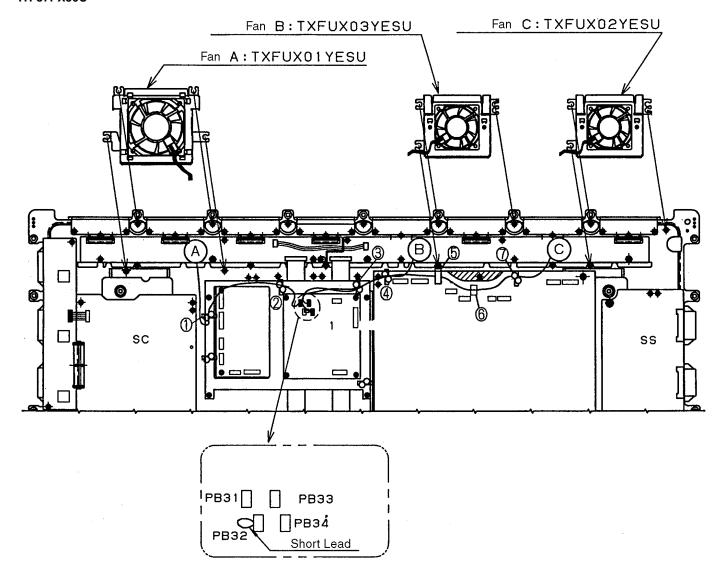


### Connector Connection:

PB31,PB33,PB34

, ,							
CON : No. —— CON : No.	1	2	3	4	(5)	6	7
FAN A — PB31		$\bigcirc$					
FAN B — PB33			$\bigcirc$	$\bigcirc$			
FAN C — PB34			0	$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$


### 7.9. Lead of Wiring (9)

#### TH-42PX50U

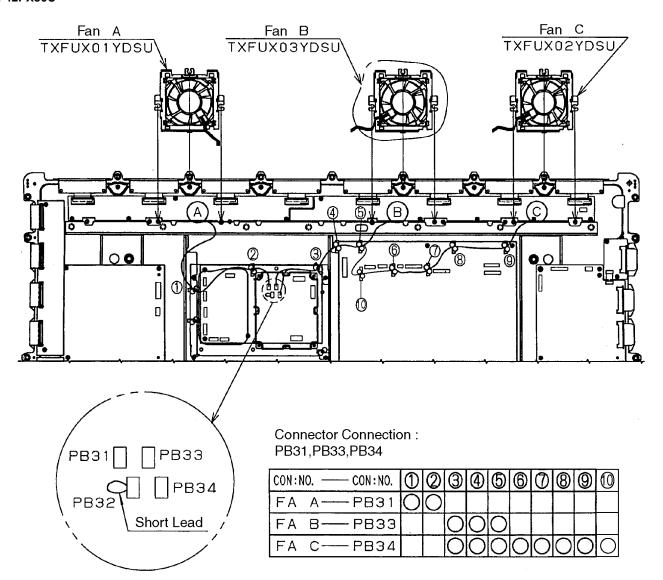

### 7.10. Lead of Wiring (10)

TH-50PX50U

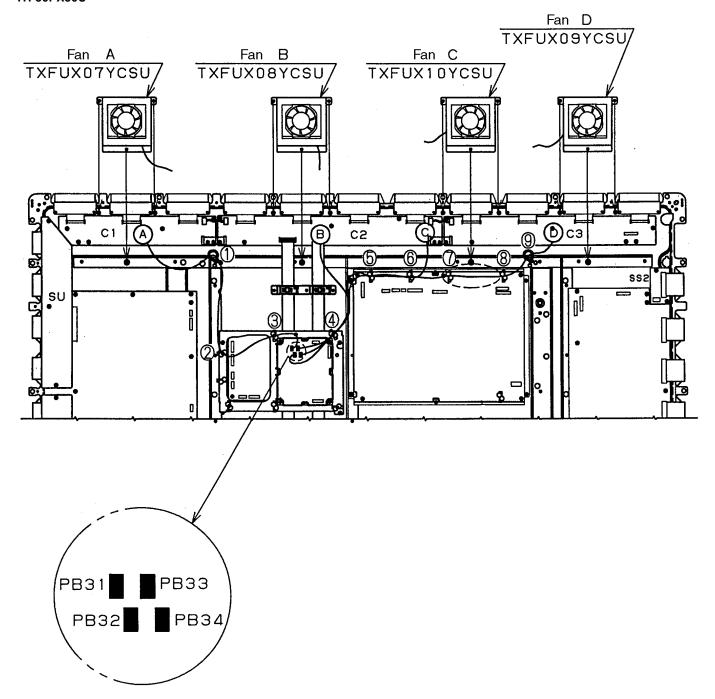

### Connector Connection: PB31,PB32,PB33,PB34

. 201,1 202,1 200,1									
CON : No. —— CON : No.	1	2	3	4	(5)	6	7	$\odot$	( <del>o</del>
FA A — PB31	$\bigcirc$	$\bigcirc$	$\bigcirc$						
FA B — PB33				$\bigcirc$					
FA C — PB32				$\bigcirc$	$\bigcirc$	$\bigcirc$			
FA D — PB34				$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$

### 8 Self-check Function

When symptoms like "the power fails sometimes" or "sometimes there is no picture and/or sound" can not be confirmed at the time of servicing, the self-check function can be used to confirm the occurrence and to find the defective circuit.

In case of "power failure", flashing of the "POWER" indication (red) at the front of the unit can be used to narrow down the +B line.

#### 8.1. How to access


#### 8.1.1. Access

Produce TV reception screen and, while pressing [VOLUME-] button on the main unit, press [SLEEP] button on the remote controller unit simultaneously.

#### 8.1.2. E xit

When the AC code is pulled out and opened, the display returns to the normal screen.

#### 8.1.3. S creen display

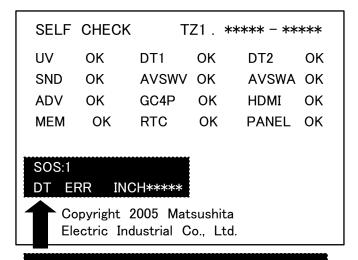

It displays it only in abnormal circumstances.

Display	Ref.No.	Description	Board
UV	TU8200	TV Tuner	DT-Board
DT1	IC8240	HDSL PEAKS_LITE	DT-Board
DT2	IC8240	HDSL PEAKS_LITE	DT-Board
SND	IC2608	BBE VIVA	H-Board
AVSWV	IC2602	VIDEO SW	H-Board
AVSWA	IC2605	AUDIO SW	H-Board
ADV	IC4018	10bit A/D	DG-Board
GC4P	IC4026	GC4PRO	DG-Board
HDMI	IC5003	HDMI I/F RECEIVER	DV-Board
MEM	IC4008	EEPROM	DG-Board
RTC	IC4024	CLOCK GEN	DG-Board
PANEL	IC9300	Display Processor	D-Board

### 8.2. Power LED Blinking timing chart

#### 1. Subject

Information of LED Flashing timing chart.

#### 2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinkes of the Power LED on the front panel of the unit.

Blinking Times	Blinking timing	Contents & Check point		
1	Once 3 sec	No particular check point 12V SOS 3.3V SOS		
4		Power SOS		
5		5V SOS		
6		Scan Driver (SC Energy recovery circuit)		
7		Scan Driver (SC floating voltage area)		
8		SUS Driver (SS Energy recovery circuit)		
9		Model code SOS (Incorrect PCB)		
10		Tuner SOS (No power for tuner)		
11		Fan SOS		
12		Sound SOS		

#### 3. Remarks


Above Fan function is operated during the fans are installed.

### 8.3. No Power


#### First check point

There are following 2 states of No Power indication by power LED.


- 1 No lit
- 2. Red is lit then turns red blinking a few seconds later. (See 8.2.)
- 1. No lit

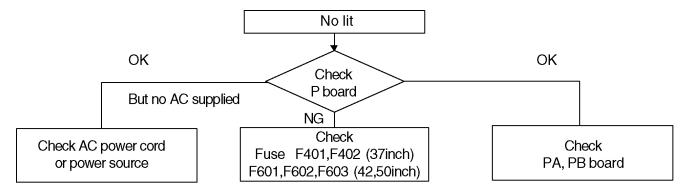


### 8.4. No Picture

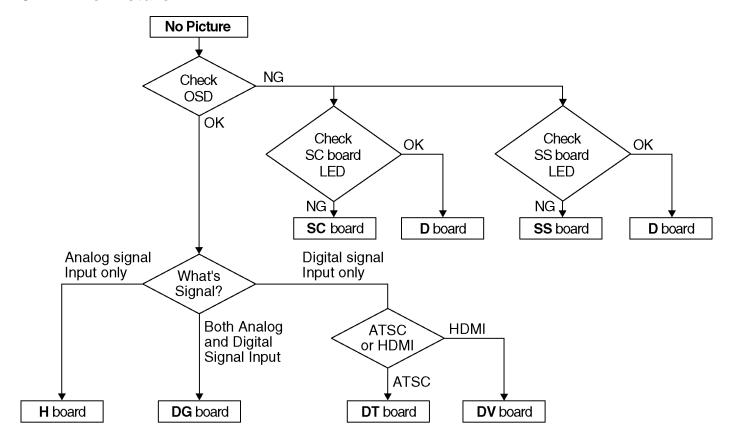

Drive circuits LED indicator

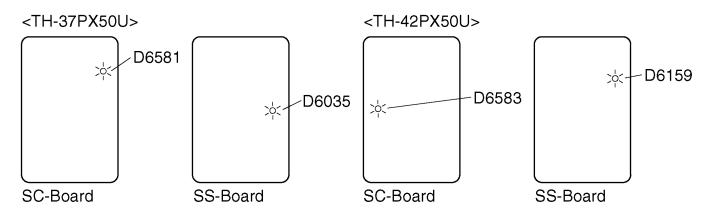


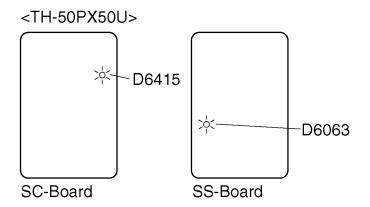

#### 8.5. Local screen failure

Plasma display may have local area failure on the screen. Fig-1, 2 is the possible defect P.C.B. for each local area.

#### TH-37, 42PX50U

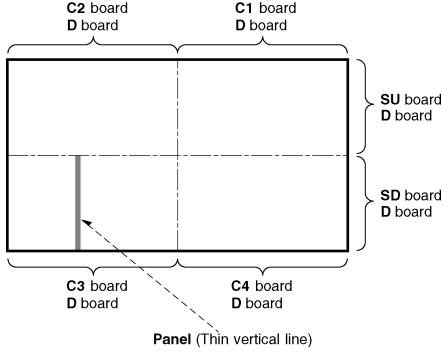

<Local screen failure chart>
Fig-1

#### TH-50PX50U

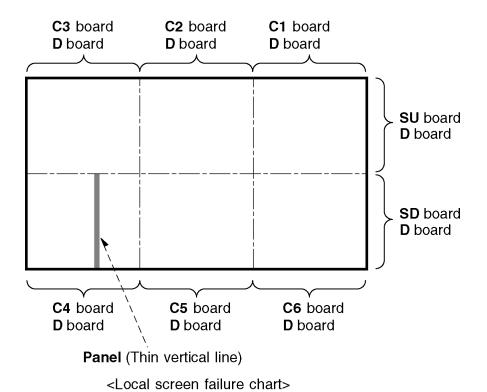


Fig-2

### 9 Serviceman Mode

#### 9.1. How to enter into Serviceman Mode

While pressing [VOLUME-◀] button of the main unit, press [RECALL] button of the remote control three times in a row (within 2 seconds).

#### 9.1.1. Adjustment method.....Use the remote control.

"1" button...Main items Selection in forward direction

"2" button...Main items Selection in reverse direction

"3" button...Sub items Selection in forward direction

"4" button...Sub items Selection in reverse direction

"VOL" button...Value of sub items change in forward direction (▶), in reverse direction (◄)

INTERCAT2001 PCT-ADJ OPTION RM-SET STB-CAS

1-2: Toggle ADJ item3-4: Toggle SUB item

#### 9.2. Cancellation


Switch off the power with the [POWER] button on the main unit or the [POWER] button on the remote control.

### 9.3. Contents of adjustment mode

- · Value is shown as a hexadecimal number.
- · Preset value differs depending on models.
- · After entering the adjustment mode, take note of the value in each item before starting adjustment.

Main item	Sub item	Sample Data
PCT-ADJ	PICTUER	22D
	PICTUER2	200
	COLOR	30
	TINT	0
	S-BRT	800
	RFAGC1	74
	AGC-ADJ1	FIX
	RFAGC2	74
	AGC-ADJ2	FIX
OPTION	BOOT	SD
	OPT00	1
	ANT-POW	OFF
	POF-SET	NORMAL
	STB-SEC	SEC
	EMGCY	OFF
	CLK-ADJ	80
	EEP COPY	ALL
RM-SET	COPY	ALL
STB-CAS	-	-

### 9.4. Option

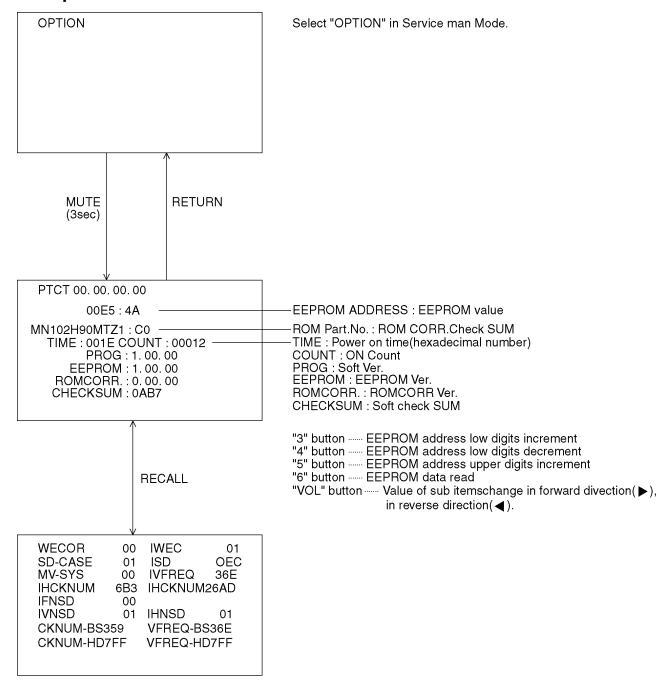

## 10 Adjustment Procedure

### 10.1. Driver Set-up

### 10.1.1. Item / Preparation

1. Input an APL 100 % white signal.

2. Set the picture controls: -

Picture mode: Normal White balance: Cool

Aspect: 16:9

#### 10.1.2. Adjustments

Adjust driver section voltages referring the panel data on the panel data label.

#### TH-37PX50U

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	187V ± 2V	R628 (P)	*
Ve	TPVE (SS)	160V ± 1V	VR6045 (SS)	*
Vset	TPVSET (SC)	240V ± 7V	Fixed	
Vad	TPVAD (SC)	-105V ± 1V	VR6503 (SC)	
Vscn	TPVSCN (SC)	Vad + 130V± 4V	Fixed	
Vda	TPVDA (SS)	70V ± 1V	R665 (P)	
PFC	C448 (+)(-)	395V ± 0.5V	R443 (P)	
Vdat	C555 (+)(-)	73V ± 0.1V	R665 (P)	load current : 0.4A
Vlow	TPVsus	178V ± 0.5V	R661 (P)	load current : 1.3A

<sup>\*</sup>See the Panel label.

#### TH-50PX50U

Name	Test Point	Voltage	Volume	Remarks		
Vsus	TPVSUS (SS)	176V ± 2V	VR351 (P)	*		
Ve	TPVE (SS)	150V ± 1V	VR6250 (SS)	*		
Vset	TPVSET (SC)	225V ± 7V	Fixed			
Vad	TPVAD (SC)	-90V ± 1V	VR6801 (SC)			
Vscn	TPVSCN (SC)	Vad + 130V± 4V	Fixed			
Vda	TPVDA (SS)	75V ± 1V	Fixed			
Vdat	P12_pin2,5	75V ± 0.1V	Fixed			


<sup>\*</sup>See the Panel label.

#### TH-42PX50U

111-42F X300					
Name	Test Point	Voltage	Volume	Remarks	
Vsus	TPVSUS (SS)	188V ± 2V	VR351(P)	*	
Ve	TPVE (SS)	160V ± 1V	VR6145 (SS)	*	
Vset	TPVSET (SC)	240V ± 7V	Fixed		
Vad	TPVAD (SC)	-105V ± 1V	VR6477 (SC)		
Vscn	TPVSCN (SC)	Vad + 130V± 4V	Fixed		
Vda	TPVDA (SS)	70V ± 1V	Fixed		
Vdat	P12_pin2,5	70V ± 0.1V	Fixed		

<sup>\*</sup>See the Panel label.

#### Panel Label information




### 10.2. Initialization Pulse Adjust

- 1. Input a Cross hatch signal.
- 2. Set the picture controls: -

Picture mode: Normal White balance: Cool

Adjust the indicated test point for the specified wave form.

	Test point	Volume	Level	Remark
			10 + 10 / -5μ Sec	TH-37PX50U
T1	TPSC1 (SC)		10 + 10 / -5µ Sec	TH-42PX50U
			20 ± 15µ Sec	TH-50PX50U
		VR6505 (SC)	210 ± 10µ Sec	TH-37PX50U
T2	TPSS1 (SS)	VR6557 (SC)	210 ± 10µ Sec	TH-42PX50U
		VR6602 (SC)	155 ± 10µ Sec	TH-50PX50U

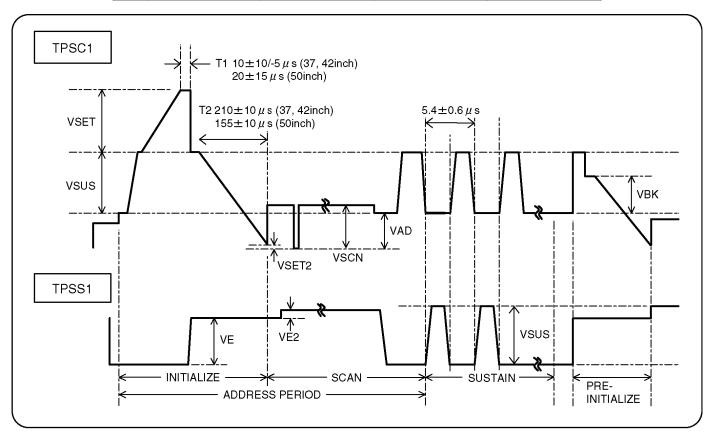

### 10.3. P.C.B. (Printed Circuit Board) exchange

### 10.3.1. Caution

1. To remove P.C.B., wait 1 minute after power was off for discharge from electrolysis capacitors.

### 10.3.2. Quick adjustment after P.C.B. exchange

#### TH-37PX50U

P.C.B.	Name	Test Point	Voltage	Volume	Remarks		
P Board	Vsus	TPVSUS (SS)	187V ± 2V	R628 (P)	*		
	Vda	TPVDA (SS)	70V ± 1V	R665 (P)			
	PFC	C488 (+) (-) (P)	395V ± 0.5V	R443 (P)			
	Vdat	C555 (+) (-) (P)	73V ± 0.1V	R665 (P)	load current : 0.4A		
	Vlow	TPVSUS (SS)	178V ± 0.5V	R661 (P)	load current : 1.3A		
SC Board	Vad	TPVAD (SC)	-105V ± 1V	VR6503 (SC)			
	Vset	TPVSET (SC)	240V ± 7V	Fixed			
	Vscn	TPVSCN (SC)	Vad + 130 ± 4V	Fixed			
SS Board	Ve	TPVE (SS)	160V ± 1V	VR6045 (SS)	*		
D, DG Board	White blance, Pedesta	nite blance, Pedestal and Sub brightness for NTSC, PAL, HD, PC and 625i signals					

<sup>\*</sup>See the Panel label.

#### TH-42PX50U

P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	188V ± 2V	R351 (P)	*
	Vda	TPVDA (SS)	70V ± 1V	Fixed	
	Vdat	P12_2,5pin (P)	70V ± 0.1V	Fixed	
SC Board	Vad	TPVAD (SC)	-105V ± 1V	VR6477(SC)	
	Vset	TPVSET (SC)	240V ± 7V	Fixed	
	Vscn	TPVSCN (SC)	Vad + 130 ± 4V	Fixed	
SS Board	Ve	TPVE (SS)	160V ± 1V	VR6145 (SS)	*
D, DG Board	White blance, Pedestal and Sub brightness for NTSC, PAL, HD, PC and 625i signals				


<sup>\*</sup>See the Panel label.


#### TH-50PX50U


P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	176V ± 2V	VR351 (P)	*
	Vda	TPVDA (SS)	75V ± 1V	Fixed	
	Vdat	P12_2,5pin (P)	75V ± 0.1V	Fixed	
SC Board	Vad	TPVAD (SC)	-90V ± 1V	VR6801(SC)	
	Vset	TPVSET (SC)	225V ± 7V	Fixed	
	Vscn	TPVSCN (SC)	Vad + 130 ± 4V	Fixed	
SS Board	Ve	TPVE (SS)	150V ± 1V	VR6250 (SS)	*
D, DG Board	White blance, Pedestal and Sub brightness for NTSC, PAL, HD, PC and 625i signals				

<sup>\*</sup>See the Panel label.


### 10.4. Adjustment Volume Location

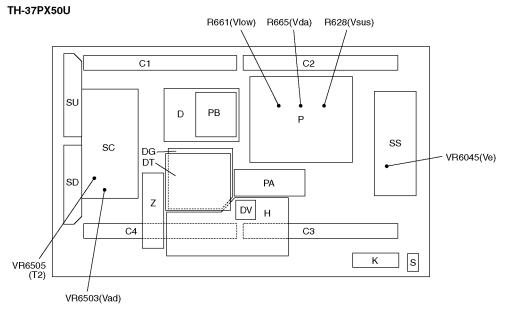


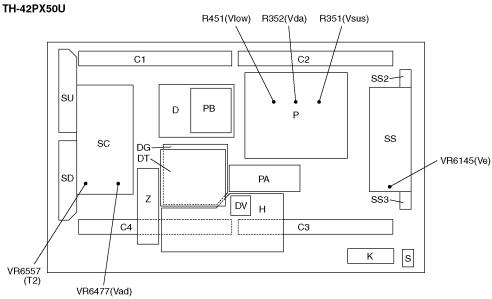


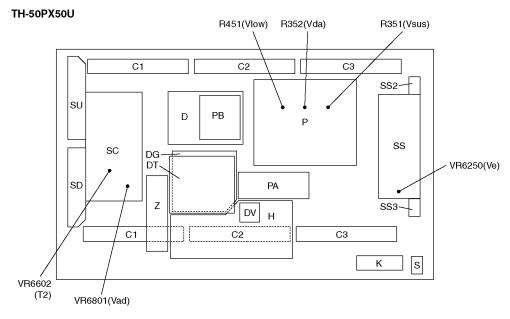

### 10.5. Test Point Location

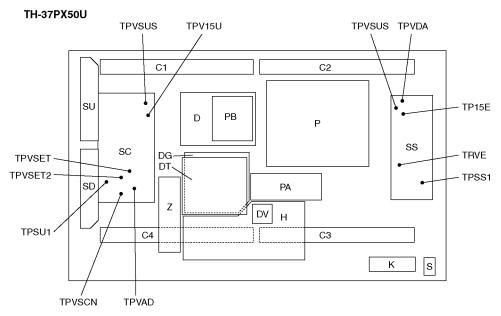

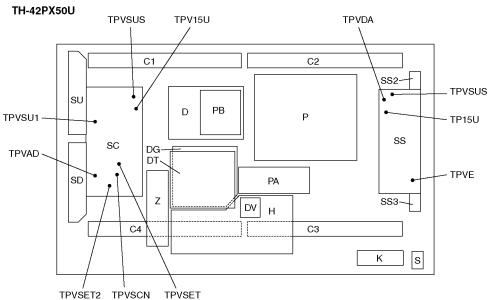

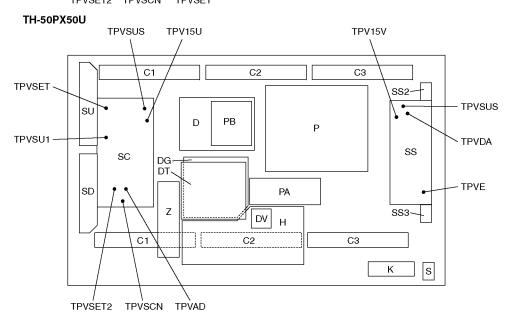


### 11 Hotel mode

1. Purpose

Restrict a function for hotels.


- 2. Access command
  - · Enter to the Service Mode.
  - Press MUTE button on remote control. Hold few seconds.
  - Press the ch "UP" or "Down" button and Vol. "UP" or "Down" button to Set the data of EEPROM(ADDRESS 1584) to 01.



Push the Power switch(button) off/on the set(the remote control) to turn the set off/on.

It can be made Hotel mode.

- 3. Exit command
  - · First, set the data of EEPROM (ADDRESS 1584) to 00.



Next, Push the Power switch(button) off/on the set(the remote control) to turn the set off/on.

Then, it is no longer hotel mode.

- 4. Access command to the Hotel mode setup menu
  - Prerequisite : It is conditions that the data of EEPROM(ADDRESS 1584) is 01.

In order to display the Hotel mode setup menu, please enter the following command (within 2 second).

[TV]: Vol. "Down" + [REMOTE]: TV/VIDEO (3 times)

Then, the Hotel mode setup menu is displayed.

Hotel Mode	back
Mode	ON
Input	RF D
Channel	101-1
Volume	20
Vol. Max	30 ▷
OSD Ctrl	Pattern 1
FP Ctrl	Pattern 1
Pow Ctrl	ON

5. Explain the Hotel mode setup menu

#### **CAUTION**


This setup is not valid, unless data of EEPROM


(ADDRESS 1584) will be 01, even if each settings were done.

item	Function
Mode	Select hotel mode ON/OFF
Input	Select input signal modes. Set this signal, each time power is switched on. Selection: Off/RF/COMP1/COMP2/HDMI1/HDMI2/VID EO1/VIDEO2
	<ul> <li>Off: give priority to a last memory.</li> </ul>
Channel	Select channel when input signal is RF. Set the channel, each time power is switched on. Selection:0 to Last setting value
Volume	Adjust output Volume. Set this volume, each time power is switched on. If the value of InitVol is changed, volume will
	change. However, priority is given to a last memory when InitVol is Off. When "InitVol" is larger than "MaxVol", make "InitVol" and "MaxVol" the same.  Selection/Range: Off/0 to 63  Off: give priority to a last memory
Vol. Max	Adjust maximum volume.  Set this max. volume, each time power is switched on.  When "MaxVol" is smaller than "InitVol", make "MaxVol" and "InitVol" the same, if "InitVol" is not Off.  Range:  0 to 63
OSD Ctrl	Restrict the OSD. Restrict the OSD, each time power is switched on. Selection:Off: altogether valid. Pattern1: restrict the OSD.
FP Ctrl	Select flont key conditions. Set this condition, each time power is switched on. Selection: Off/Pattern1/All Off: altogether valid Pattern: restrict input selection
	All: altogether invalid.
Pow Ctrl	Select power on control when AC power on. Off: Power on in the state of last. ON: Power on when AC power on.

## **12 Conductor View**

### 12.1. P-Board (37inch)

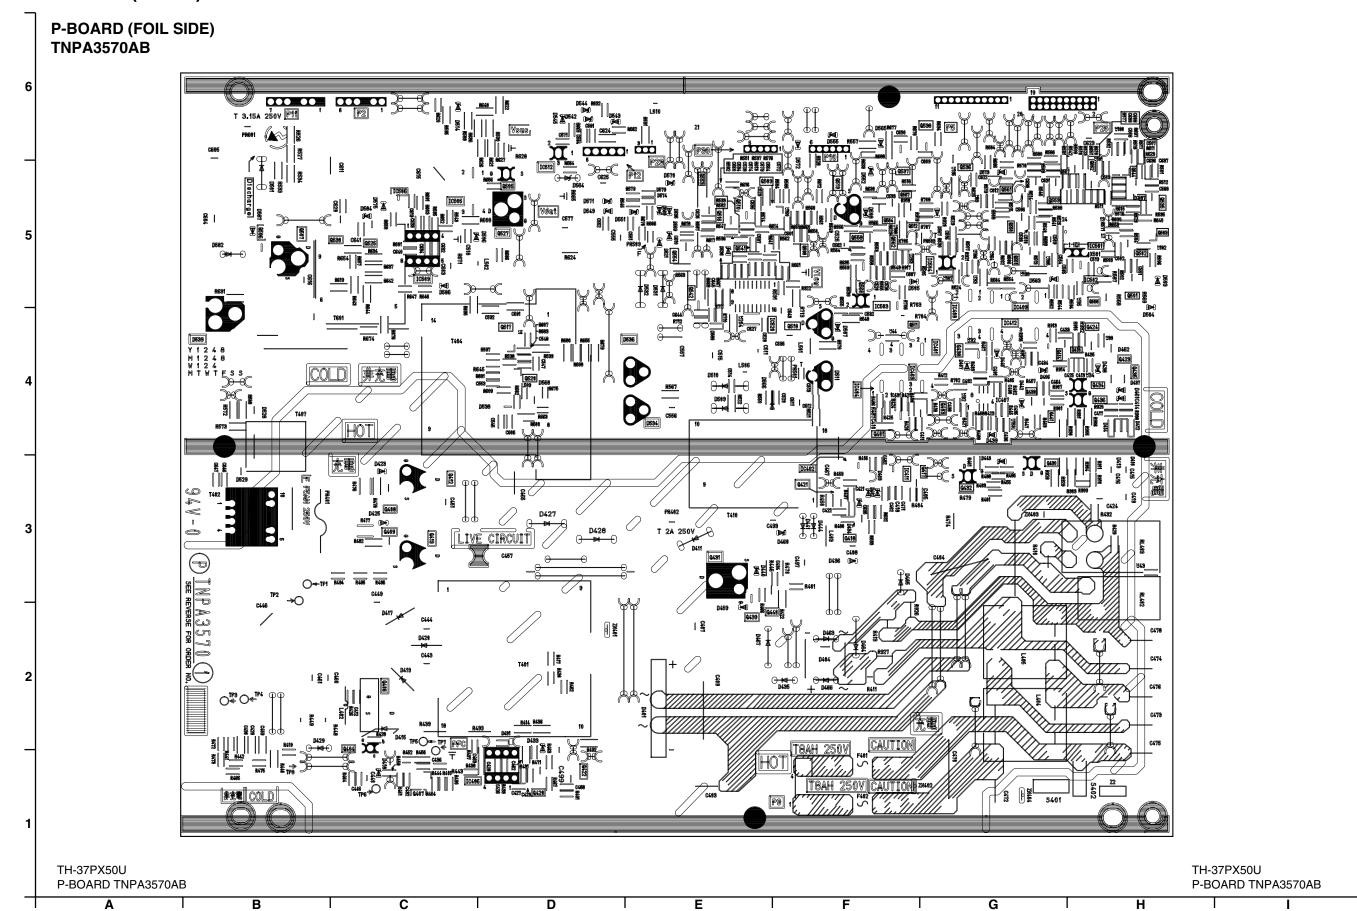

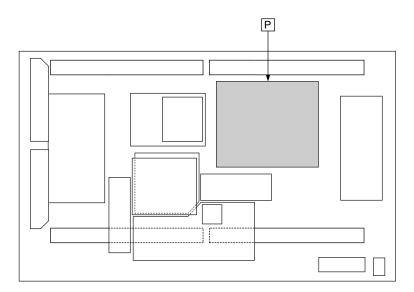


#### **Parts Location**


P-BOARD (FOIL SIDE)					
IC	TRANSISTOR	Q441	G-4	Q553	E-5
IC401 G-4 IC402 F-3 IC403 F-4 IC404 F-4	Q401 F-4 Q403 G-4 Q404 C-2 Q406 C-2	Q501 Q502 Q503 Q505	H-5 H-5 H-5 D-5	Q554 Q557 Q558 Q559	E-5 G-5 F-5 G-5
IC406 D-1 IC407 G-4 IC408 G-4 IC409 G-5 IC411 F-3 IC412 G-4	Q407 C-1 Q408 C-3 Q409 C-3 Q412 C-3 Q413 C-3 Q414 G-4	Q506 Q507 Q508 Q509 Q510 Q511	B-5 B-5 F-5 E-5 E-5 F-4	Q560 Q561 Q562 Q564 Q565 Q567	F-5 G-5 F-5 F-5 H-5 F-5
C431	Q415 H-4 Q417 G-3 Q418 F-3 Q420 D-1 Q421 F-3 Q422 D-1 Q423 H-4 Q424 H-4 Q430 G-3 Q431 E-3 Q432 G-3 Q432 G-3 Q433 G-4 Q434 H-4 Q435 H-4 Q436 H-4 Q438 G-4 Q439 E-2	Q512 Q516 Q517 Q518 Q519 Q520 Q525 Q527 Q530 Q535 Q536 Q537 Q538 Q537 Q538 Q541 Q542 Q544 Q550	F-5 E-5 D-4 F-4 F-5 D-4 C-5 D-5 C-5 H-5 G-6 E-5 E-5 H-5 G-5	TP  TP1  TP2  TP3  TP4  TP5  TP6  TP7  TP8	B-3 B-3 B-2 B-2 C-2 C-1 C-1 B-1


#### **Parts Location**

P-BOARD (COMPONENT SIDE)				
IC		TRANSISTO	R	
IC406 IC503 IC504 IC509 IC512	F-1 D-5 C-5 G-5 F-6	Q404 Q406 Q412 Q413 Q430 Q431 Q432 Q434 Q436 Q505 Q507 Q518 Q519	G-1 G-2 G-3 G-3 B-3 D-3 C-3 B-4 B-4 F-5 G-5 D-4	
		Q527	D-5 F-5	

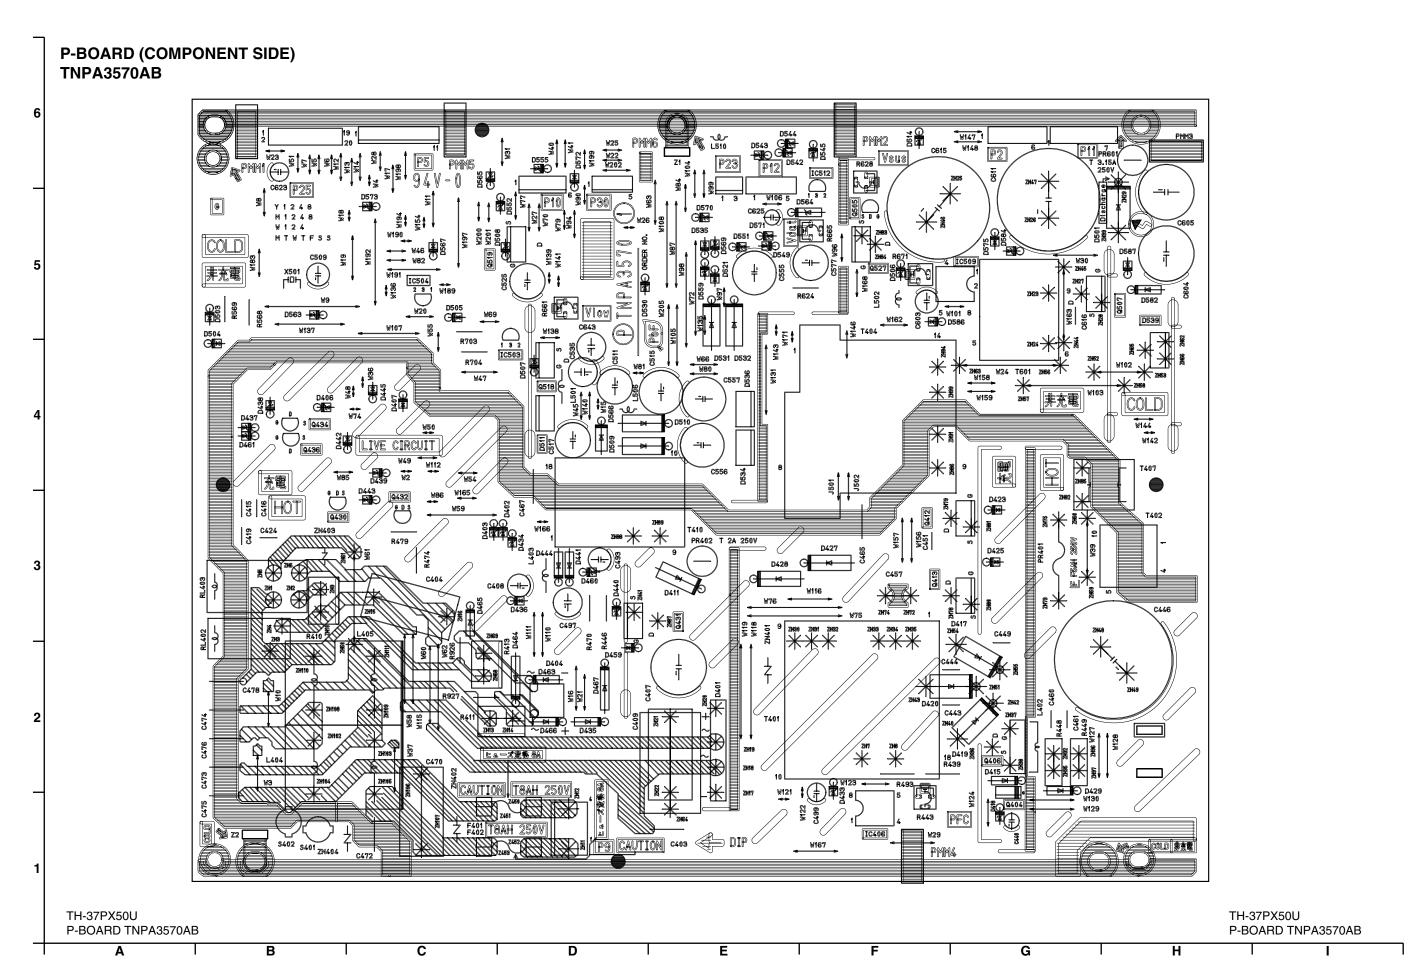

### 12.2. P-Board (42inch)

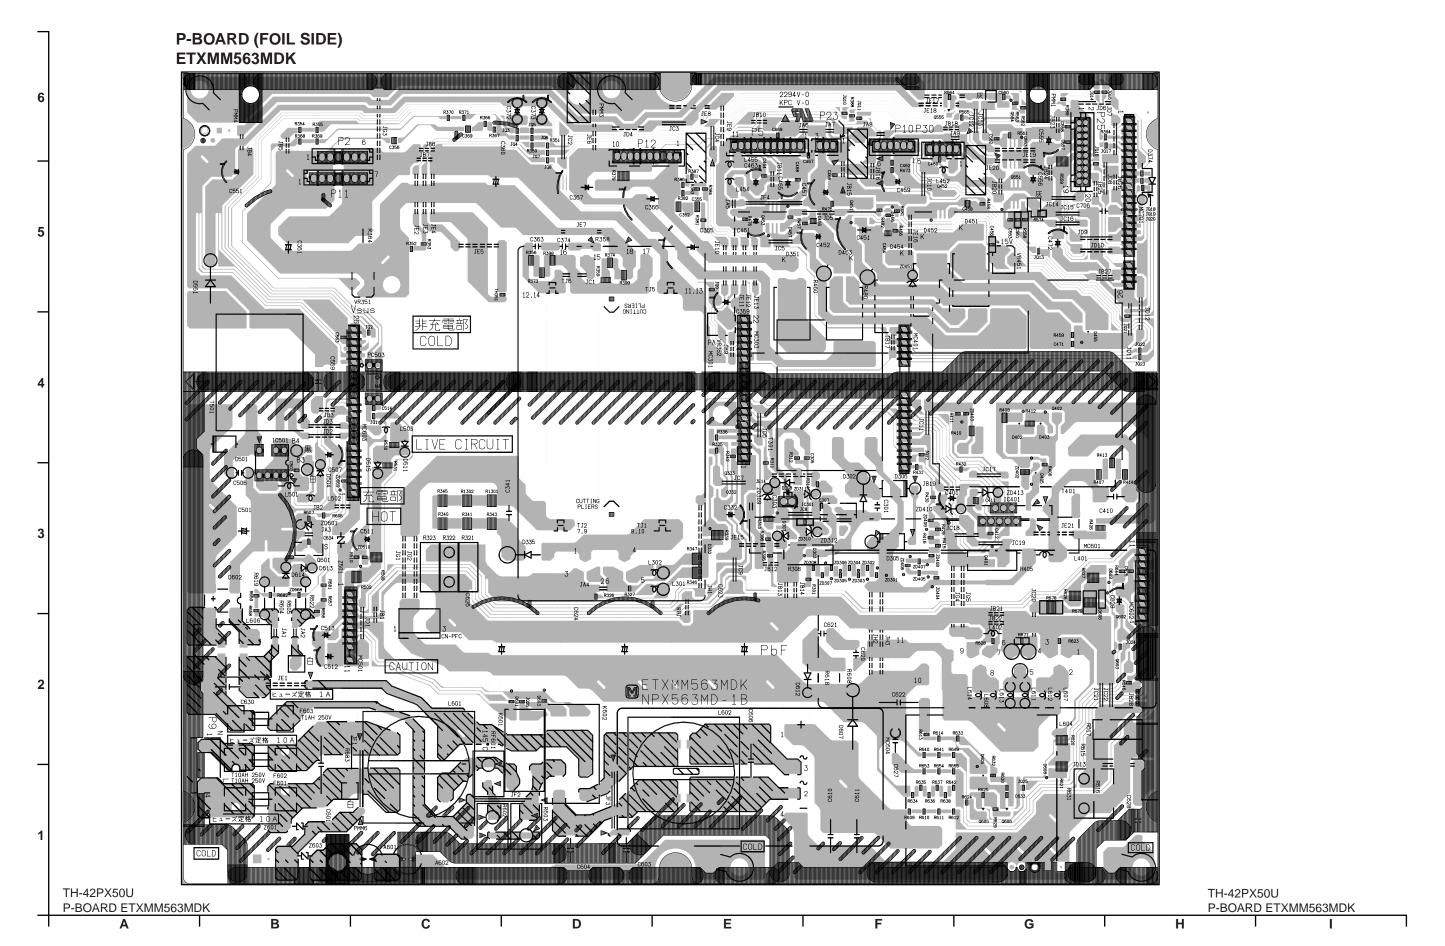

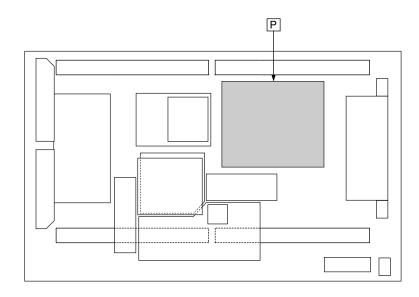


#### **Parts Location**


P-BOARD (FOIL SIDE)				
IC		TRANSISTO	R	
IC301	E-3	Q332	E-3	
IC401	G-3	Q333	E-3	
IC501	B-3	Q402	G-4	
MC301	D-4	Q451	F-5	
MC303	E-4	Q453	E-5	
MC401	F-4	Q551	G-5	
MC501	B-2	Q554	G-6	
MC601	G-2	Q555	F-6	
MC602	H-3	Q555	G-6	
MC603	C-4	Q602	H-3	
MC604	E-1	Q603	H-2	
MC701	H-5	Q605 Q606	G-1 G-1	


#### **Parts Location**

P-BOARD (COMPONENT SIDE)				
IC		TRANSISTO	R	
IC301 IC401 IC501 MC301 MC303 MC401	C-3 B-3 G-3 E-4 D-4 C-4	Q601	G-3	
MC501 MC601 MC602 MC603 MC604 MC701	G-2 B-2 A-3 G-4 D-1 A-5			

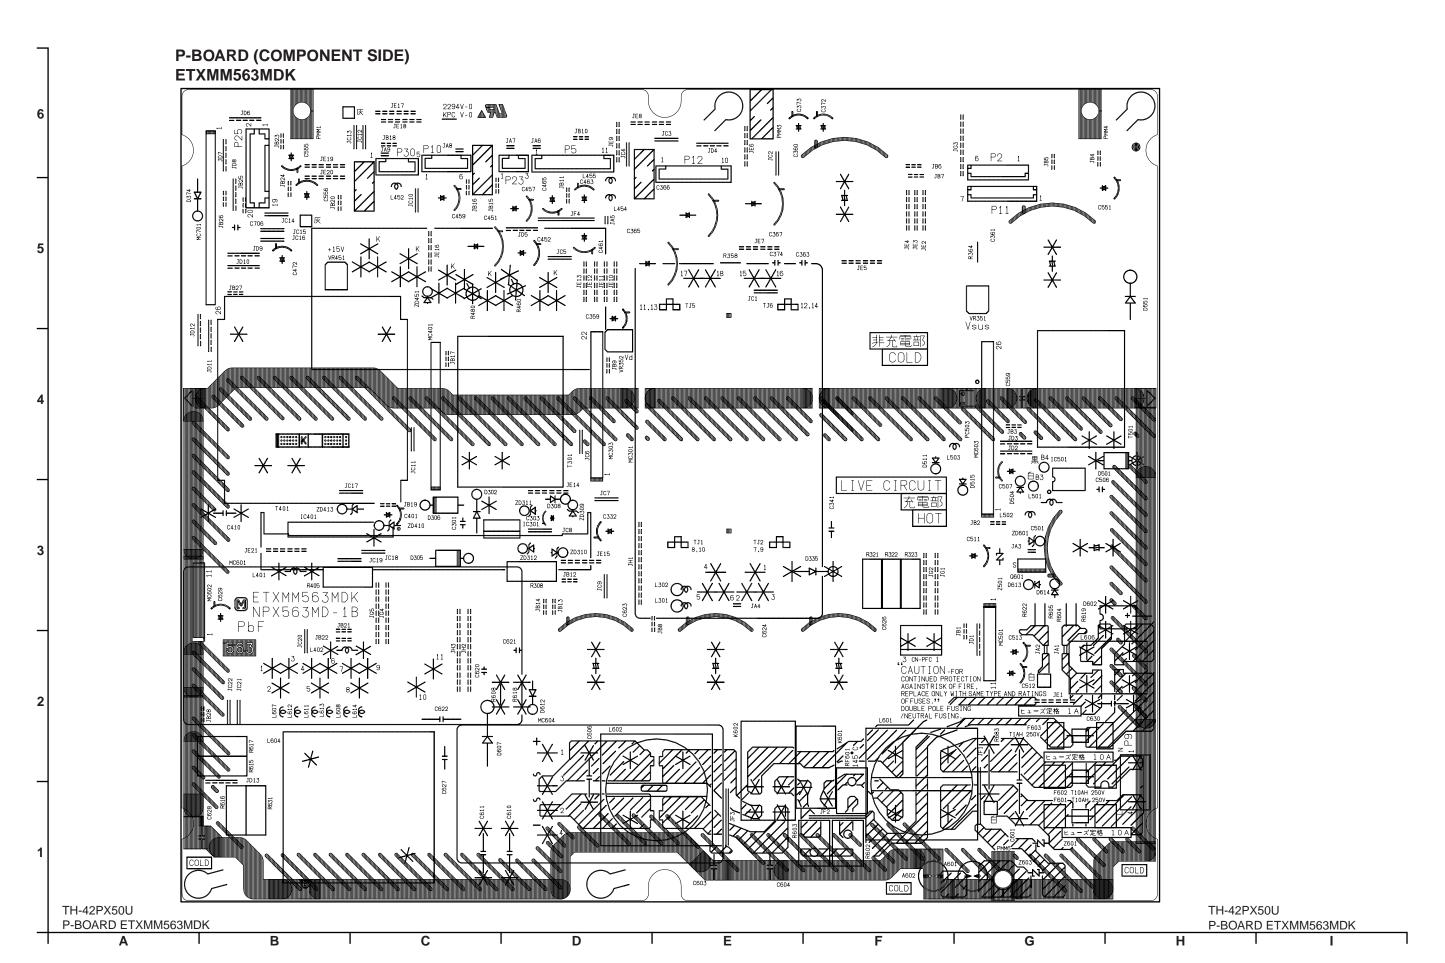

### 12.3. P-Board (50inch)

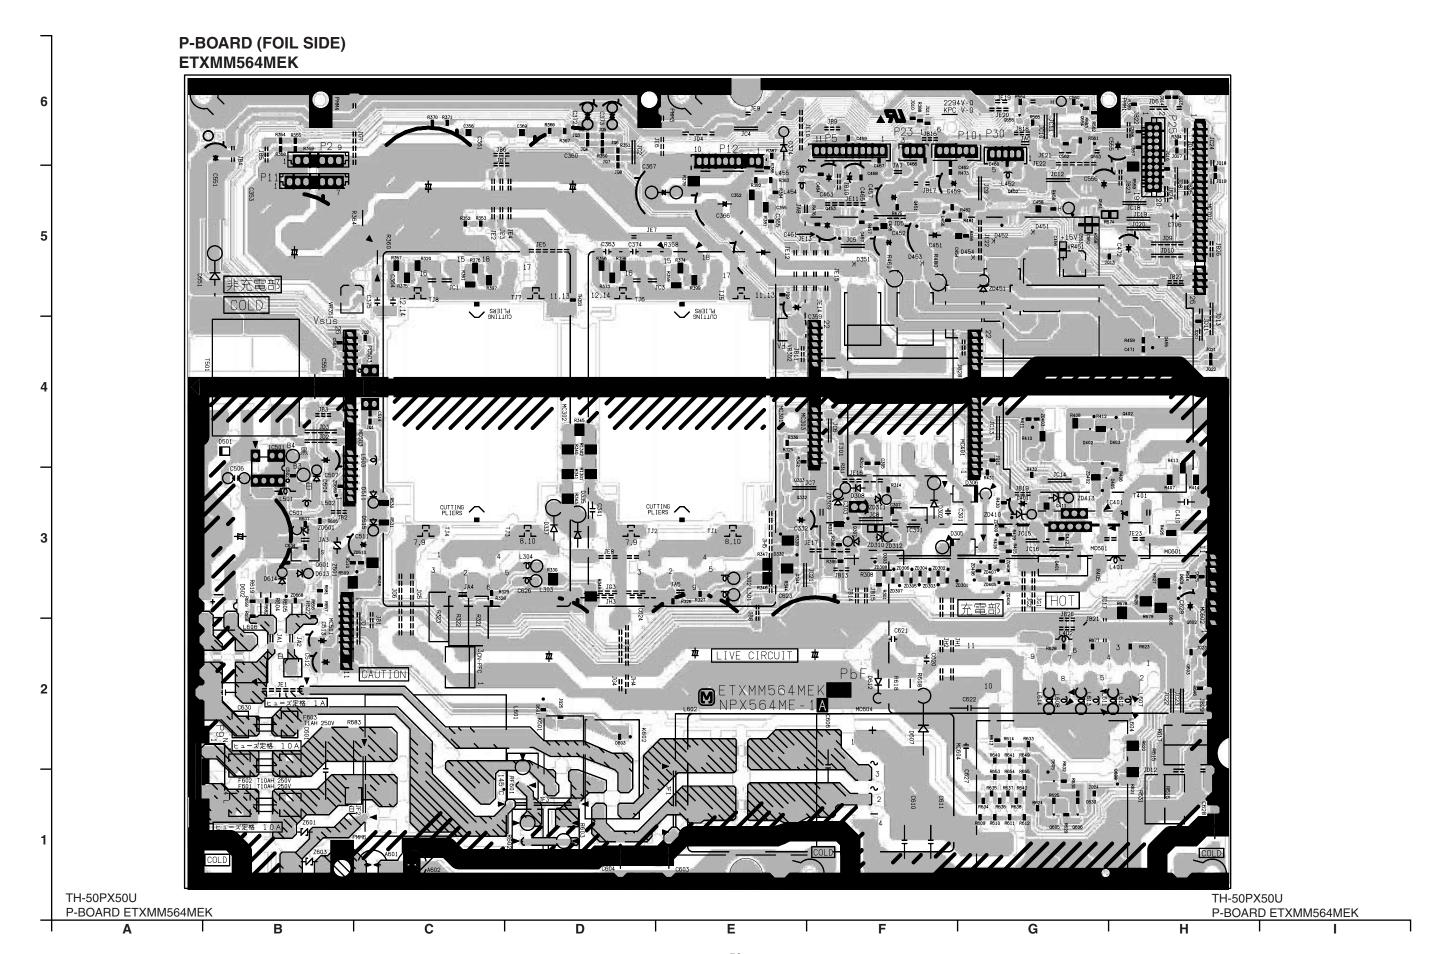

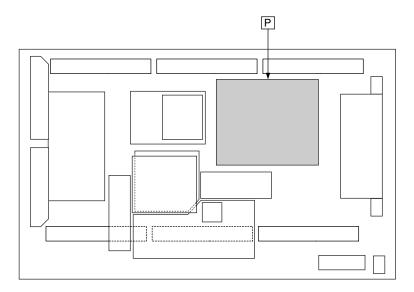


#### **Parts Location**

P-BOARD (FOIL SIDE)				
IC		TRANSISTO	R	
IC301	F-3	Q332	E-3	
IC401	G-3	Q333	E-3	
IC501	B-3	Q402	H-4	
MC301	E-4	Q451	F-5	
MC302	C-4	Q452	G-5	
MC303	F-4	Q453	F-5	
MC401	G-4	Q551	G-5	
MC501	B-2	Q553	G-6	
MC601	G-2	Q554	G-6	
MC602	G-2	Q555	G-6	
MC603	B-4	Q601	B-3	
MC604	F-1	Q602	H-3	
MC701	H-5	Q603	H-2	
		Q605	G-1	
		Q606	G-1	


#### **Parts Location**


P-BOARD (COMPONENT SIDE)				
IC		TRANSISTO	R	
IC301	D-3	Q601	H-3	
IC401	C-3			
IC501	H-3			
MC301	E-4			
MC302	G-4			
MC303	D-4			
MC401	C-4			
MC501	G-2			
MC601	C-2			
MC602	C-2			
MC603	G-4			
MC604	D-1			
MC701	B-5			

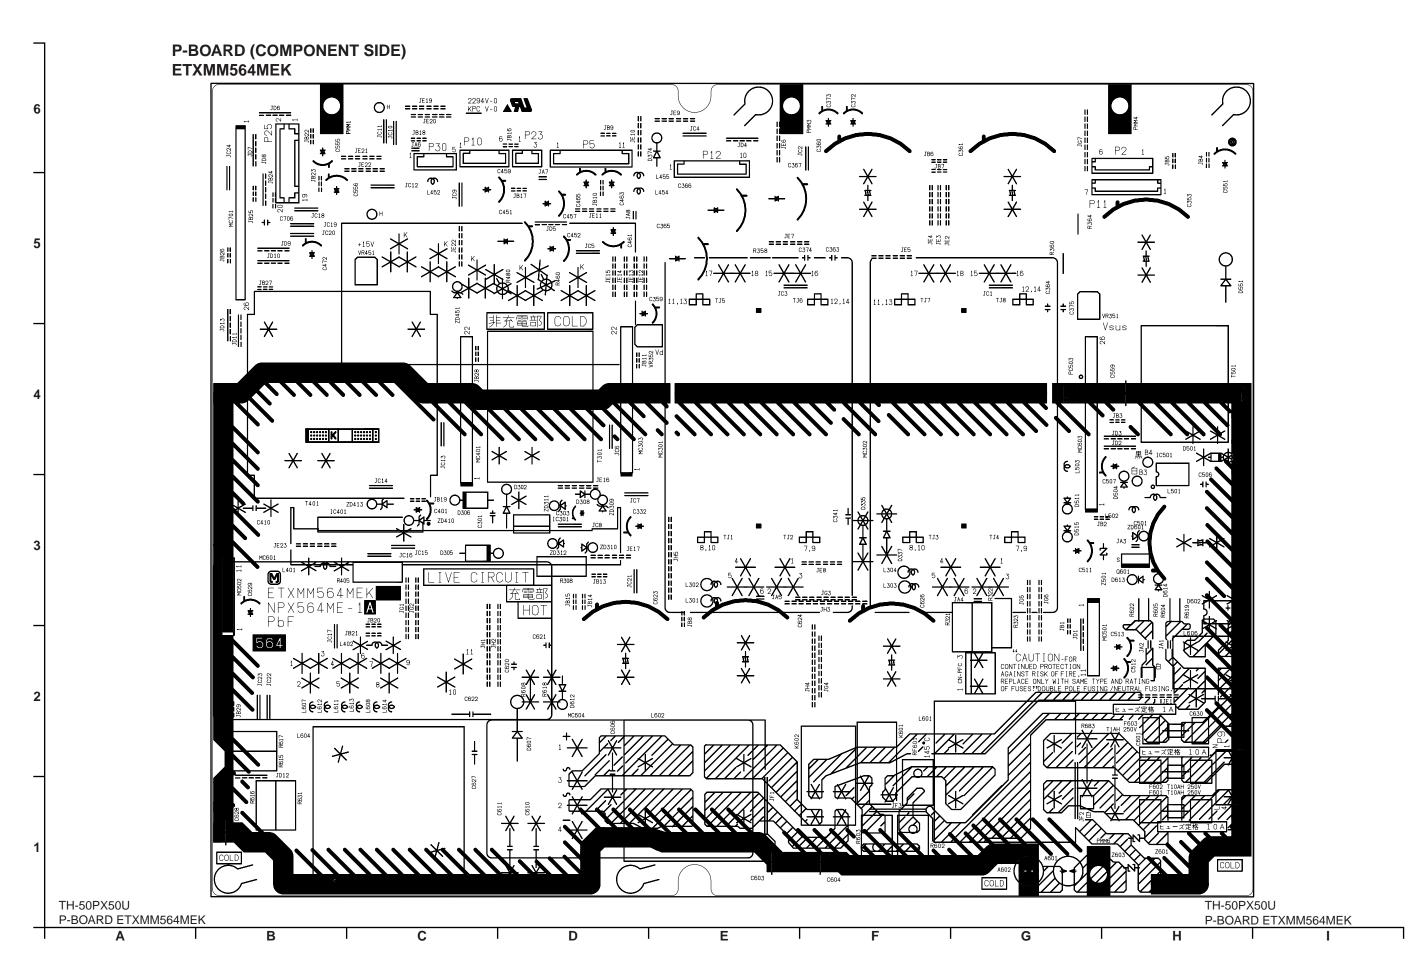


### 12.4. PA-Board

### PA-BOARD(FOIL SIDE) TNPA3620

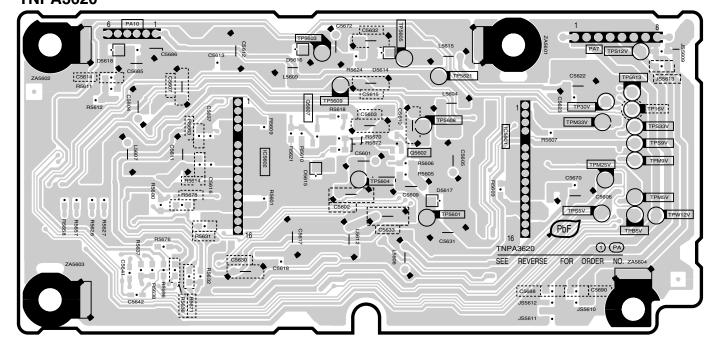

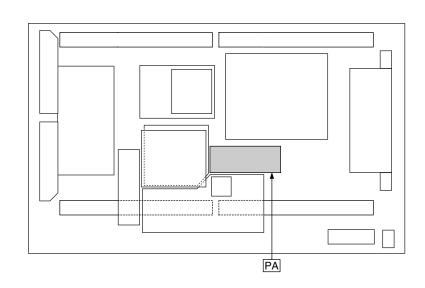

### PA-BOARD(COMPONENT SIDE) TNPA3620

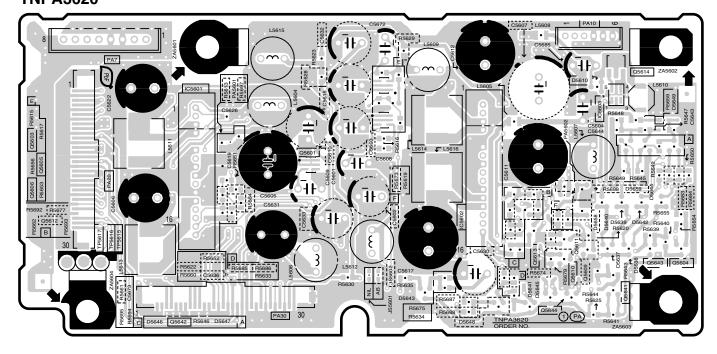

#### **Parts Location**

	PA-BOARD				
IC		TP			
IC5601	B-2	TP5601	C-4		
IC5602	D-2	TP5603	C-5		
IC5603	E-2	TP5604	C-4		
TRANSICTO	•	TP5605	C-5		
TRANSISTO	1	TP5608	C-5		
Q5601	C-2	TP5609	C-5		
Q5602	D-5	TP5621	C-5		
Q5603	A-2	TP16V	E-5		
Q5604	E-1	TP30V	E-5		
Q5605	2	TPB5V	E-4		
Q5606	A-2	TPM25V	E-5		
Q5607	C-5	TPM33V	E-5		
Q5609	E-1	TPM5V	E-5		
Q5610	E-1	TPM9V	E-5		
Q5612	A-2	TPS12V	E-5		
Q5613	D-1	TPS33V	E-5		
Q5614	E-3	TPS5V	E-4		
Q5641	E-1	TPS9V	E-5		
Q5642	B-1	TPW12V	E-4		
Q5643	E-1				
Q5644	D-1				


TH-37/42/50PX50U
PA-BOARD TNPA3620

A B C D D E F G H I I


### 12.5. PB-Board



PB-BOARD				
	TP			
F-1 G-4 H-1	TP5801 TP5802 TP5803 TP5804 TP5808	H-4 H-3 F-3 H-4 H-3		
	F-1 G-4	TP F-1 TP5801 G-4 TP5802 H-1 TP5803 TP5804		

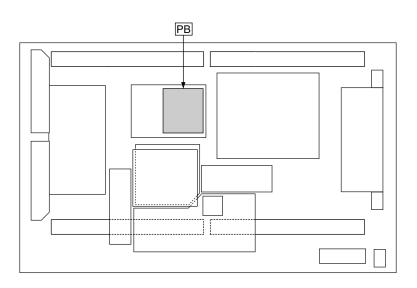


### PB-BOARD(FOIL SIDE) TNPA3643AC

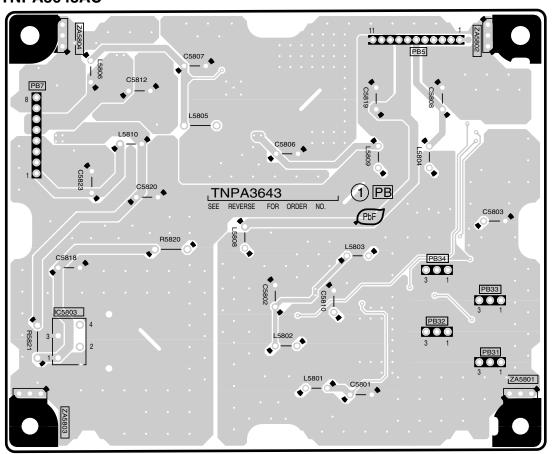

С

D

# PB-BOARD(COMPONENT SIDE) TNPA3643AC

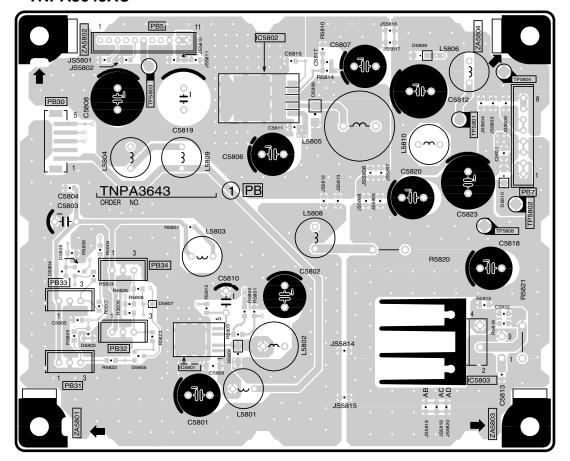

G

TH-37/42/50PX50U PB-BOARD TNPA3643AC


В


TH-37/42/50PX50U PB-BOARD TNPA3643AC

57


Е


### 12.6. H-Board

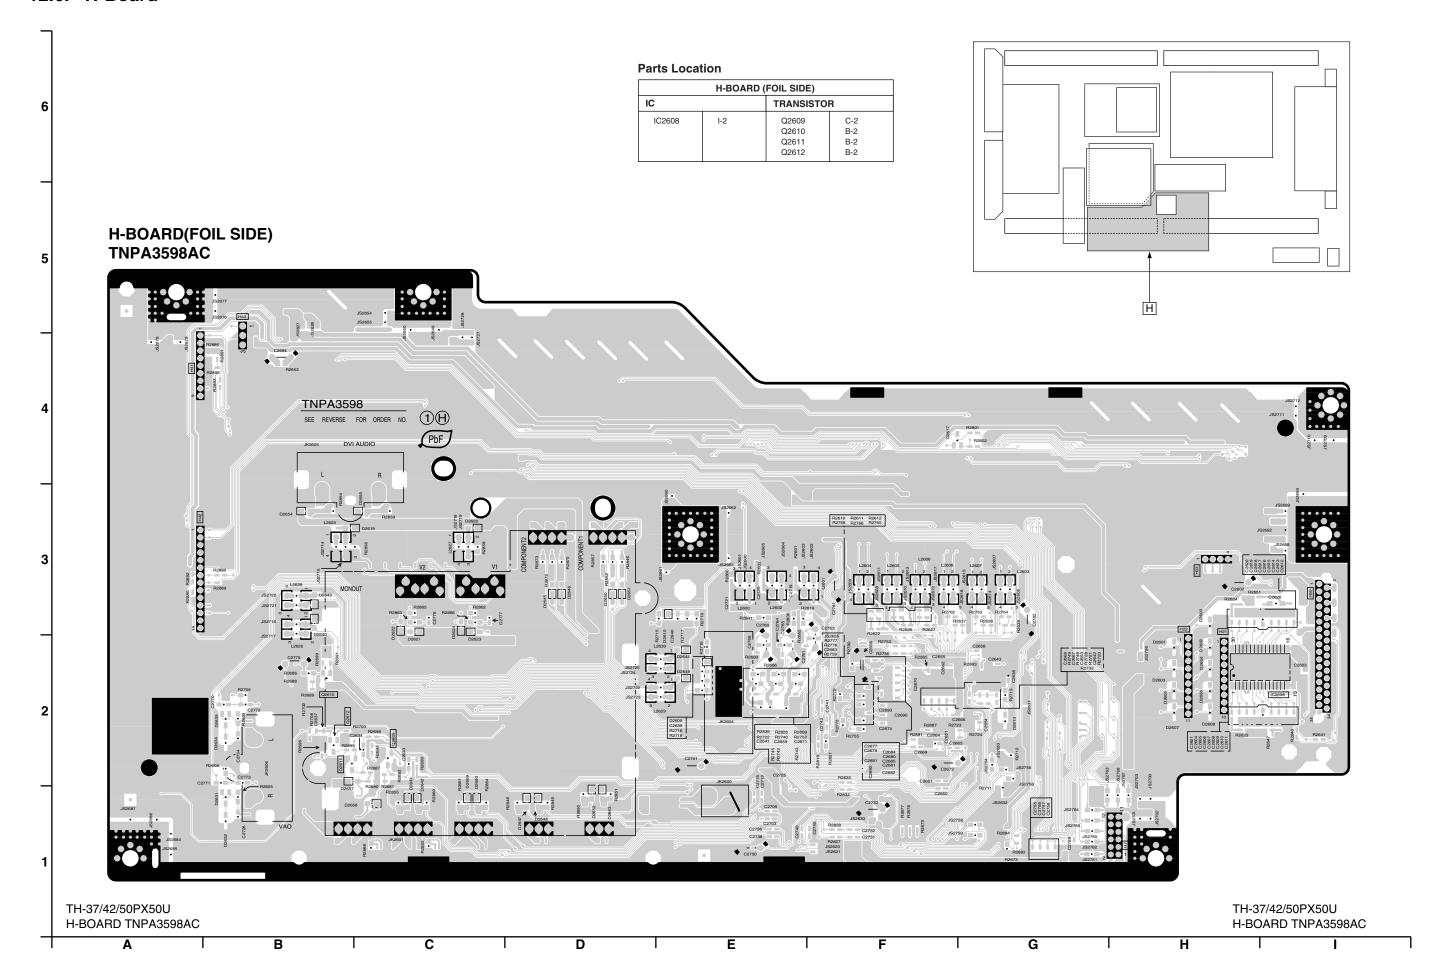

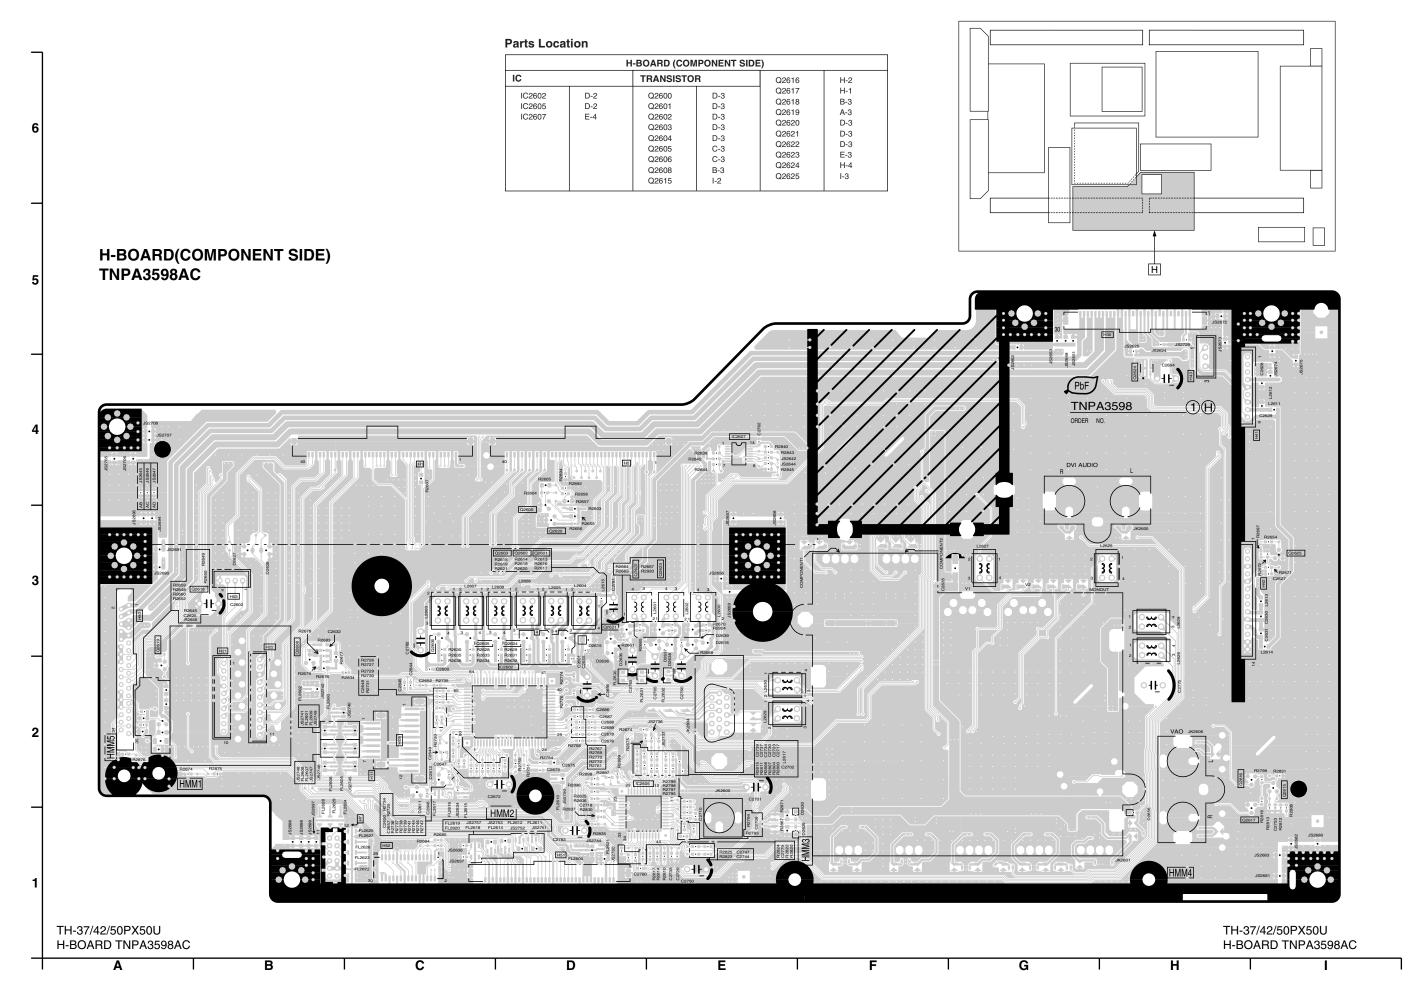

### 12.7. DT-Board

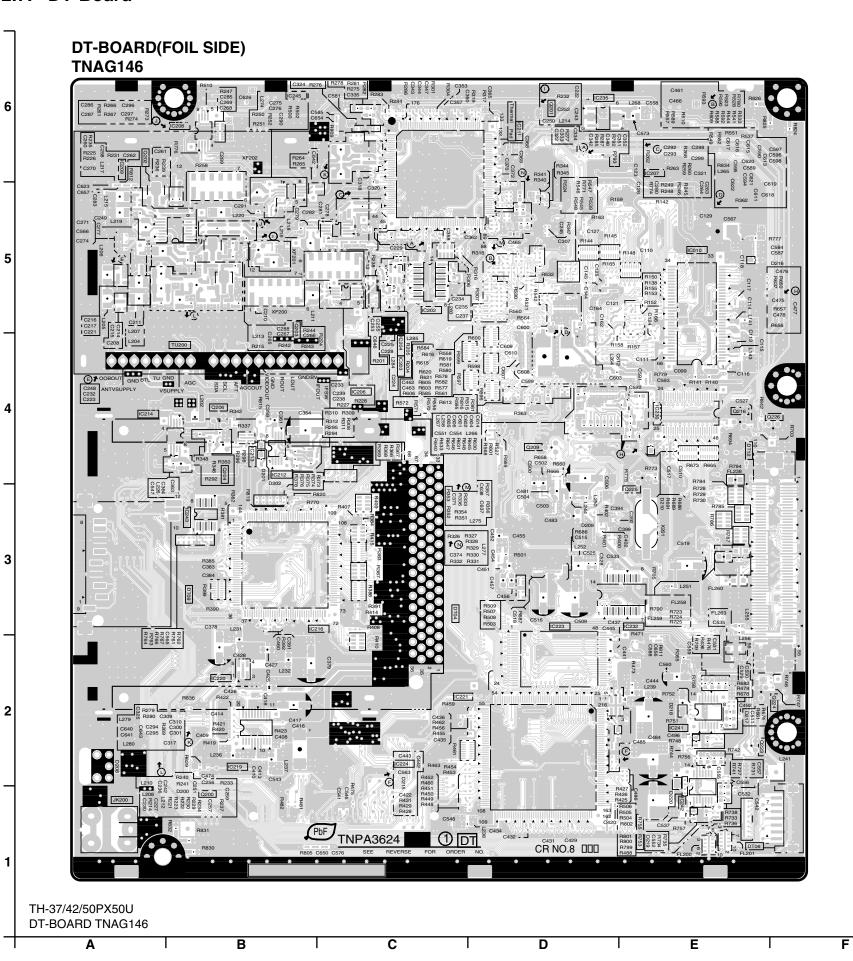


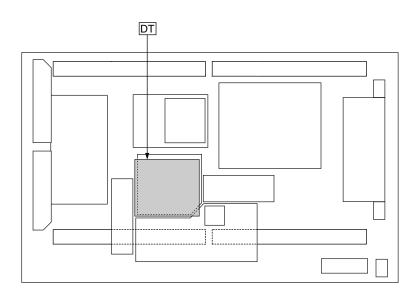

#### **Parts Location**

DT-BOARD (FOIL SIDE)			
IC		TRANSISTO	R
IC8010	E-5	Q8200	B-1
IC8202	C-5	Q8201	D-6
IC8203	C-4	Q8202	A-6
IC8204	C-4	Q8203	B-4
IC8206	C-4	Q8204	B-4
IC8207	E-6	Q8206	B-4
IC8208	B-6	Q8209	D-4
IC8209	A-6	Q8216	E-4
IC8211	D-6	Q8223	E-2
IC8212	B-4	Q8224	E-2
IC8213	B-4	Q8225	D-3
IC8214	A-4	Q8226	E-4
IC8216	B-3		
IC8219	B-2		
IC8220	B-2		
IC8221	C-2		
IC8223	D-3		
IC8224	C-2		
IC8230	E-4		
IC8232	E-3		
IC8235	D-6		
IC8241	E-2		
IC8242	E-1		
IC8243	B-3		
IC8245	B-6		

TH-37/42/50PX50U DT-BOARD TNAG146 **G** H I

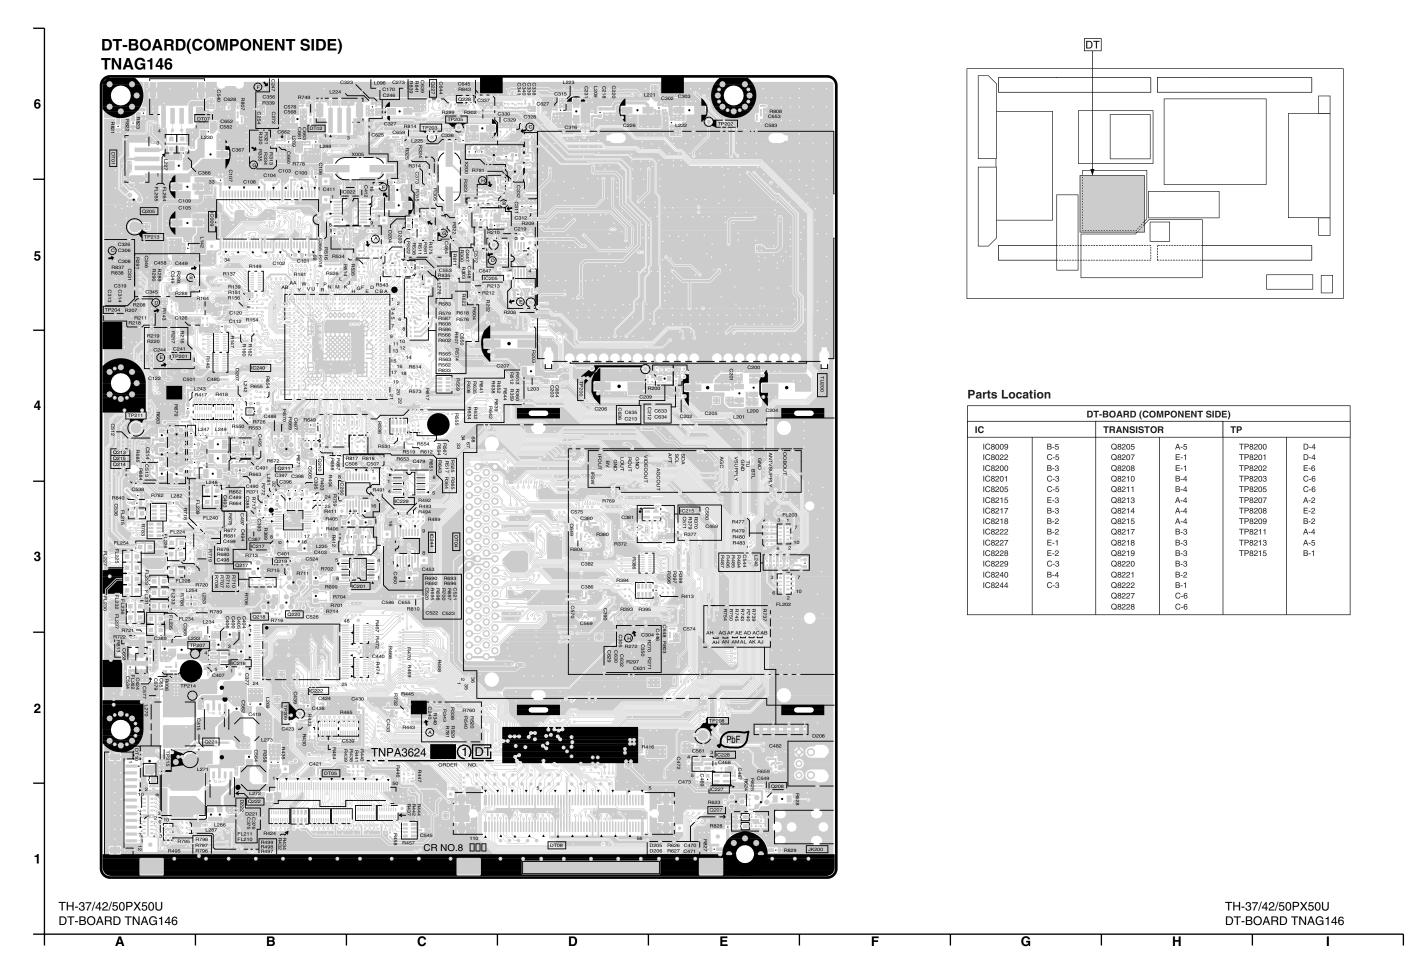


### 12.8. DV-Board

THIS IS FOR REFERENCE USE ONLY.
THIS MUST BE REPLACED WITH
AN EXCHANGE BOARD ONLY.

#### **Parts Location**


DV-BOARD					
IC TRANSISTOR			)R		
IC5003	F-2	Q5001	B-3		
IC5015	B-3	Q5002	C-2		
IC5016	H-2	Q5003	C-2		
IC5017	G-1	Q5004	G-1		
		Q5020	F-1		

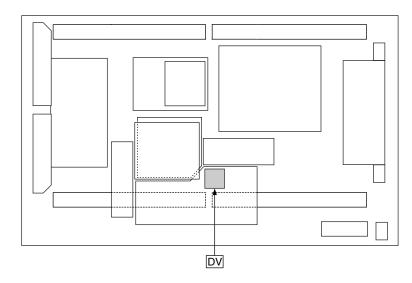

### DV-BOARD(FOIL SIDE) TNPA3626

TH-37/42/50PX50U


**DV-BOARD TNPA3626** 

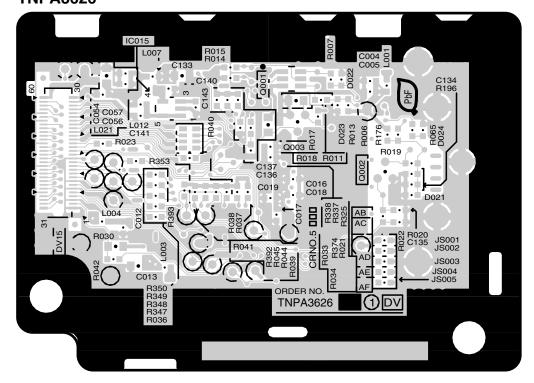

С

D

### DV-BOARD(COMPONENT SIDE) TNPA3626

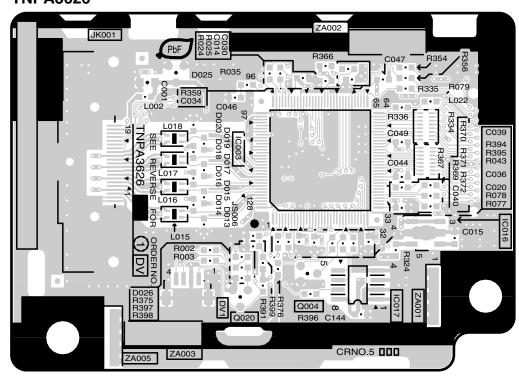


G

TH-37/42/50PX50U DV-BOARD TNPA3626

Е

### 12.9. DG-Board


DG-BOARD(FOIL SIDE) TNPA3625AE (37inch) TNPA3625AC (42inch) TNPA3625AD (50inch)

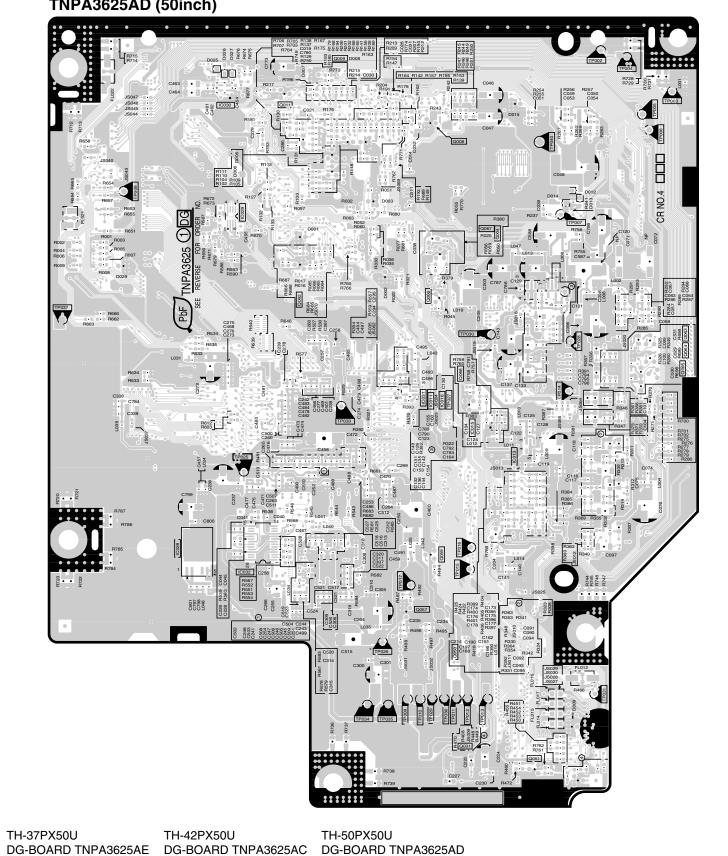

С

D

В

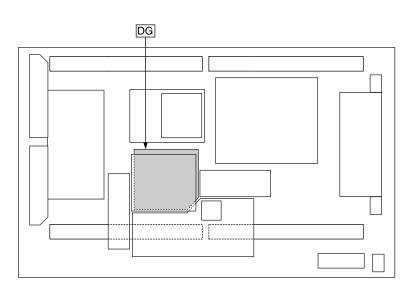


#### **Parts Location**

DG-BOARD (FOIL SIDE)					
IC		TRANSISTO	3	TP	
IC4011	C-4	Q4004	D-5	TP4002	E-6
IC4013	D-3	Q4008	D-5	TP4003	E-5
IC4015	D-3	Q4009	C-6	TP4004	E-6
IC4016	C-4	Q4011	B-6	TP4005	E-5
IC4028	B-3	Q4031	D-1	TP4006	E-5
IC4029	B-5	Q4050	D-2	TP4007	D-5
IC4030	B-6	Q4051	D-1	TP4008	A-5
IC4031	C-4	Q4057	C-2	TP4009	C-1
IC4032	B-2	Q4059	C-3	TP4010	C-1
		Q4062	C-4	TP4011	D-1
		Q4063	E-4	TP4012	D-1
		Q4064	E-4	TP4013	D-1
		Q4065	E-4	TP4014	D-4
		Q4066	C-4	TP4015	D-2
		Q4067	D-5	TP4016	D-2
		Q4068	D-4	TP4017	C-2
				TP4025	B-3
				TP4026	C-2
				TP4028	D-4
				TP4029	C-1
				TP4030	D-4
				TP4031	D-1
				TP4033	C-3
				TP4034	C-1
				TP4035	C-1
				TP4036	C-1
				TP4037	A-4
				TP4040	D-5
				I	

TH-37PX50U TH-42PX50U TH-50PX50U
DG-BOARD TNPA3625AE DG-BOARD TNPA3625AC DG-BOARD TNPA3625AD

G | H | I

Ε

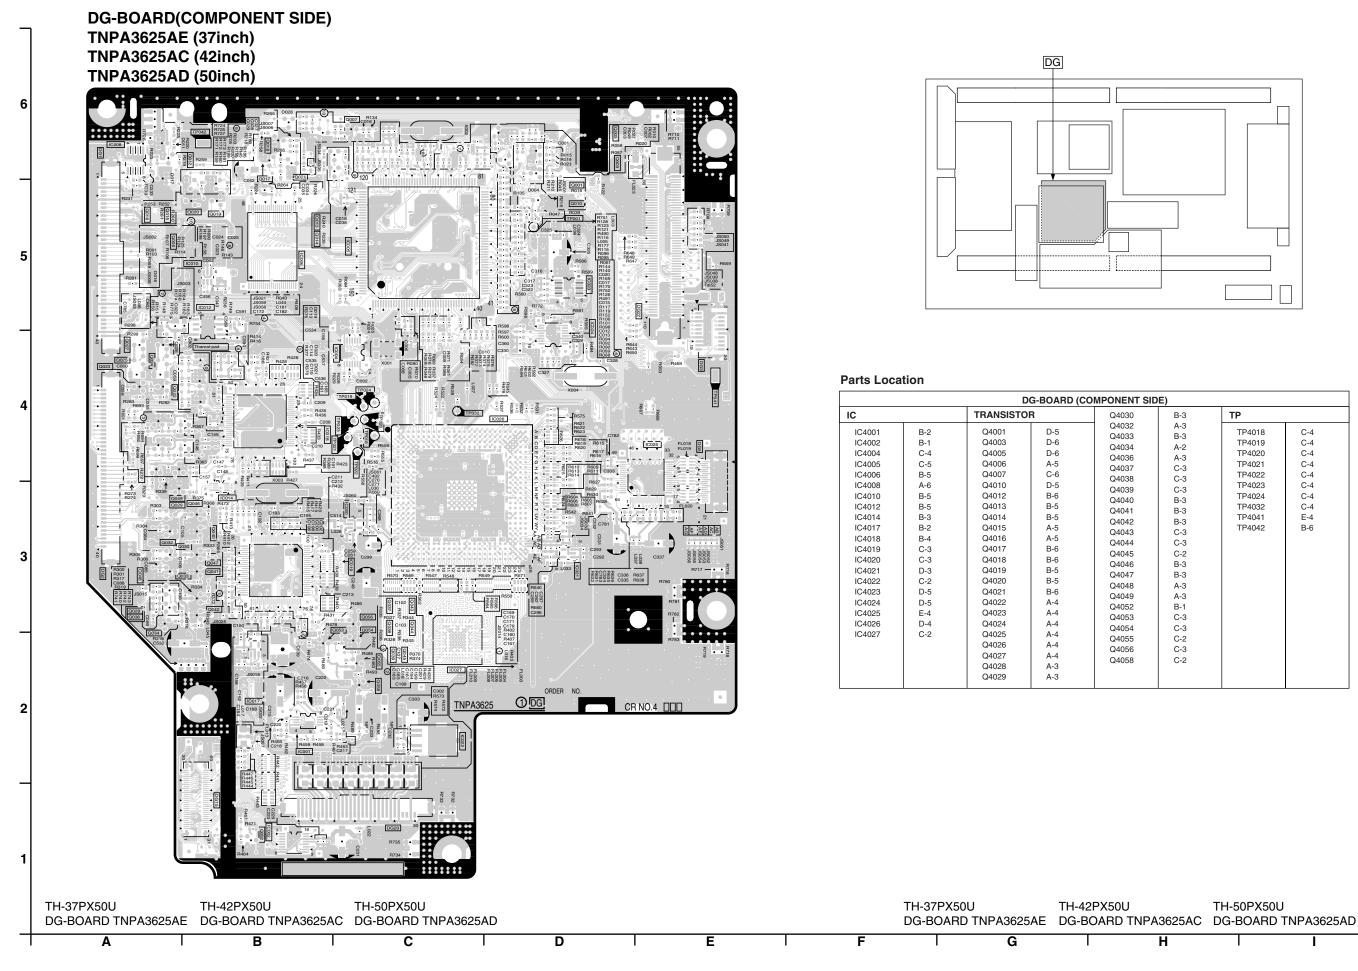

TP4018

TP4019

TP4020

TP4021

TP4022

TP4023

TP4024

TP4032

TP4041

TP4042

C-4


C-4 C-4


C-4 C-4 C-4

C-4 C-4 C-4 E-4


B-6

### Z-BOARD (FOIL SIDE) TNPA3621AB

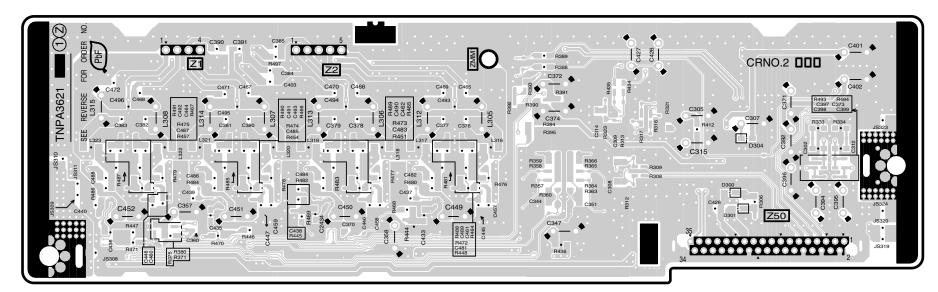

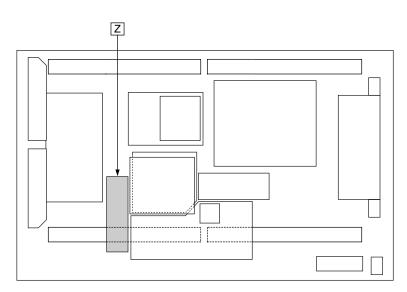

### Z-BOARD (COMPONENT SIDE) TNPA3621AB

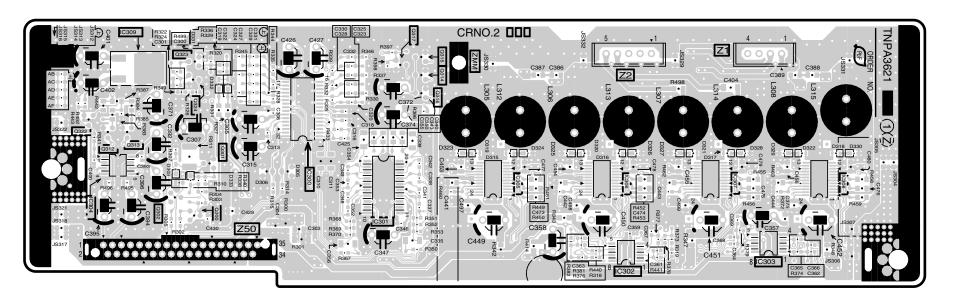


#### **Parts Location**

	Z	-BOAF	RD	
		Т	RANSISTO	R
00 01 02 03 04 05 06 07 08	C-2 C-2 E-2 F-2 A-2 D-2 E-2 E-2 F-2 A-3		Q2300 Q2301 Q2302 Q2312 Q2313 Q2314 Q2315 Q2316 Q2317 Q2322 Q2323	B-2 B-2 B-2 A-2 B-2 D-3 D-3 C-3 A-2 B-3
			Q2324	B-3
֡	01 02 03 04 05 06 07	00 C-2 01 C-2 02 E-2 03 F-2 04 A-2 05 D-2 06 E-2 07 E-2 08 F-2	00 C-2 01 C-2 02 E-2 03 F-2 04 A-2 05 D-2 06 E-2 07 E-2 08 F-2	01

TH-37/42/50PX50U Z-BOARD TNPA3621AB TH-37/42/50PX50U Z-BOARD TNPA3621AB

I B I C I D I E I F I G I H I I

**D-BOARD(FOIL SIDE)** TZTNP010YES (37inch) TZTNP010YDS (42inch) *ੇ*ਊਊਊਊਊਊਊਊ 5/2-0/0/0/0/0/0/0/0/0/0/0/0/ Q003 Q001 R015 Q004 R020 R121 IC702 C740 TNPA3540 O C C C C R723 8 7 7 6 9 R727 C311 0 C304 2 C305 2 C326 C327 C331 C323 G C509 R335 R900 C900 R902 TH-37PX50U TH-42PX50U TH-37PX50U TH-42PX50U D-BOARD TZTNP010YES D-BOARD TZTNP010YDS D-BOARD TZTNP010YES D-BOARD TZTNP010YDS D Е С G

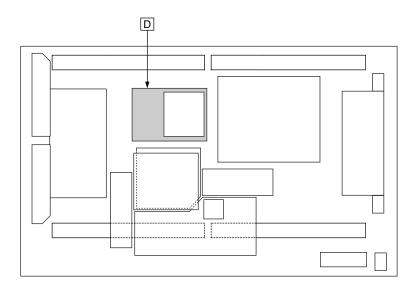

#### **Parts Location**


D-BOARD (FOIL SIDE)					
IC		TRANSISTO	R		
IC9004 IC9301 IC9702	F-2 B-3 D-5	Q9001 Q9001 Q9002 Q9003 Q9004 Q9005 Q9010 Q9700 Q9800 Q9801 Q9900	H-5 H-5 H-5 H-5 H-5 H-1 H-1 C-6 C-5 D-6		

#### **Parts Location**

	D-BOARD (COMPONENT SIDE)					
IC		TRANSISTO	OR	TP		
IC9001 IC9003 IC9005 IC9006 IC9007 IC9008	B-1 C-2 B-3 A-2 A-2 B-5	Q9008 Q9009 Q9011 Q9012 Q9013 Q9020	C-3 C-3 B-2 B-3 B-3	TP9013 TP9300 TP9301	B-1 F-4 F-4	
IC9200 IC9300 IC9302 IC9303 IC9500 IC9502 IC9503 IC9504 IC9700	H-4 G-2 E-2 G-2 B-4 C-2 C-2 C-5 D-5	Q9021 Q9022 Q9023 Q9500 Q9701 Q9702 Q9703 Q9704 Q9901	B-2 B-3 B-3 C-3 E-5 G-5 F-5 F-5			

**D-BOARD(COMPONENT SIDE)** TZTNP010YES (37inch) TZTNP010YDS (42inch) D31 M<sub>L J</sub> HGFEDC BA L200 IC300 TH-37PX50U TH-42PX50U TH-37PX50U TH-42PX50U D-BOARD TZTNP010YES D-BOARD TZTNP010YDS D-BOARD TZTNP010YES D-BOARD TZTNP010YDS Е

D-BOARD (FOIL SIDE) TZTNP010YCS TNPA35 TH-50PX50U TH-50PX50U D-BOARD TZTNP010YCS D-BOARD TZTNP010YCS В С D Е G

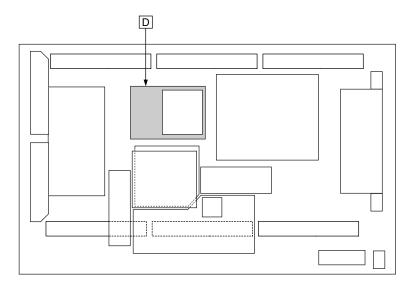



#### **Parts Location**

D-BOARD (FOIL SIDE)							
IC		TRANSISTOR					
IC9004 IC9301 IC9702	F-2 B-3 D-4	Q9000 Q9001 Q9002 Q9003 Q9004 Q9005 Q9010 Q9700 Q9800 Q9801	H-5 H-5 H-5 H-5 G-5 G-2 G-1 C-5 C-5				
		Q9900	D-1				

#### **Parts Location**


D-BOARD (COMPONENT SIDE)								
IC		TRANSISTOR		TP				
IC9001	B-2	Q9008	C-3	TP9013	B-2			
IC9003	C-3	Q9009	C-3	TP9300	F-4			
IC9005	B-3	Q9011	B-2	TP9301	F-4			
IC9006	B-2	Q9012	B-3	TP9700	F-5			
IC9007	B-2	Q9013	B-3					
IC9008	B-5	Q9020	B-2					
IC9200	G-3	Q9021	B-2					
IC9300	F-3	Q9022	B-3					
IC9302	D-3	Q9023	B-3					
IC9303	G-3	Q9500	C-3					
IC9500	B-4	Q9701	E-4					
IC9502	C-2	Q9702	F-5					
IC9503	C-2	Q9703	E-4					
IC9504	B-5	Q9704	E-5					
IC9700	D-4	Q9901	F-1					

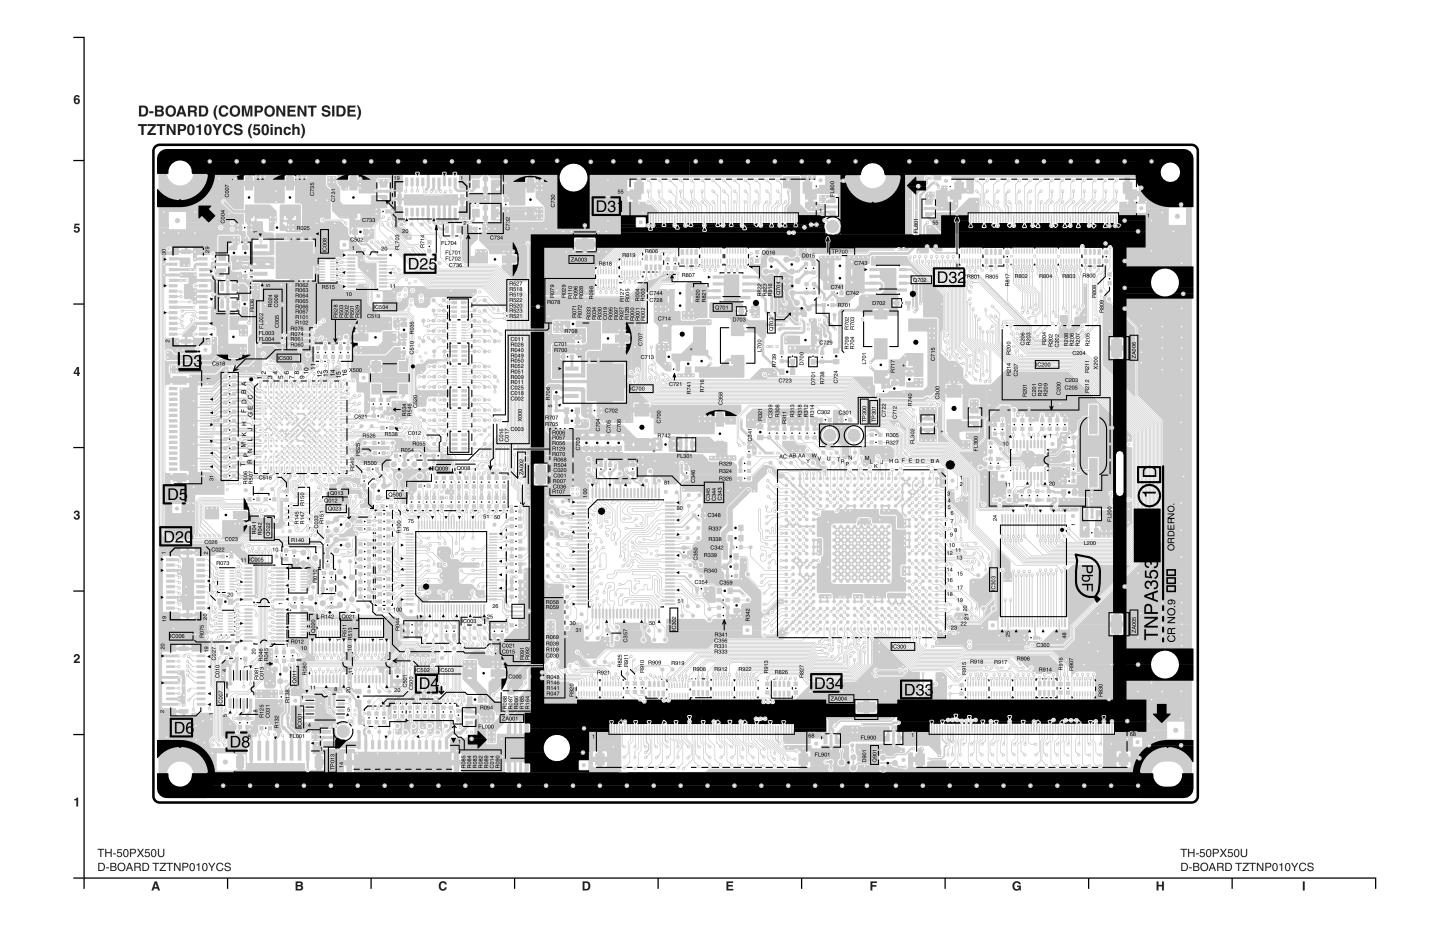

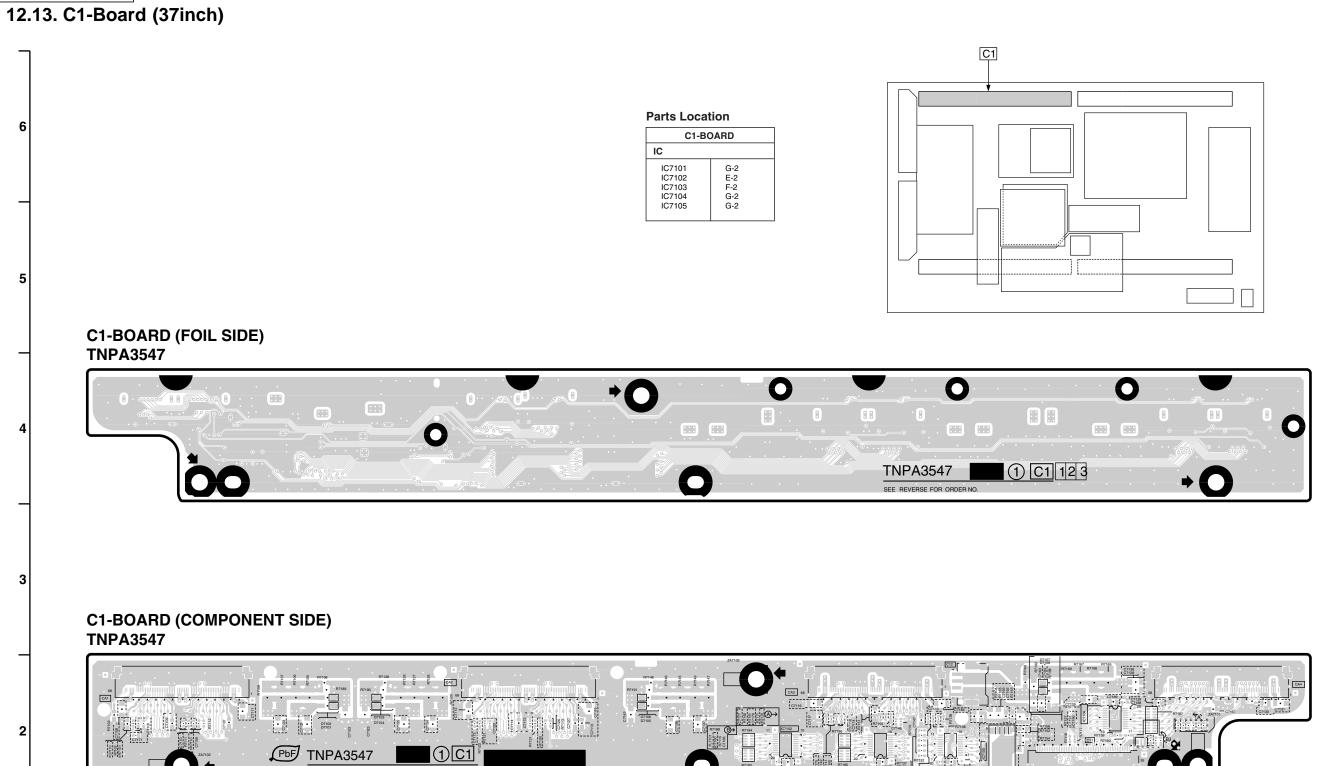

TH-37PX50U TH-37PX50U C1-BOARD TNPA3547 C1-BOARD TNPA3547 Е G


# 12.14. C2-Board (37inch)

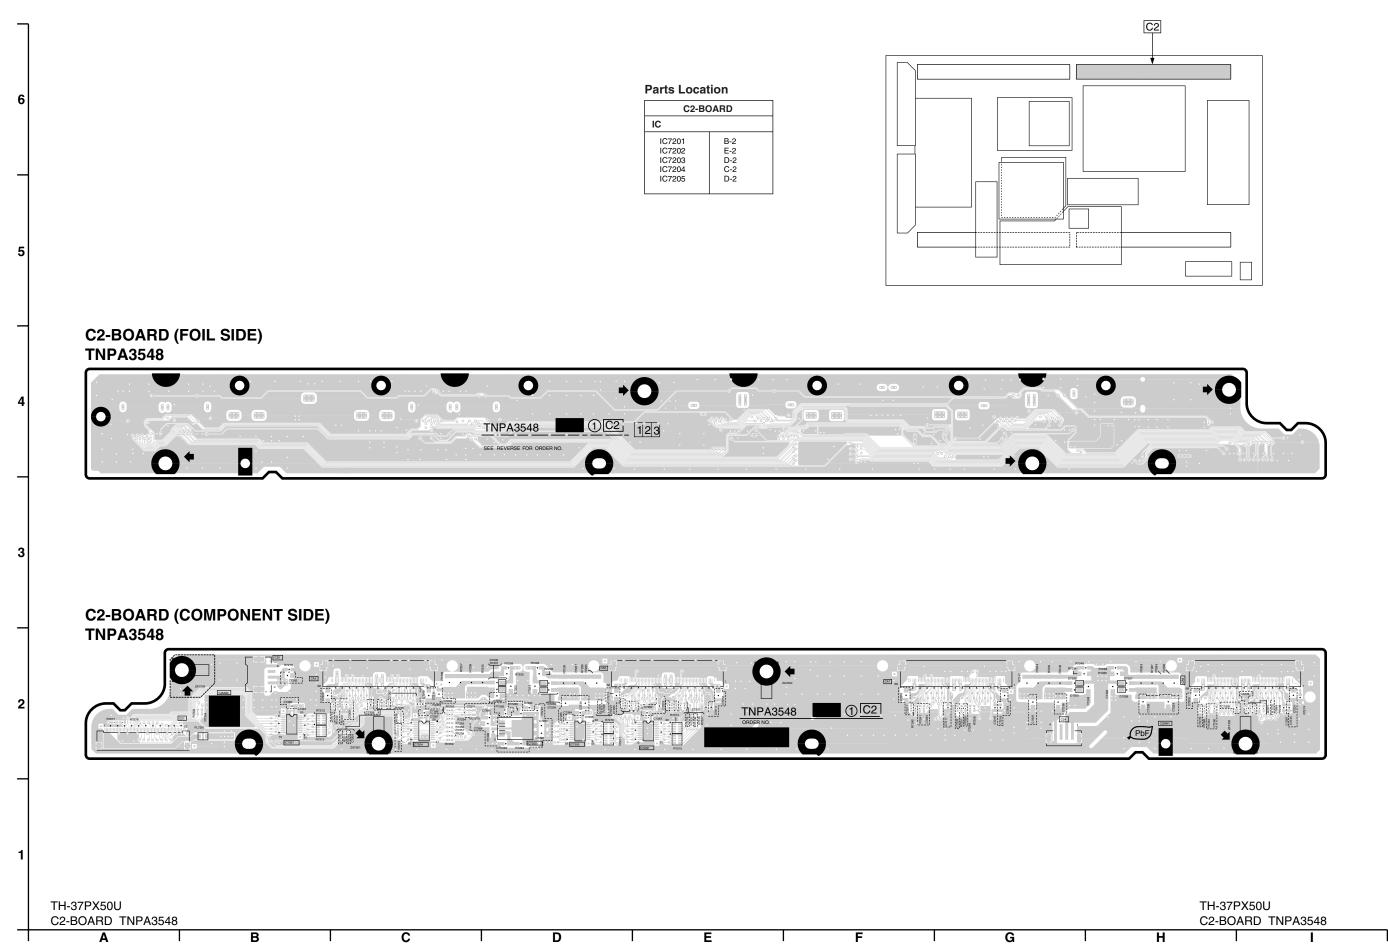

# 12.15. C3-Board (37inch)




ai is Locai	arts Location				
C3-BOARD					
IC					
IC7301 IC7302 IC7303 IC7304 IC7305	B-2 D-2 D-2 C-2 F-2				

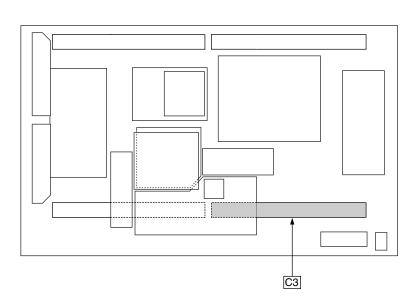


# C3-BOARD (FOIL SIDE)

**TNPA3549** 



## C3-BOARD (COMPONENT SIDE)


**TNPA3549** 

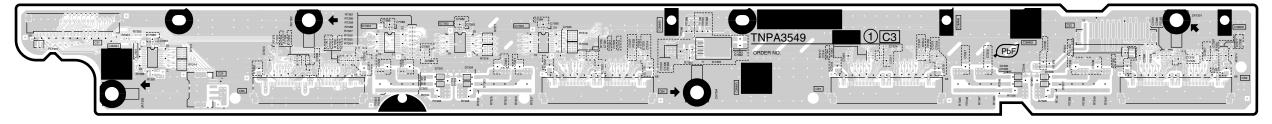


TH-37PX50U
C3-BOARD TNPA3549

A B C D D E F G H I


# 12.16. C4-Board (37inch)

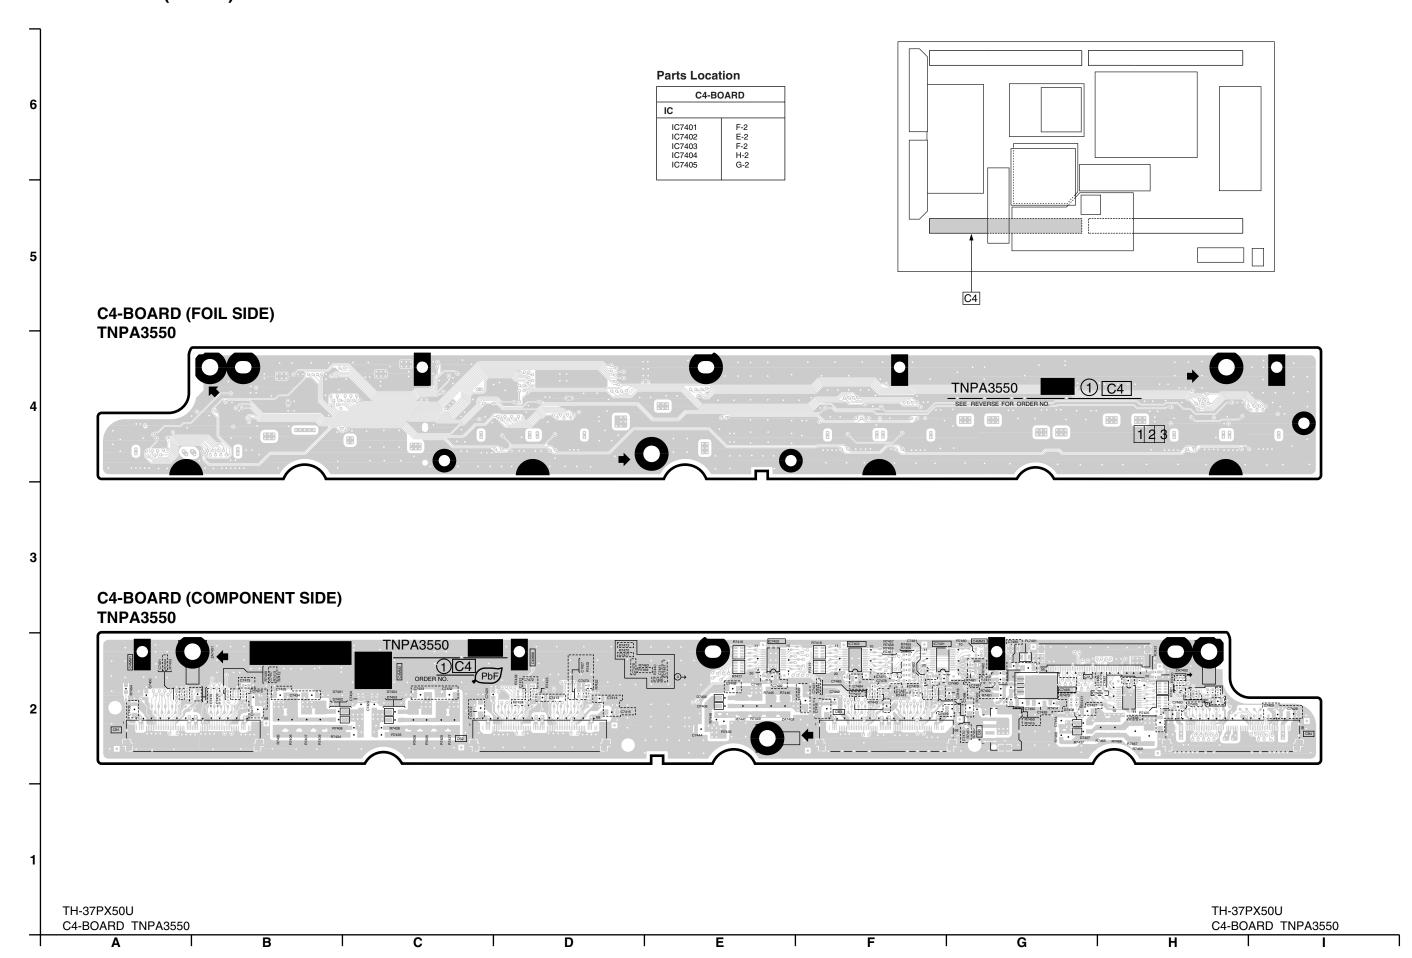

# 12.17. C1-Board (42inch)

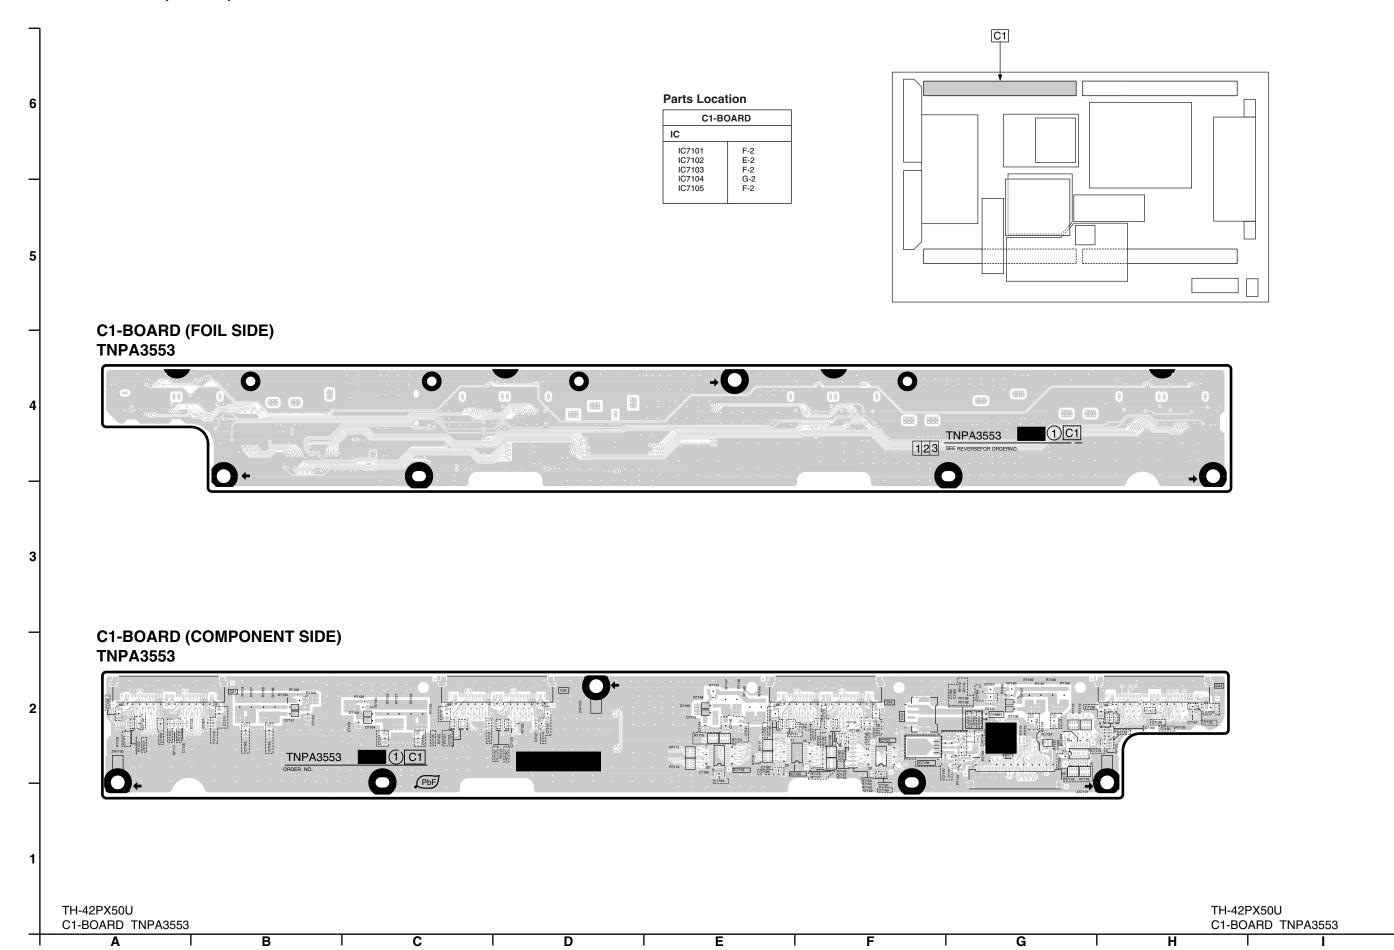


# 12.18. C2-Board (42inch)

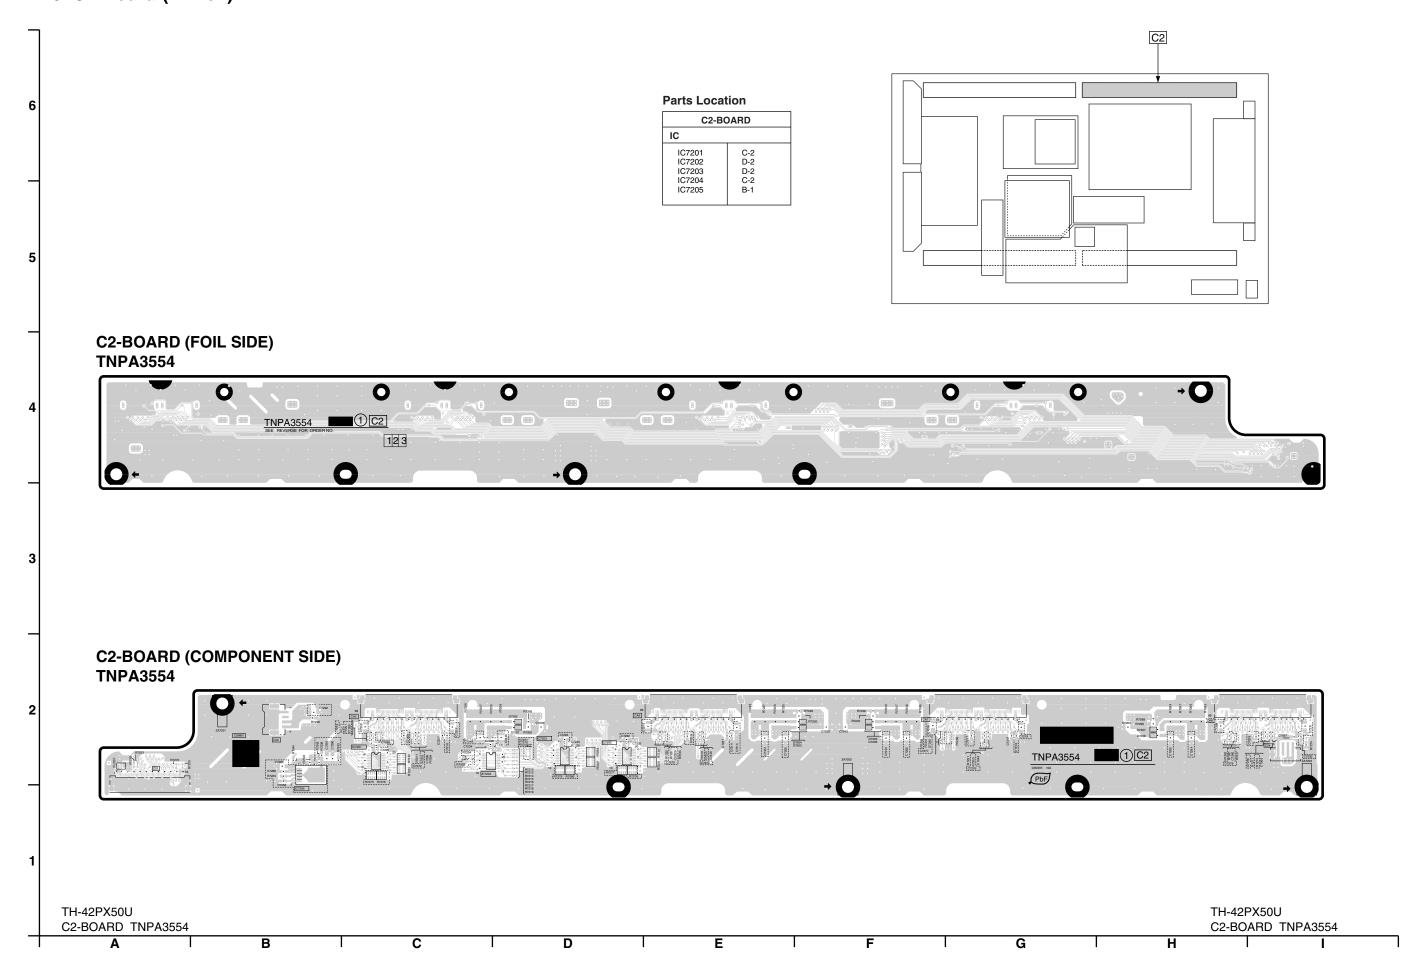

# 12.19. C3-Board (42inch)


**Parts Location** 

C3-BOARD					
IC					
IC7301 IC7302 IC7303 IC7304 IC7305	B-2 C-2 C-2 D-2 D-1				

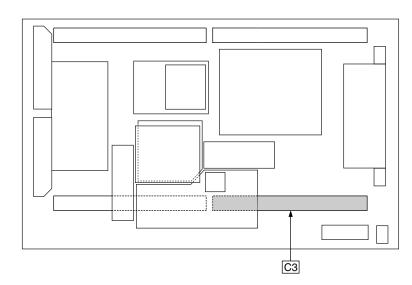


# C3-BOARD (FOIL SIDE)

**TNPA3555** 

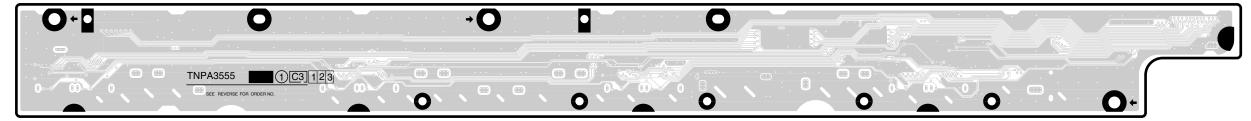

# C3-BOARD (COMPONENT SIDE)

**TNPA3555** 

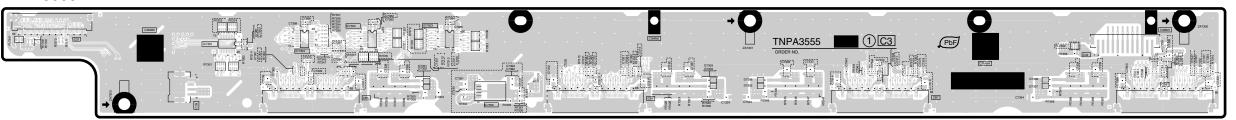


TH-42PX50U C3-BOARD TNPA3555

A B C D E F G H I I


# 12.20. C4-Board (42inch)




C4-BOARD					
IC					
IC7401	G-2				
IC7402	E-2				
IC7403	F-2				
IC7404	G-2				
IC7405	F-1				

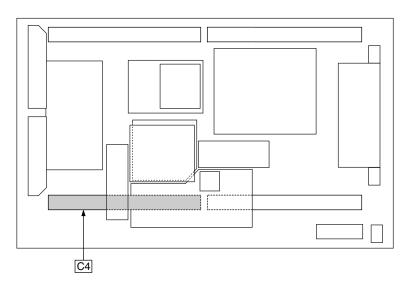

### C4-BOARD (FOIL SIDE) TNPA3556

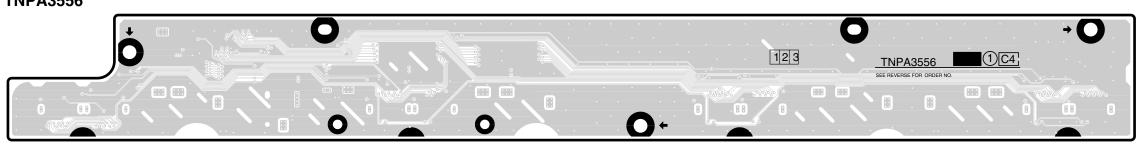


### C4-BOARD (COMPONENT SIDE) TNPA3556

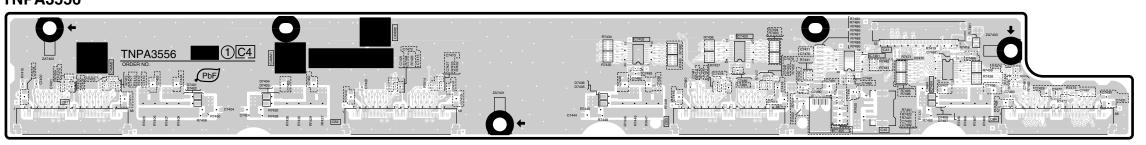


TH-42PX50U C4-BOARD TNPA3556


A B C D D E F G H I I

# 12.21. C1-Board (50inch)




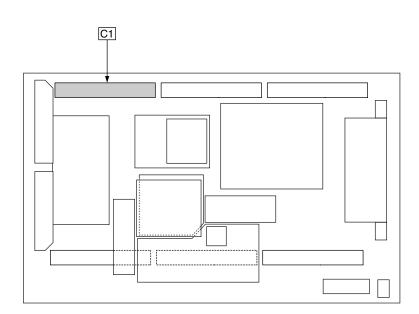

### C1-BOARD (FOIL SIDE) TNPA3561

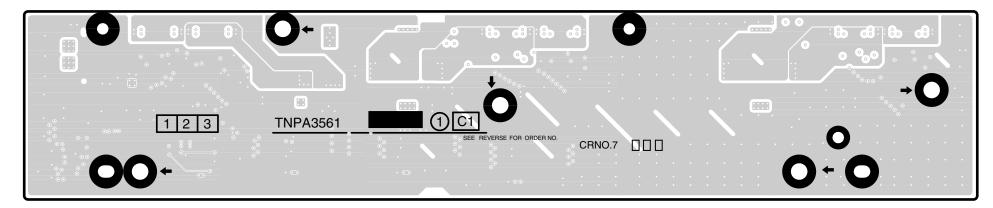


### C1-BOARD (COMPONENT SIDE) TNPA3561

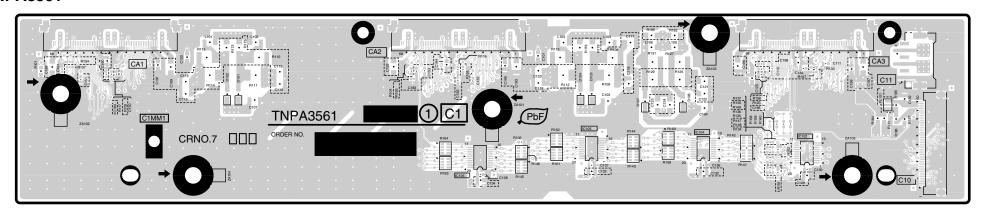


TH-50PX50U
C1-BOARD TNPA3561

A B C D D E F G H I I

# 12.22. C2-Board (50inch)

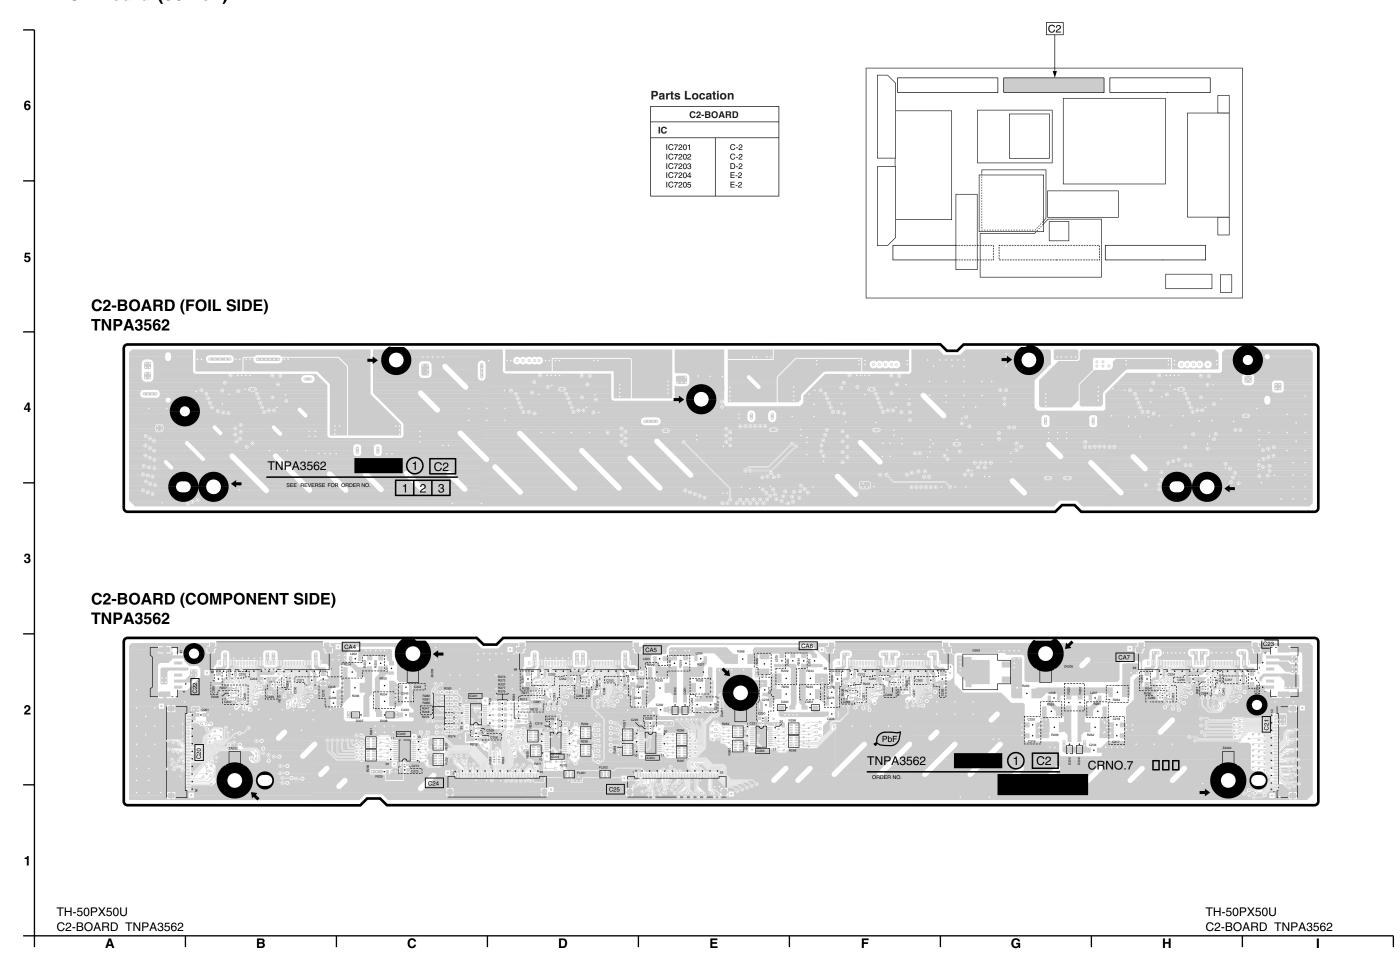


# 12.23. C3-Board (50inch)

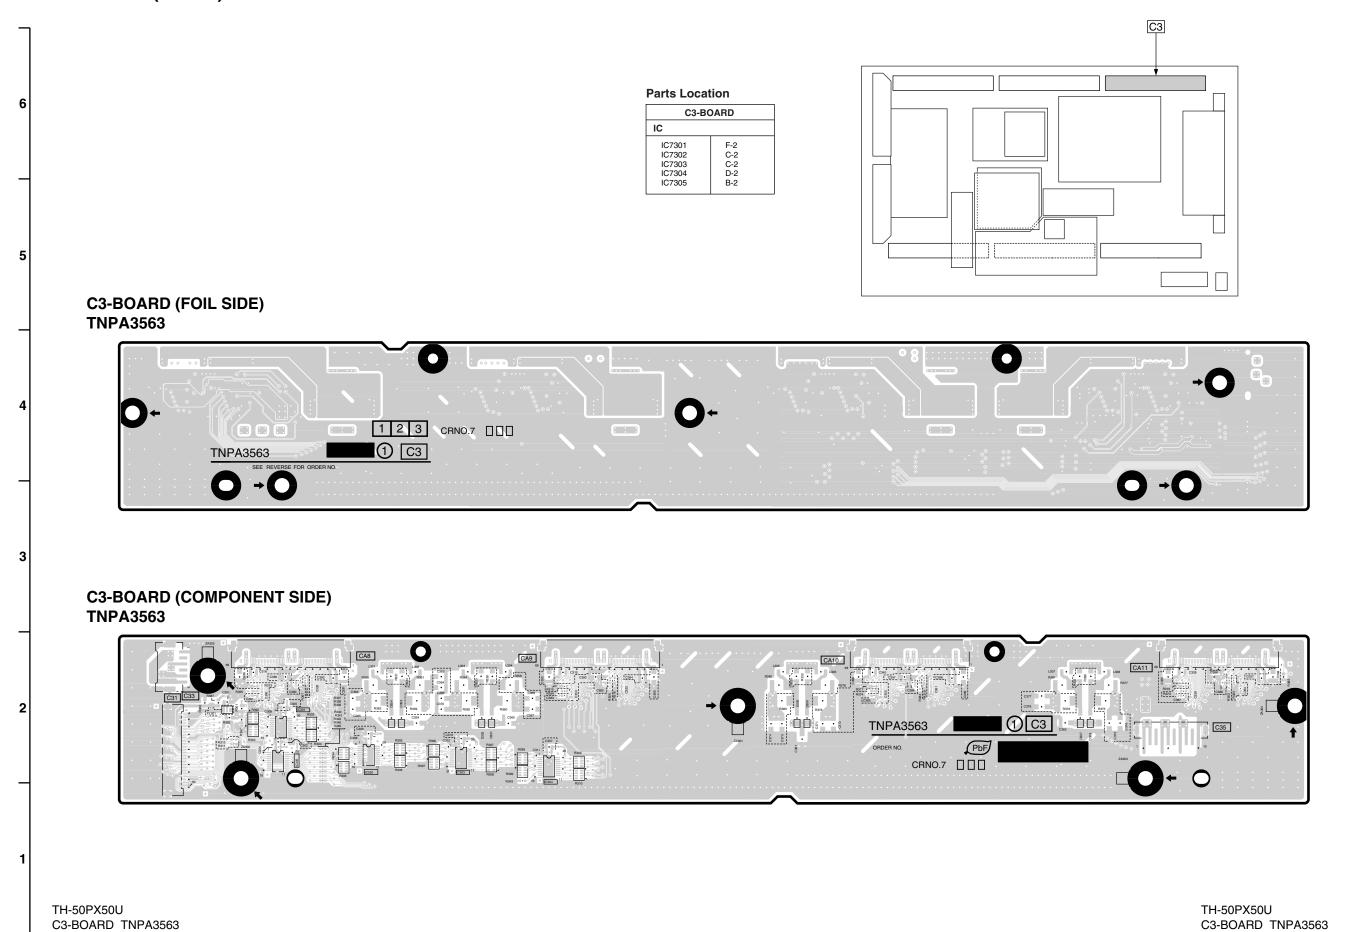


Е


G

# 12.24. C4-Board (50inch)

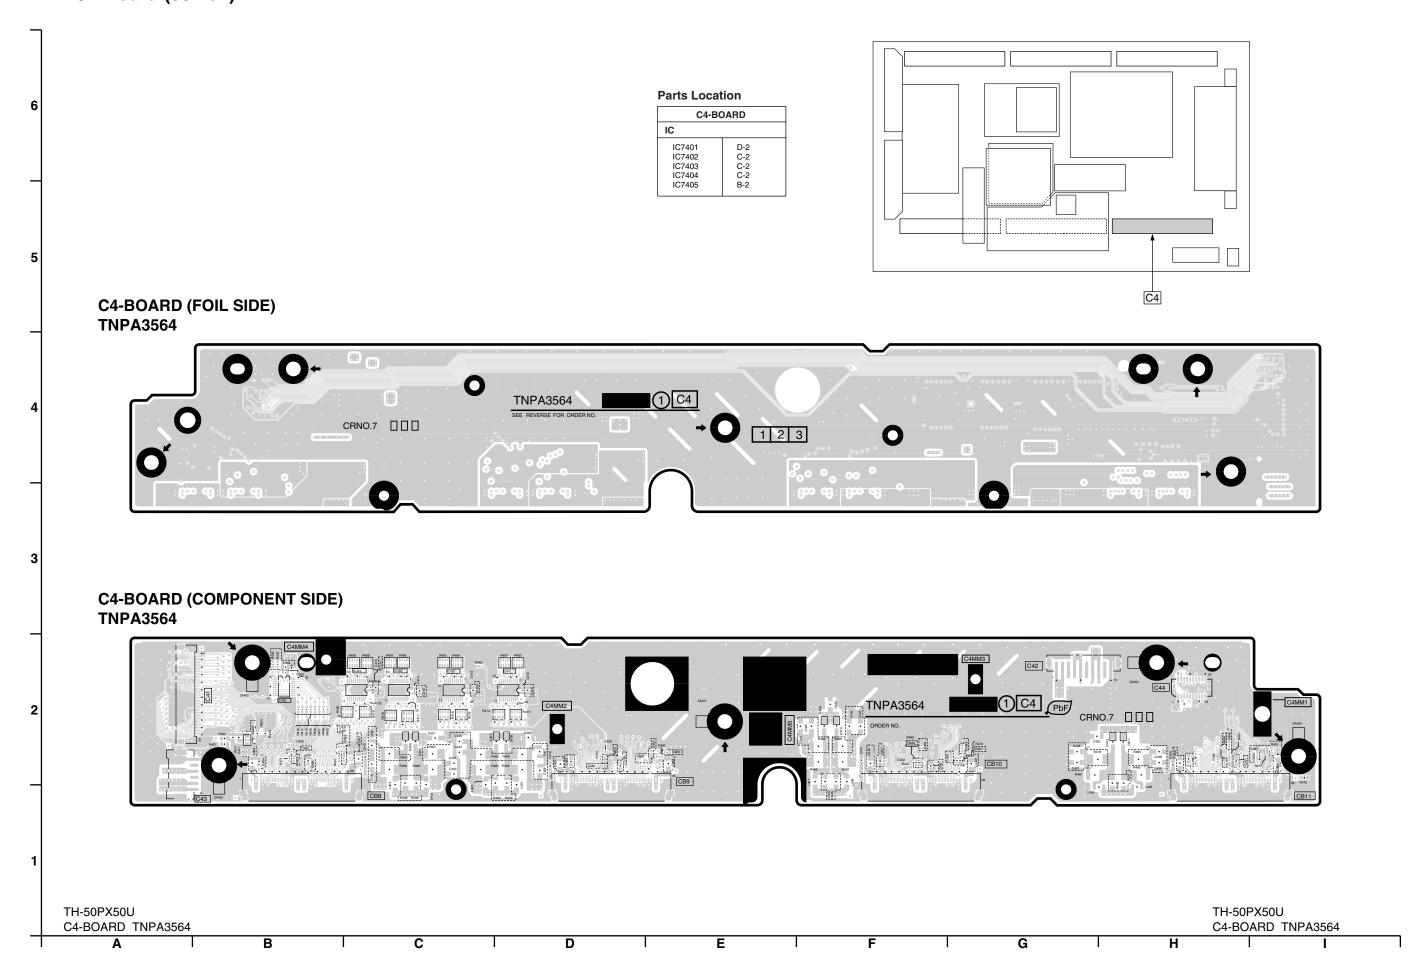

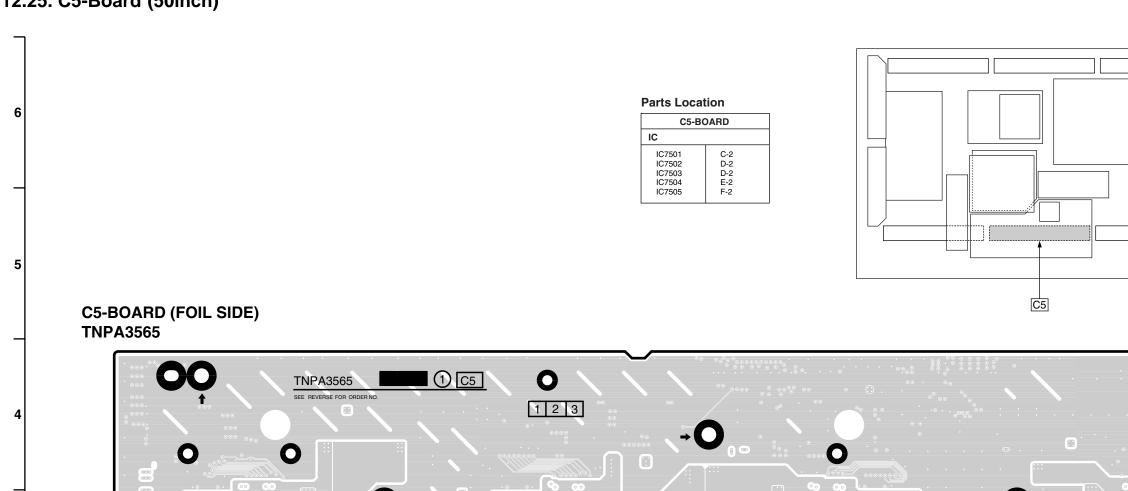


### C5-BOARD (COMPONENT SIDE) TNPA3565

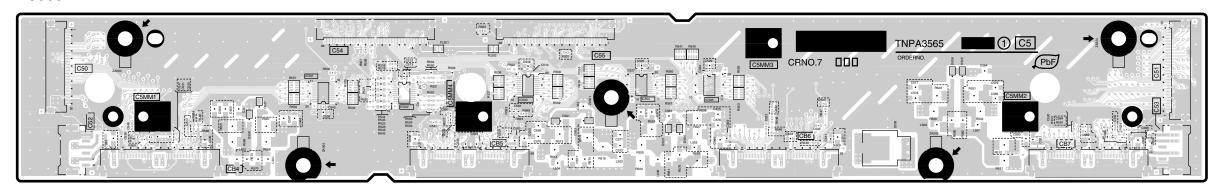


TH-50PX50U
C5-BOARD TNPA3565

A B C D E F G H I

# 12.26. C6-Board (50inch)

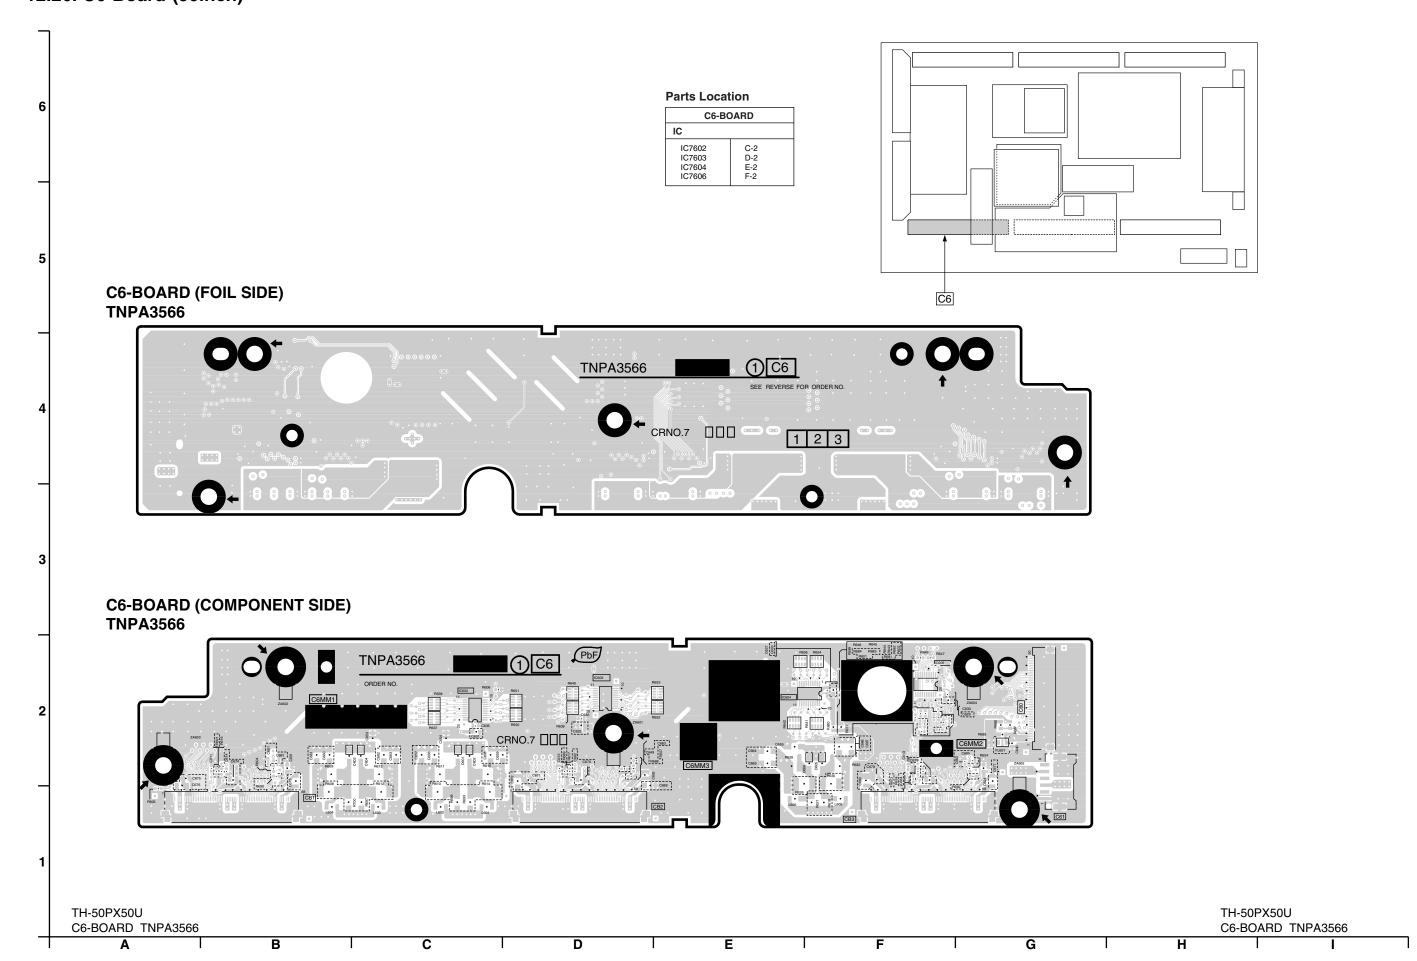

SC-BOARD (FOIL SIDE) TNPA3573 (1) SC TNPA3573 CRNo.6 □□□ PbF TH-37PX50U SC-BOARD TNPA3573 TH-37PX50U SC-BOARD TNPA3573 С D Е G

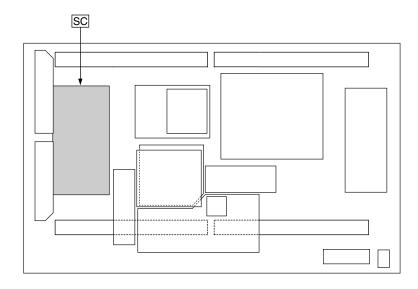

### **Parts Location**


		SC-BOARI	D (FOIL SIDE)		
TRANSISTOR	3	TP		TP43	C-5
Q6552 Q6601 Q6602 Q6603 Q6611 Q6612 Q6613 Q6635 Q6649 Q6762 Q6771 Q6791 Q6792	E-4 C-4 B-4 D-4 D-4 D-2 D-2 G-3 H-3 G-2 G-2	TP1 TP10 TP11 TP12 TP13 TP14 TP15 TP16 TP17 TP18 TP19 TP2 TP20 TP21 TP22 TP23 TP24 TP25 TP26 TP27 TP3 TP30 TP31 TP4 TP40 TP41 TP42	B-1 C-1 C-1 C-1 C-1 C-1 C-1 D-1 D-1 D-1 D-1 D-1 D-1 D-1 D-1 D-1 C-1 C-1 C-1 C-1 C-1 C-1 C-1 C-1 C-1 C	TP44 TP45 TP46 TP47 TP48 TP49 TP5 TP50 TP51 TP54 TP55 TP56 TP57 TP58 TP59 TP6 TP60 TP61 TP62 TP63 TP7 TP8 TP80 TP81 TP80 TP81 TP83 TP84 TP9	C-5 B-5 G-5 G-5 G-5 G-5 C-5 C-5 C-5 C-5 F-5 B-1 C-1 D-5 F-5 F-5 C-1


### **Parts Location**

			SC-BOARD (CO	MPONENT SI	DE)		
IC		TRANSISTO	OR	Q6562	F-5	Q6764	B-3
IC6500 IC6502 IC6503 IC6504 IC6505 IC6506 IC6511	B-2 B-3 B-3 A-4 A-4 B-5 A-3	Q6501 Q6503 Q6504 Q6511 Q6512 Q6520 Q6521 Q6523	B-4 C-4 C-4 B-5 B-5 D-4 D-4	Q6563 Q6564 Q6565 Q6566 Q6581 Q6582 Q6583 Q6586 Q6601	G-5 G-5 G-5 H-5 F-1 E-5 C-5 G-4	Q6765 Q6768 Q6771 Q6772 Q6774 Q6775 Q6776 Q6777	B-1 B-2 B-3 A-2 A-2 A-2 B-4 B-4 C-2
IC6514 IC6515 IC6524 IC6525 IC6526	C-2 A4 A-5 B-4 C-4	Q6524 Q6525 Q6526 Q6527 Q6530	C-4 D-5 D-5 B-4 E-4	Q6602 Q6603 Q6608 Q6609 Q6611	G-4 G-4 G-4 G-4 E-4	Q6792  TP  TPSC1	C-2 B-5
IC6527 IC6528 IC6529 IC6530	D-4 C-5 C-5 B-4	Q6531 Q6532 Q6533 Q6534	E-4 E-4 F-4	Q6612 Q6613 Q6619 Q6620	E-4 F-4 F-4	TPSOS1 TPSOS2 TPV15V TPVAD TPVSCN	F-1 F-2 G-1 B-3 B-3
IC6531 IC6532 IC6533 IC6534 IC6535	D-5 F-1 F-4 F-3 E-3	Q6535 Q6536 Q6537 Q6538 Q6539	F-4 G-4 G-4 G-4 H-4	Q6627 Q6628 Q6629 Q6630 Q6635	F-2 F-2 F-2 F-2 F-2	TPVSET TPVSET2 TPVSUS	C-3 B-3 H-1
IC6536 IC6537 IC6538	E-1 E-2 E-2	Q6540 Q6551 Q6552 Q6560 Q6561	H-4 C-4 D-4 F-5 F-5	Q6639 Q6640 Q6649 Q6761 Q6762	E-1 E-1 E-2 C-2 B-3		

TH-37PX50U SC-BOARD PARTS LOCATION TH-37PX50U SC-BOARD PARTS LOCATION

# **SC-BOARD (COMPONENT SIDE) TNPA3573** TH-37PX50U TH-37PX50U SC-BOARD TNPA3573 SC-BOARD TNPA3573 Е G

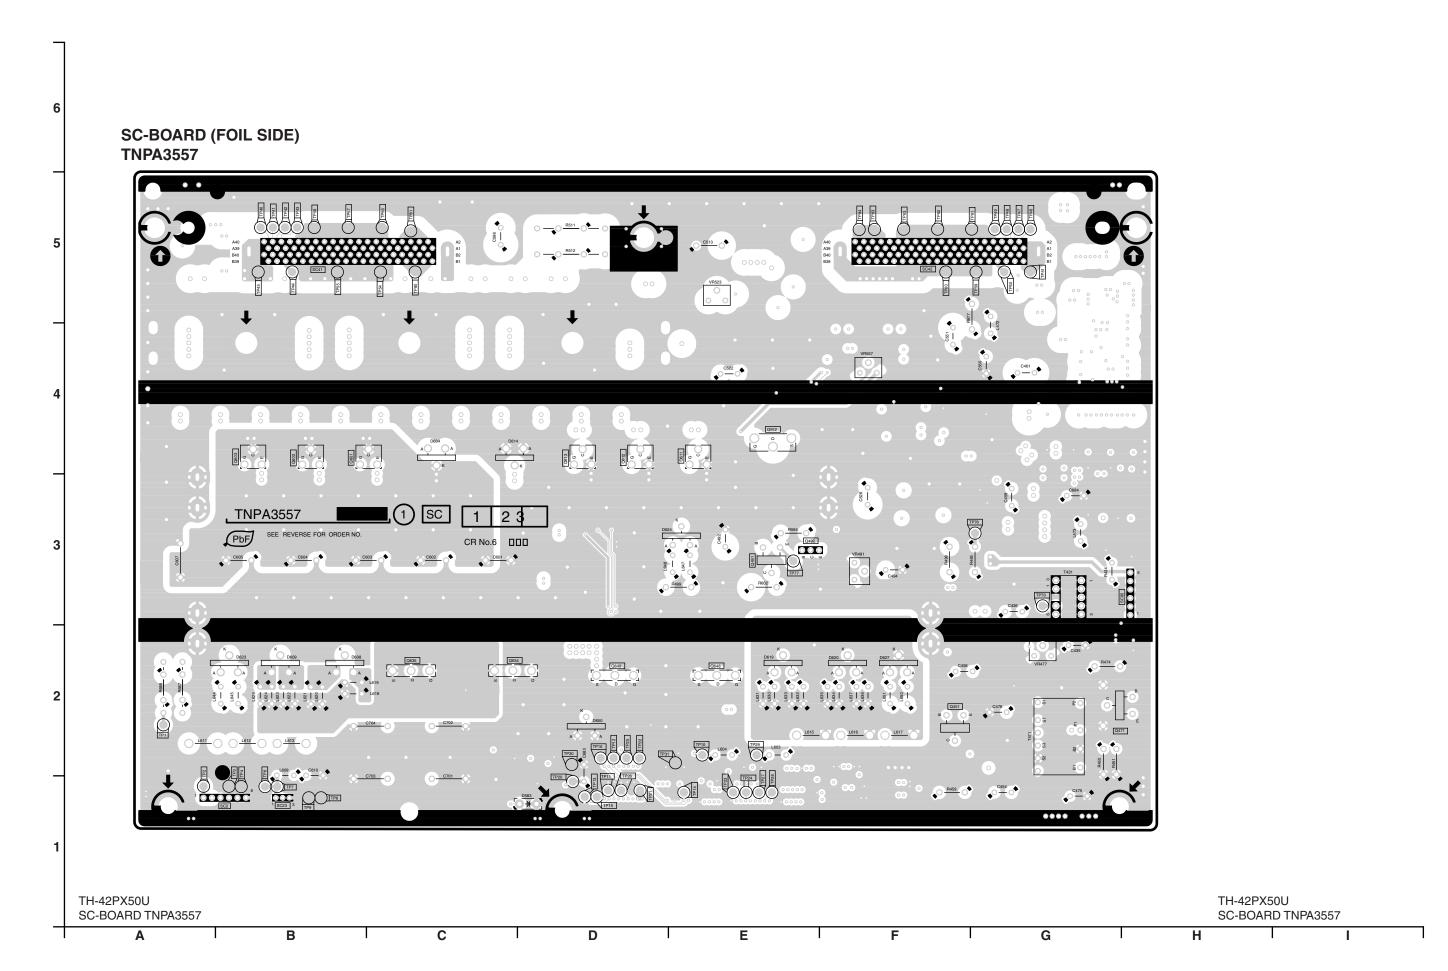

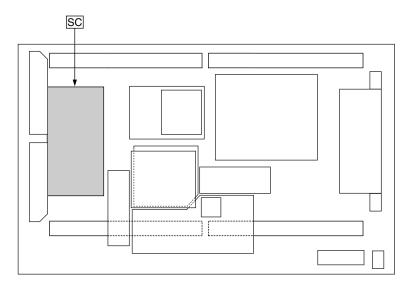

### **Parts Location**

	SC-BOARD (FOIL SIDE)						
TRANSISTO	3	TP		TP41	B-5		
Q6451 Q6471 Q6491 Q6492 Q6552 Q6601 Q6602 Q6603 Q6611 Q6612 Q6613 Q6634 Q6635 Q6648	F-2 G-2 E-3 E-3 E-4 C-4 B-4 B-4 D-4 D-2 C-2 E-2 D-2	TP1 TP2 TP3 TP4 TP6 TP7 TP8 TP9 TP10 TP11 TP12 TP13 TP14 TP15 TP16 TP20 TP21 TP22 TP23 TP24 TP25 TP26 TP27 TP28 TP28 TP29 TP21 TP29 TP30 TP21 TP29 TP30 TP31	A-2 A-1 B-1 B-1 B-1 B-1 B-1 B-1 D-2 D-1 D-1 D-1 D-2 D-1 D-1 D-1 D-2 E-1	TP42 TP43 TP44 TP45 TP46 TP47 TP48 TP49 TP50 TP51 TP54 TP55 TP56 TP57 TP58 TP59 TP60 TP61 TP62 TP63 TP70 TP76 TP77 TP80 TP77 TP80 TP81 TP83 TP84	B-5 B-5 B-5 B-5 G-5 G-5 G-5 G-5 G-5 G-5 G-5 G-5 G-5 G		


### **Parts Location**

	SC-BOARD (COMPONENT SIDE)							
IC		TRANSISTO	R	Q6533	E-4	Q6603	G-4	
IC6431	B-3	Q6431	A-3	Q6534	F-4	Q6608	E-3	
IC6451	B-3	Q6432	A-3	Q6535	F-4	Q6609	E-3	
IC6453	B-4	Q6435	A-3	Q6536	F-4	Q6611	D-4	
IC6454	B-4	Q6451	B-2	Q6537	F-4	Q6612	D-4	
IC6455	B-5	Q6455	B-2	Q6538	G-4	Q6613	E-4	
IC6462	B-2	Q6471	A-2	Q6539	G-4	Q6619	D-3	
IC6462	B-2	Q6471 Q6472	A-2 A-2	Q6540	G-4	Q6620	D-3	
IC6471	B-3	Q6474	B-2	Q6541	G-4	Q6627	E-2	
IC6491	C-3	Q6475	A-2	Q6551	C-4	Q6628	E-2	
IC6500	A-5	Q6476	B-4	Q6552	C-4	Q6629	D-2	
IC6500	A-3 A-4	Q6477	A-4	Q6554	A-3	Q6630	D-2	
IC6509	C-5	Q6491	D-3	Q6560	E-5	Q6634	E-2	
IC6511	B-3	Q6491 Q6492	C-3	Q6561	E-5	Q6635	F-2	
IC6521	D-4	Q6502	C-3	Q6562	F-5	Q6639	C-1	
IC6521	C-4	Q6502 Q6503	C-3	Q6563	F-5	Q6640	C-1	
IC6541	C-4 C-4	Q6503 Q6504	C-4 C-4	Q6564	F-5	Q6648	D-2	
IC6542	B-4	Q6504 Q6506	C-4 C-3	Q6565	F-5	Q6649	E-2	
	C-5	Q6506 Q6511	D-5	Q6566	G-5	TD	1	
IC6544 IC6581	E-1	Q6511 Q6512	D-5 D-5	Q6567	G-5	TP		
IC6581	E-3	Q6520	D-5 D-4	Q6568	G-5	TP15V	G-1	
IC6602	E-3	Q6521	D-4 D-5	Q6569	G-5	TPSC1	E-5	
IC6602	D-2	Q6521 Q6523	D-5 D-4	Q6581	E-2	TPSOS1	C-2	
	I			Q6582	C-5	TPSOS2	D-2	
IC6604	C-1	Q6524	C-4	Q6583	C-5	TPVAD	B-4	
IC6605	D-1	Q6525	C-5	Q6588	C-4	TPVSCN	B-3	
IC6606	C-1	Q6526	D-5	Q6601	C-5	TPVSET	B-3	
		Q6530	D-4	Q6601	F-4	TPVSET2	A-3	
		Q6531 Q6532	E-4 E-4	Q6602	G-4	TPVSUS	H-2	

TH-42PX50U SC-BOARD PARTS LOCATION TH-42PX50U SC-BOARD PARTS LOCATION

# SC-BOARD (COMPONENT SIDE) **TNPA3557** TH-42PX50U TH-42PX50U SC-BOARD TNPA3557 SC-BOARD TNPA3557 Α В С D Е F G

SC-BOARD (FOIL SIDE) **TNPA3567** 1 SC PbF CR No.6 DDD TH-50PX50U SC-BOARD TNPA3567 TH-50PX50U SC-BOARD TNPA3567 С D Е G

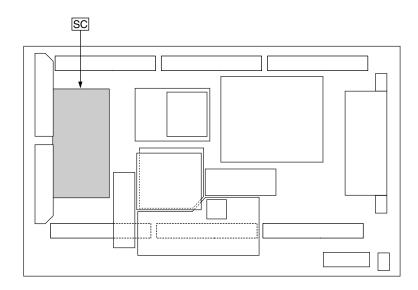

### **Parts Location**

	SC-BOARD (FOIL SIDE)						
IC		TP		TP6029	E-1		
IC6801	H-3	TP4038 TP4039	G-5 G-5	TP6030 TP6031 TP6032	E-2 E-2 B-5		
Q6501 Q6502 Q6503 Q6513 Q6514 Q6515 Q6516 Q6531 Q6532 Q6537 Q6538 Q6602 Q6814 Q6815 Q6819 Q6820	D-4 D-4 E-4 D-4 C-4 C-4 B-4 D-2 E-2 D-2 C-2 F-4 A-5 B-4 F-3 F-3	TP4043 TP6005 TP6005 TP6006 TP6007 TP6008 TP6009 TP6010 TP6011 TP6012 TP6013 TP6014 TP6015 TP6016 TP6017 TP6018 TP6019 TP6020 TP6021 TP6022 TP6023 TP6024 TP6025 TP6025 TP6026 TP6027 TP6028	G-5 B-1	TP6033 TP6034 TP6035 TP6036 TP6037 TP6040 TP6041 TP6042 TP6044 TP6045 TP6046 TP6047 TP6048 TP6049 TP6050 TP6051 TP6052 TP6053 TP6054 TP6060 TP6061 TP6062 TP6063	B-5-5-5-5-5-5-5-5-5-5-5-5-5-5-5-5-5-5-5		


### **Parts Location**

	SC-BOARD (COMPONENT SIDE)							
IC		TRANSISTO	OR .	Q6614	E-4	Q6670	B-5	
IC6411	D-2	Q6411	F-1	Q6615	E-4	Q6689	B-5	
IC6412	C-2	Q6412	C-2	Q6616	E-4	Q6814	H-5	
IC6413	C-2	Q6413	C-2	Q6617	F-4	Q6815	G-4	
IC6421	F-1	Q6501	E-4	Q6618	F-4	Q6816	A-4	
IC6501	E-3	Q6502	E-4	Q6619	F-4	Q6817	A-4	
IC6502	D-2	Q6503	D-4	Q6630	D-5	Q6818	A-4	
IC6603	F-2	Q6513	E-4	Q6631	D-5	Q6819	C-3	
IC6610	G-4	Q6514	F-4	Q6632	E-5	Q6820	C-3	
IC6611	G-4	Q6515	F-4	Q6633	E-5	Q6821	B-2	
IC6620	D-5	Q6516	F-4	Q6634	E-5	Q6822	B-5	
IC6640	C-5	Q6531	E-2	Q6635	E-5	Q6823	B-5	
IC6650	A-5	Q6532	D-2	Q6636	F-5	Q6824	A-4	
IC6651	A-5	Q6537	E-2	Q6650	C-5			
IC6652	B-5	Q6538	F-2	Q6651	C-5	TP		
IC6653	B-5	Q6551	E-3	Q6652	C-5	TP15V	G-1	
IC6654	B-5	Q6552	E-3	Q6654	C-5	TPSC1	E-5	
IC6801	A-3	Q6559	F-3	Q6655	G-4	TPSOS1	D-2	
IC6812	H-4	Q6567	D-2	Q6656	G-4	TPVAD	B-4	
IC6814	B-4	Q6568	D-2	Q6658	H-4	TPVSCN	A-4	
IC6815	C-3	Q6571	E-2	Q6659	H-4	TPVSET	G-5	
IC6817	B-2	Q6572	E-2	Q6660	D-5	TPVSET2	B-4	
IC6818	B-4	Q6577	H-4	Q6660	F-3	TPVSUS	G-2	
		Q6601	G-5	Q6661	D-5			
		Q6602	C-4	Q6664	C-5			
		Q6604	D-5	Q6665	D-4			
		Q6611	D-4	Q6666	B-5			
		Q6612	D-4	Q6667	B-5			
		Q6613	E-4	Q6668	B-5			


TH-50PX50U SC-BOARD PARTS LOCATION TH-50PX50U SC-BOARD PARTS LOCATION

# **SC-BOARD (COMPONENT SIDE) TNPA3567** DIP PbF TNPA3567 TH-50PX50U TH-50PX50U SC-BOARD TNPA3567 SC-BOARD TNPA3567 Е


# 12.30. SU-Board (37inch)

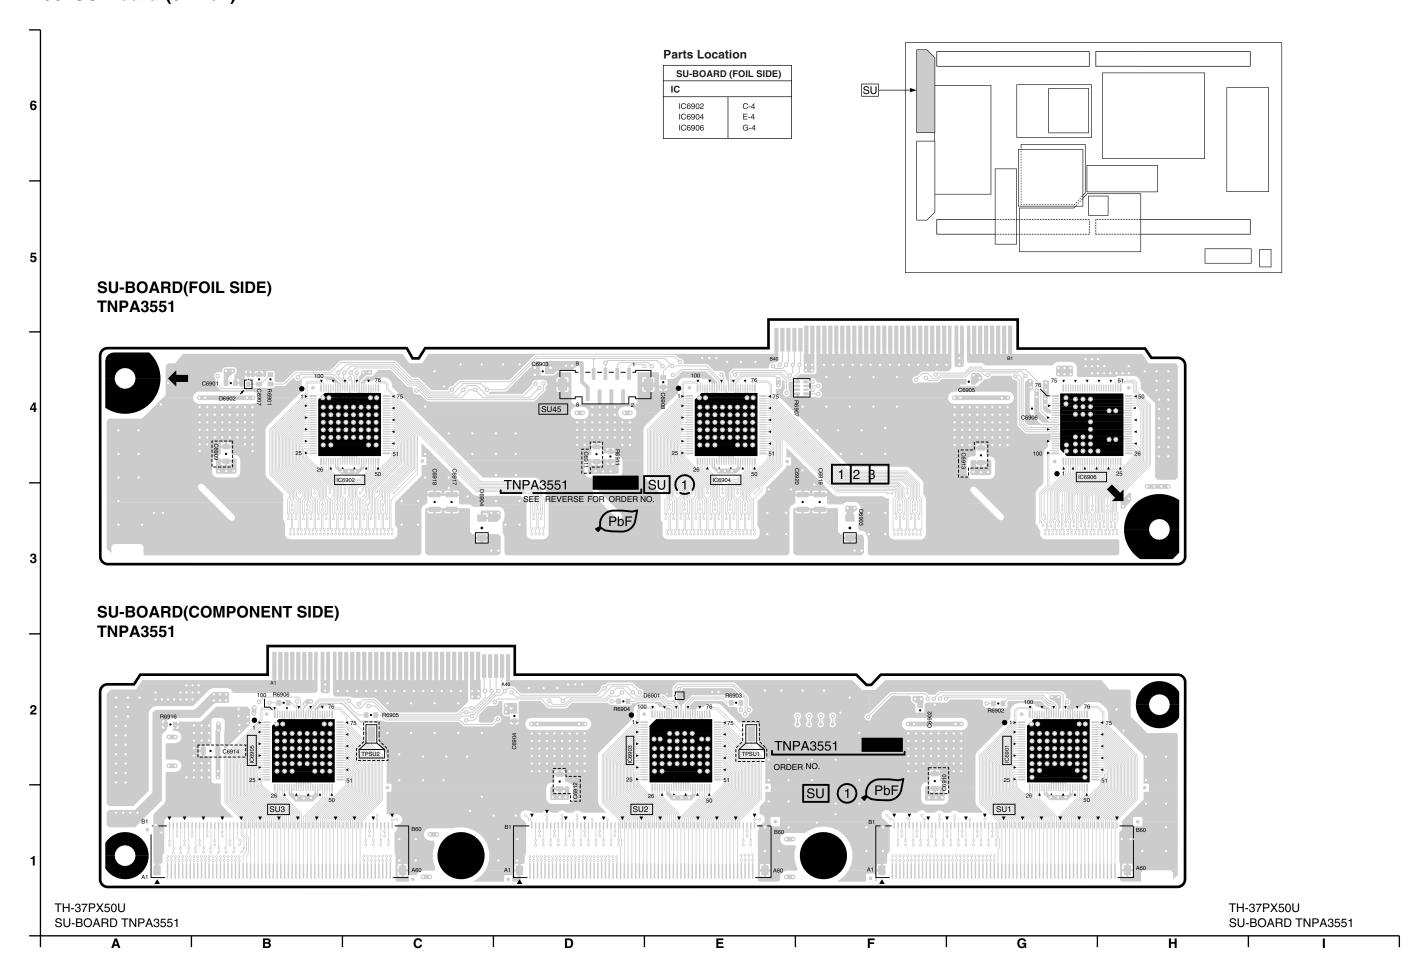


# 12.31. SU-Board (42inch)

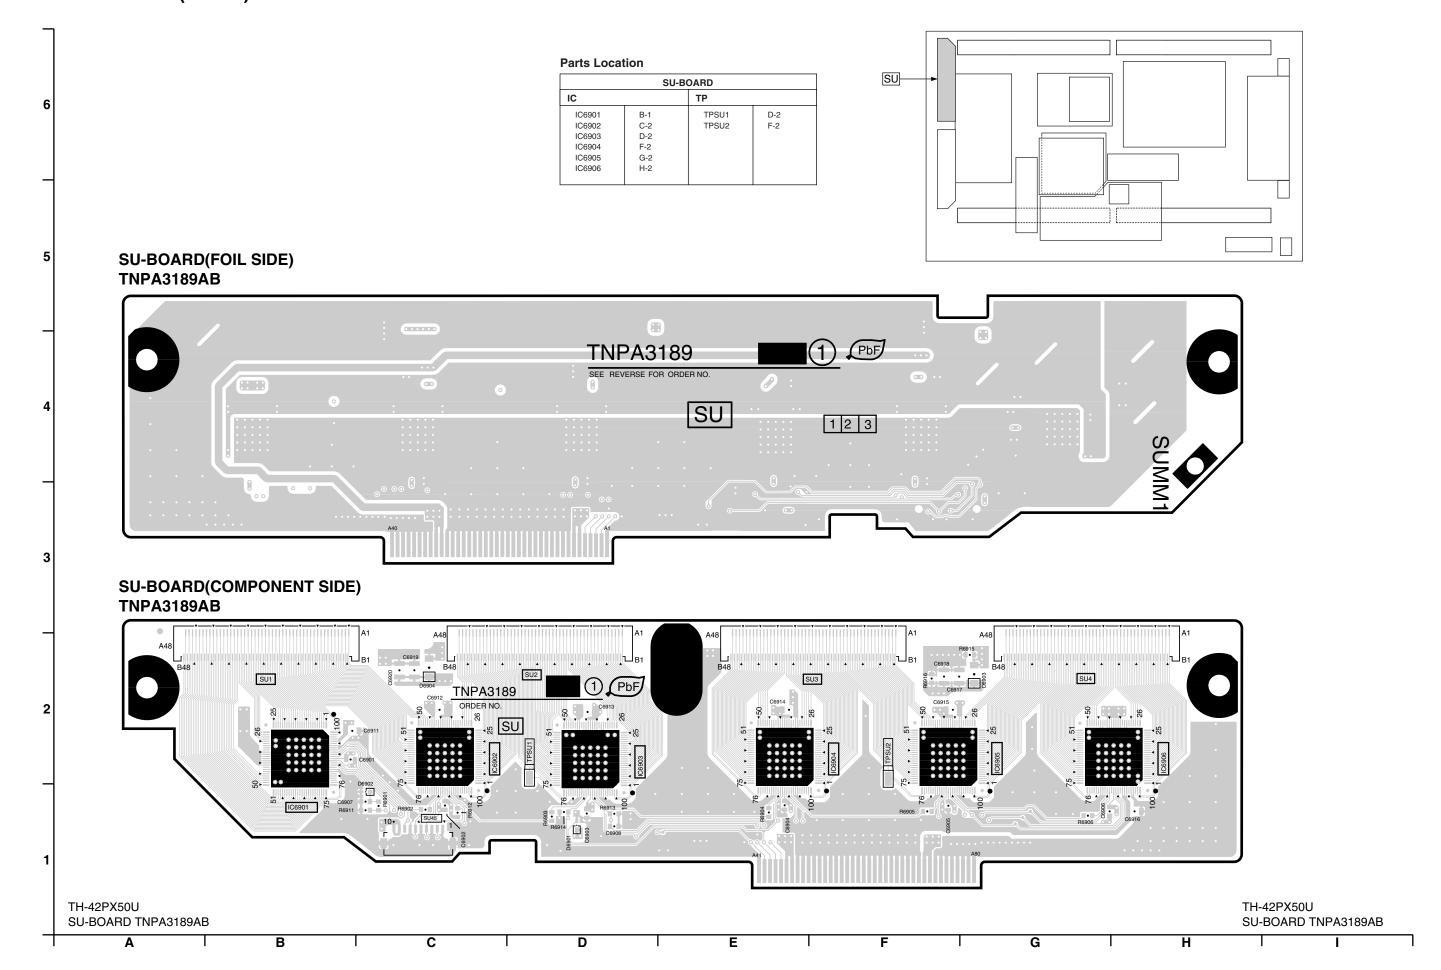


# 12.32. SU-Board (50inch)

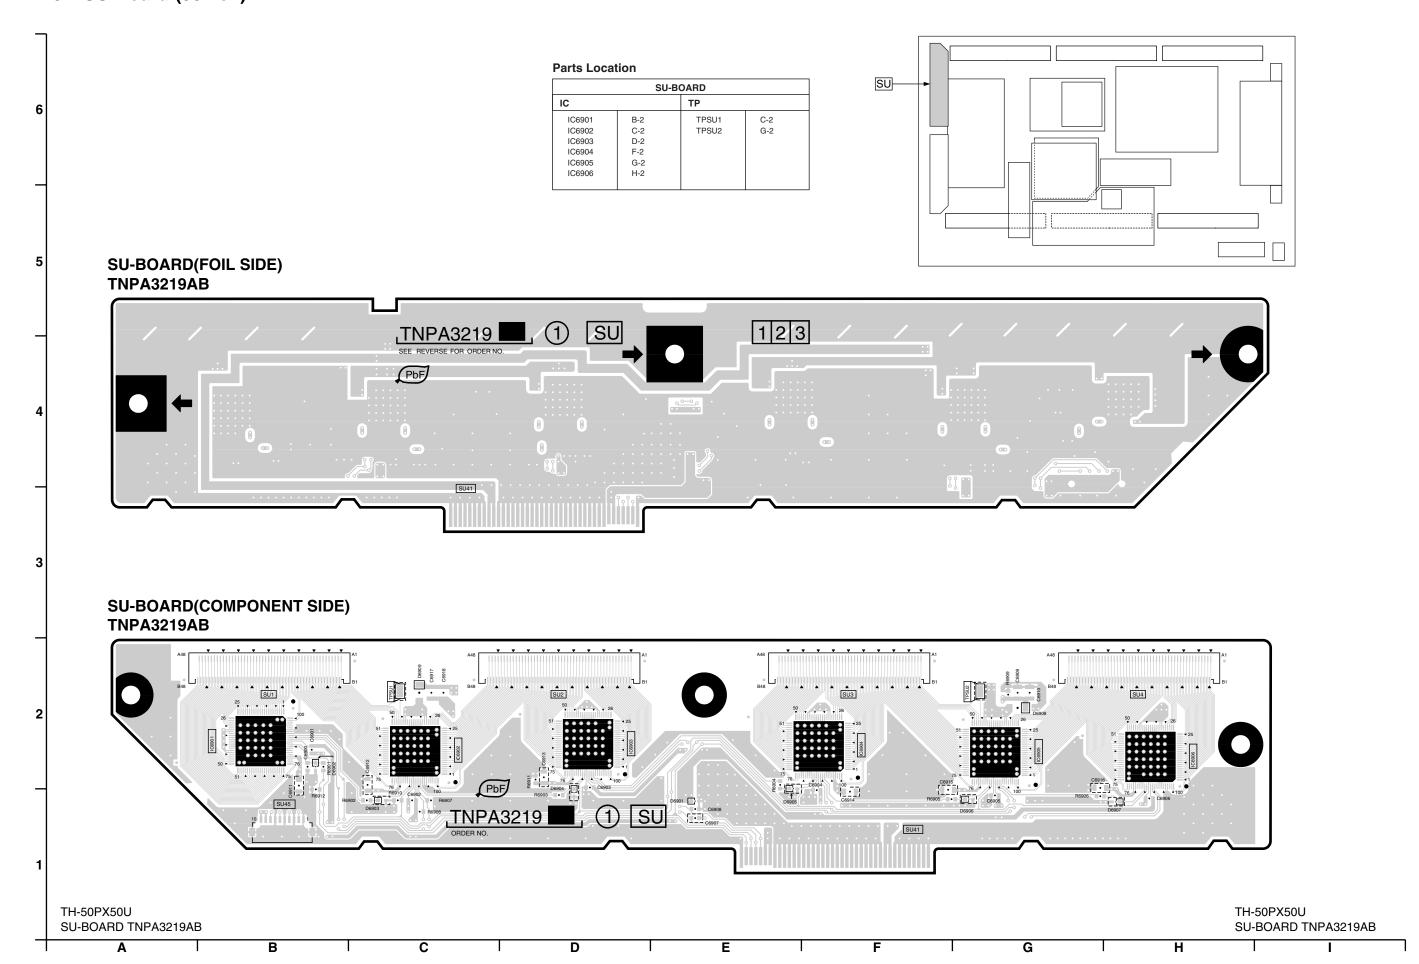


# 12.33. SD-Board (37inch)

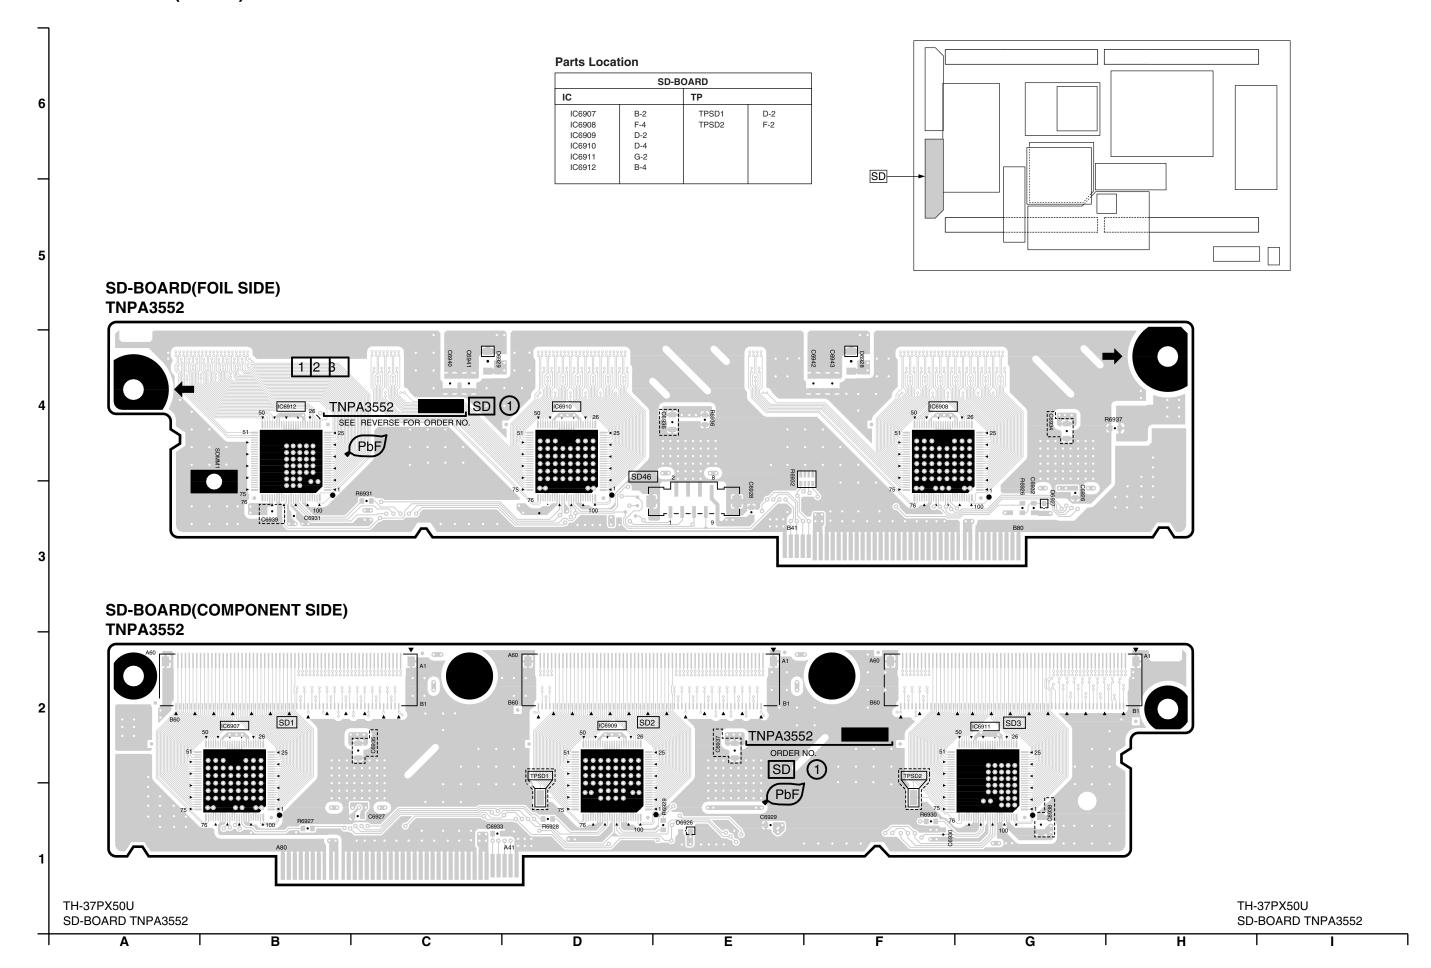



# 12.34. SD-Board (42inch)

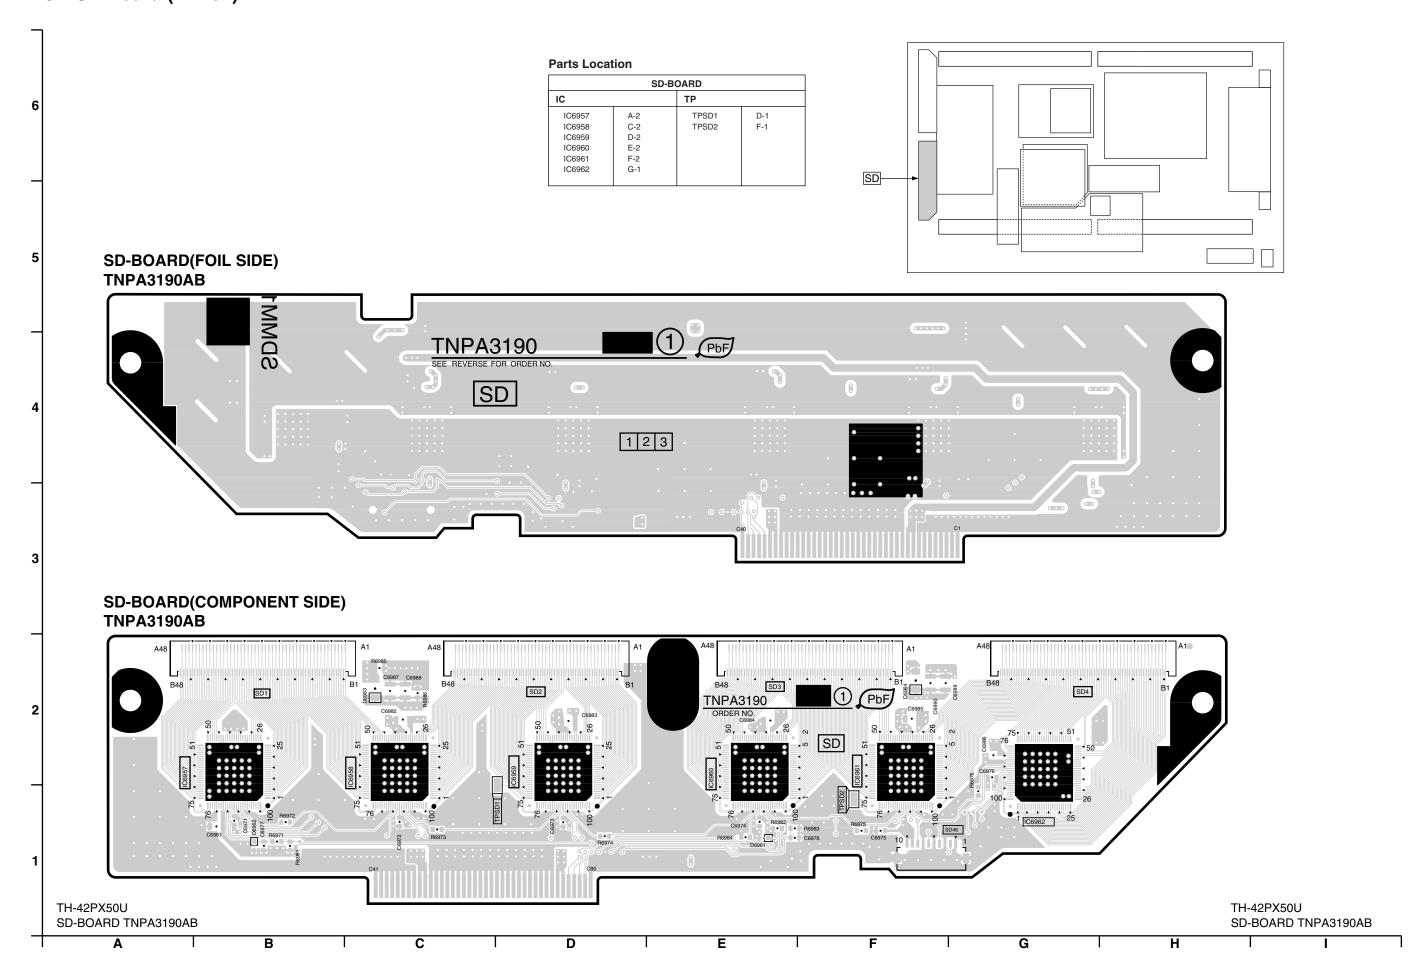


# 12.35. SD-Board (50inch)

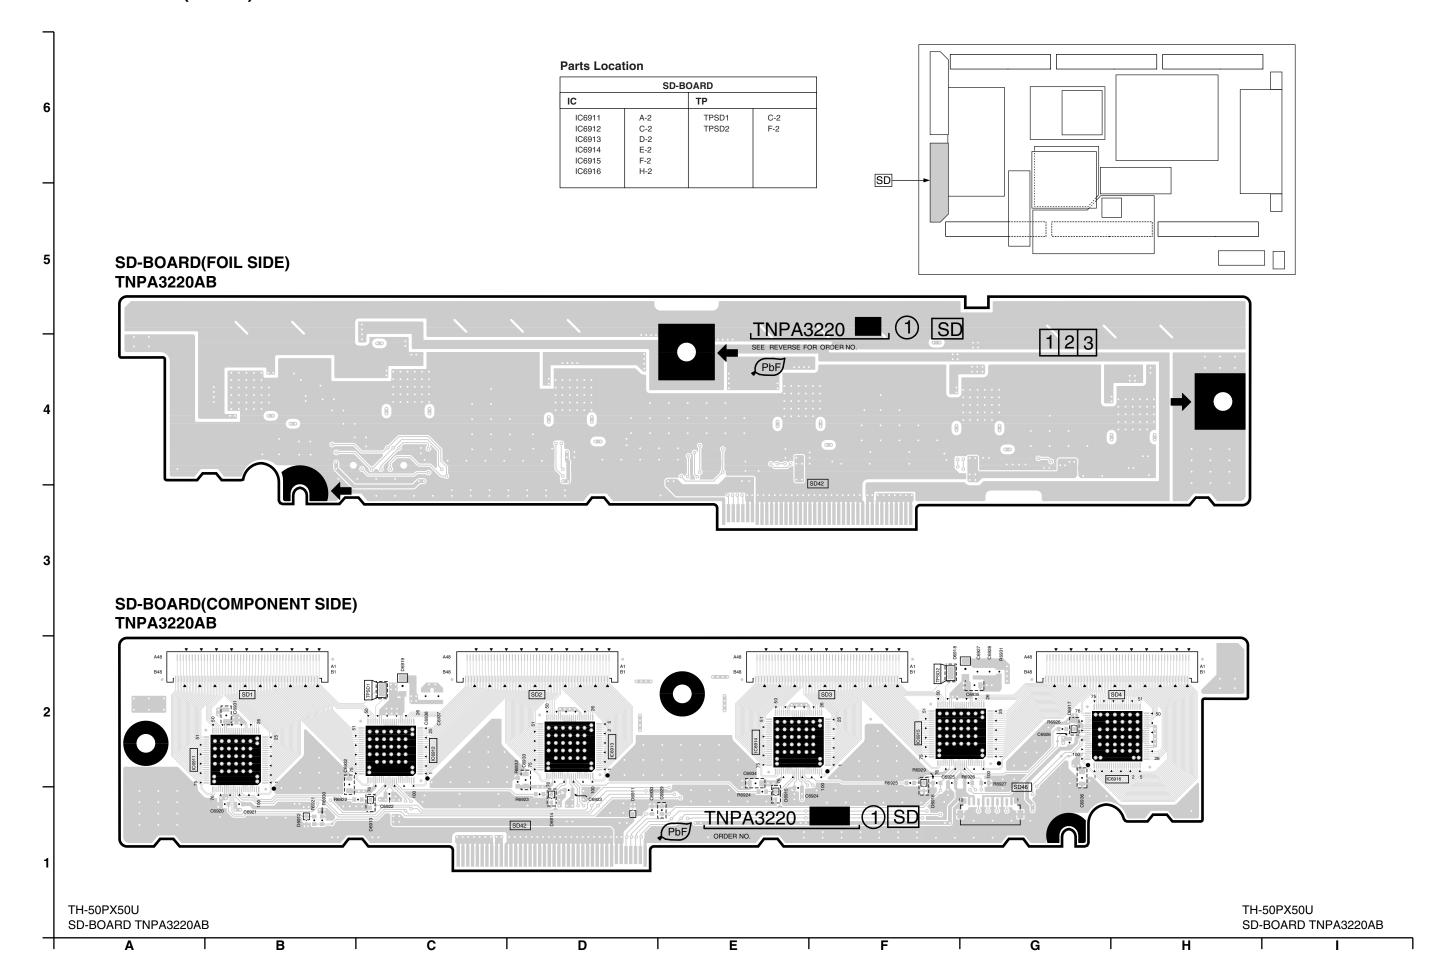



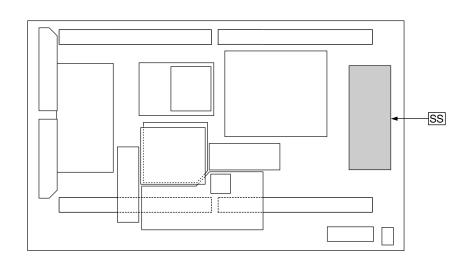

### SS-BOARD (FOIL SIDE) TNPA3574

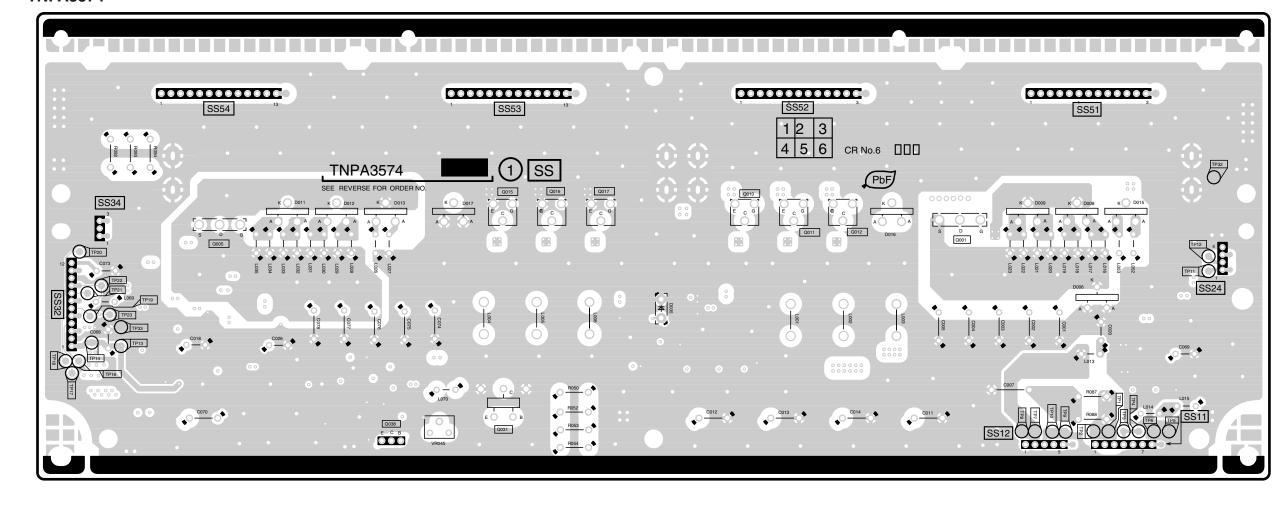


TH-37PX50U SS-BOARD TNPA3574


A B C D E F G H I

### **Parts Location**

	4.50 =0040						
ss	SS-BOARD (COMMPONENT SIDE)						
TRANSISTOR	3	TP7	H-1				
Q6001 Q6005 Q6010 Q6011 Q6012 Q6015 Q6016 Q6017 Q6031 Q6038	G-3 B-3 F-3 F-3 D-3 D-3 E-3 D-2 C-1	TP8 TP9 TP10 TP11 TP12 TP13 TP14 TP16 TP17 TP18 TP18 TP19	G-1 H-1 H-1 I-2 I-3 A-2 A-2 A-2 A-2 A-2 A-2				
TP		TP20	A-3				
TP1 TP2 TP3 TP4 TP5 TP6	H-1 H-1 H-1 H-1 H-1	TP21 TP22 TP23 TP32 TP33	A-2 A-2 A-2 I-3 A-2				

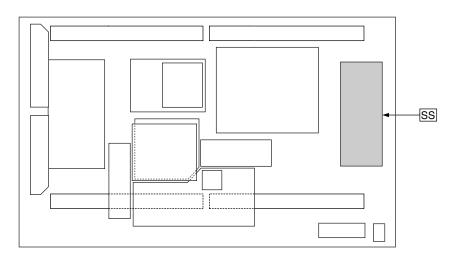


### SS-BOARD (COMPONENT SIDE) TNPA3574

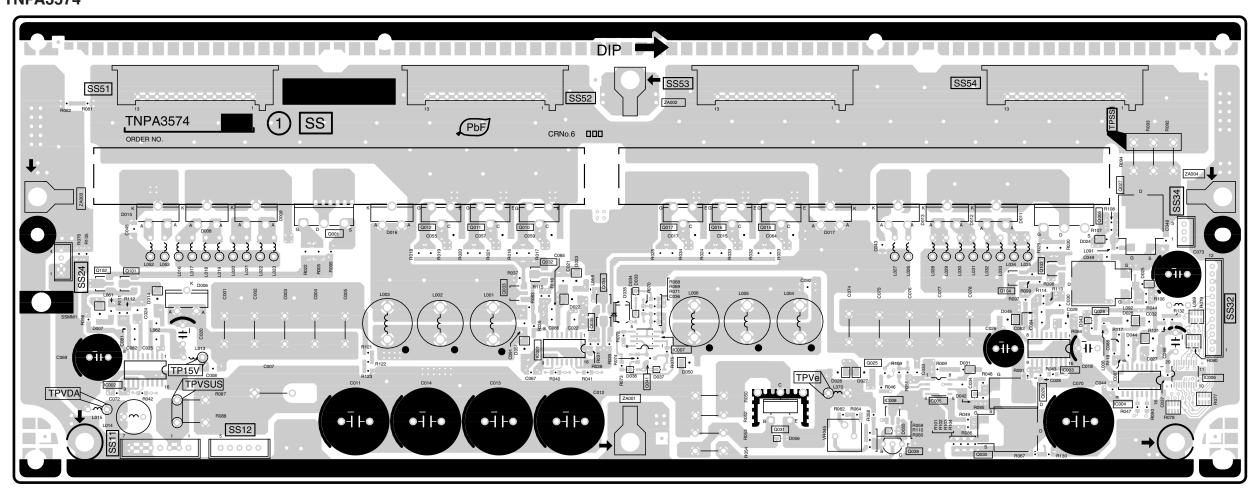


TH-37PX50U SS-BOARD TNPA3574

A B C D E F G H I


## 12.37. SS, SS2 and SS3-Board (42inch)

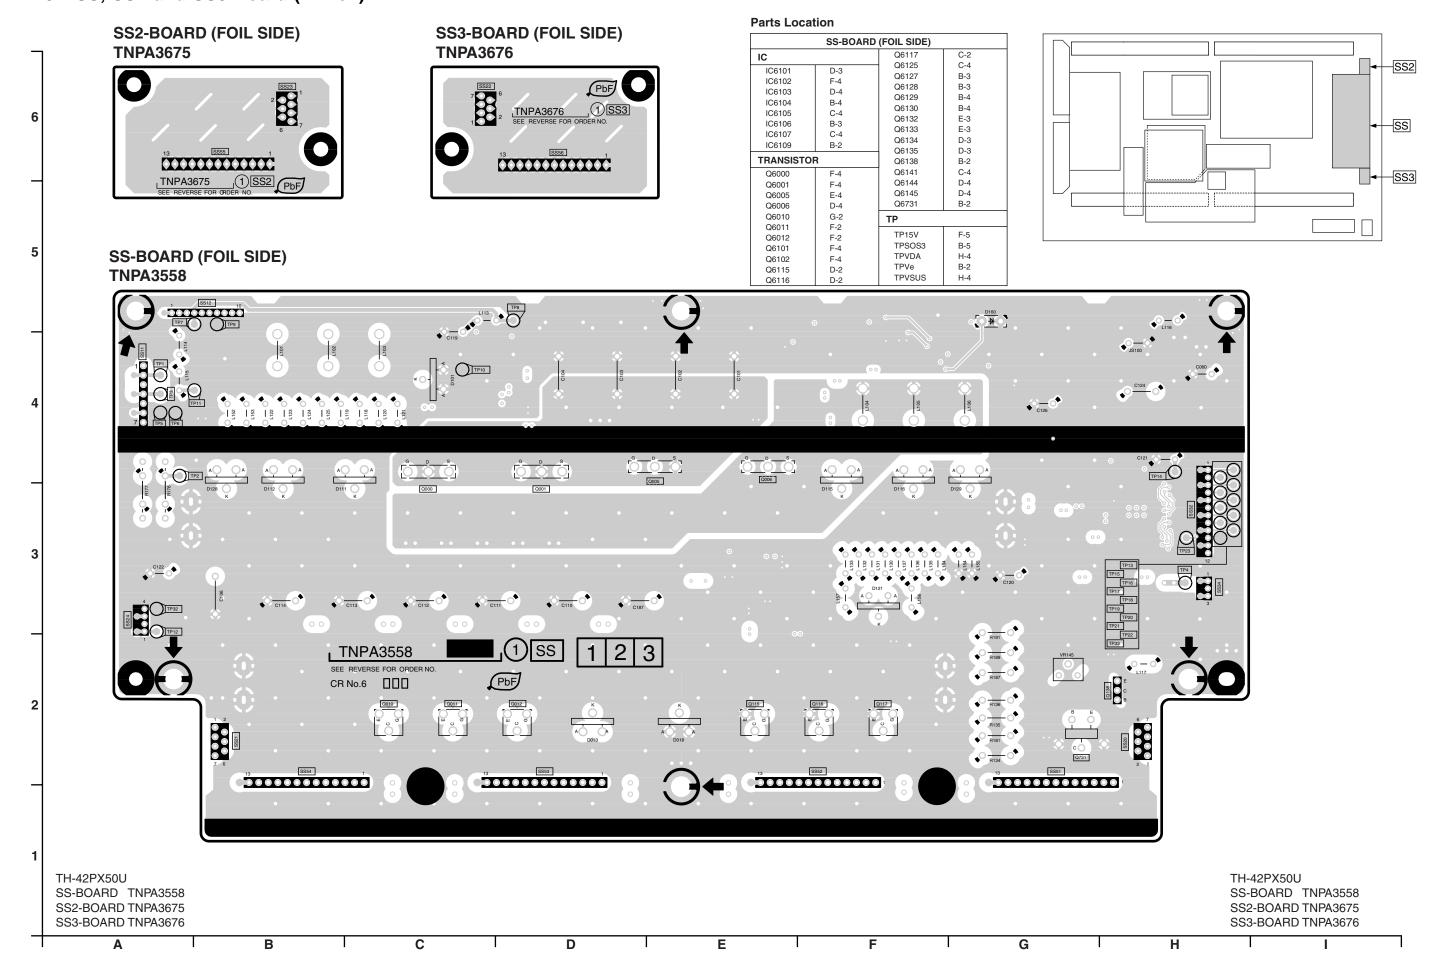

### SS2-BOARD (COMPONENT SIDE) TNPA3675




### SS3-BOARD (COMPONENT SIDE) TNPA3676




### **Parts Location**

S	SS-BOARD (COMPONENT SIDE)					
TRANSISTO	3	TP6	A-4			
Q6000	C-4	TP7	B-5			
Q6001	D-4	TP8	D-5			
Q6005	E-4	TP9	B-5			
Q6006	E-4	TP10	C-4			
Q6010	C-2	TP11	B-4			
Q6011	C-2	TP12	A-2			
Q6012	D-2	TP13	H-4			
Q6115	E-2	TP14	H-4			
Q6116	F-2	TP15	H-4			
Q6117	F-2	TP16	H-4			
Q6138	H-2	TP17	H-3			
Q6731	G-2	TP18	H-3			
	<u> </u>	TP19	H-3			
TP		TP20	H-3			
TP1	A-4	TP21	H-3			
TP2	A-4	TP22	H-3			
TP3	A-4	TP23	H-3			
TP4	H-3	TP32	A-3			
TP5	A-4	TP33	H-3			

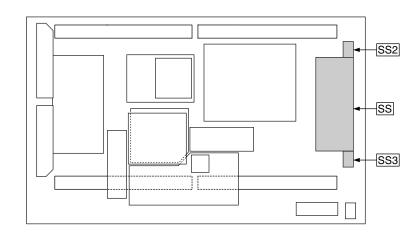

### SS-BOARD (COMPONENT SIDE) TNPA3558

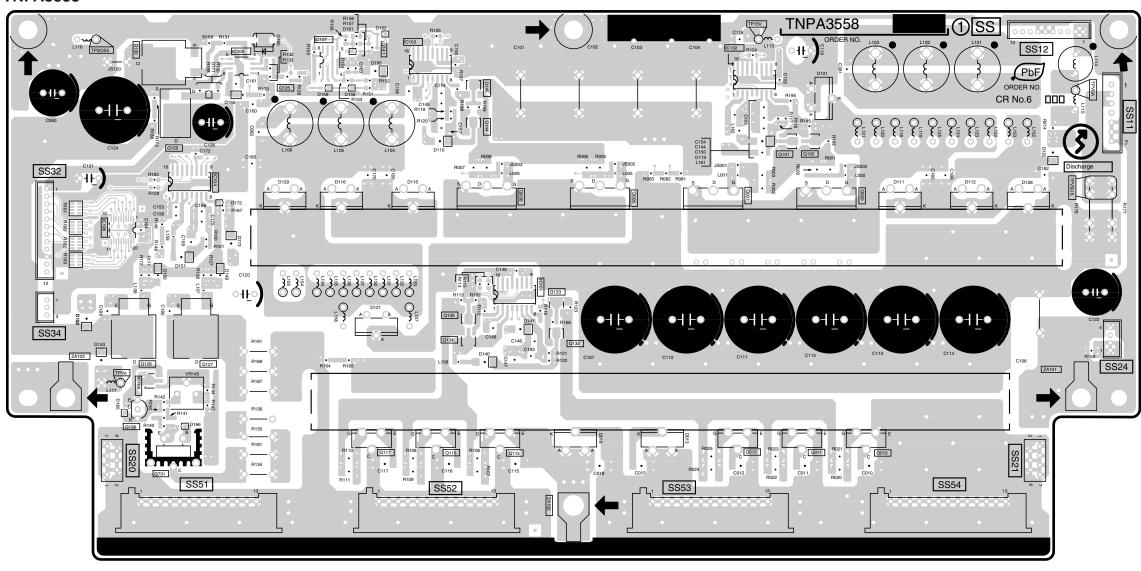


TH-42PX50U SS-BOARD TNPA3558 SS2-BOARD TNPA3675 SS3-BOARD TNPA3676 TH-42PX50U SS-BOARD TNPA3558 SS2-BOARD TNPA3675 SS3-BOARD TNPA3676

G

Е

D

# 12.38. SS, SS2 and SS3-Board (50inch)




SS3-BOARD TNPA3560

Α

В


С

# SS3-BOARD (FOIL SIDE) TNPA3560




### **Parts Location**

	SS-BOARD (FOIL SIDE)							
TRANSIS	TOR	TP		TP17	H-3	TP6905	A-3	
TRANSIS  Q6001 Q6000 Q6020 Q6021 Q6102 Q6101 Q6100 Q6140 Q6140 Q6141 Q6142 Q6143	C-3 D-3 E-3 C-2 C-2 D-2 D-2 E-2 E-2 E-2 E-2	TP TP1 TP2 TP3 TP4 TP5 TP6 TP7 TP8 TP9 TP10 TP11	B-4 B-5 B-5 B-5 B-5 B-5 B-4 A-4 A-3	TP17 TP18 TP19 TP20 TP21 TP22 TP23 TP24 TP25 TP26 TP27 TP28 TP29	H-3 H-3 H-3 H-3 H-3 H-3 E-4 A-2 B-1 F-1 H-1	TP6905 TP6910 TP6911 TP6913 TP6914 TP6915 TP6916 TP6917 TP6918 TP6919 TP6920 TP6921 TP6921	A-3 H-4 H-3 H-3 H-3 A-3 A-3 H-3 H-3 H-3 H-3	
Q6240 Q6256 Q6257	G-4 G-2 G-1	TP12 TP13 TP14 TP15 TP16	B-4 H-3 H-3 H-3 H-3	TP29 TP30 TP31 TP32 TP33 TP6904	F-1 F-4 H-2 H-5 B-4 A-3	TP6922 TP6923	H-3 H-3	

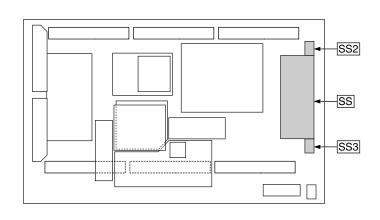

SS3-BOARD TNPA3560

G

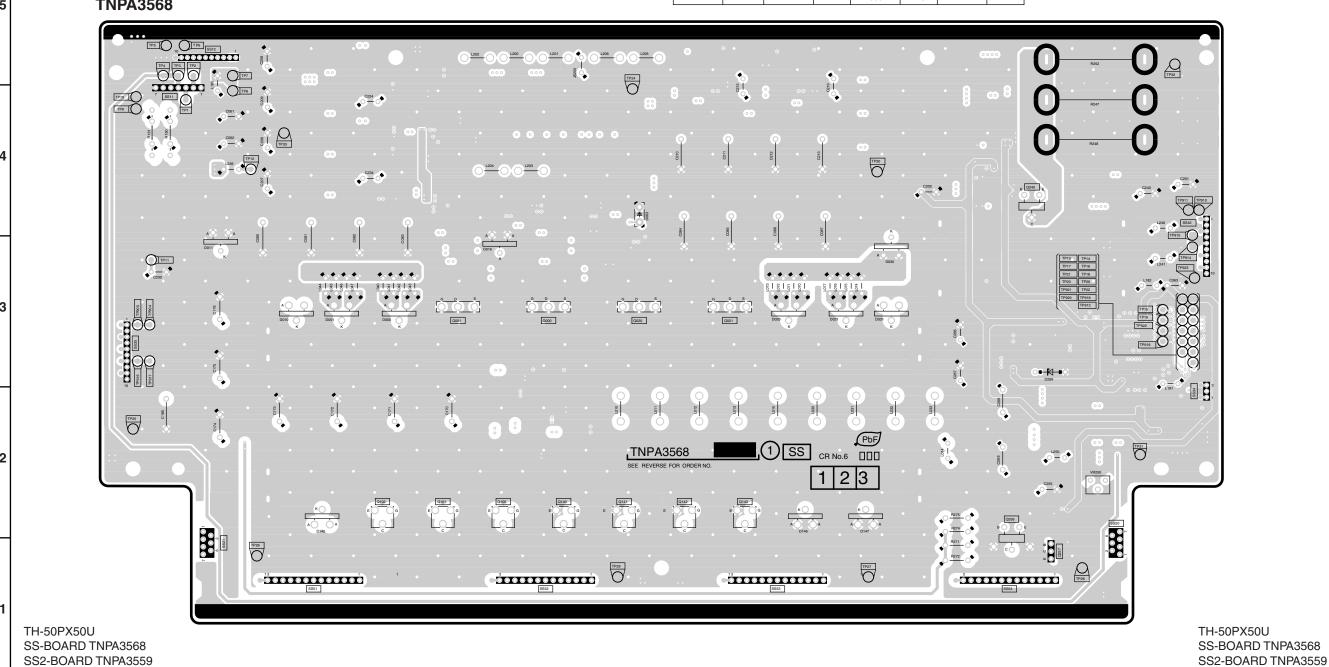


D

Е


SS2-BOARD TNPA3559


SS3-BOARD TNPA3560

### Parts Location



### SS3-BOARD (COMPONENT SIDE) TNPA3560



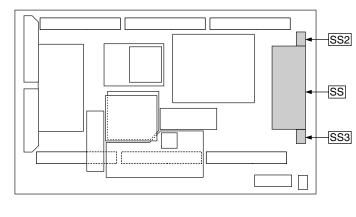


SS2-BOARD TNPA3559

SS3-BOARD TNPA3560

G


### SS-BOARD (COMPONENT SIDE) TNPA3568

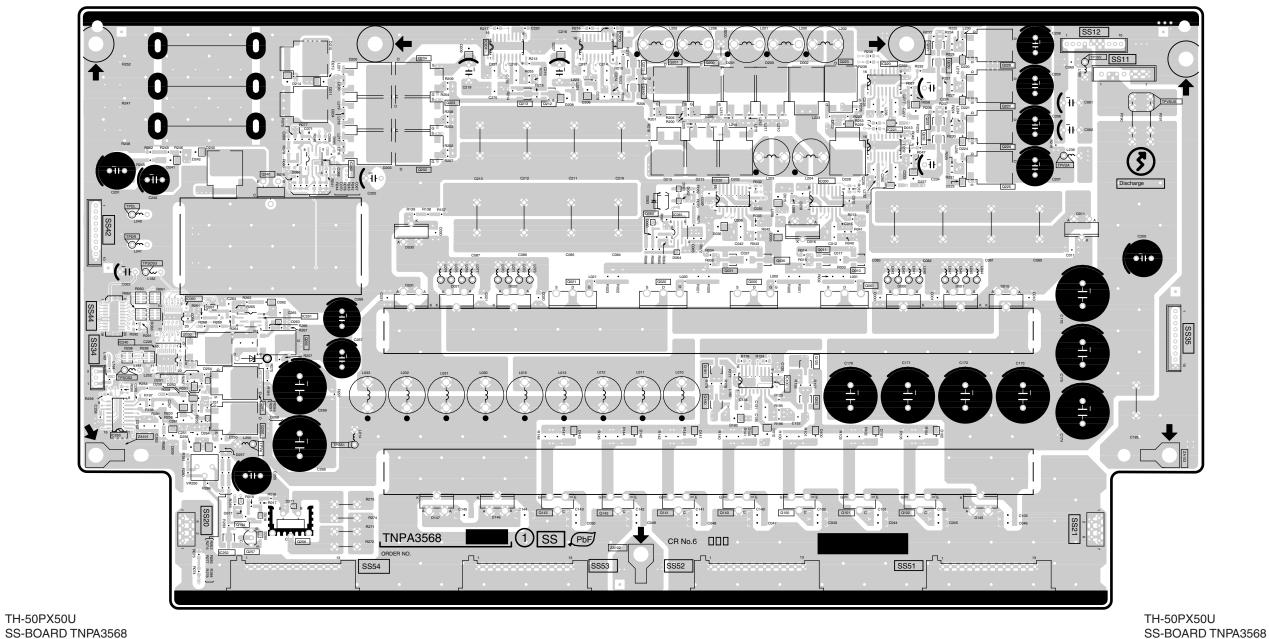

Е

D

### 12.39. K and S-Board

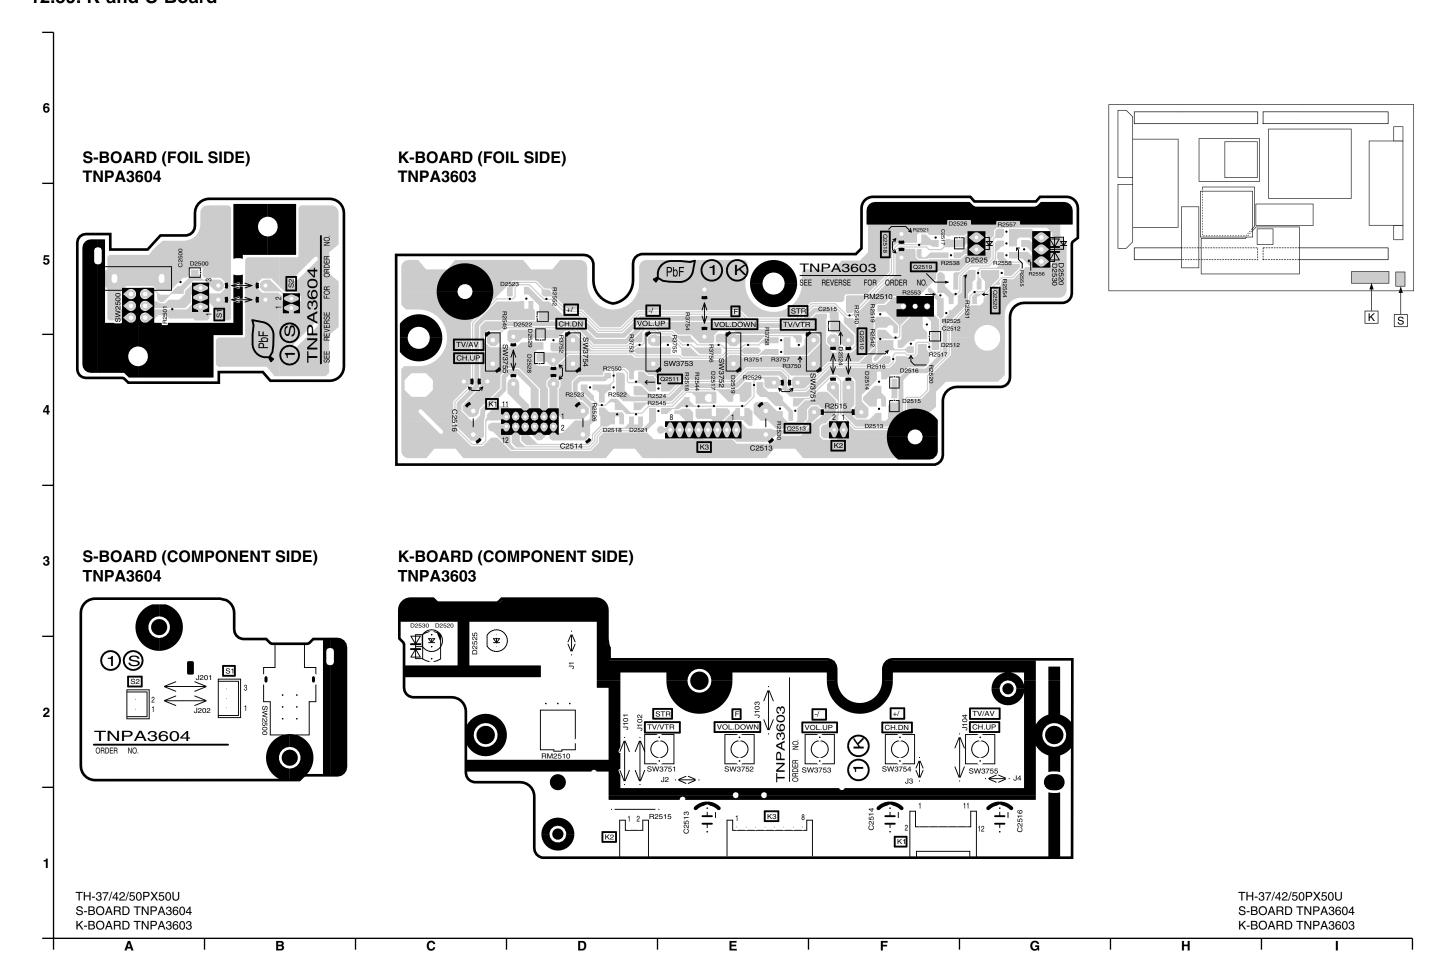

TH-37PX50U / TH-42PX50U / TH-50PX50U

### 13 Block and Schematic Diagram

#### 13.1. Schematic Diagram Notes

ı	r	n	n	^	r	ŀэ	n	ıŧ	S	af	۵	t١	,	N	ı	^	ti	^	۵
	•		μ	u		ιa	Ш	16	J	aı	C	ı,	,			v	u	C	C

Components identified by  $\triangle$  mark have special characteristics important for safety. When replacing any of these components, use only manufacture's specified parts.

#### Notes:

1. Resistor

Unit of resistance is OHM  $[\Omega]$  (K=1,000, M=1,000,000).

2. Capacitor

Unit of capacitance is µF, unless otherwise noted.

3. Coil

Unit of inductance is H, unless otherwise noted.

4. Test Point

○ : Test Point position

5. Earth Symbol

# ∶ Chassis Earth (Cold)

: Line Earth (Hot)

6. Voltage Measurement

Voltage is measured by a DC voltmeter.

Conditions of the measurement are the following:

- 7. When arrow mark ( / ) is found, connection is easily found from the direction of arrow.
- 8. Indicates the major signal flow.
  - : Video →

Audio ⇒

9. This schematic diagram is the latest at the time of printing and subject to change without notice.

TH-37PX50U / TH-42PX50U / TH-50PX50U

#### Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection


The circuit is defined by HOT and COLD indications in the schematic diagram. Take the follwing precautions.

All circuits, except the Power Circuit, are cold.

Precautions


- a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
- b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
- Connect the earth of instruments to the earth connection of the circuit being measured.
- d. Make sure to disconnect the power plug before removing the chassis.

#### 13.2. Main Block Diagram (37inch)

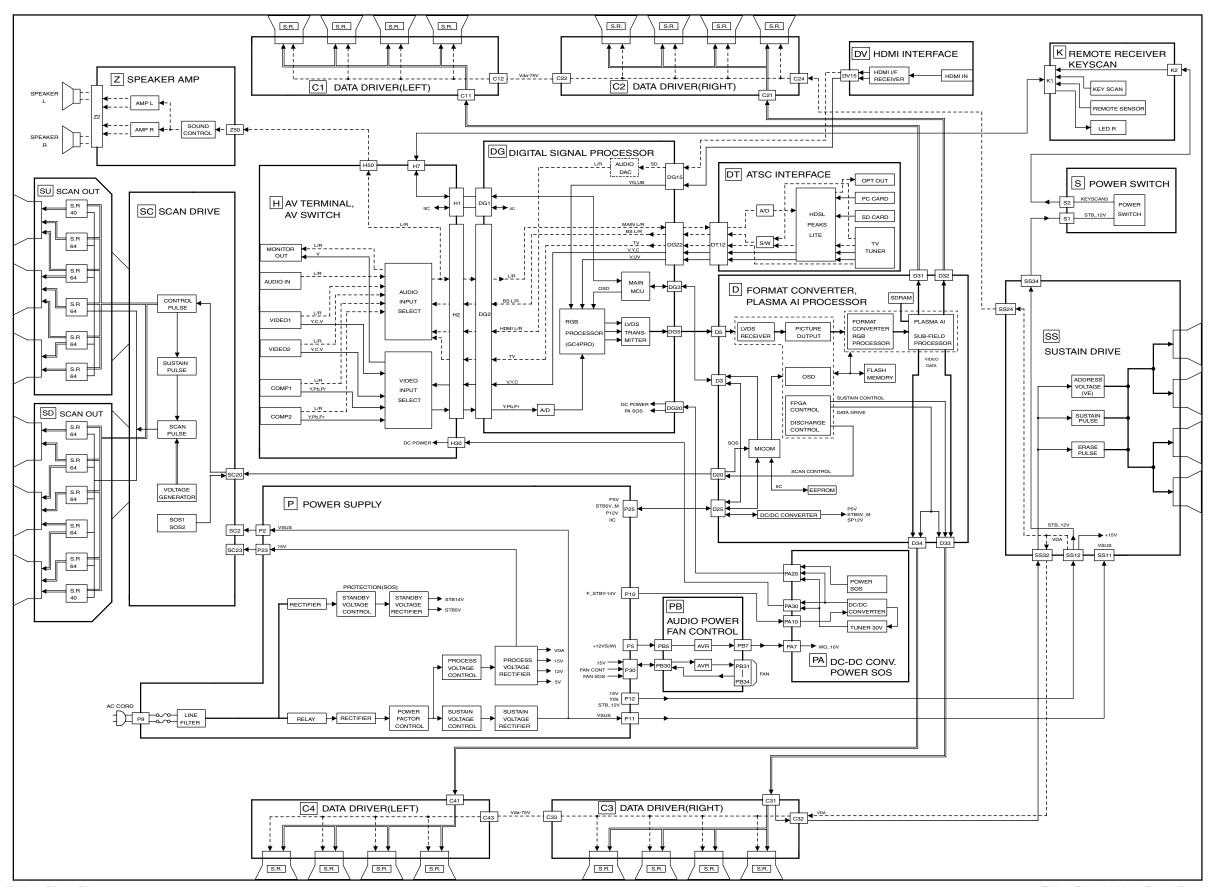


TH-37PX50U Main Block Diagram
TH-37PX50U Main Block Diagram

#### 13.3. Main Block Diagram (42inch)

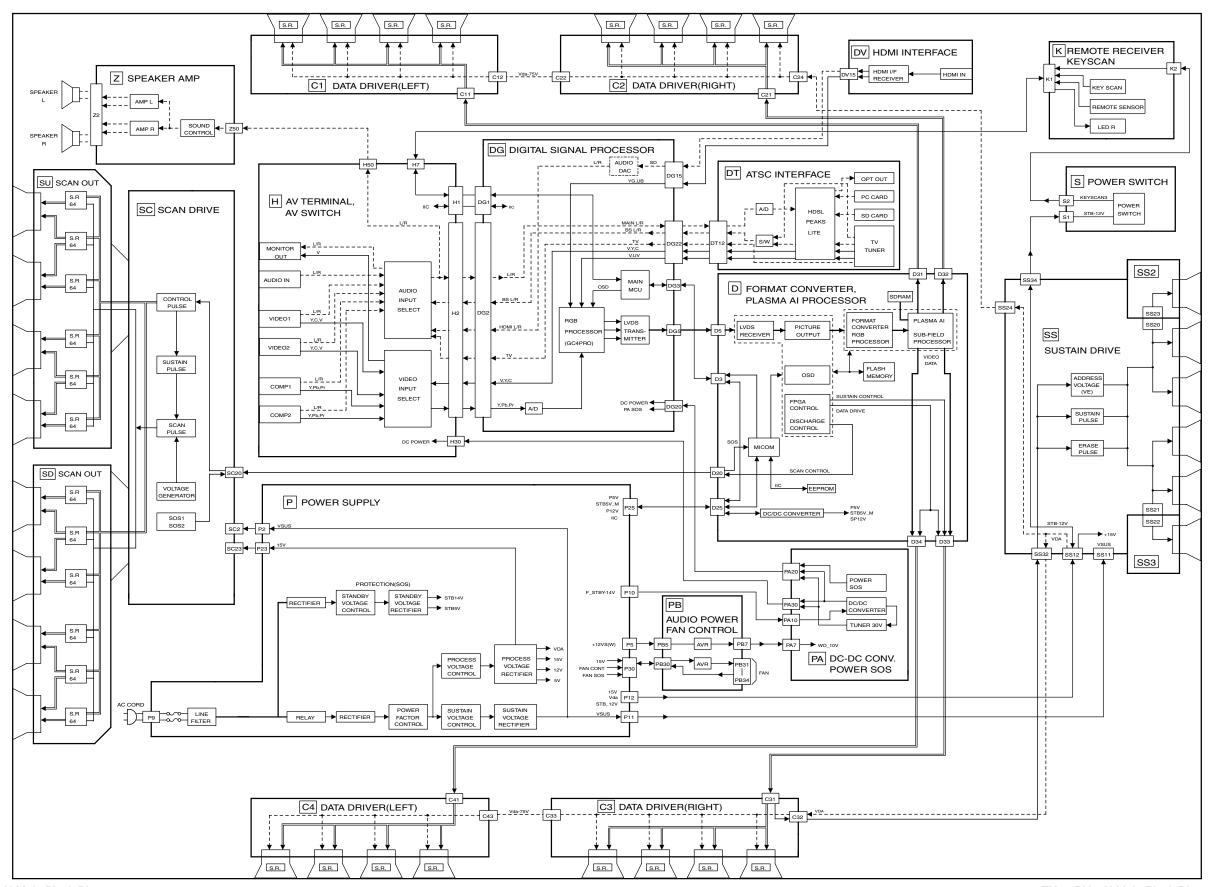


#### 13.4. Main Block Diagram (50inch)

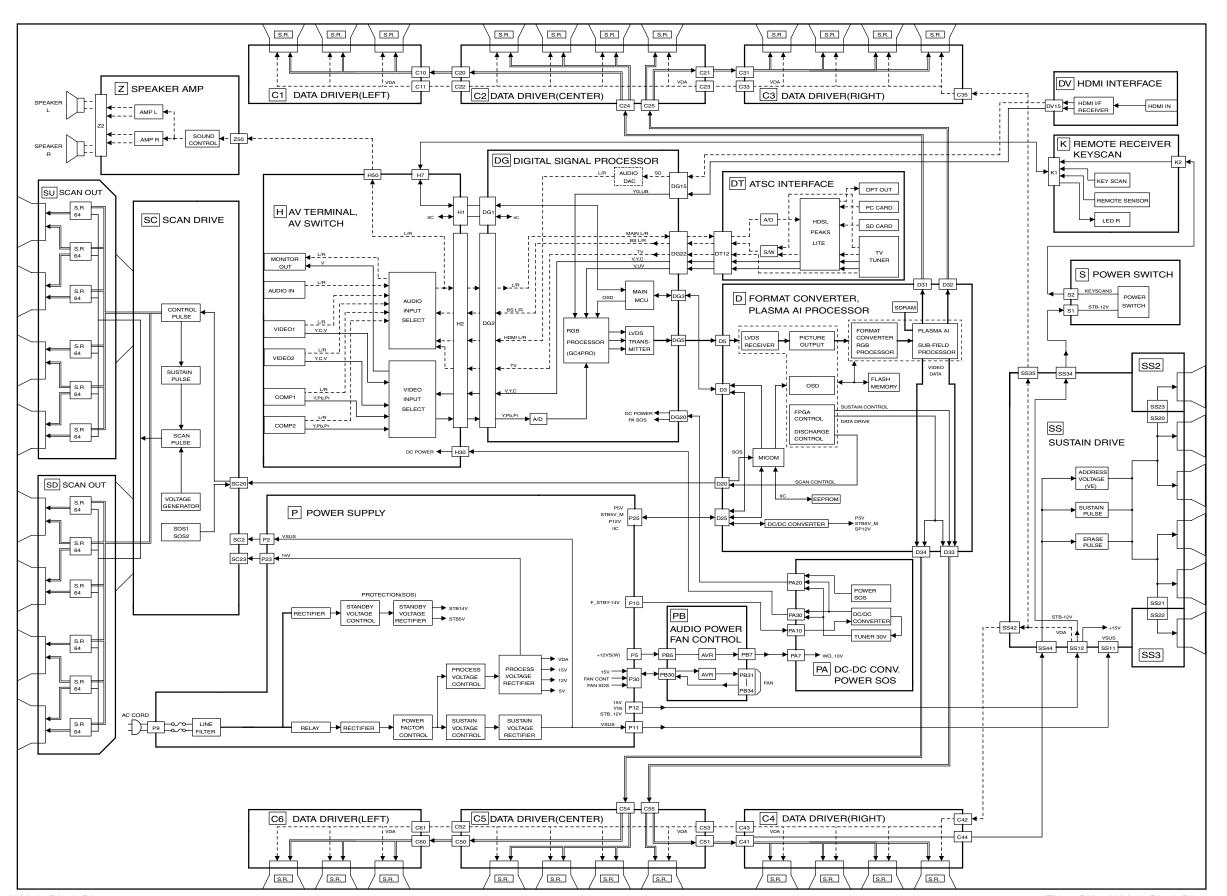


TH-50PX50U Main Block Diagram
TH-50PX50U Main Block Diagram


#### 13.5. P-Board Block Diagram (37inch)

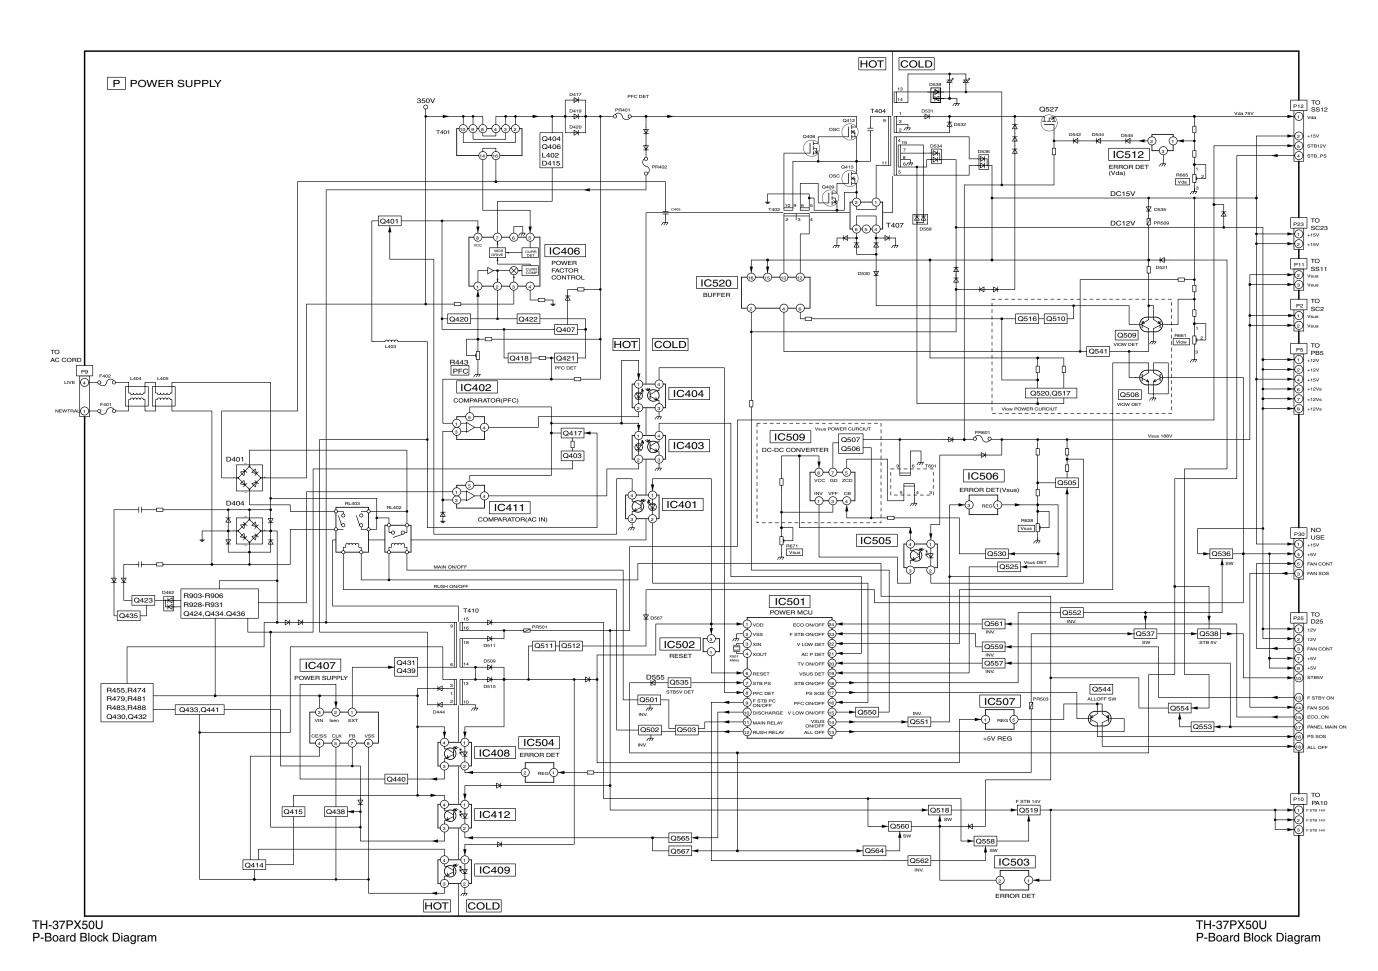


# 13.6. P-Board (1 of 6) Schematic Diagram (37inch)

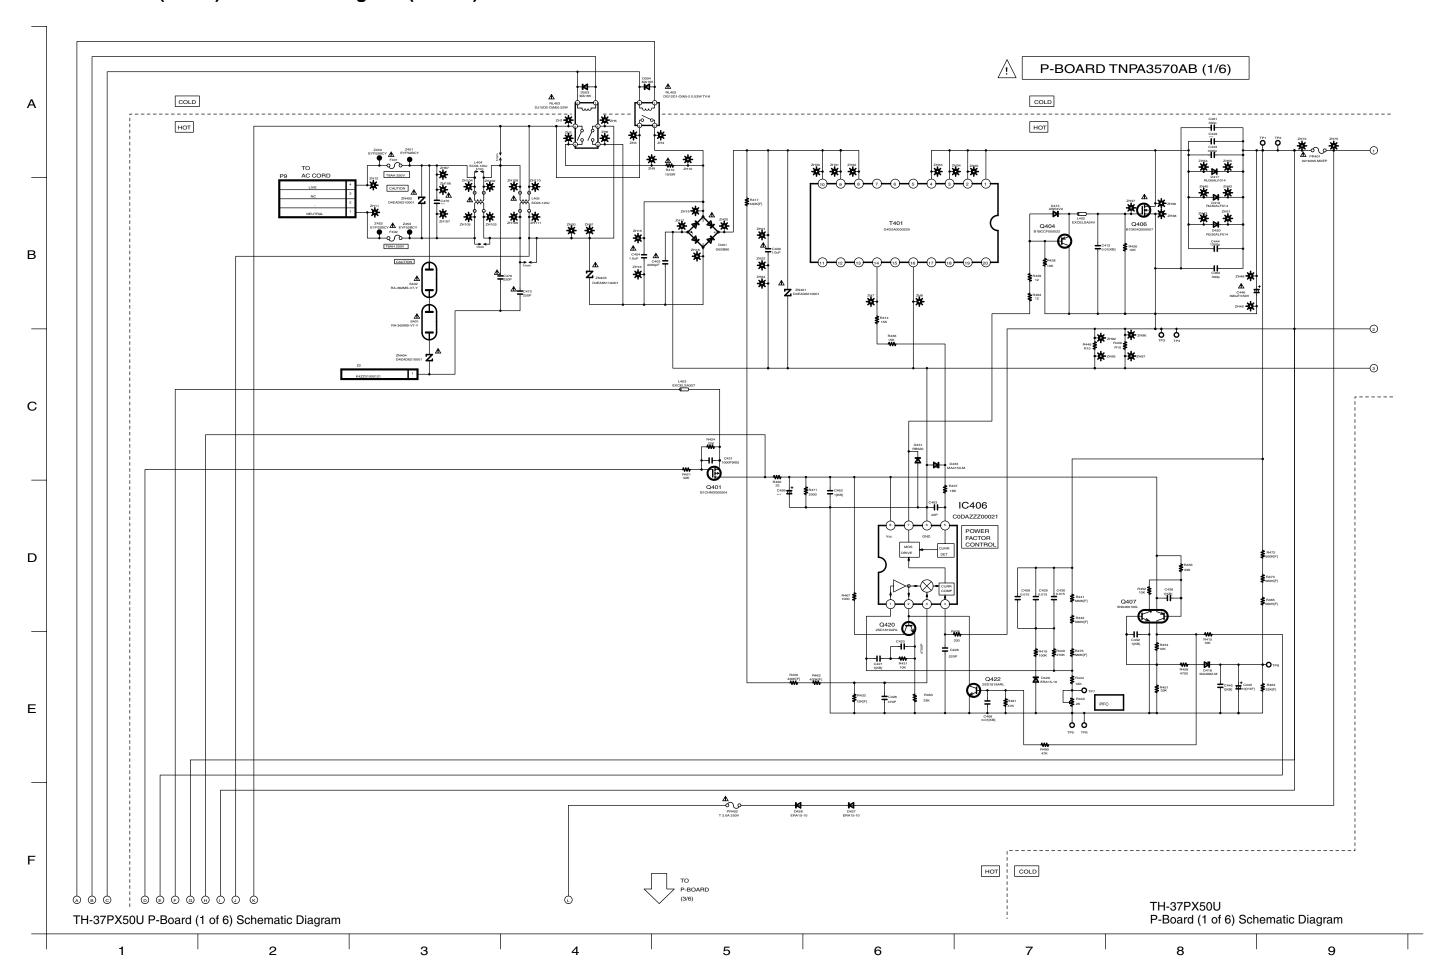


# 13.7. P-Board (2 of 6) Schematic Diagram (37inch)

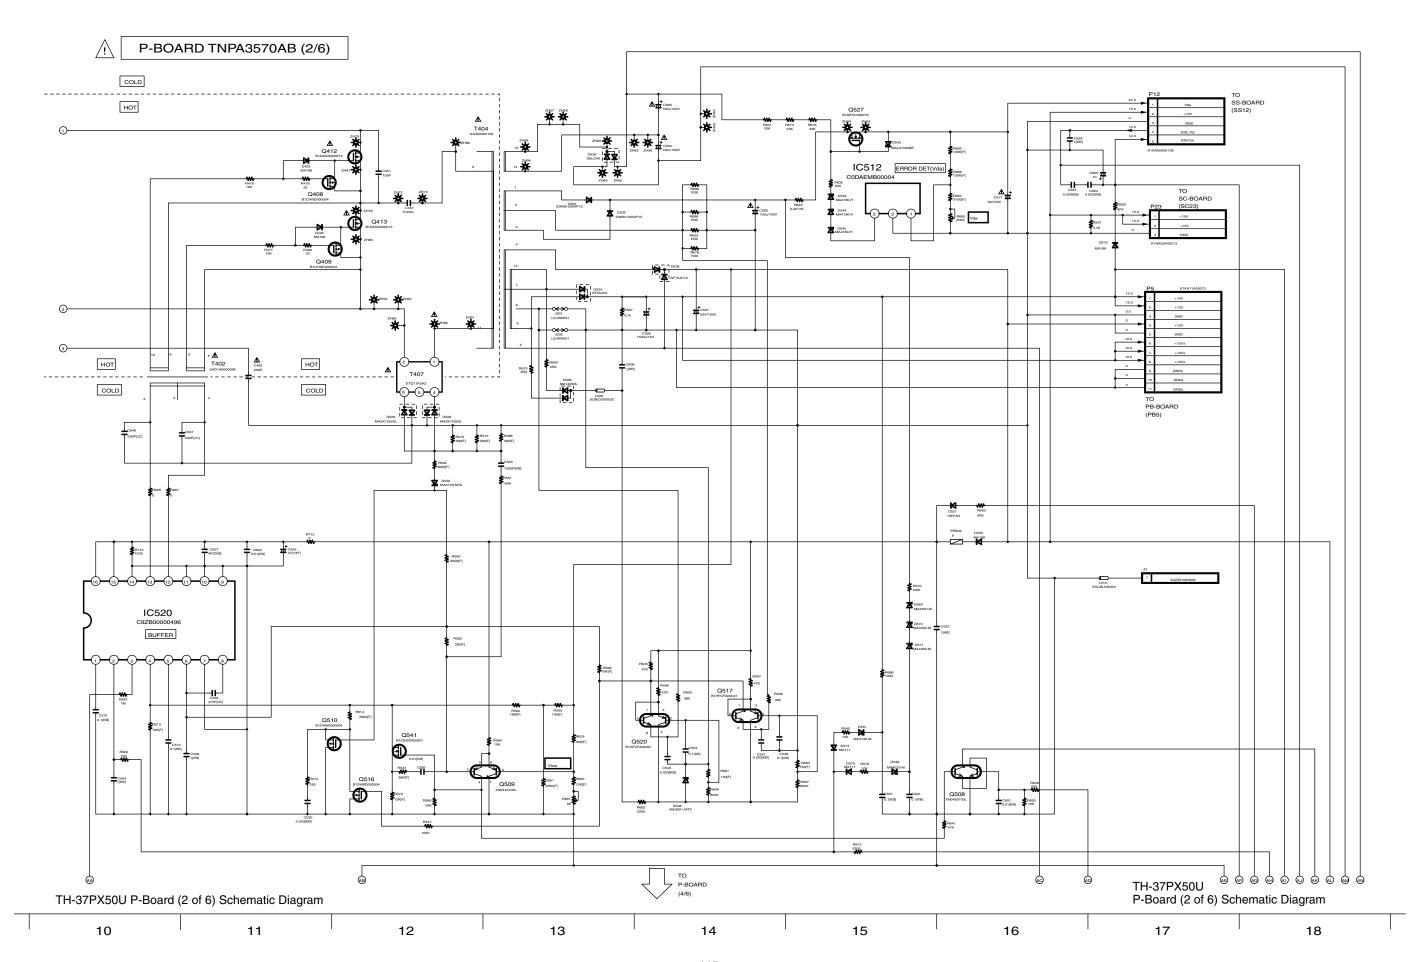


# 13.8. P-Board (3 of 6) Schematic Diagram (37inch)

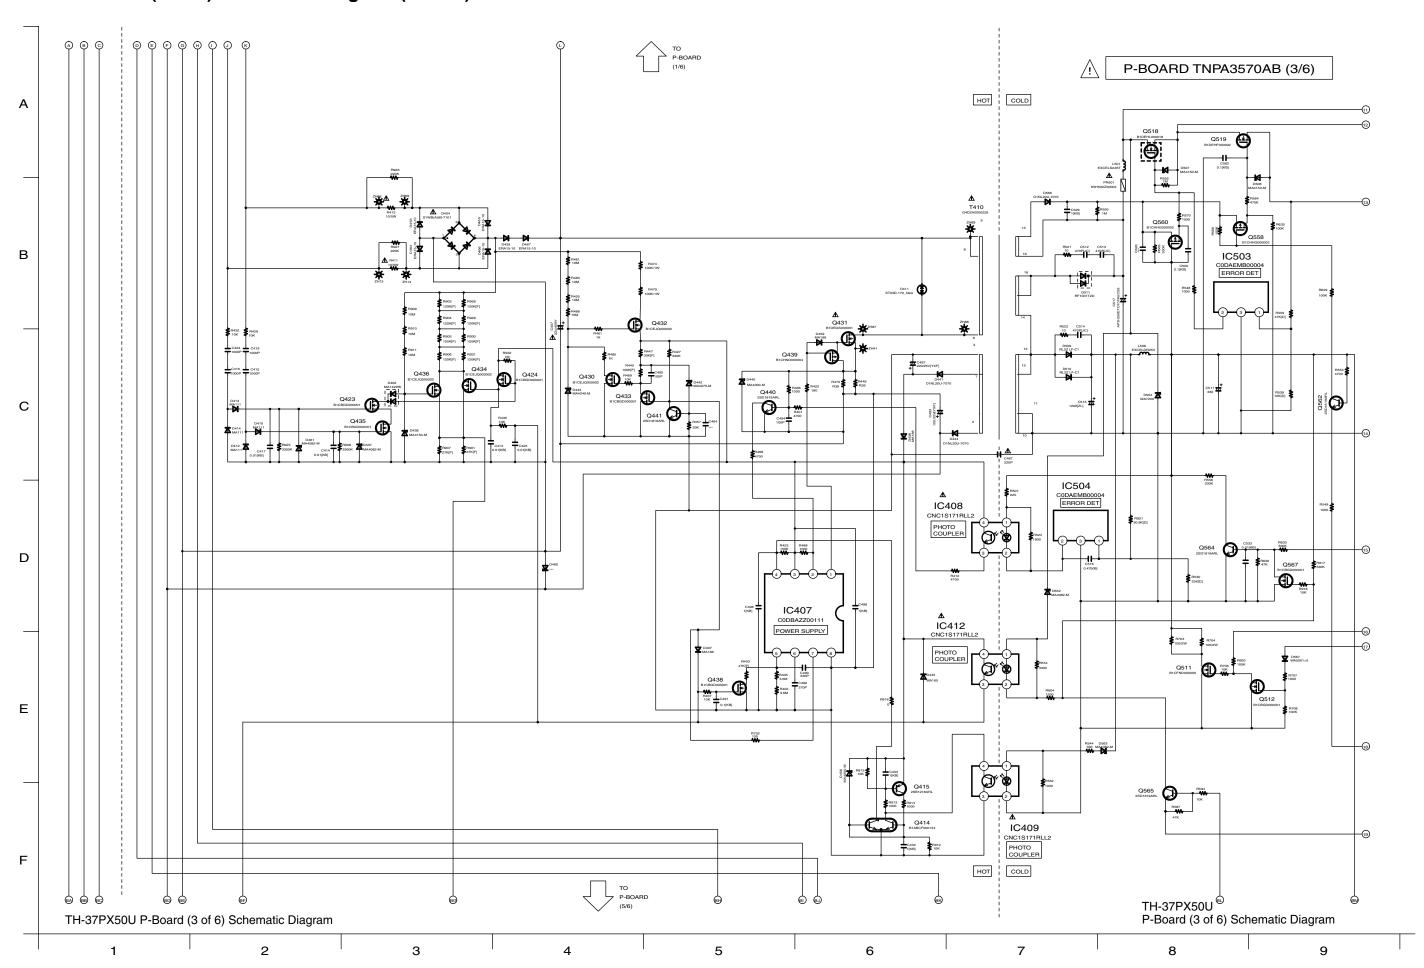


# 13.9. P-Board (4 of 6) Schematic Diagram (37inch)

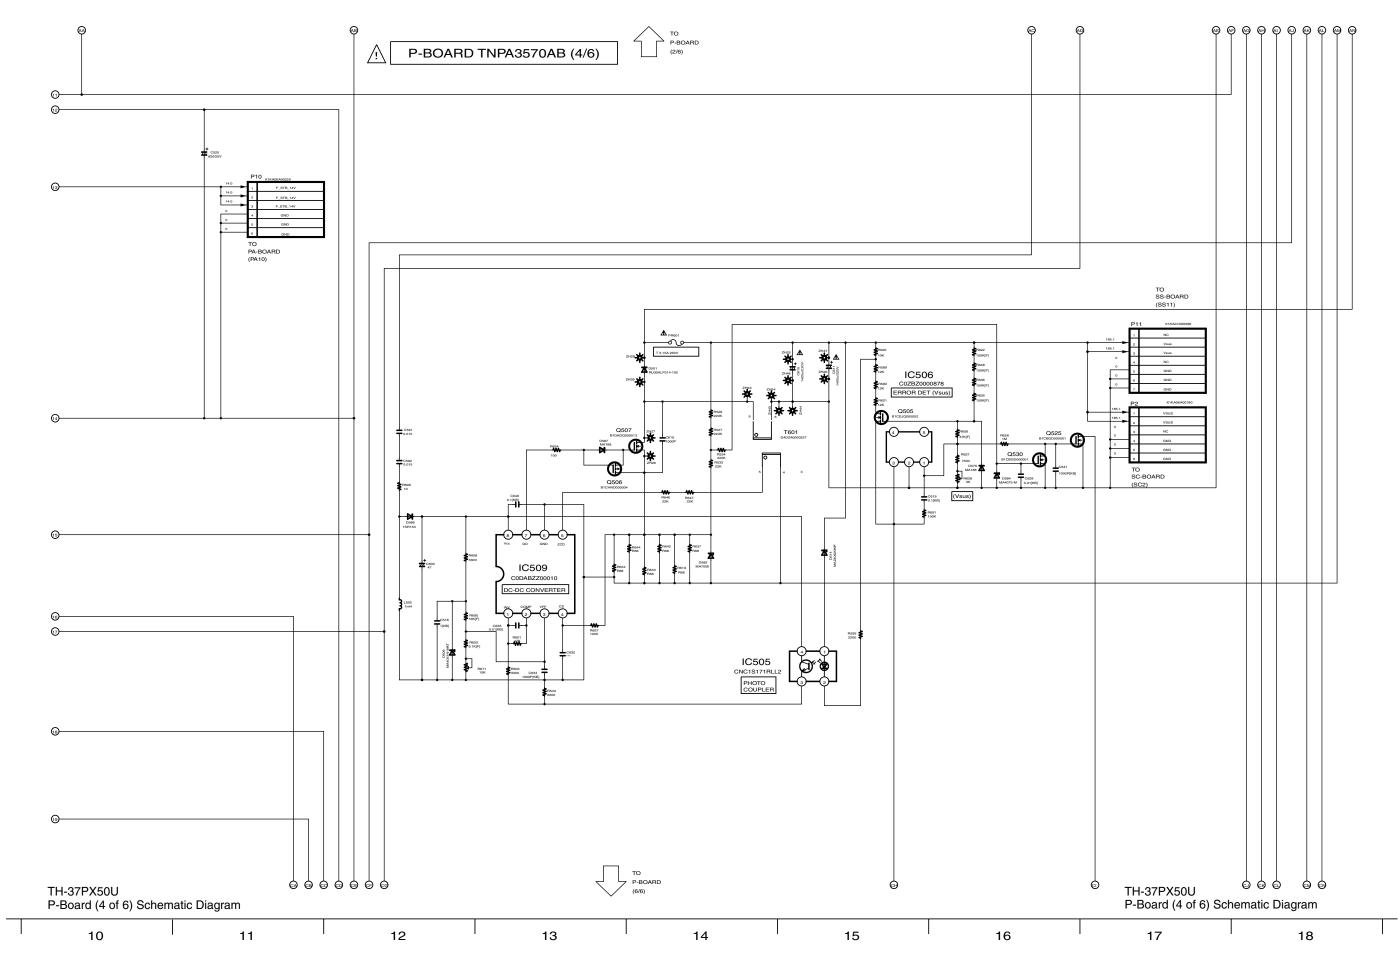


## 13.10. P-Board (5 of 6) Schematic Diagram (37inch)

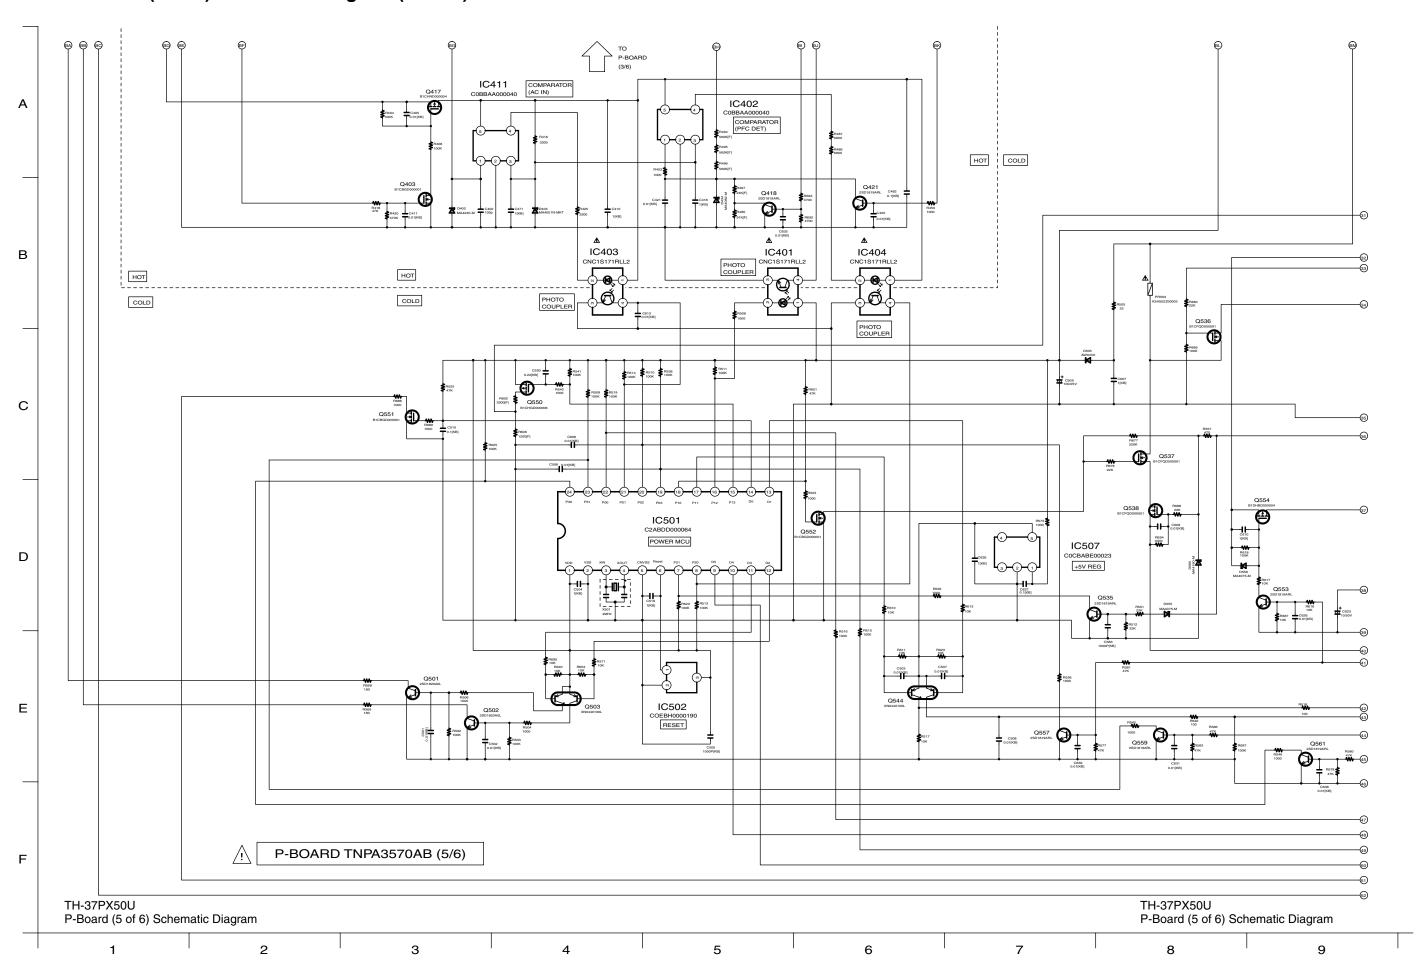

# 13.11. P-Board (6 of 6) Schematic Diagram (37inch)

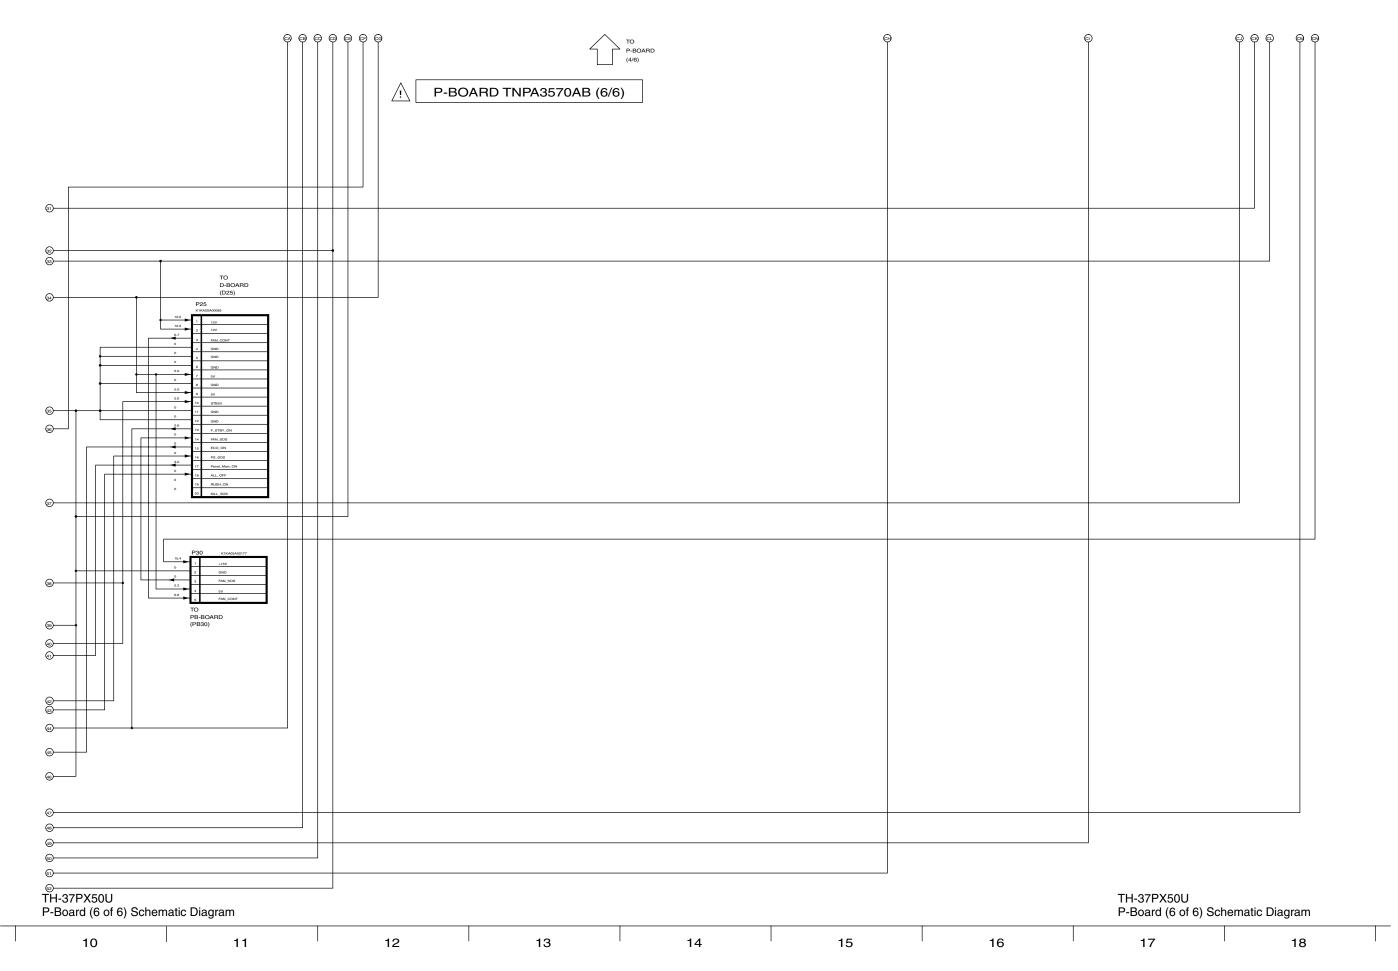


#### 13.12. P-Board Block Diagram (42inch)

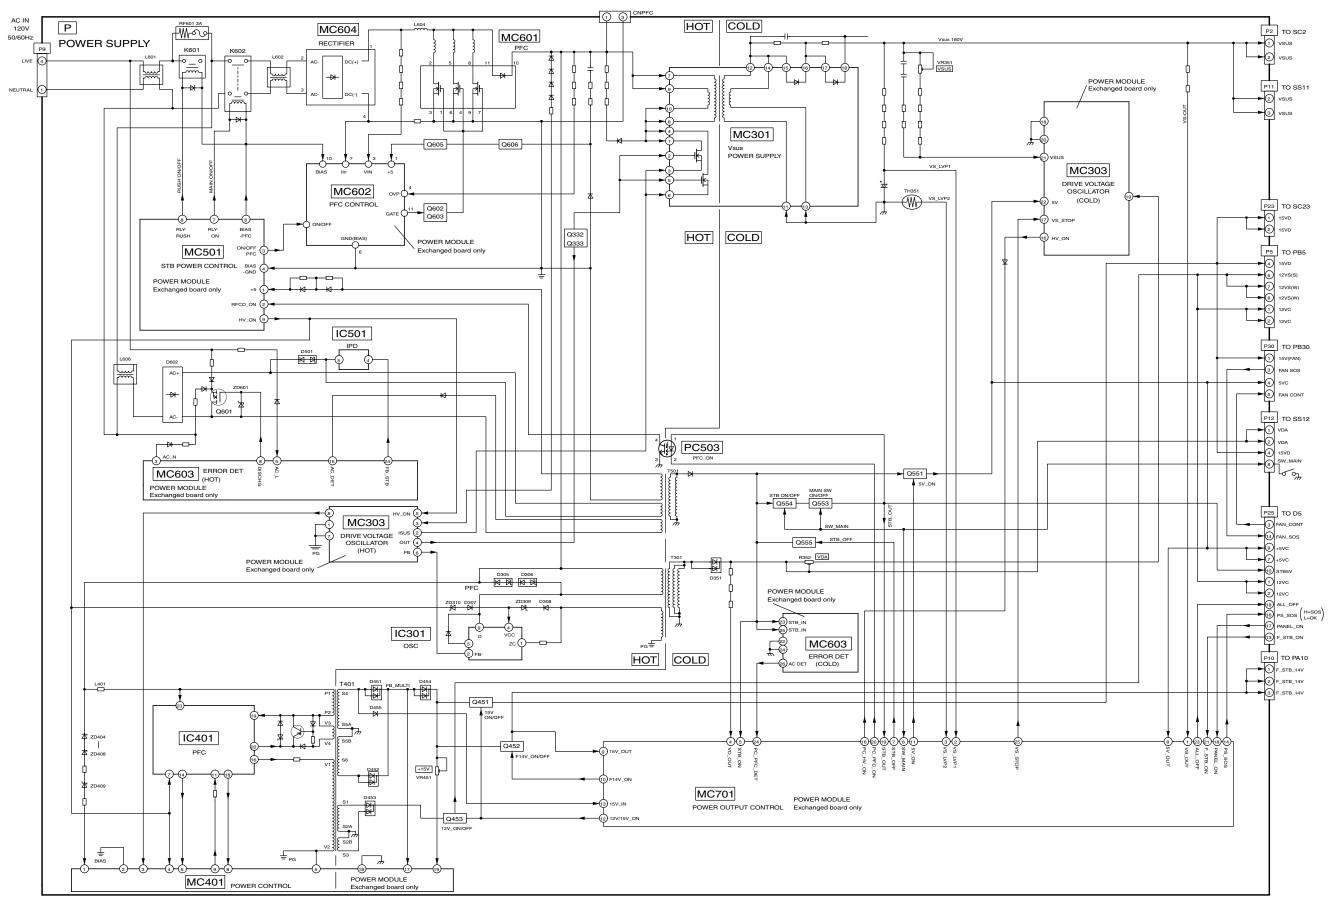


TH-42PX50U P-Board Block Diagram TH-42PX50U P-Board Block Diagram


# 13.13. P-Board (1 of 2) Schematic Diagram (42inch)

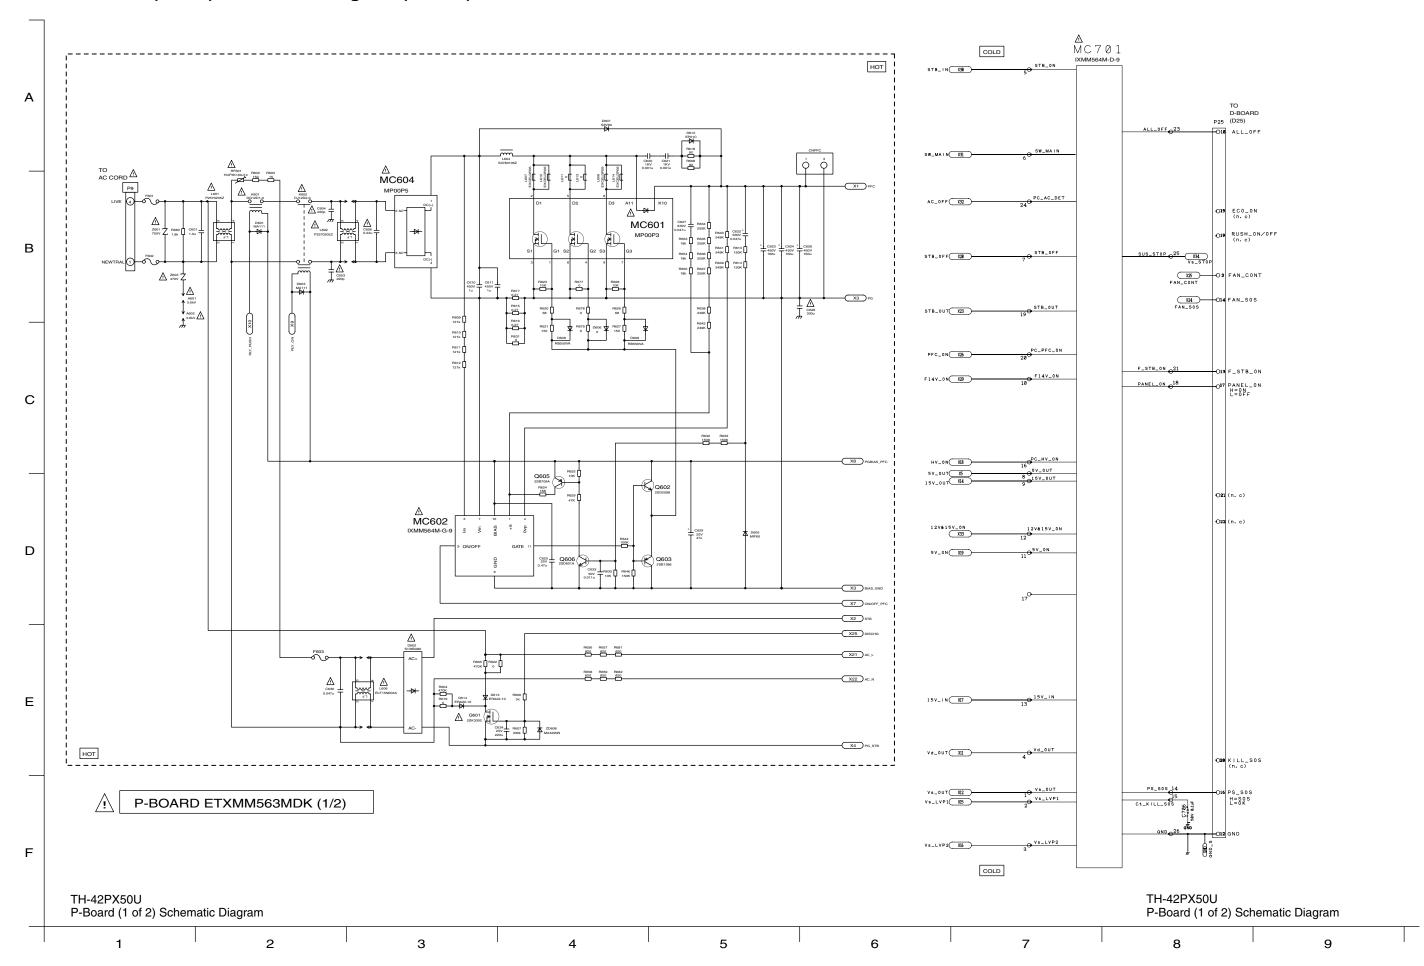

## 13.14. P-Board (2 of 2) Schematic Diagram (42inch)

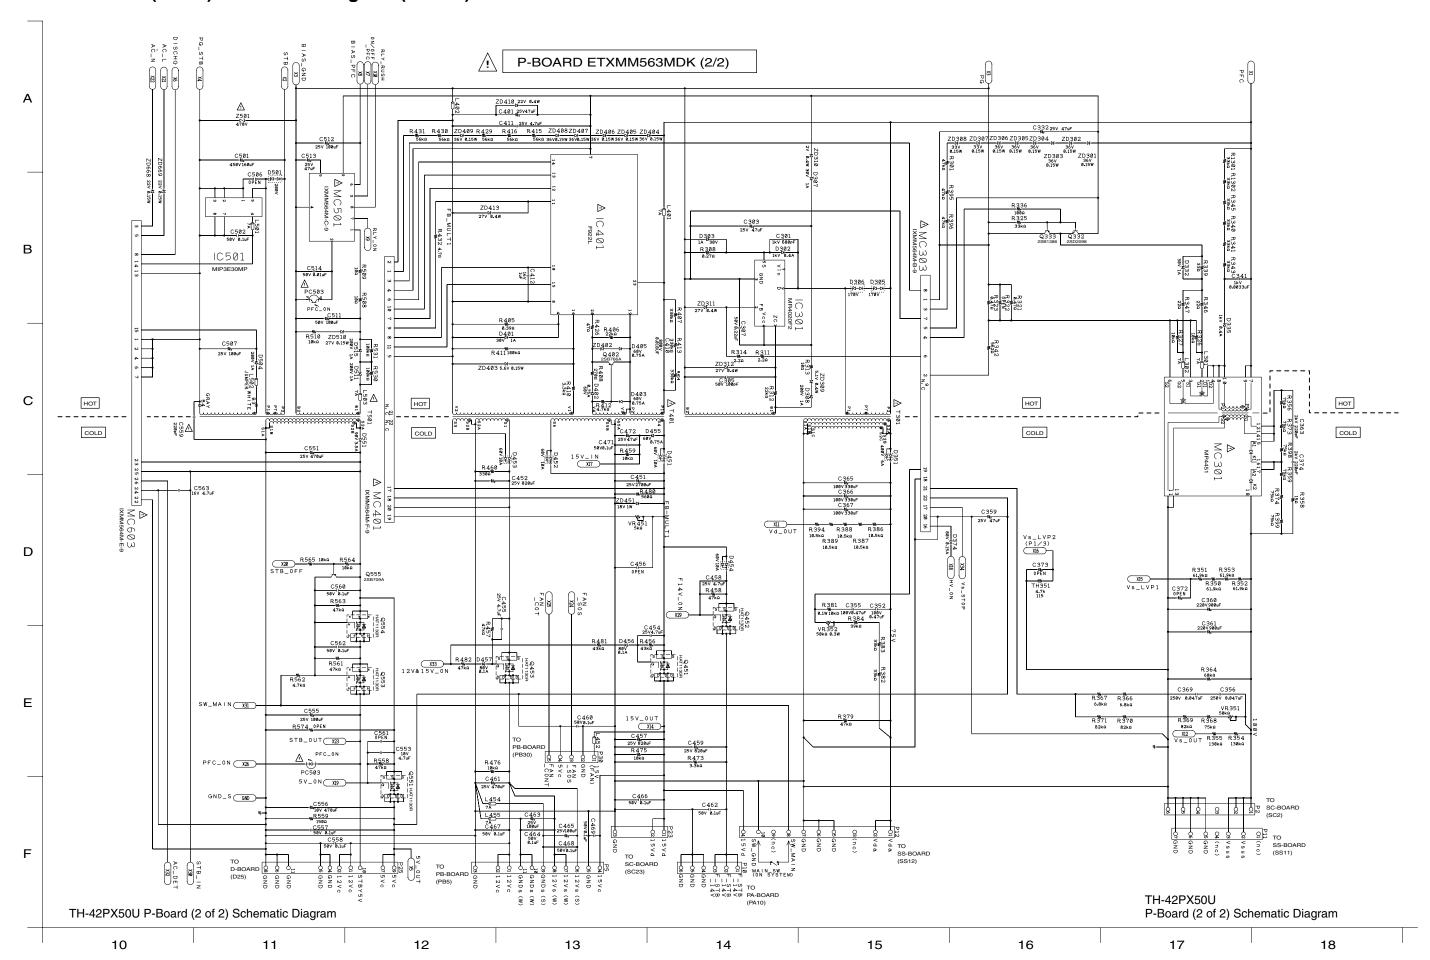


#### 13.15. P-Board Block Diagram (50inch)

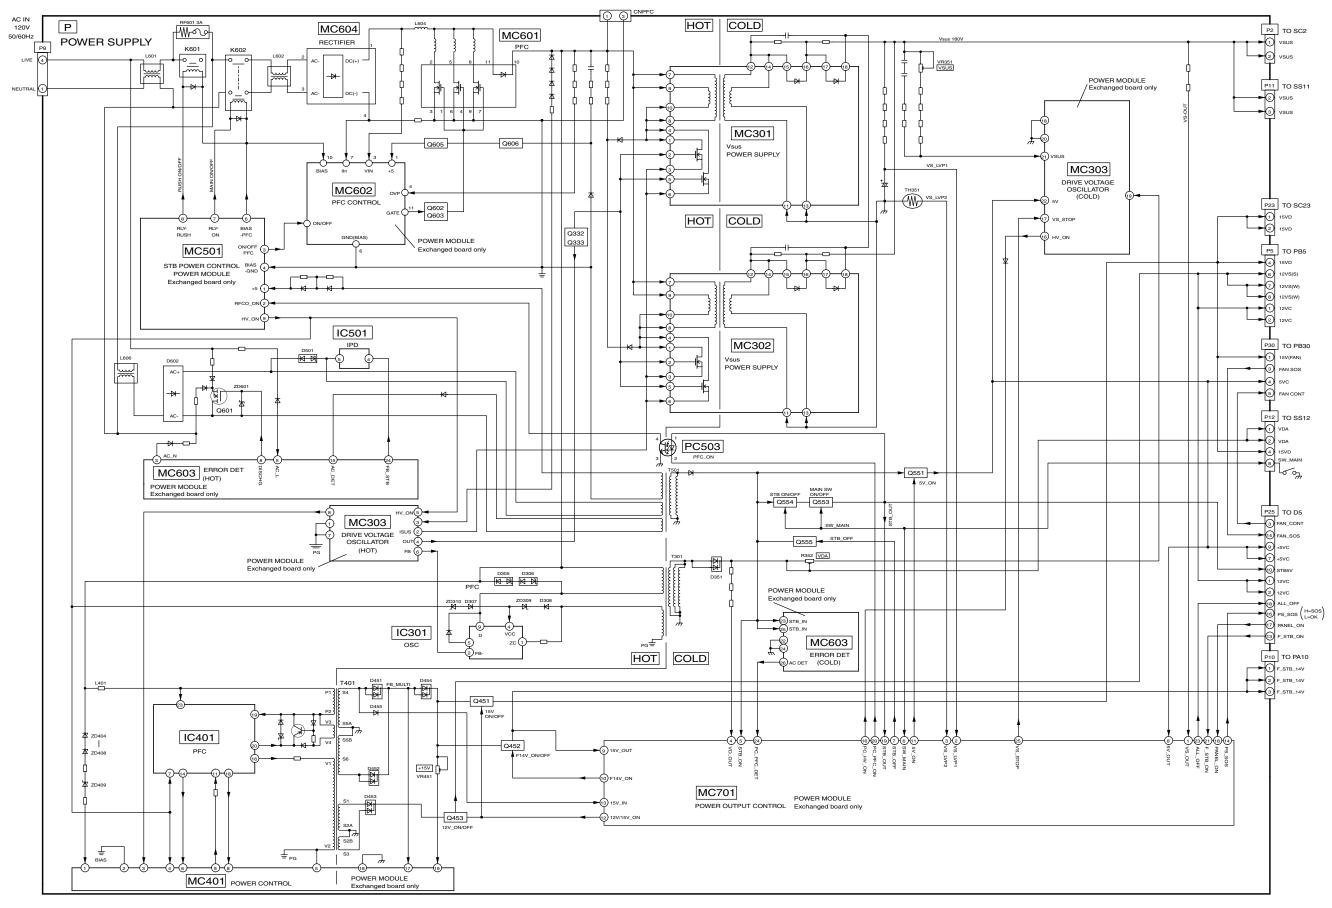


TH-50PX50U P-Board Block Diagram TH-50PX50U P-Board Block Diagram


# 13.16. P-Board (1 of 2) Schematic Diagram (50inch)

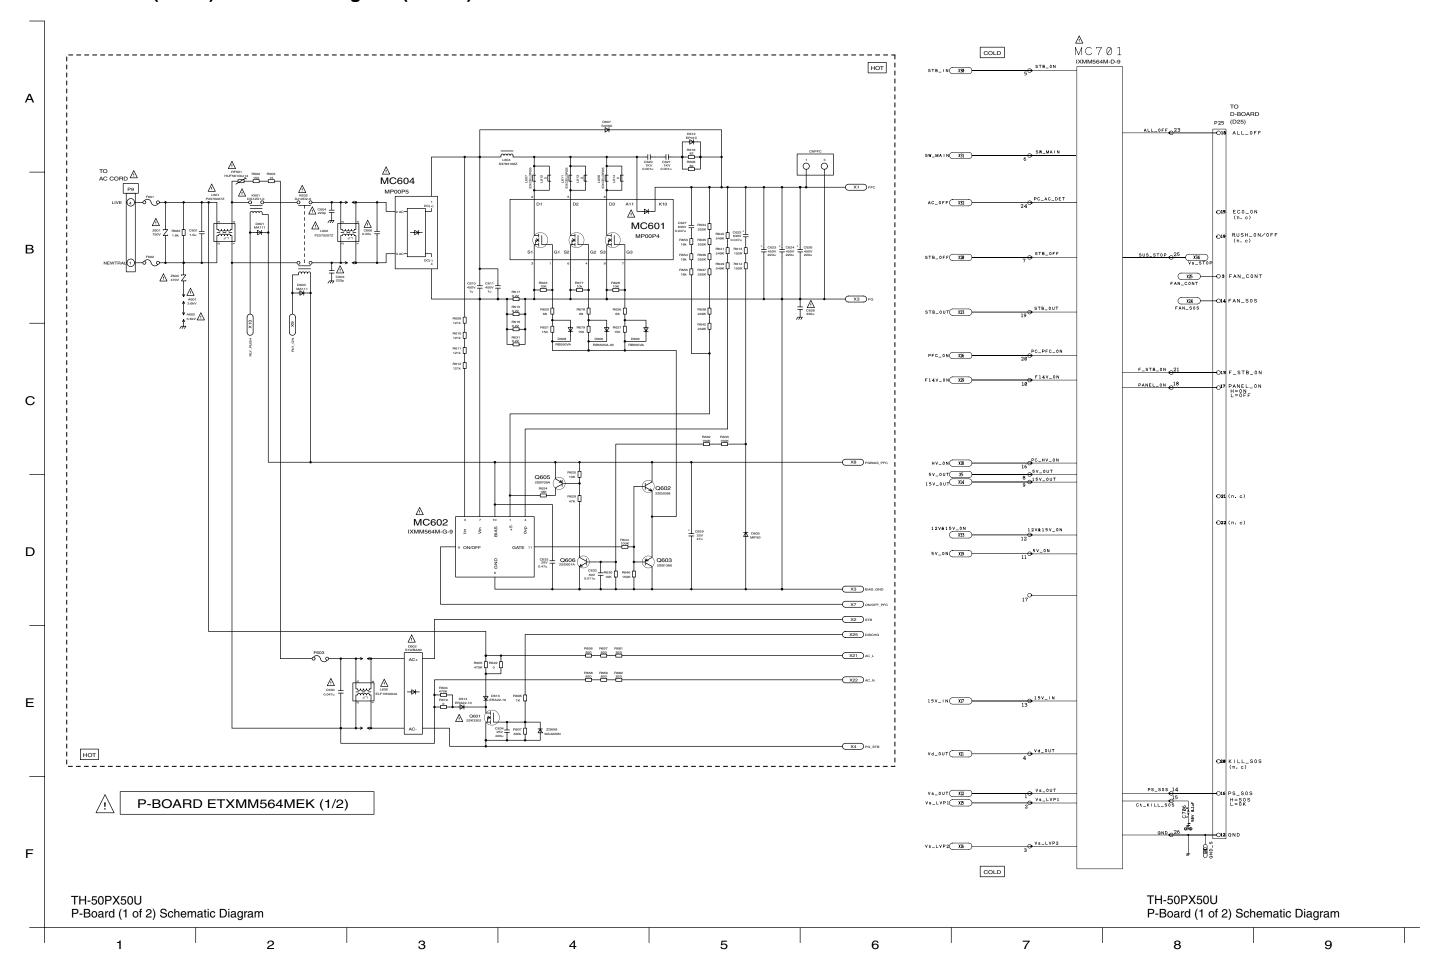


## 13.17. P-Board (2 of 2) Schematic Diagram (50inch)

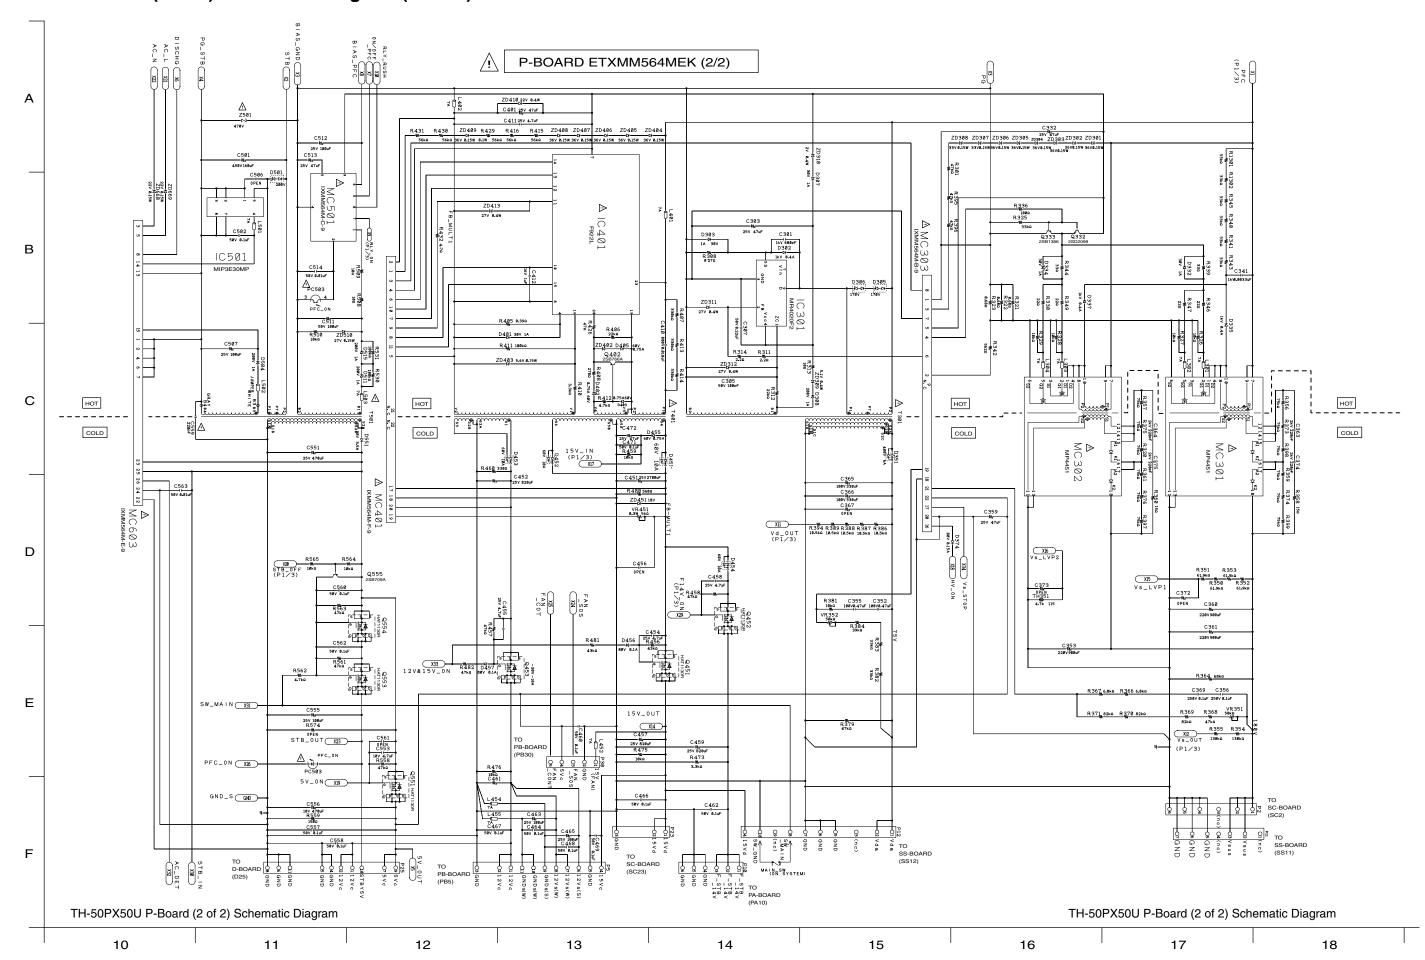


#### 13.18. PA and PB Board Block Diagram

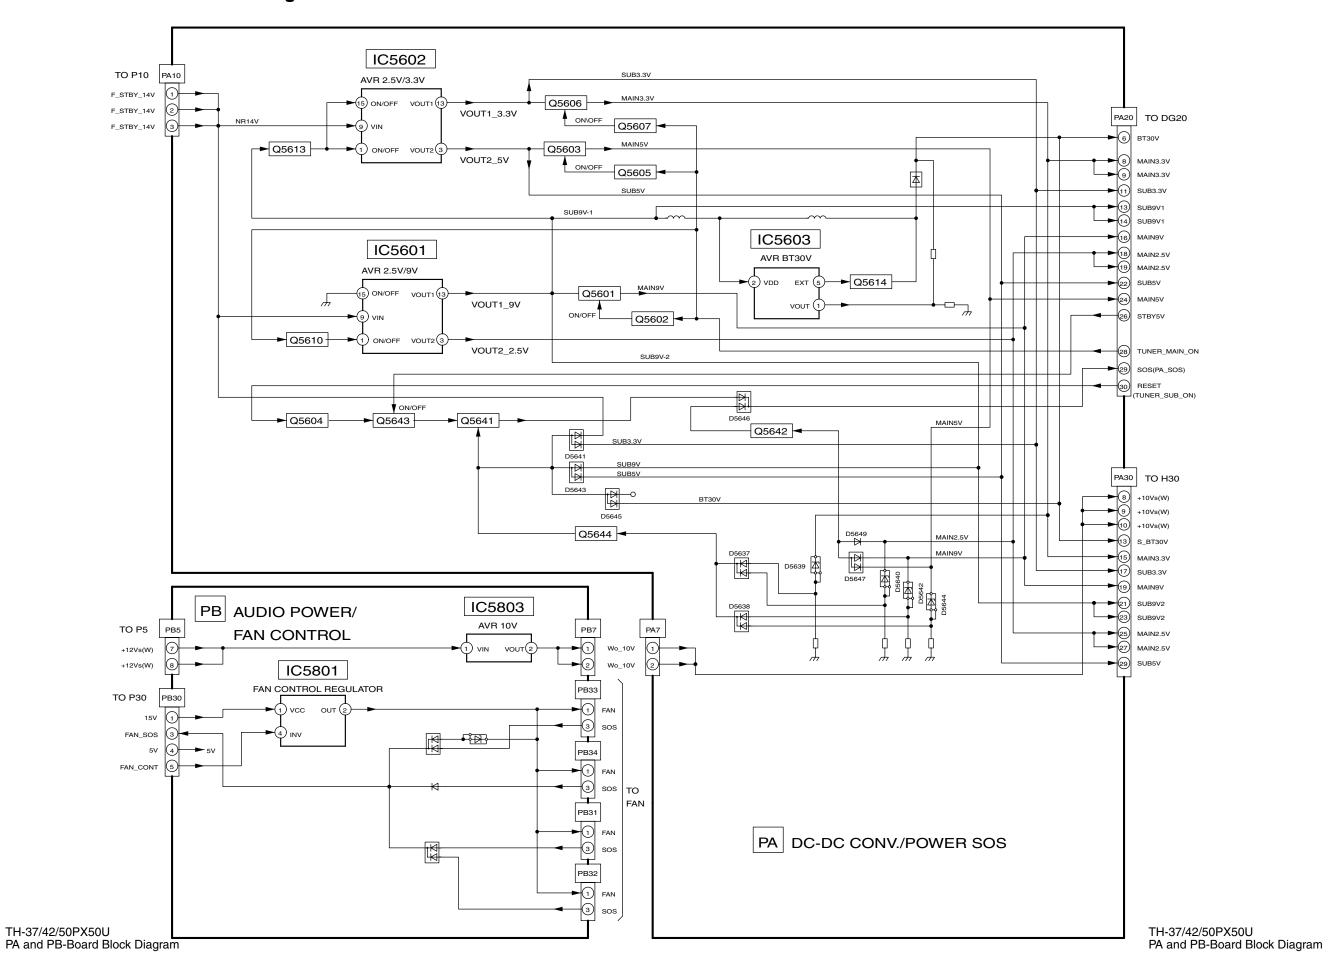


## 13.19. PA-Board Schematic Diagram

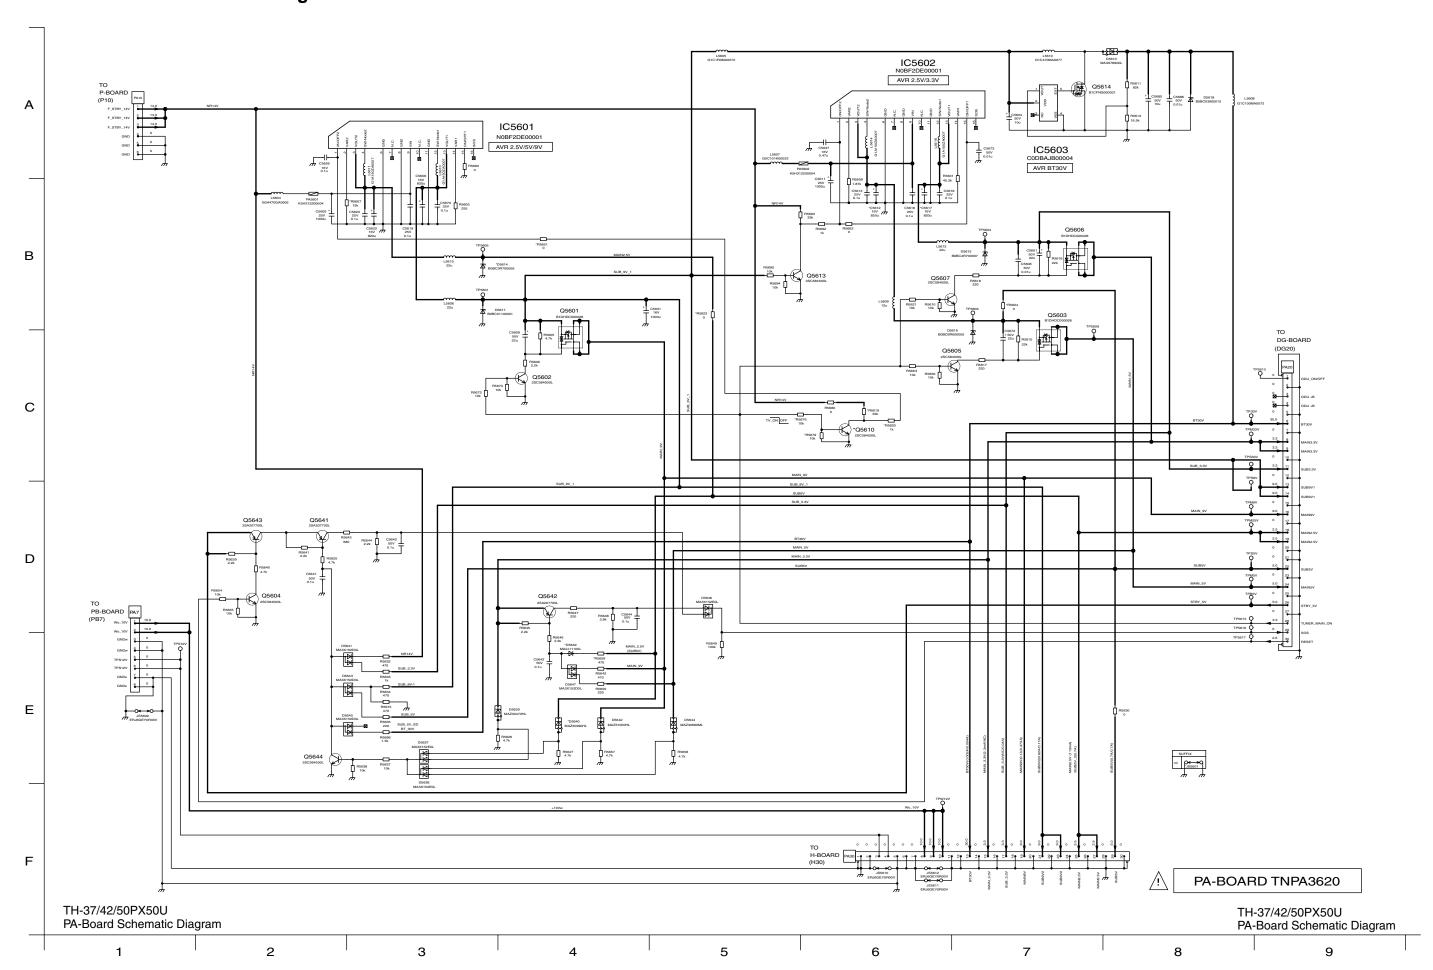


# 13.20. PB-Board Schematic Diagram

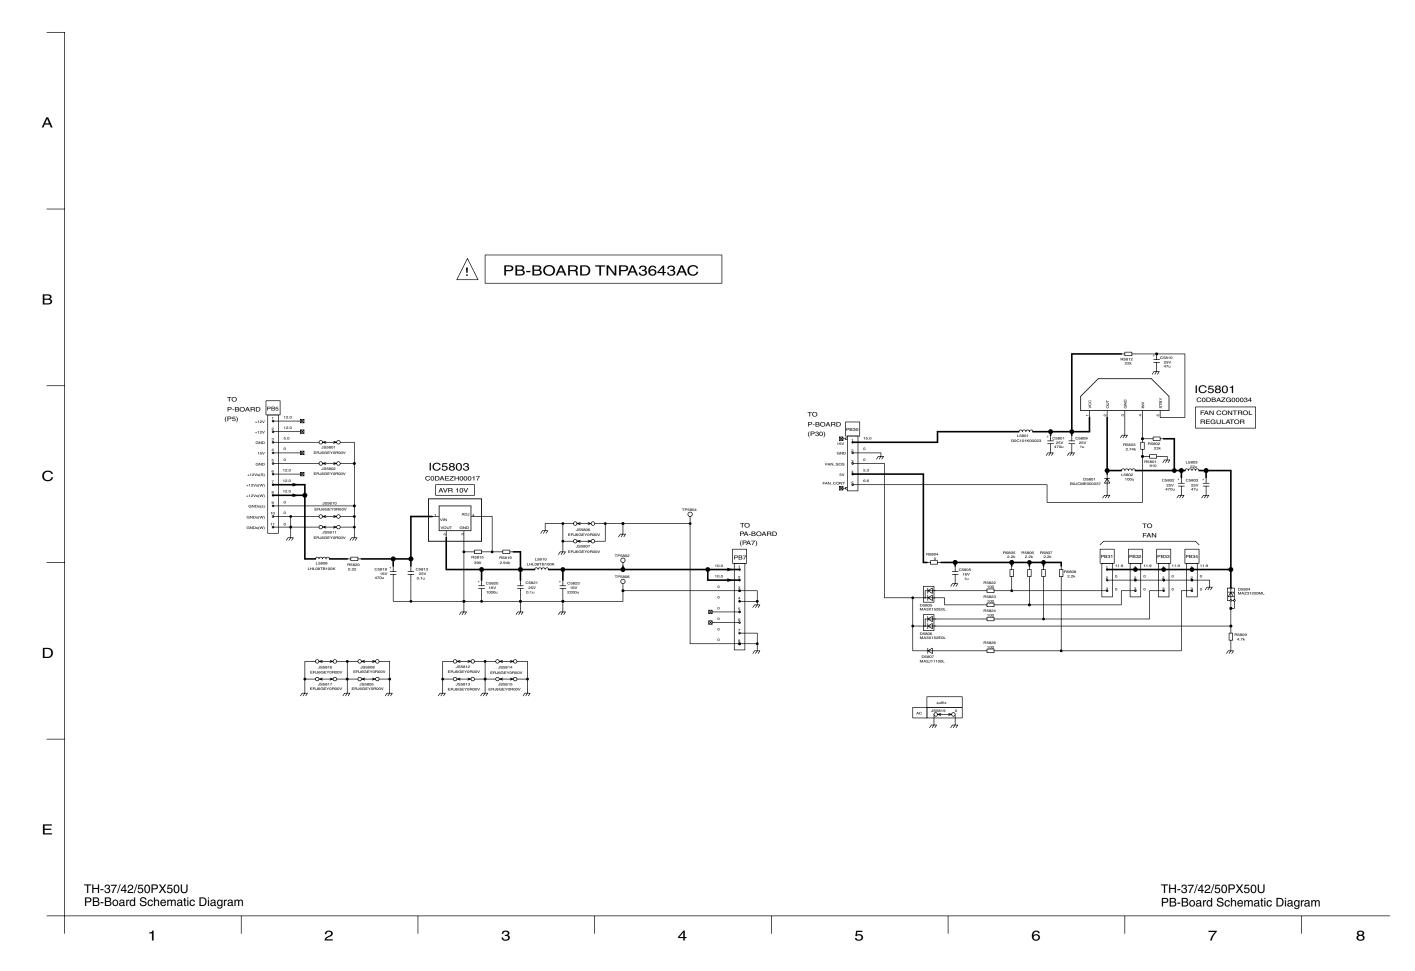


#### 13.21. H, K, S and Z-Board Block Diagram

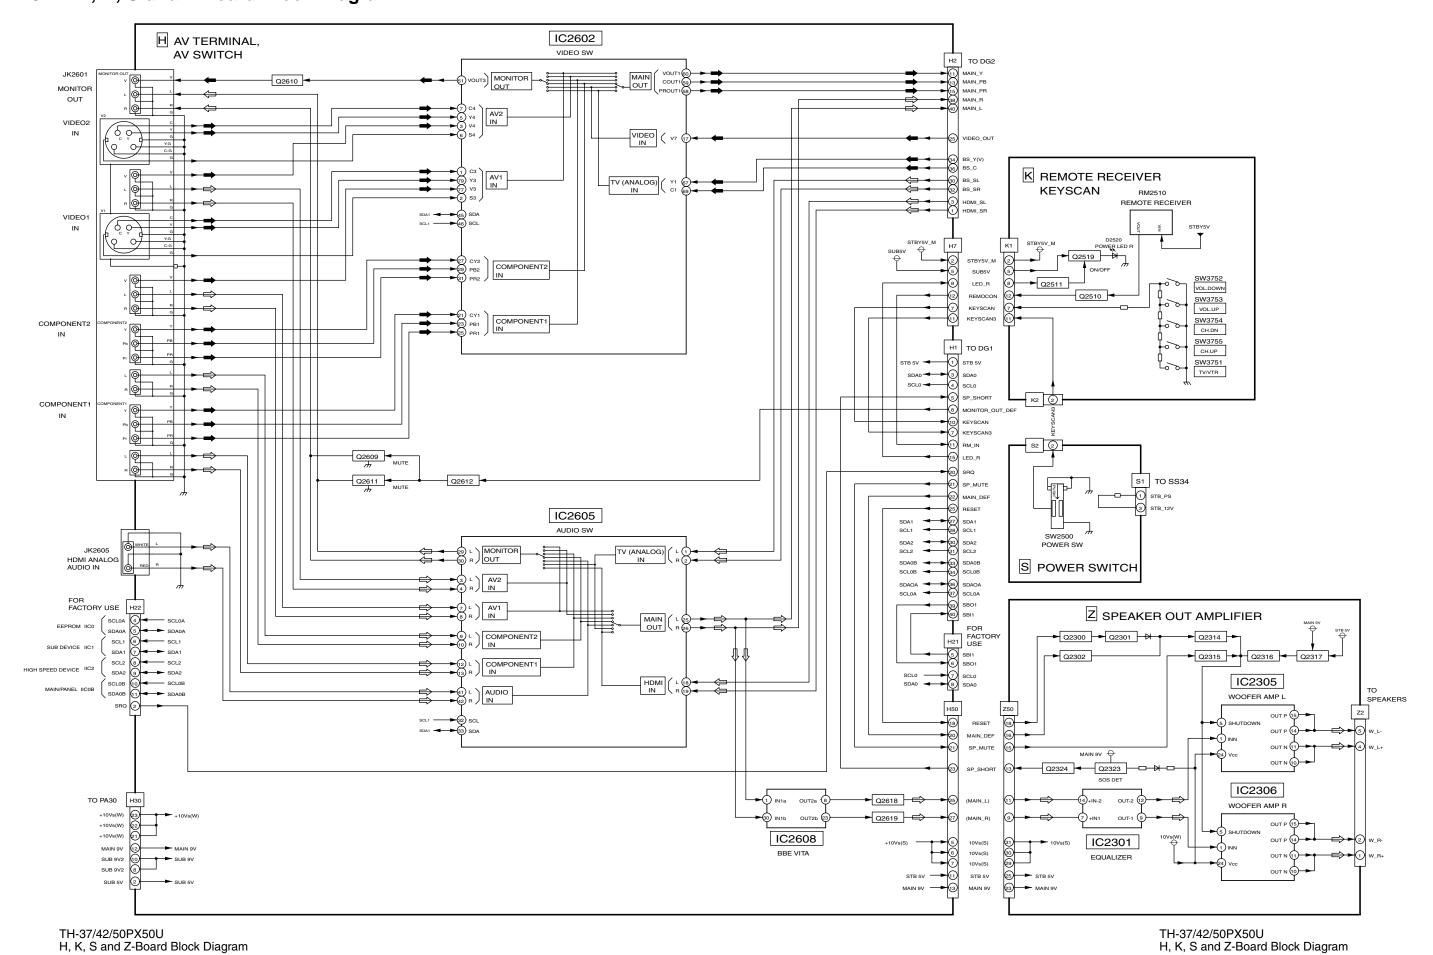


## 13.22. H-Board (1 of 3) Schematic Diagram

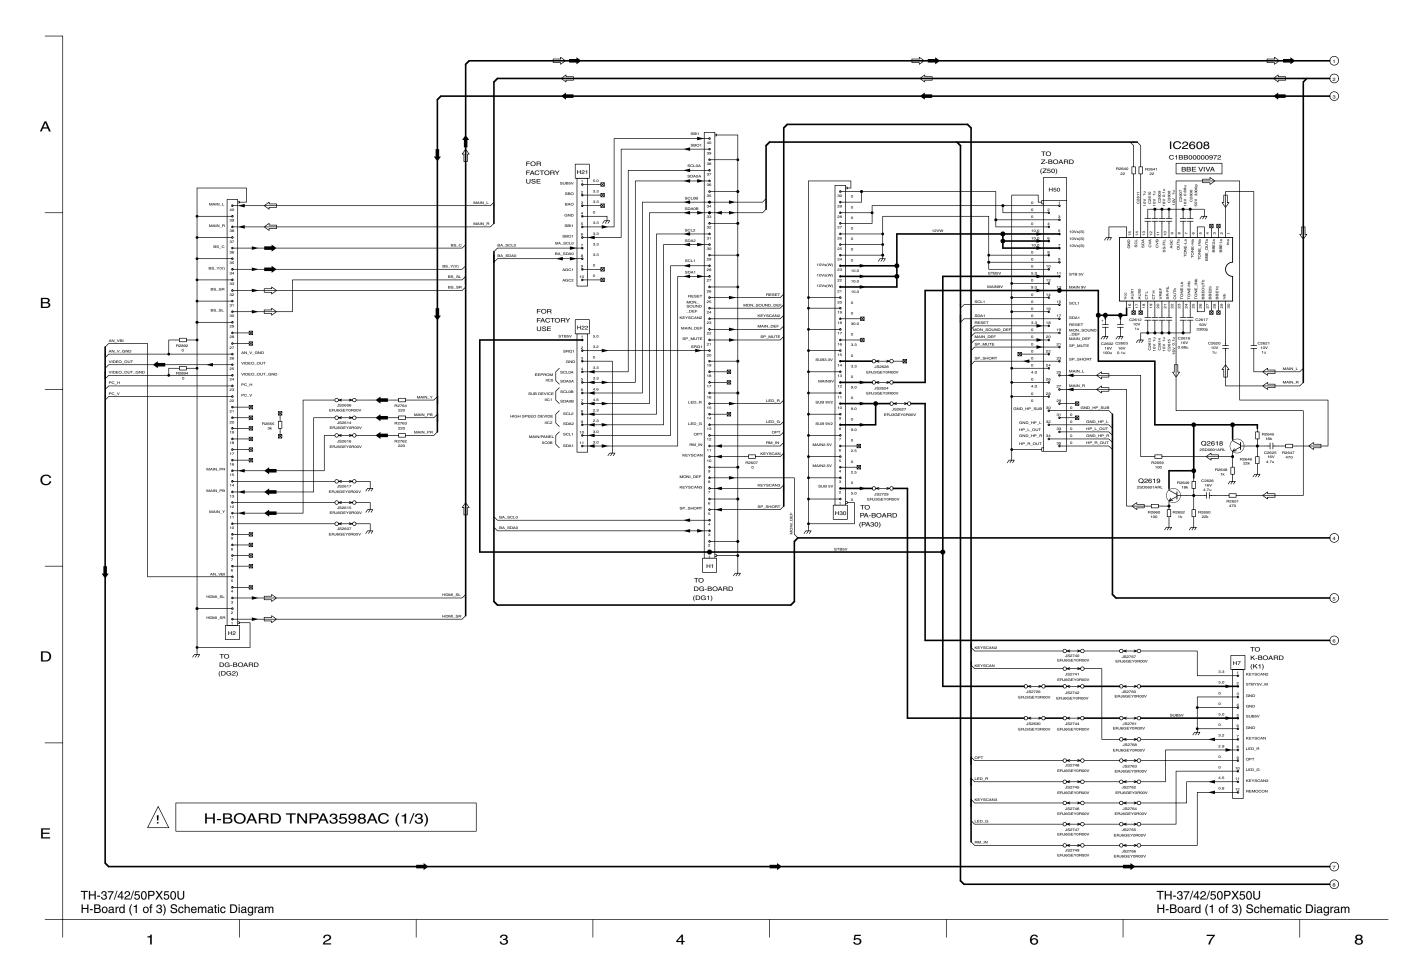


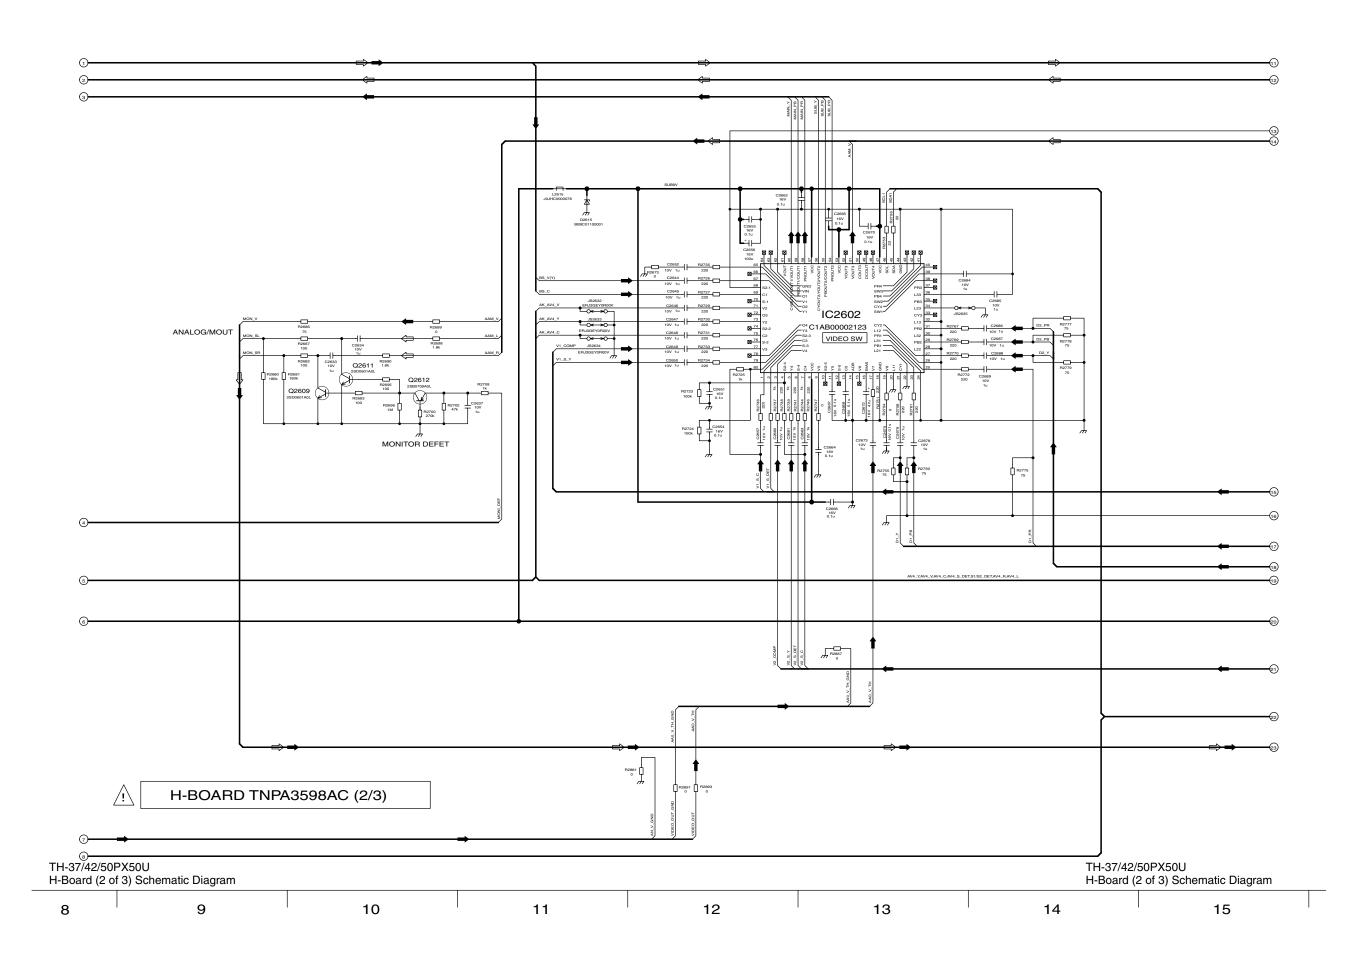


## 13.24. H-Board (3 of 3) Schematic Diagram

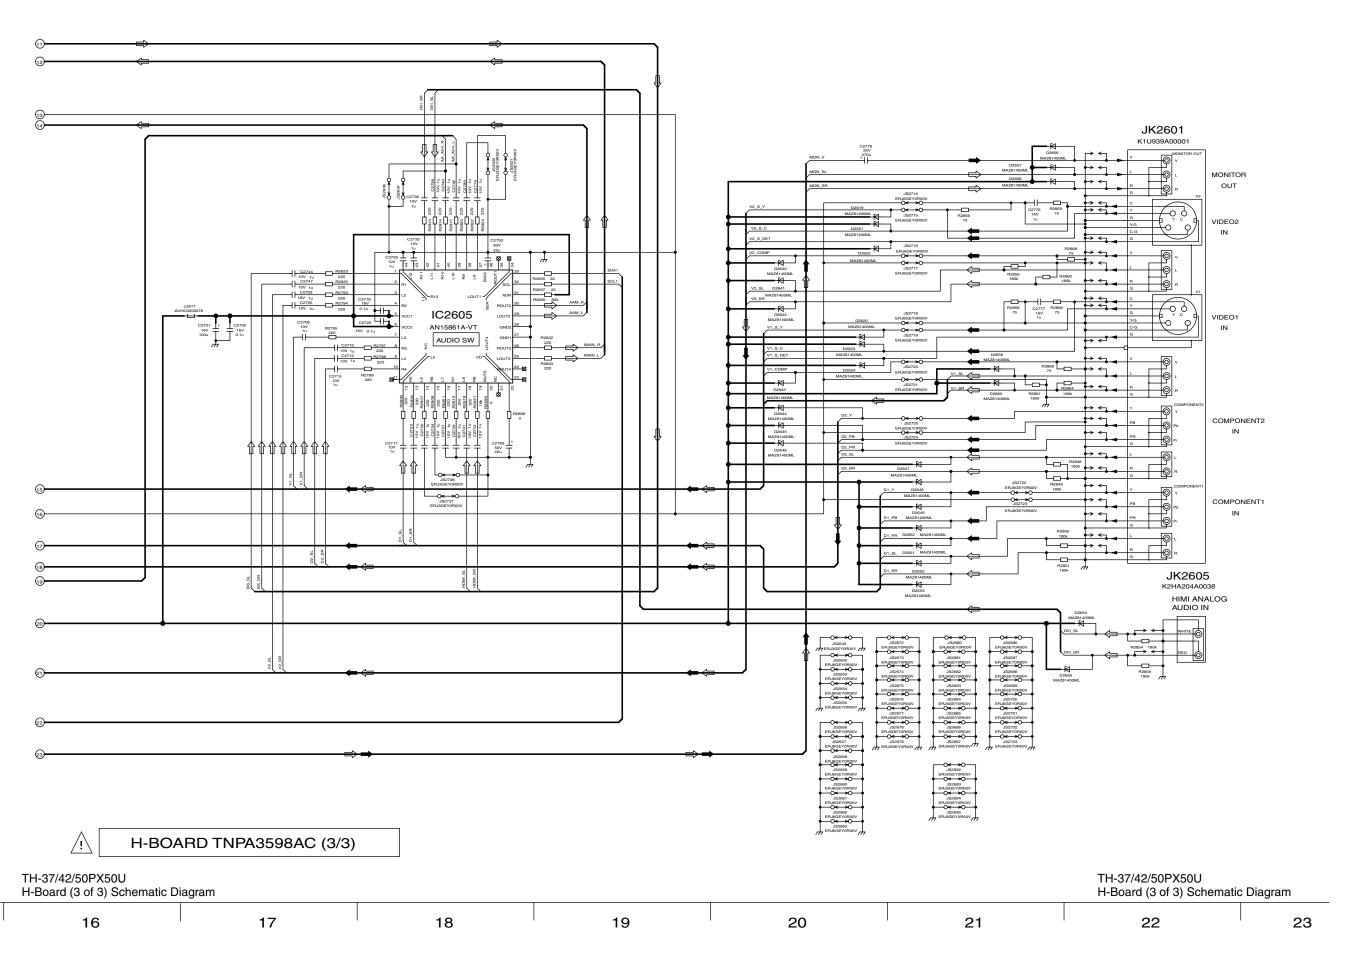


## 13.25. Z-Board Schematic Diagram

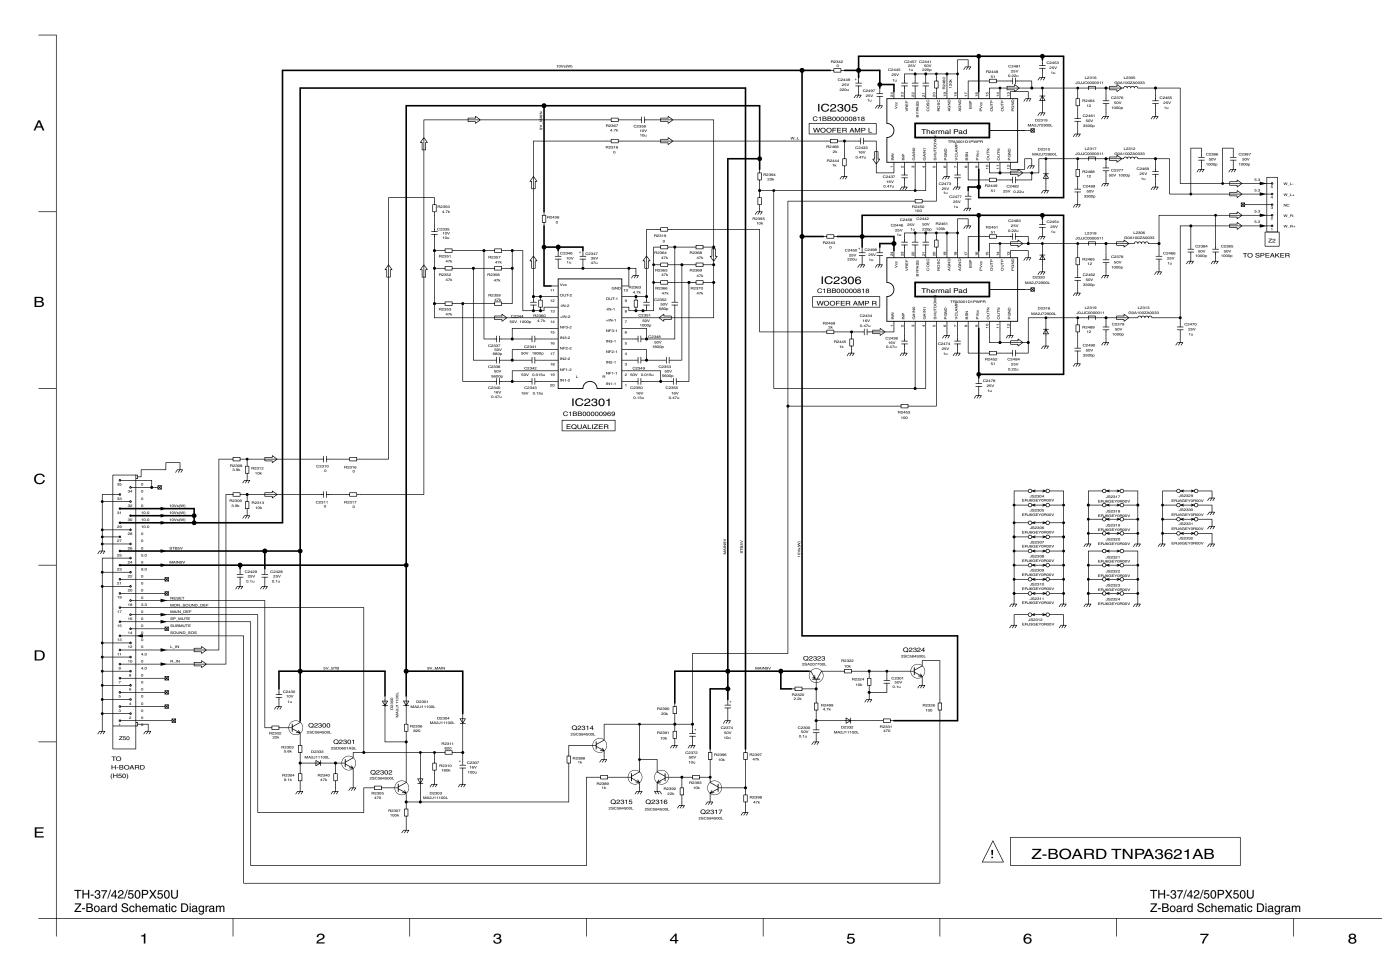


# 13.26. K and S-Board Schematic Diagram

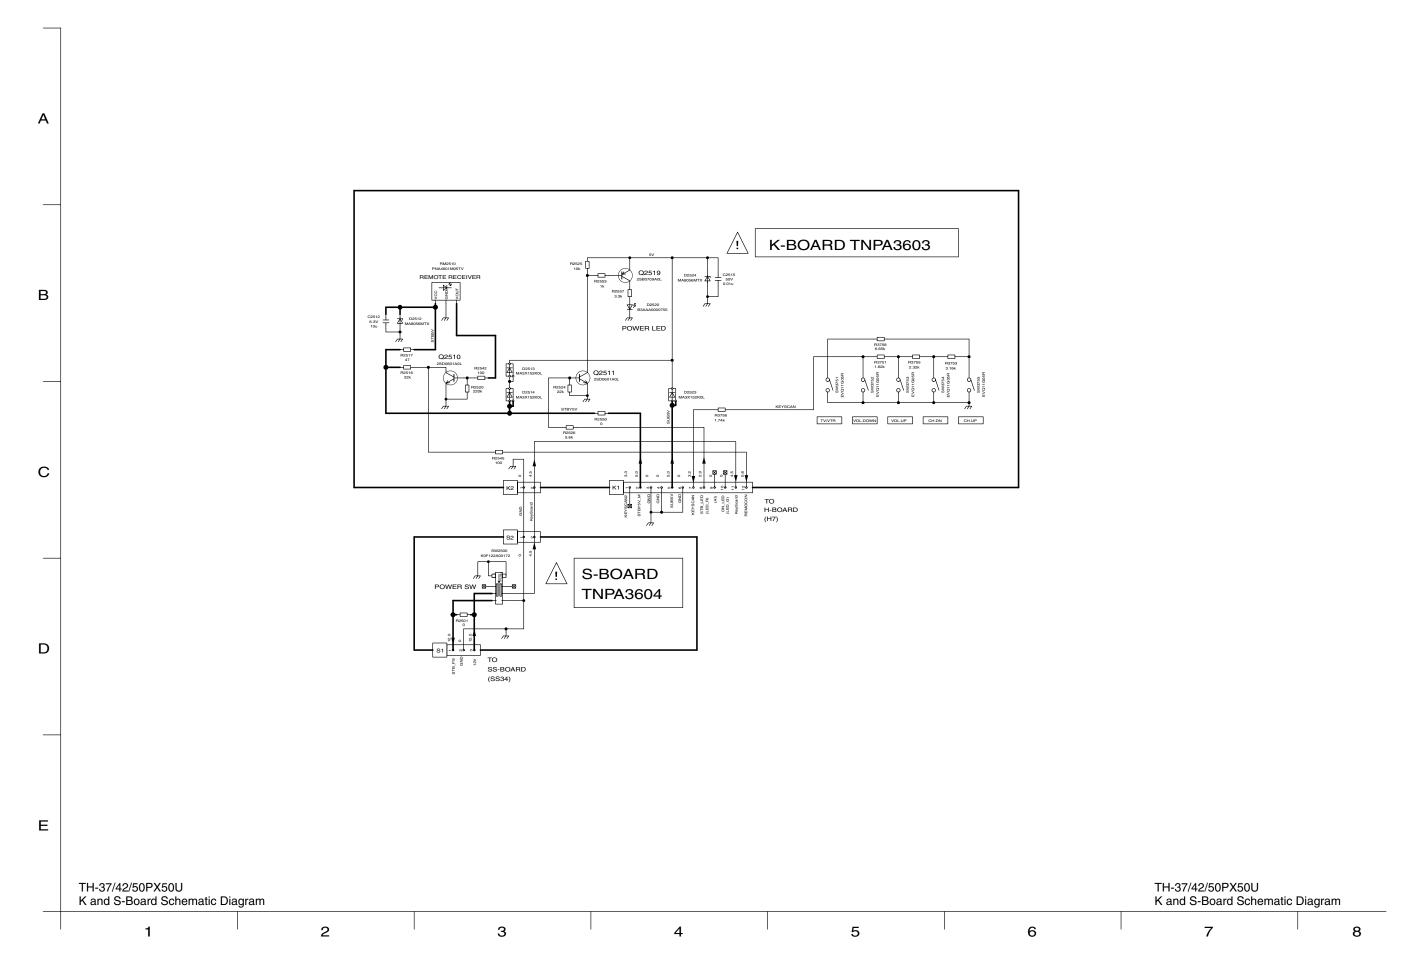


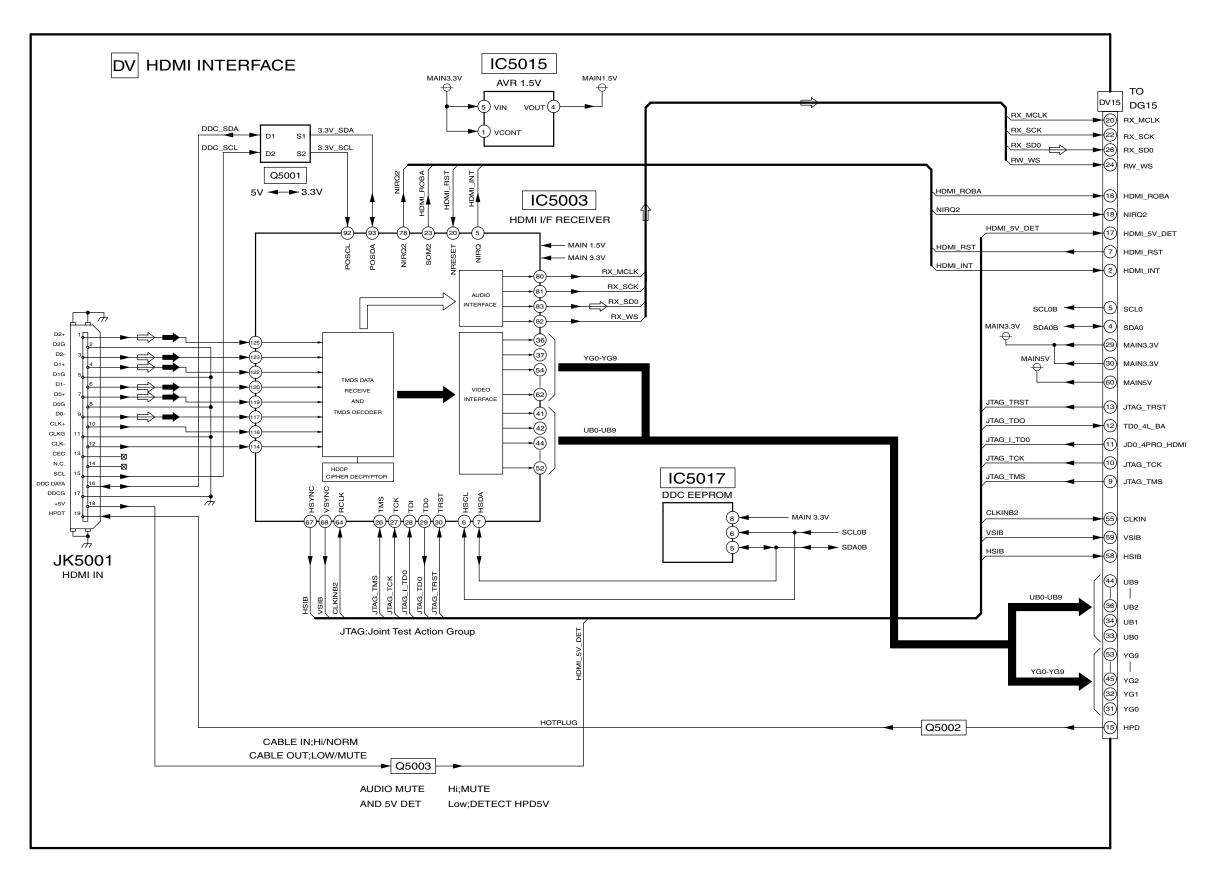


TH-37/42/50PX50U DV-Board Block Diagram

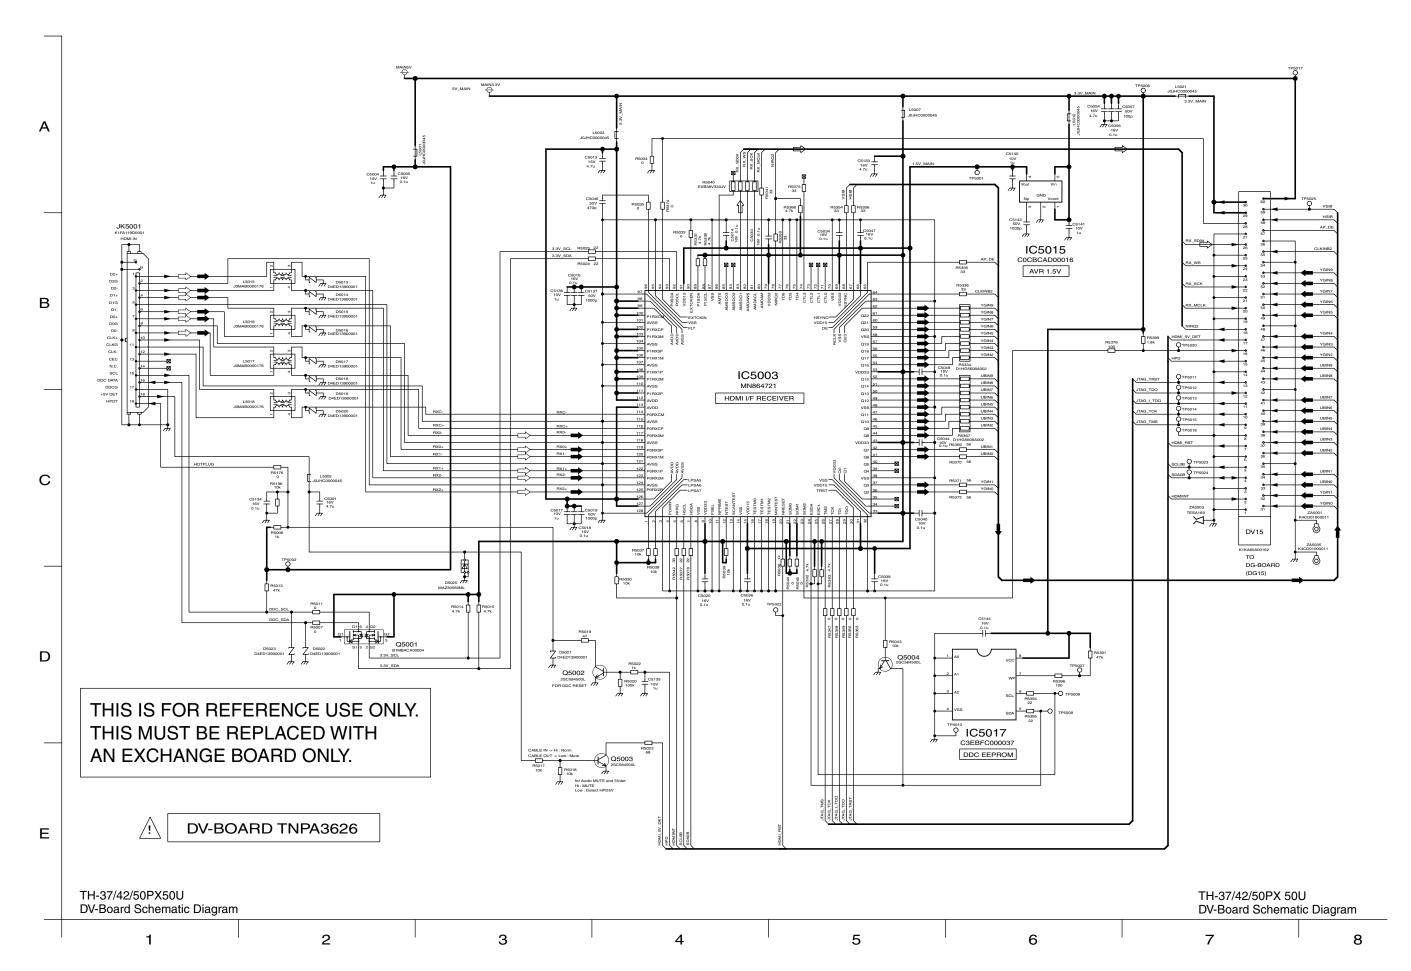


#### 13.29. DT-Board Block Diagram

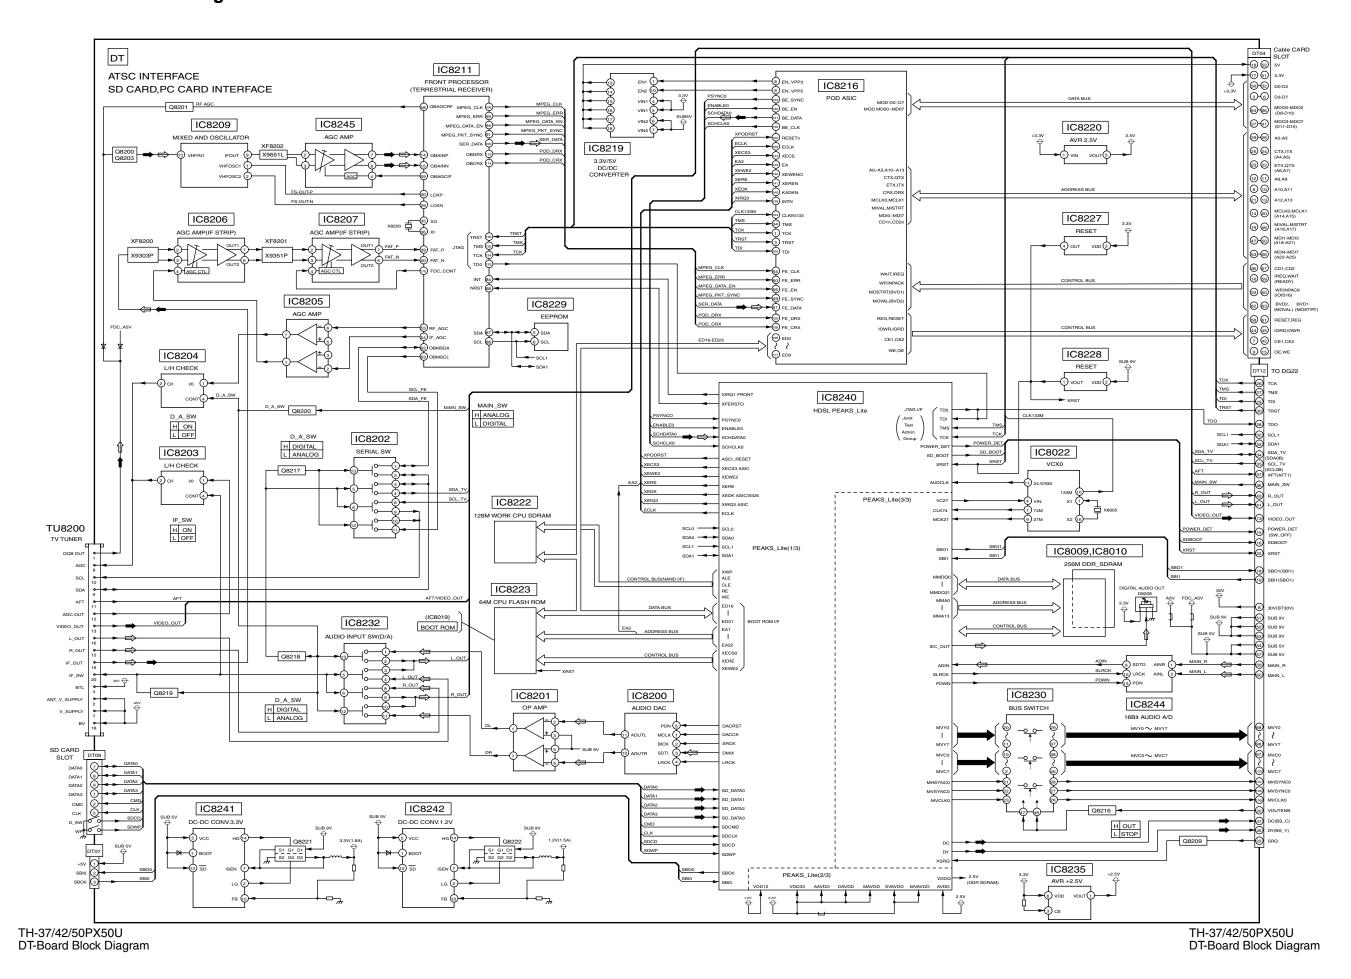


## 13.30. DT-Board (1 of 5) Schematic Diagram

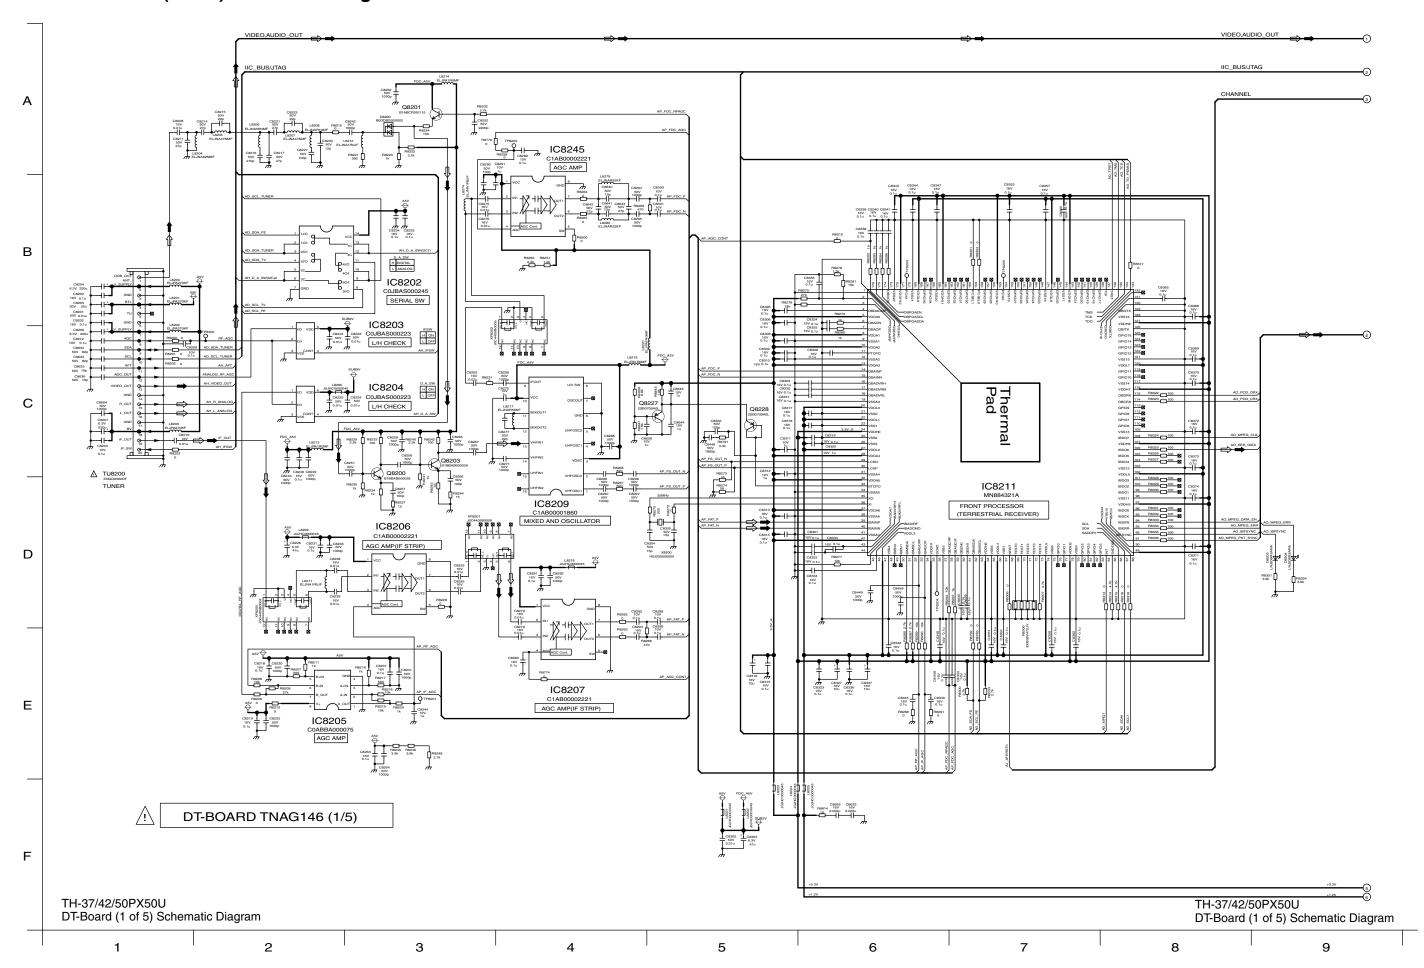


## 13.31. DT-Board (2 of 5) Schematic Diagram

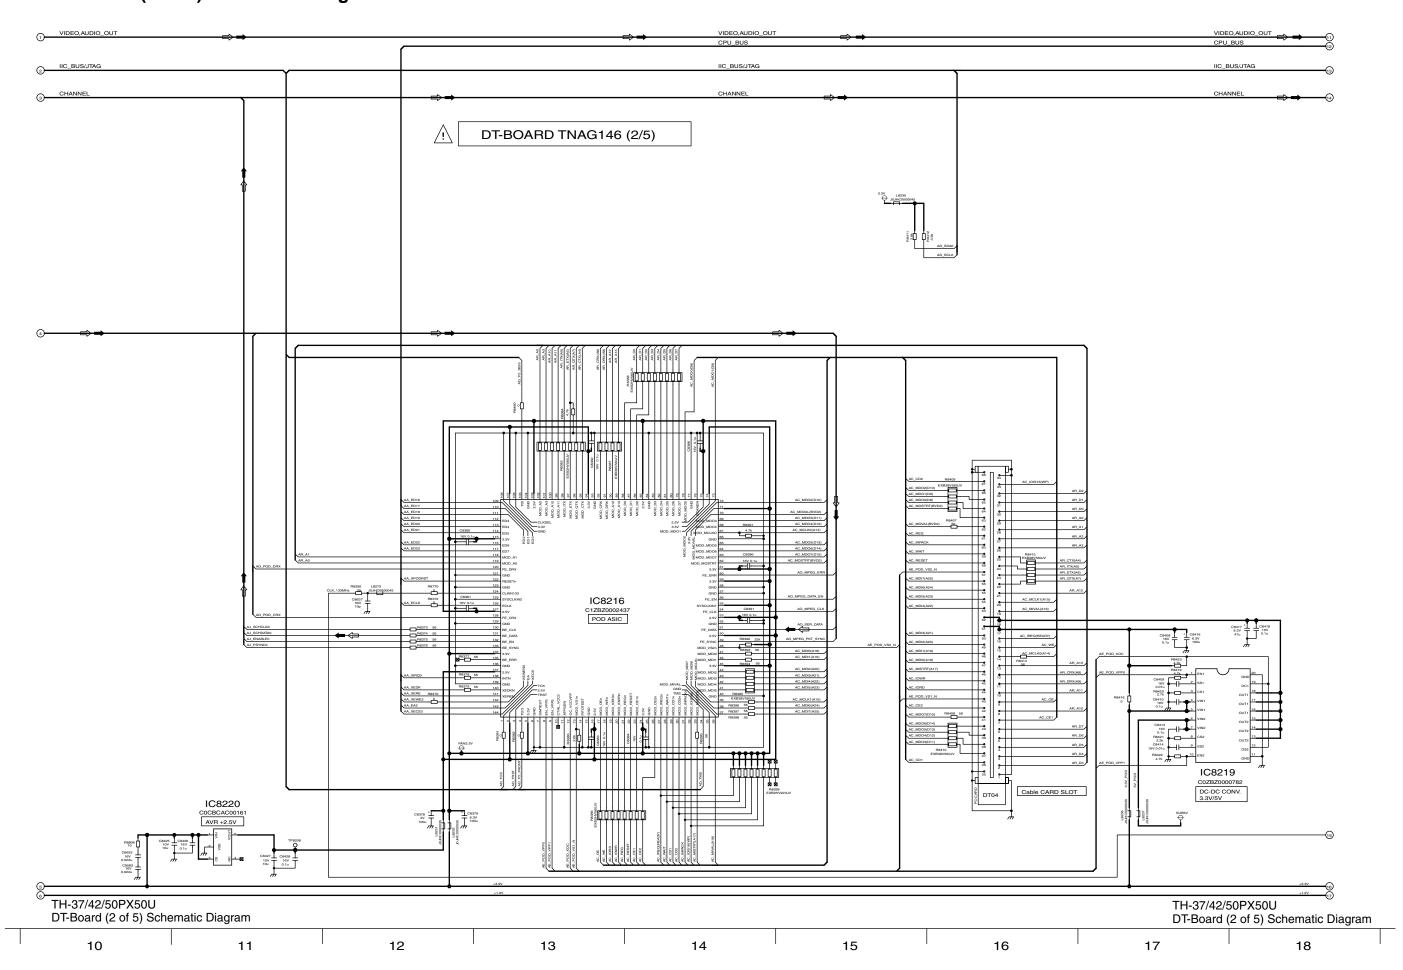


#### 13.32. DT-Board (3 of 5) Schematic Diagram

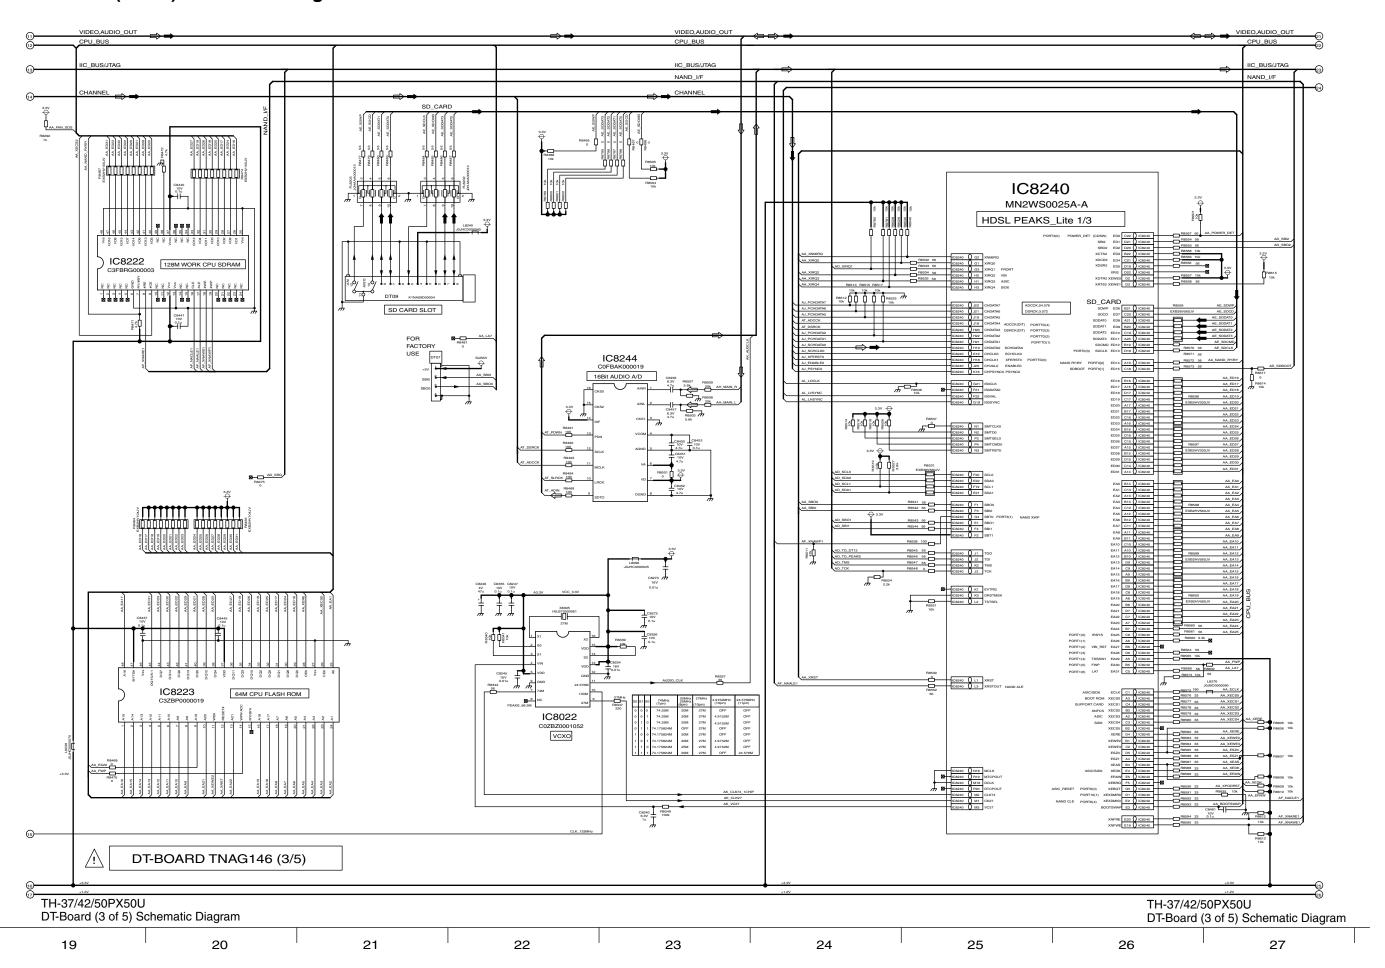


## 13.33. DT-Board (4 of 5) Schematic Diagram

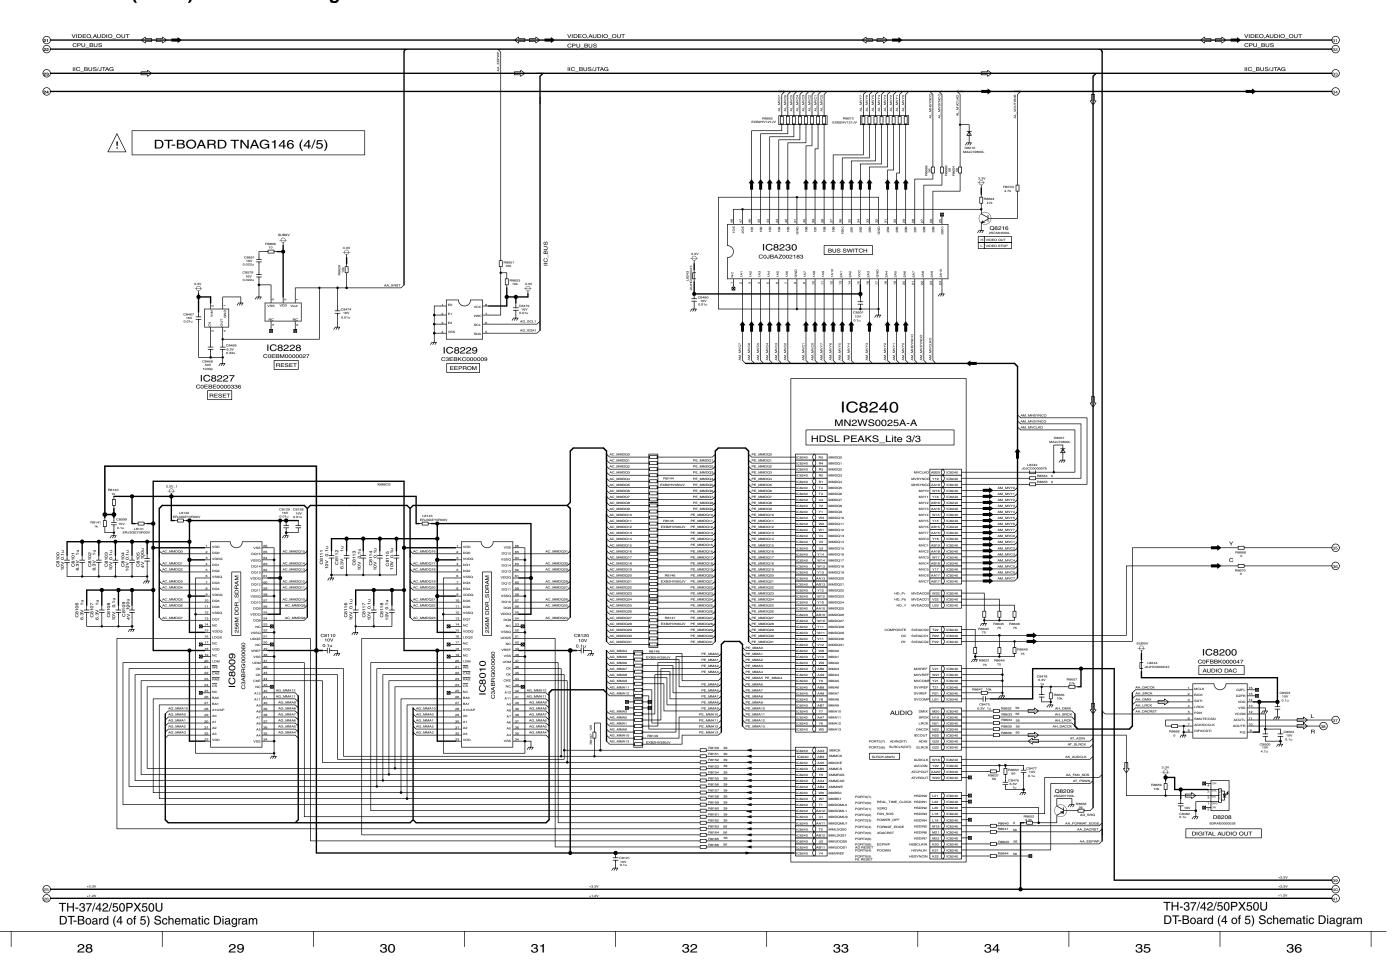


## 13.34. DT-Board (5 of 5) Schematic Diagram

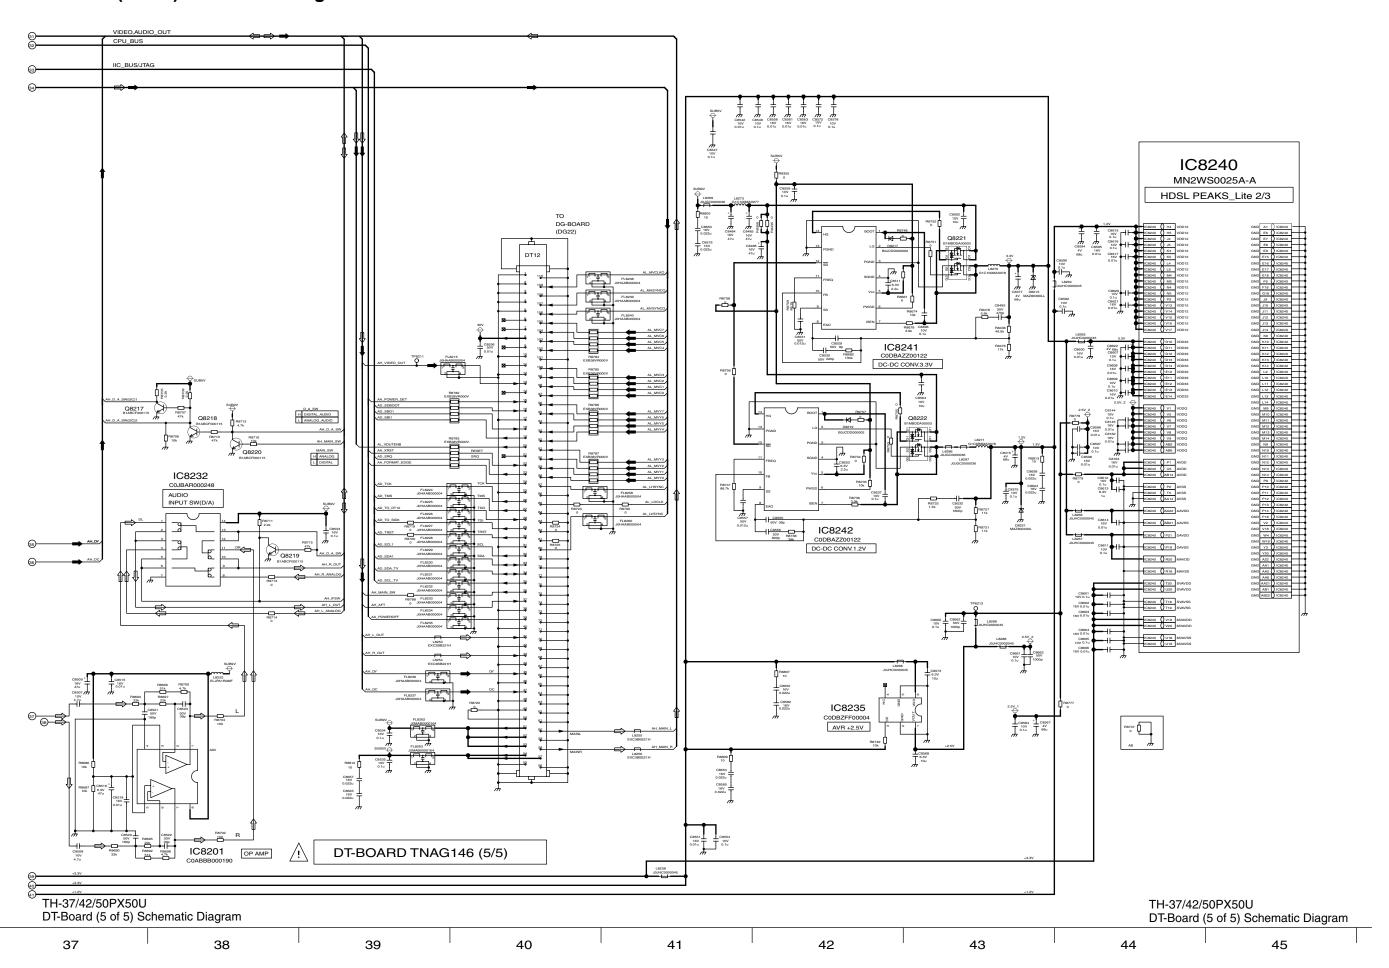

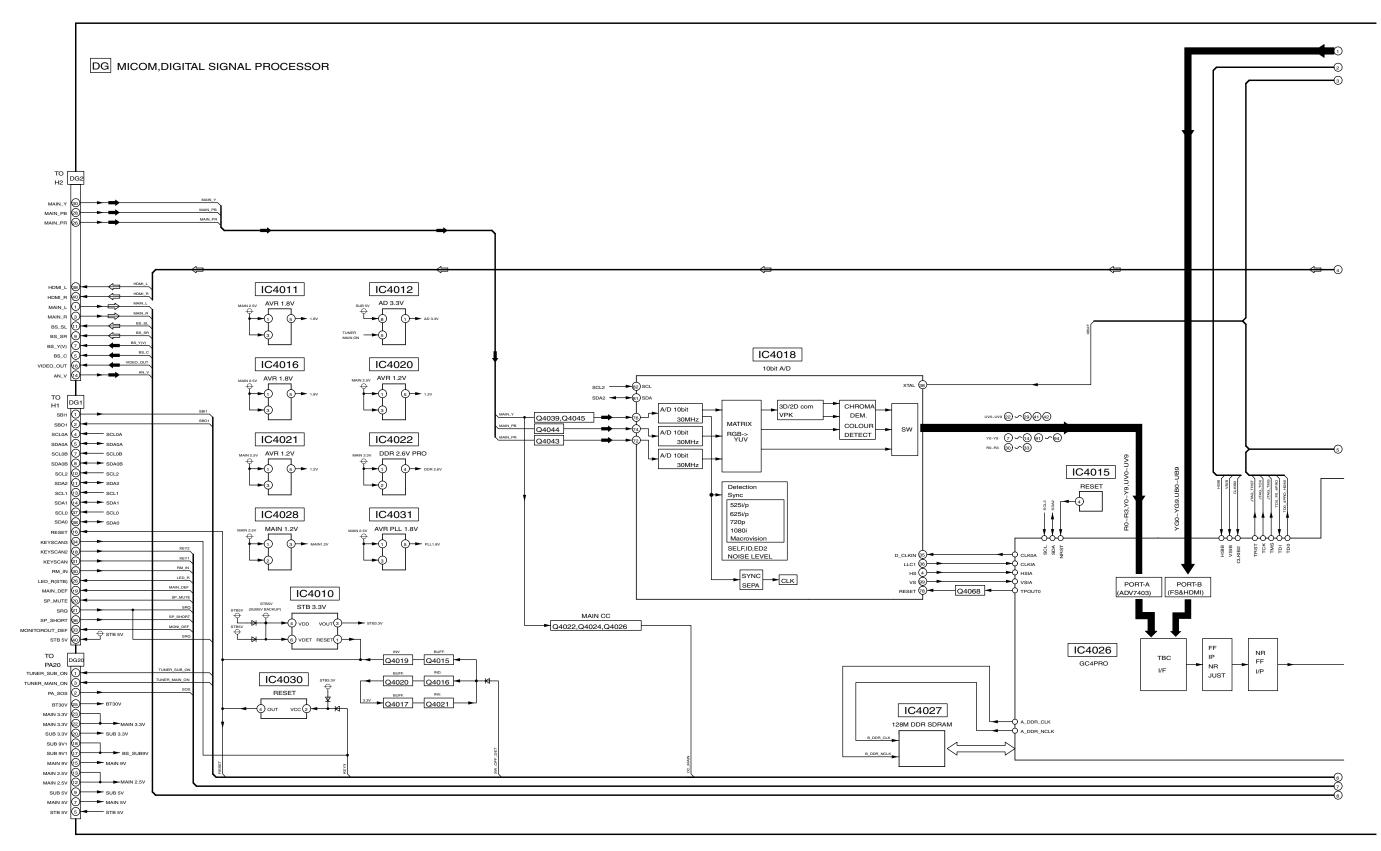


TH-37/42/50PX50U DG-Board (1 of 2) Block Diagram TH-37/42/50PX50U DG-Board (1 of 2) Block Diagram

## 13.36. DG-Board (2 of 2) Block Diagram

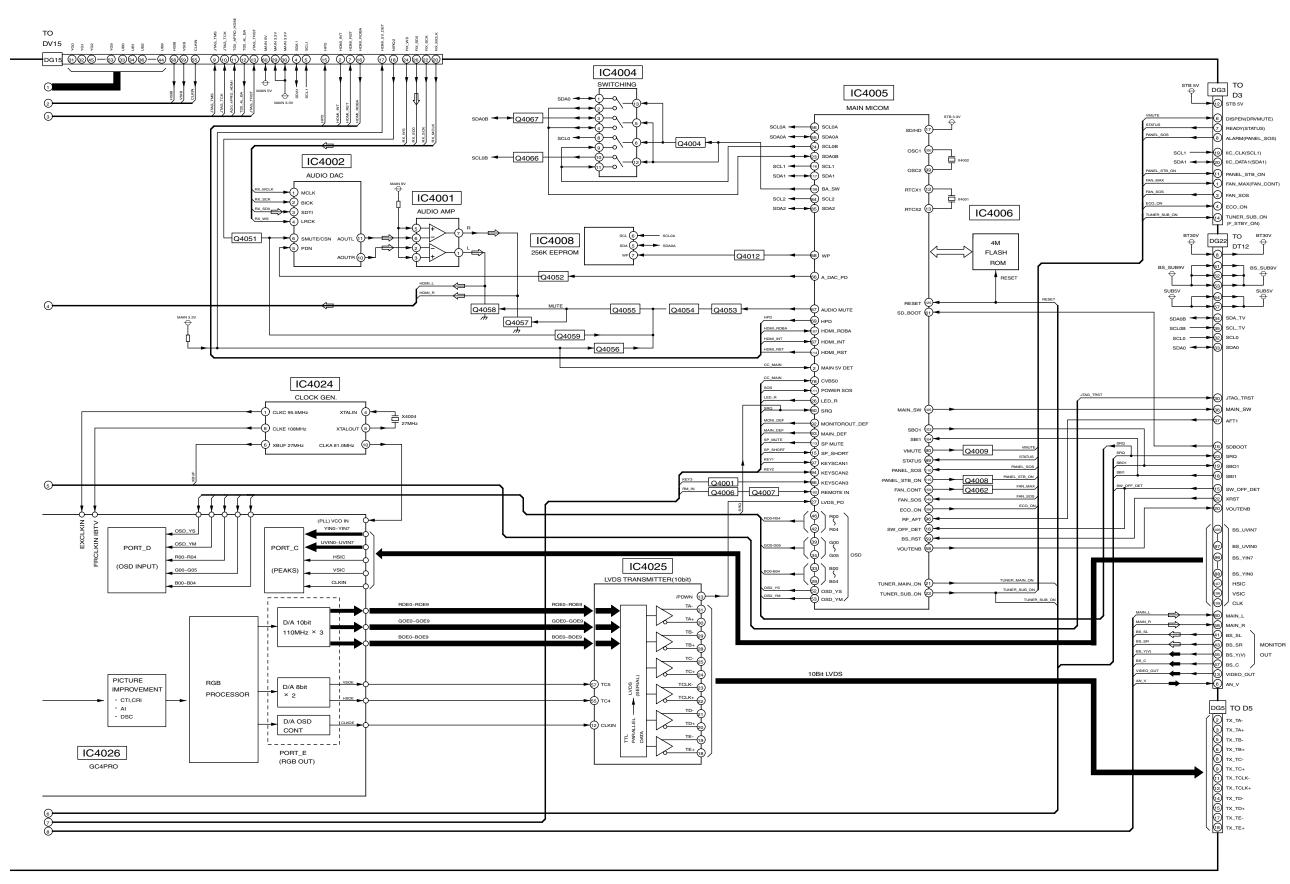



TH-37/42/50PX50U DG-Board (2 of 2) Block Diagram TH-37/42/50PX50U DG-Board (2 of 2) Block Diagram

## 13.37. DG-Board (1 of 11) Schematic Diagram

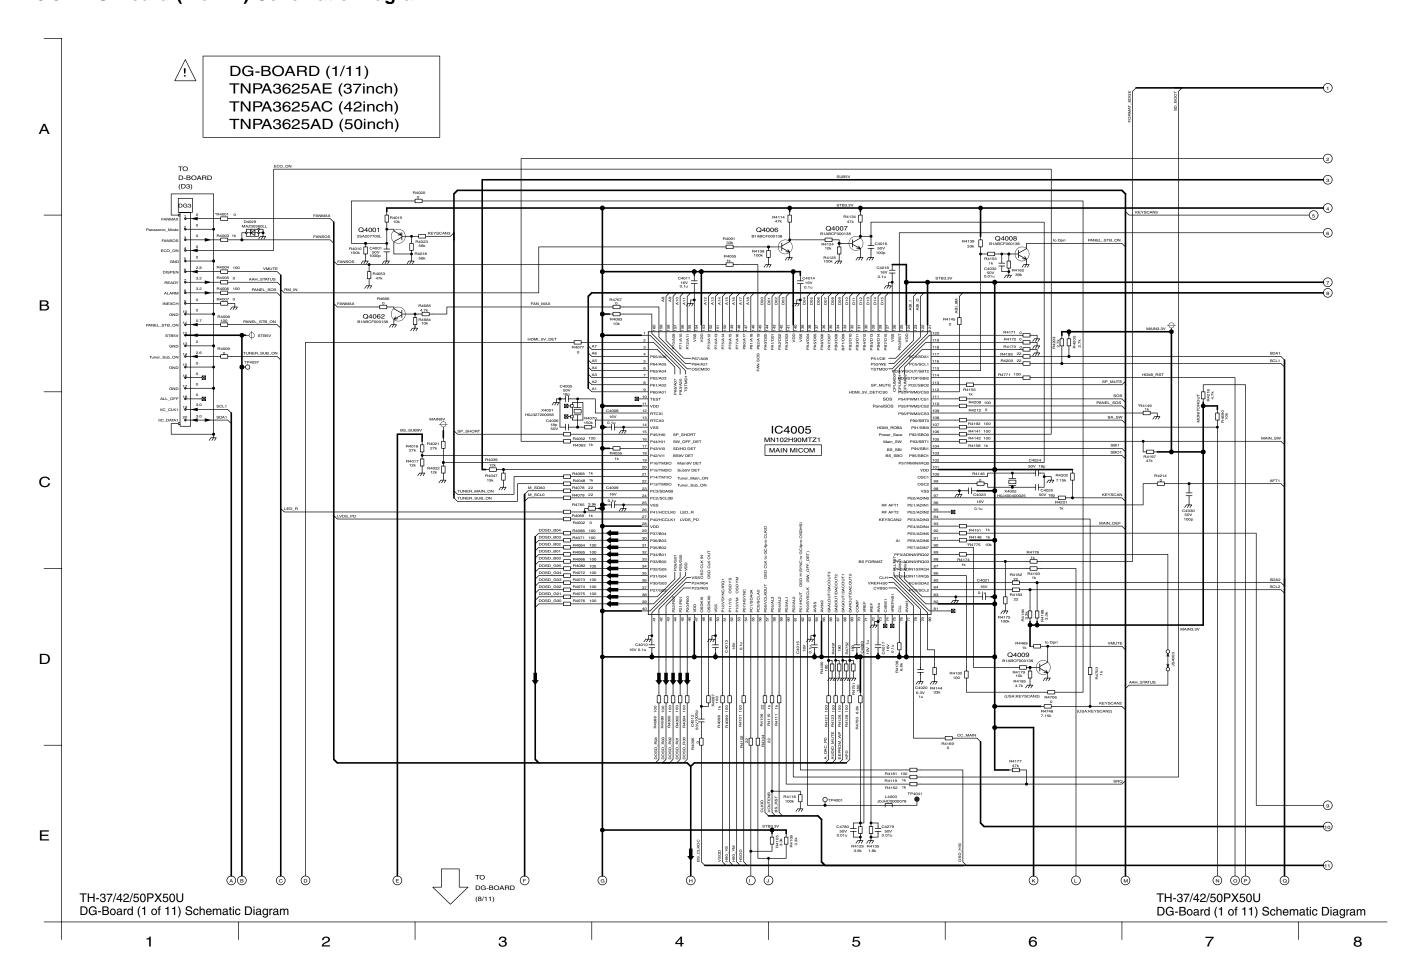



# 13.38. DG-Board (2 of 11) Schematic Diagram

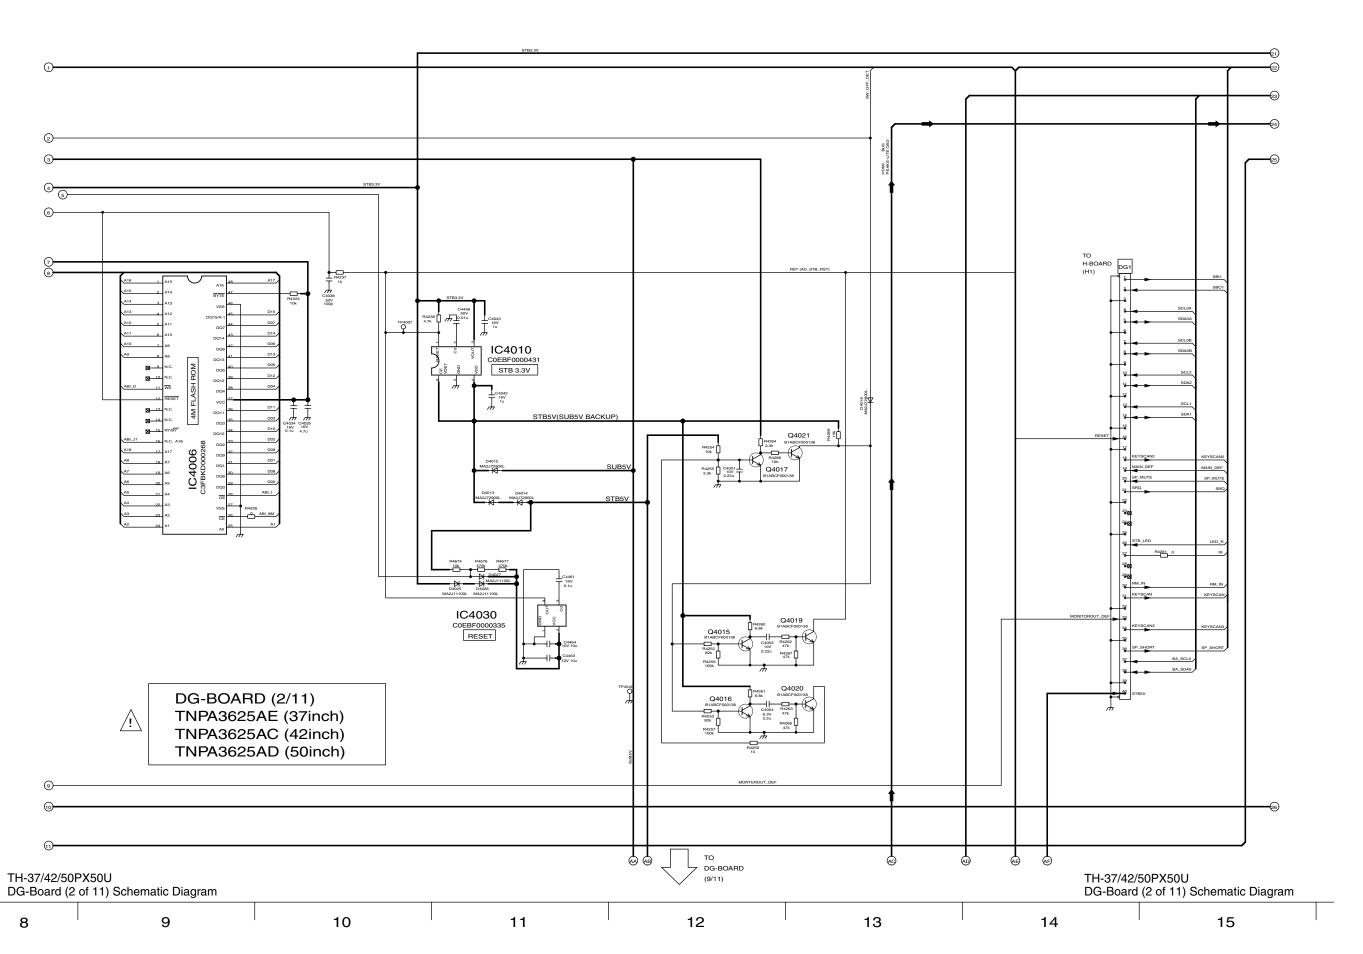

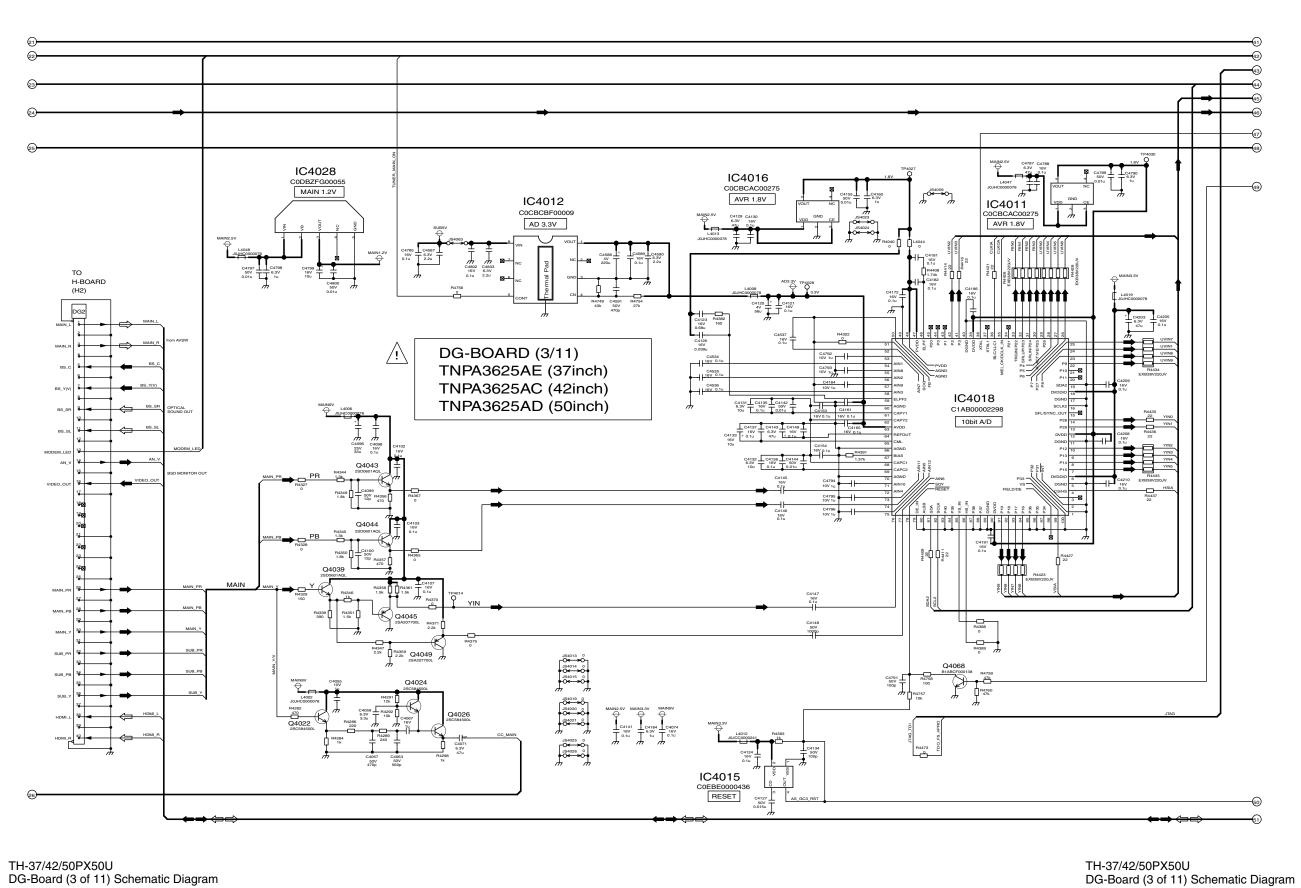


## 13.40. DG-Board (4 of 11) Schematic Diagram

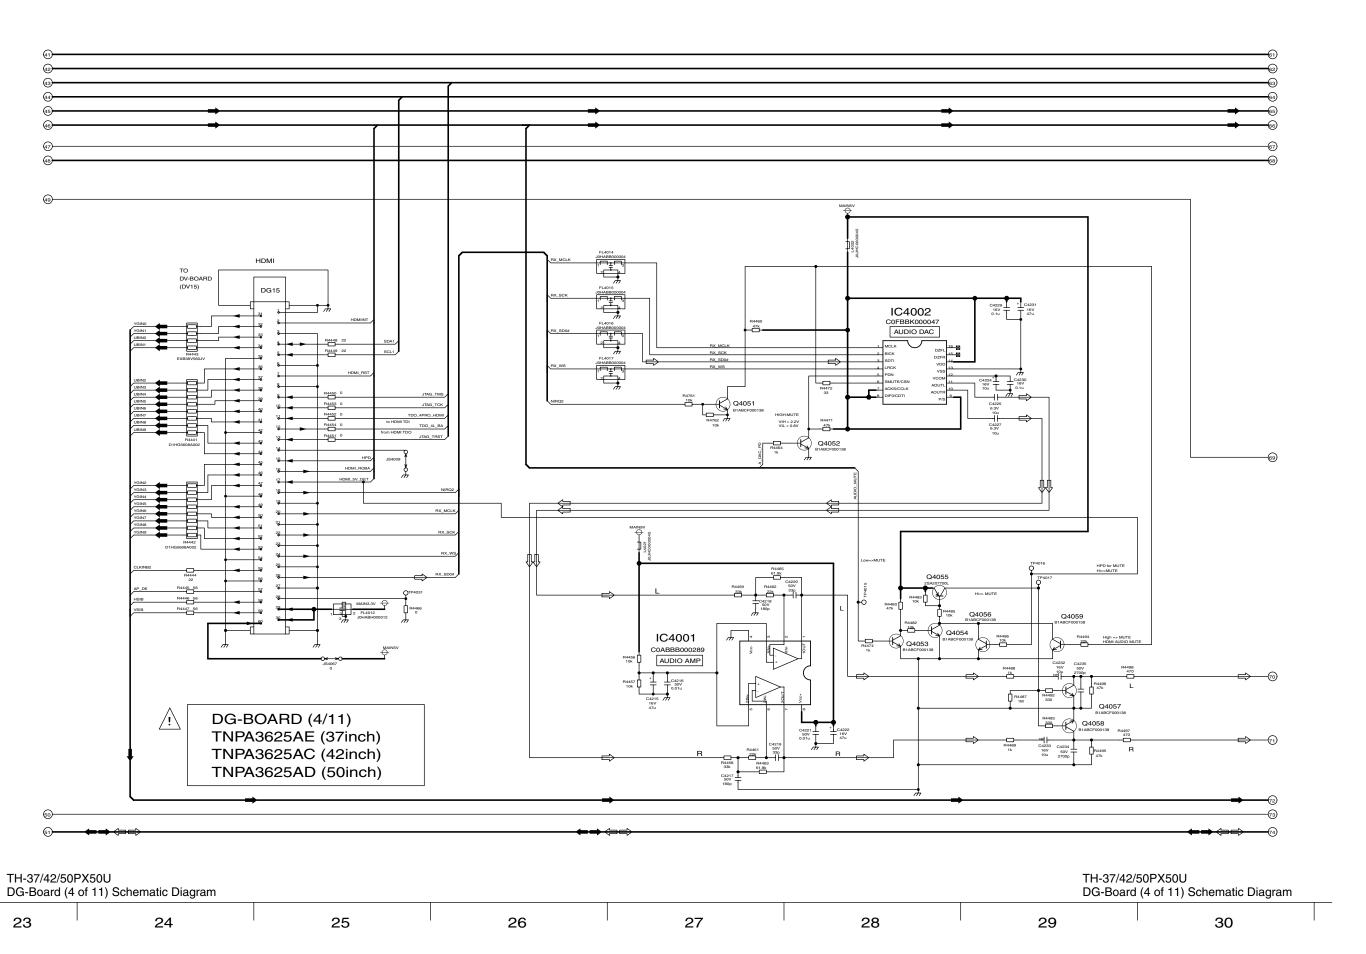


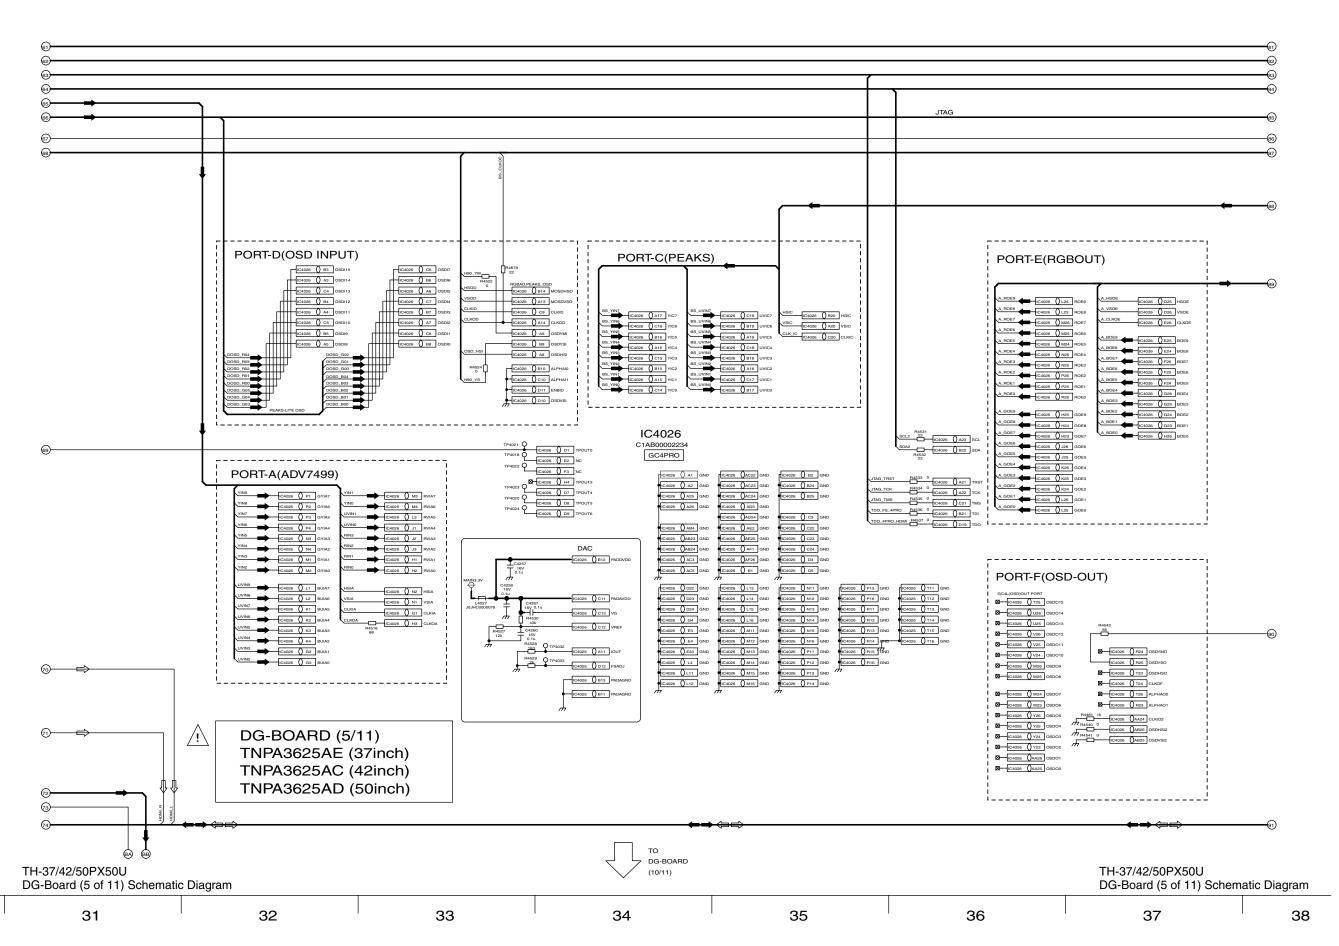


## 13.42. DG-Board (6 of 11) Schematic Diagram

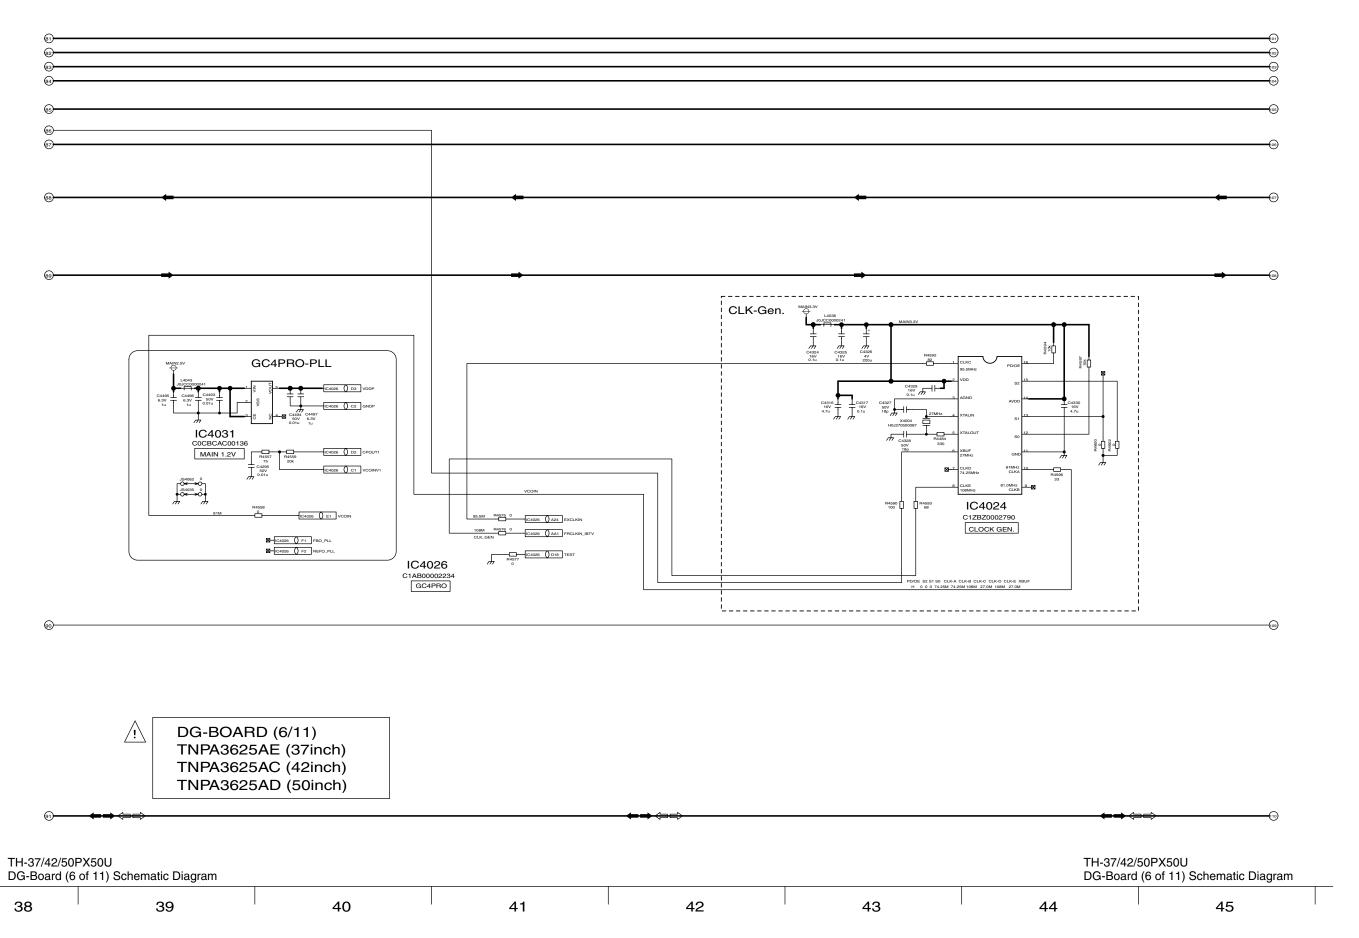


## 13.43. DG-Board (7 of 11) Schematic Diagram

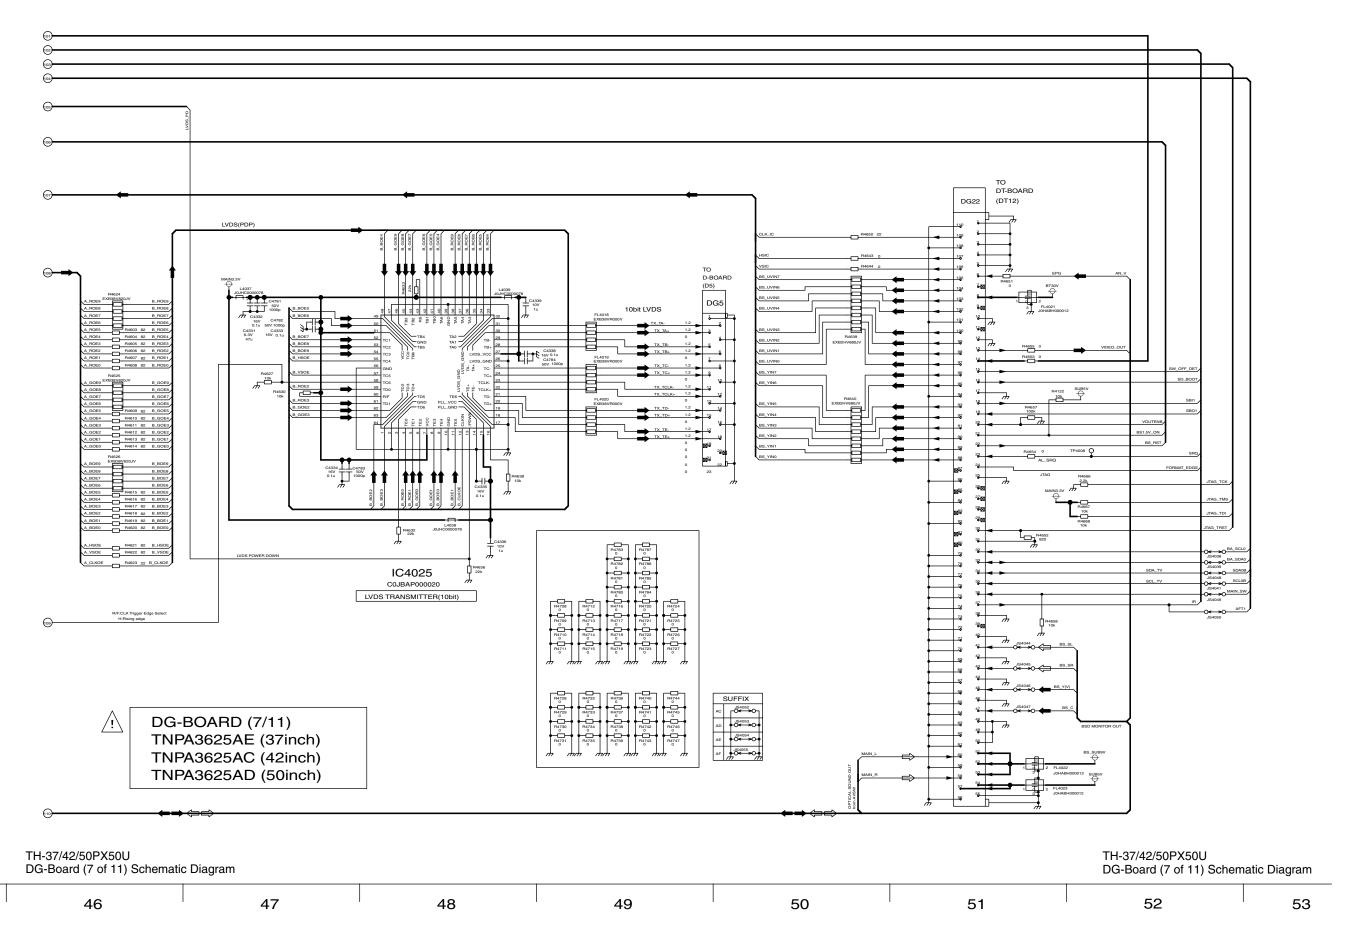


# 13.44. DG-Board (8 of 11) Schematic Diagram

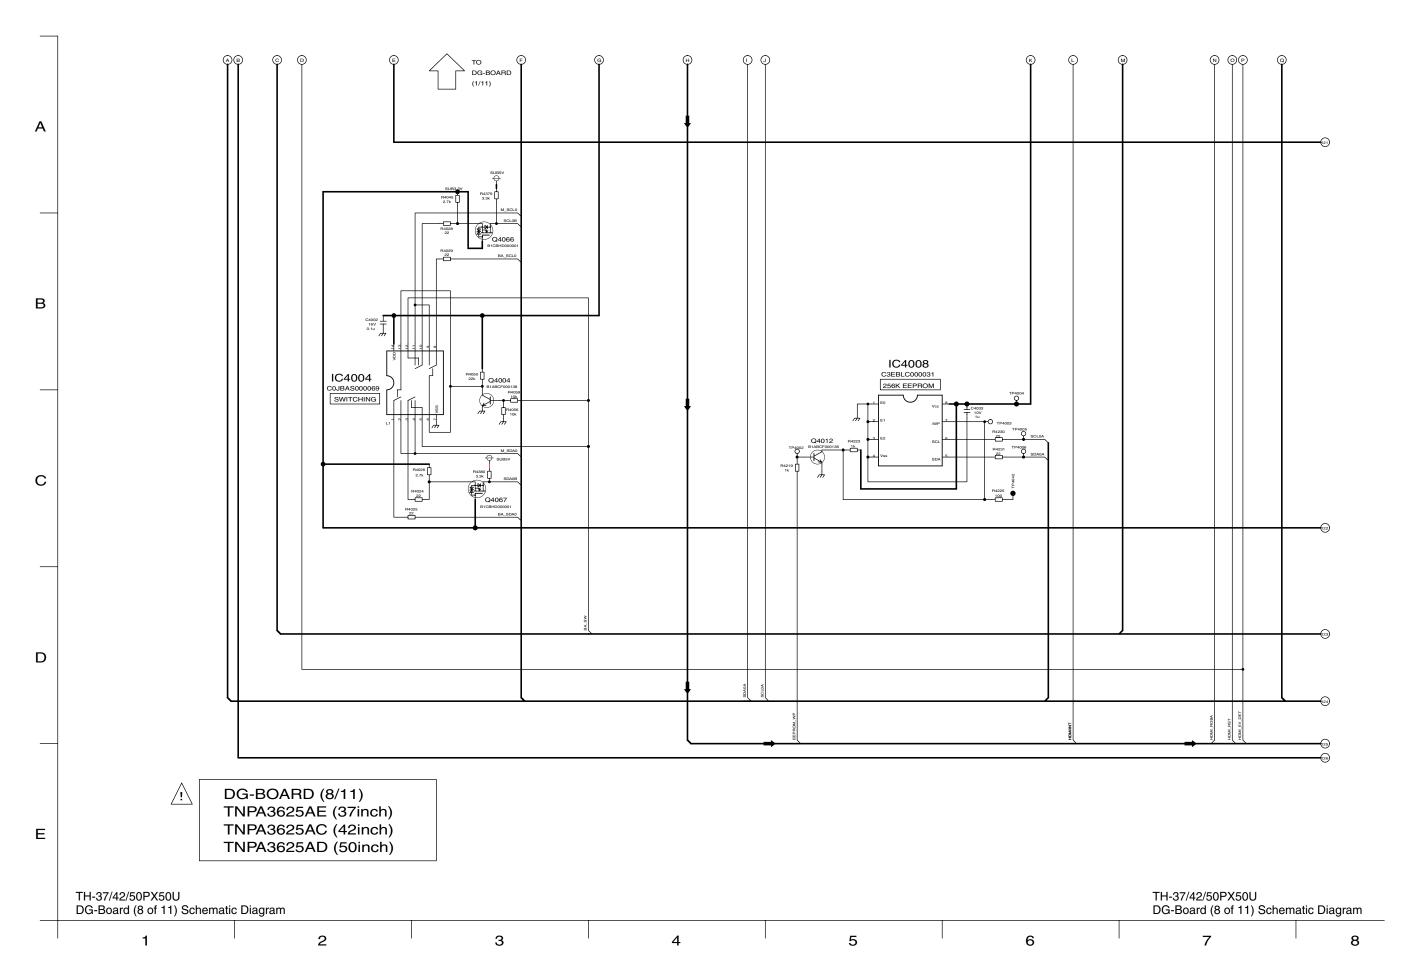


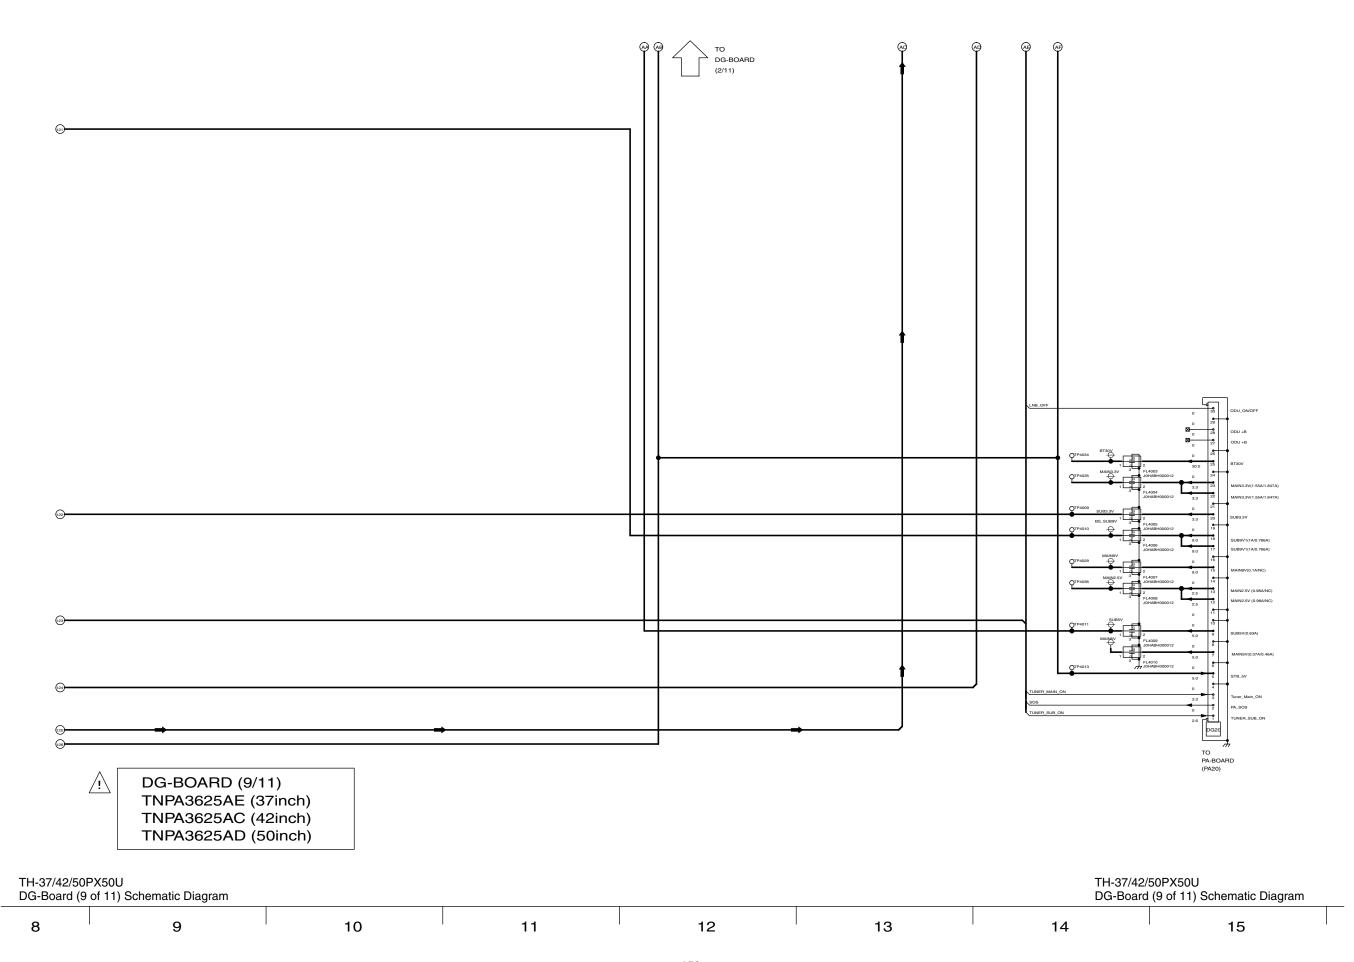


### 13.46. DG-Board (10 of 11) Schematic Diagram

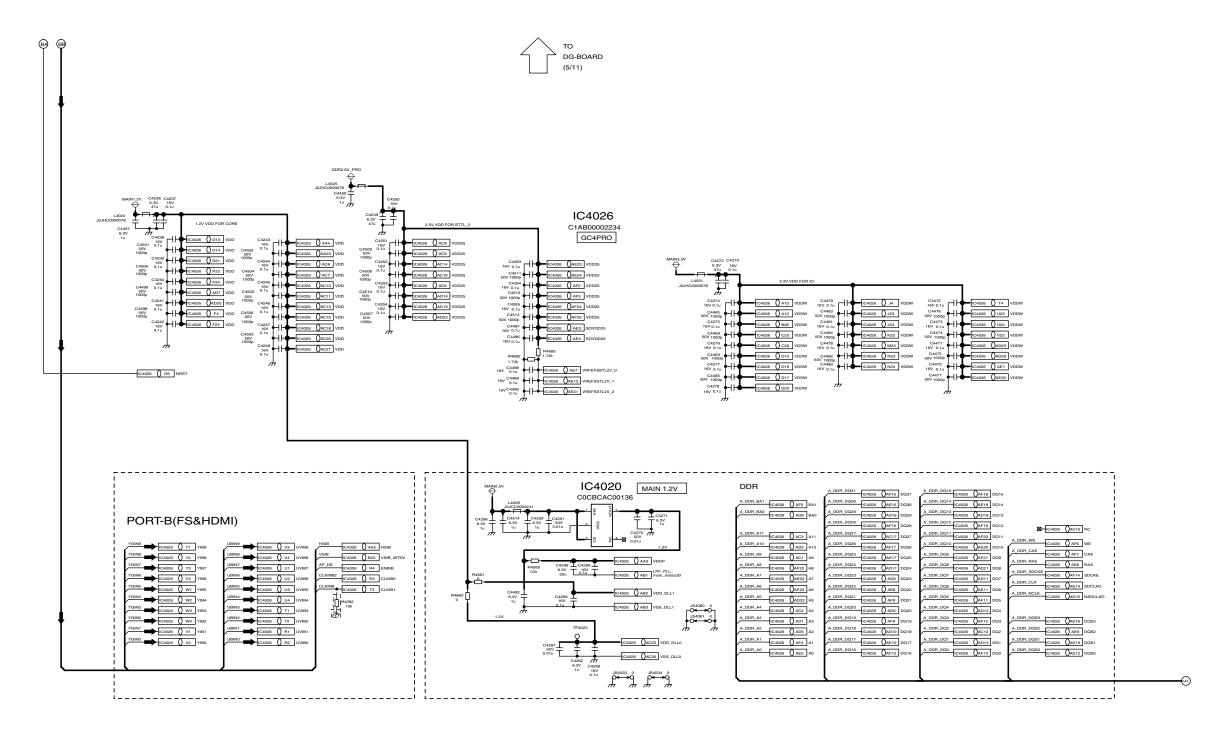







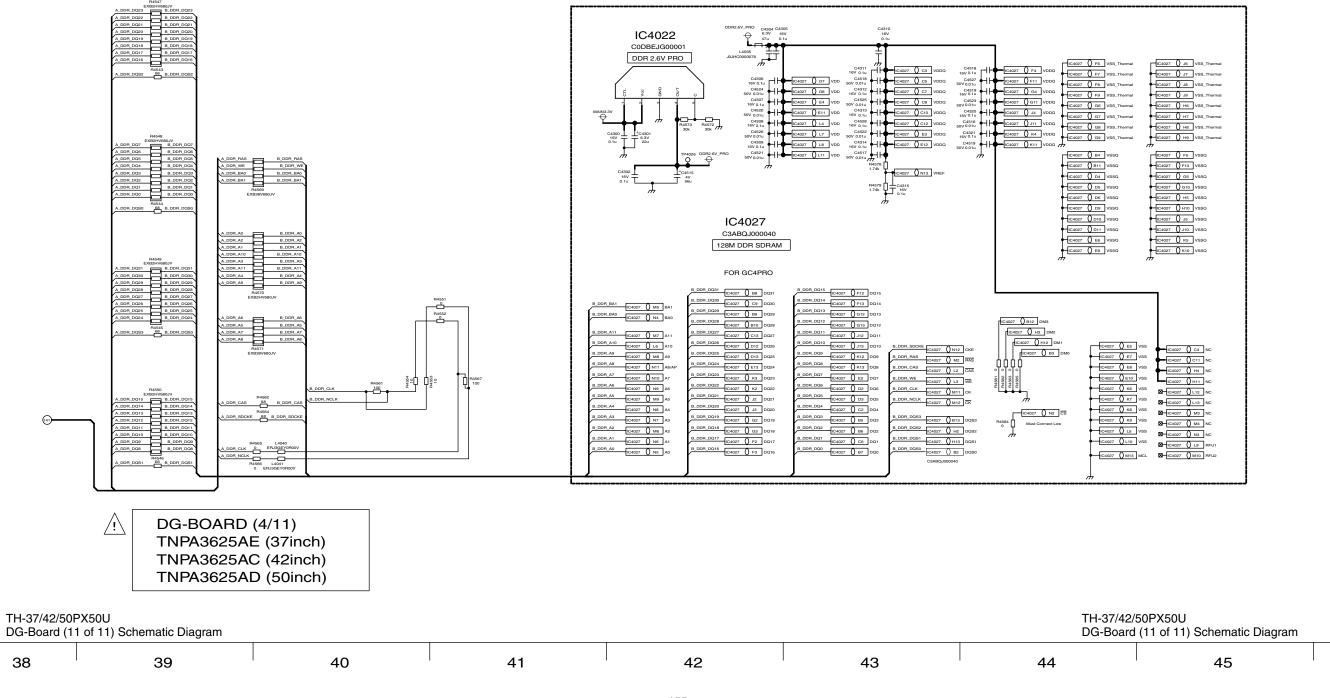


## 13.48. D-Board Block Diagram (37, 42inch)

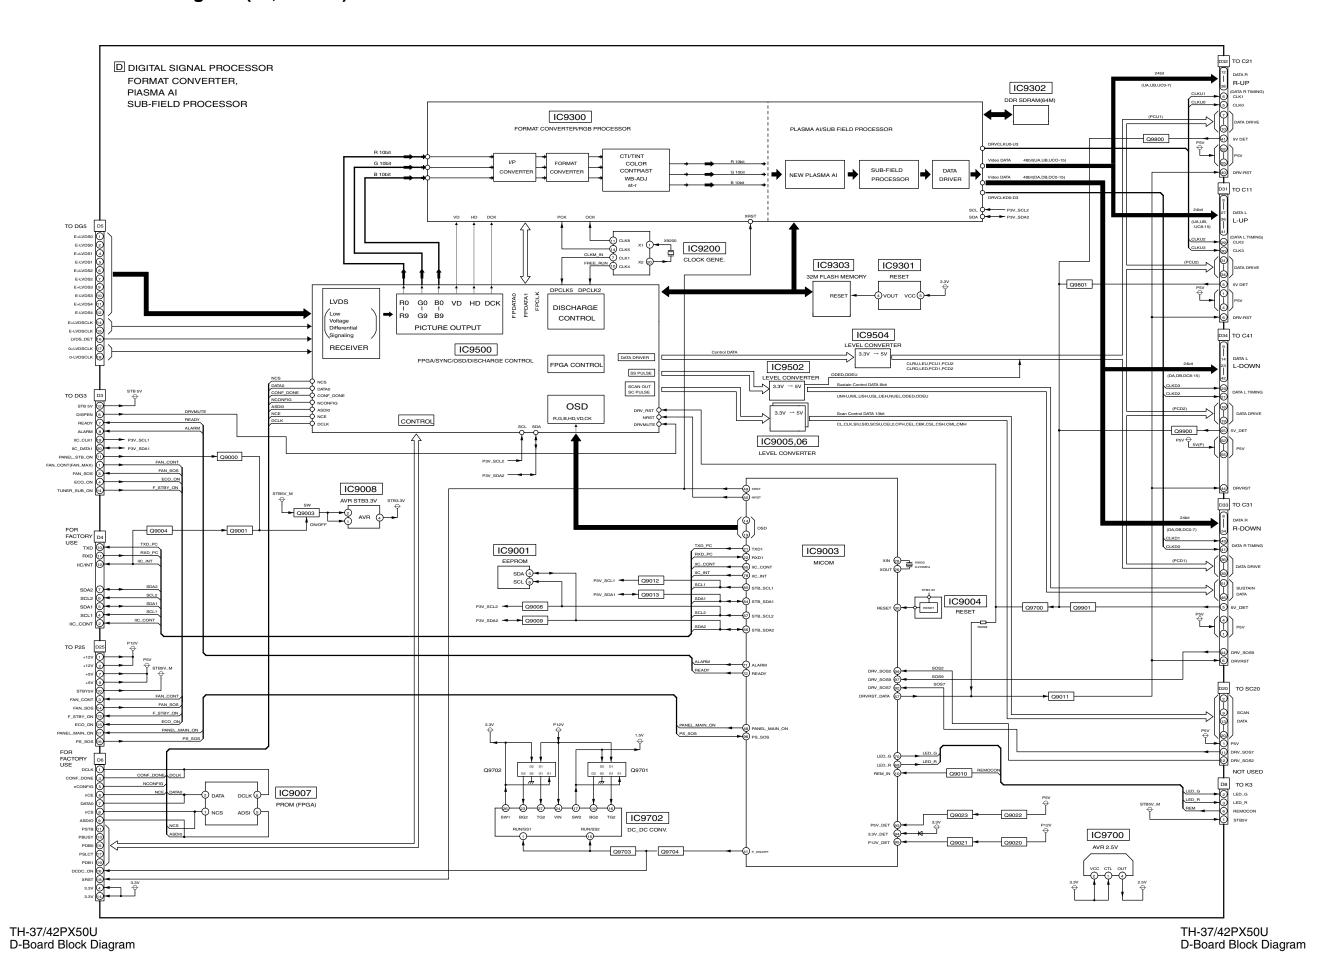


## 13.49. D-Board Block Diagram (50inch)

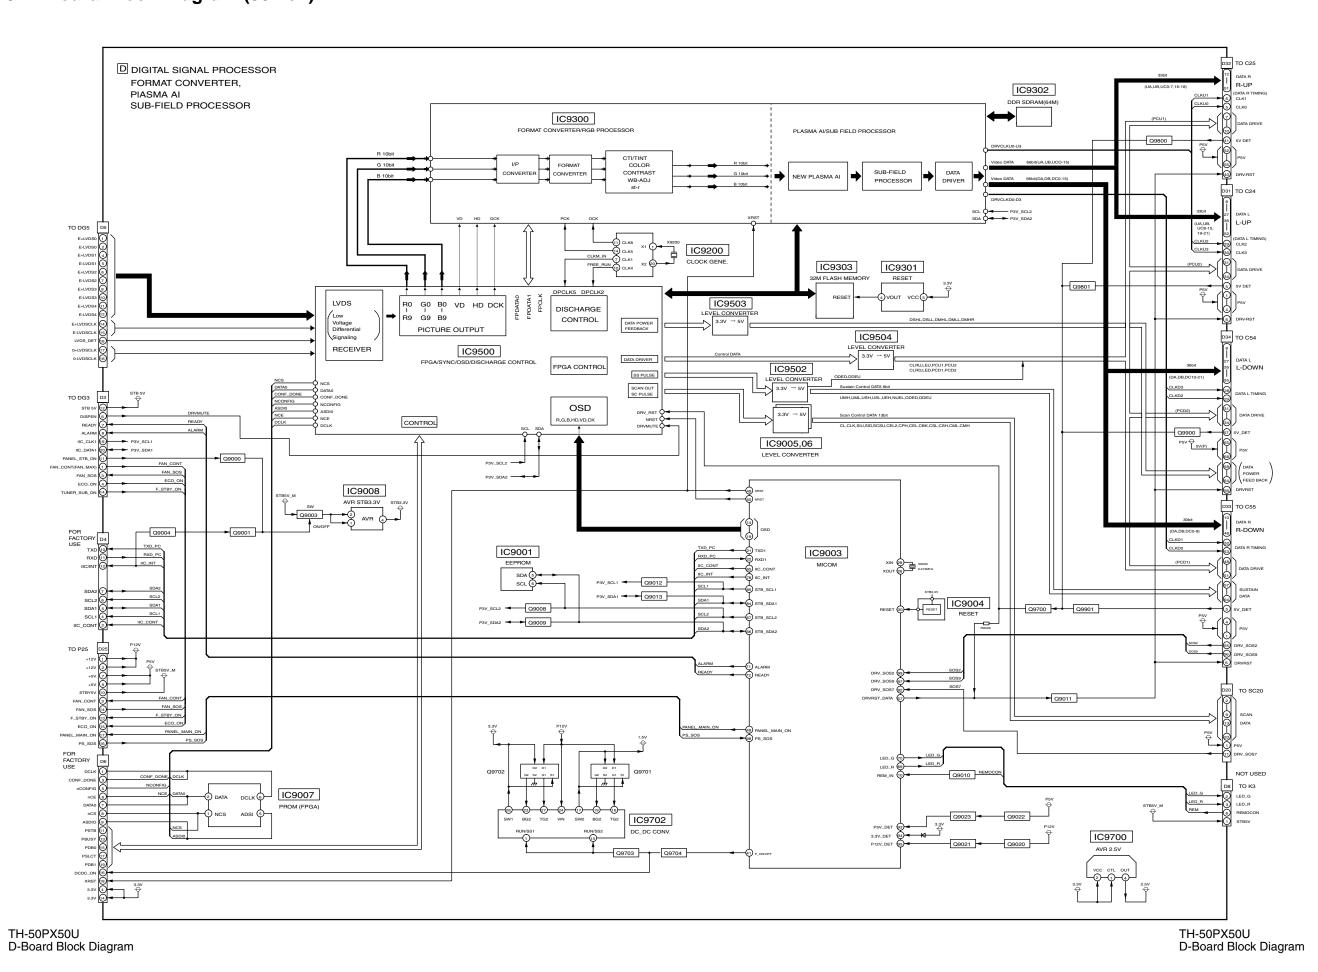


# 13.50. D-Board (1 of 6) Schematic Diagram

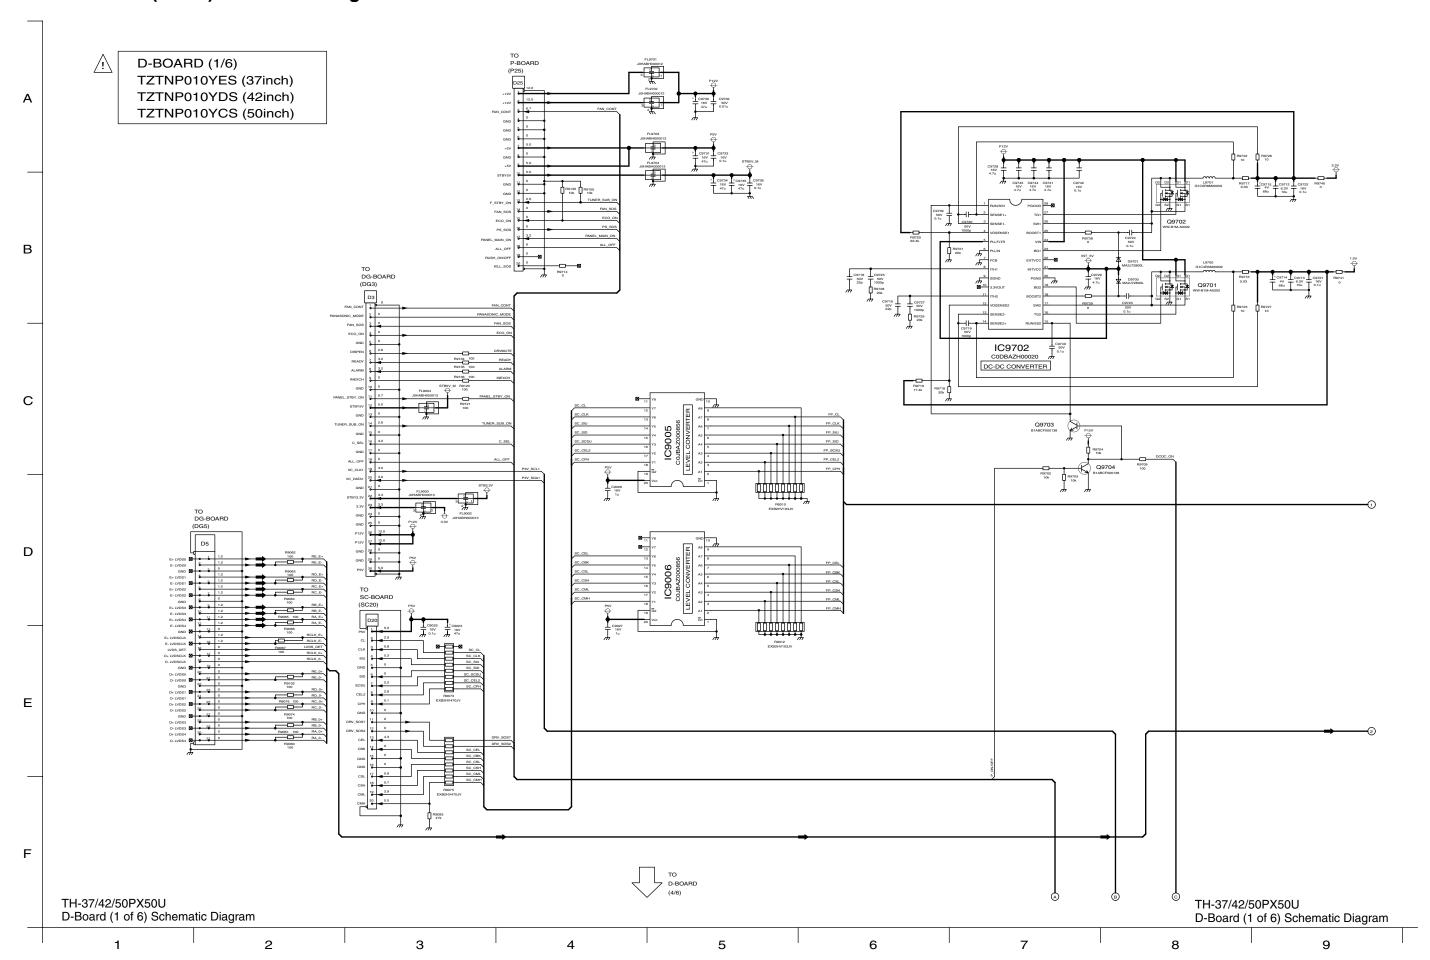


### 13.51. D-Board (2 of 6) Schematic Diagram

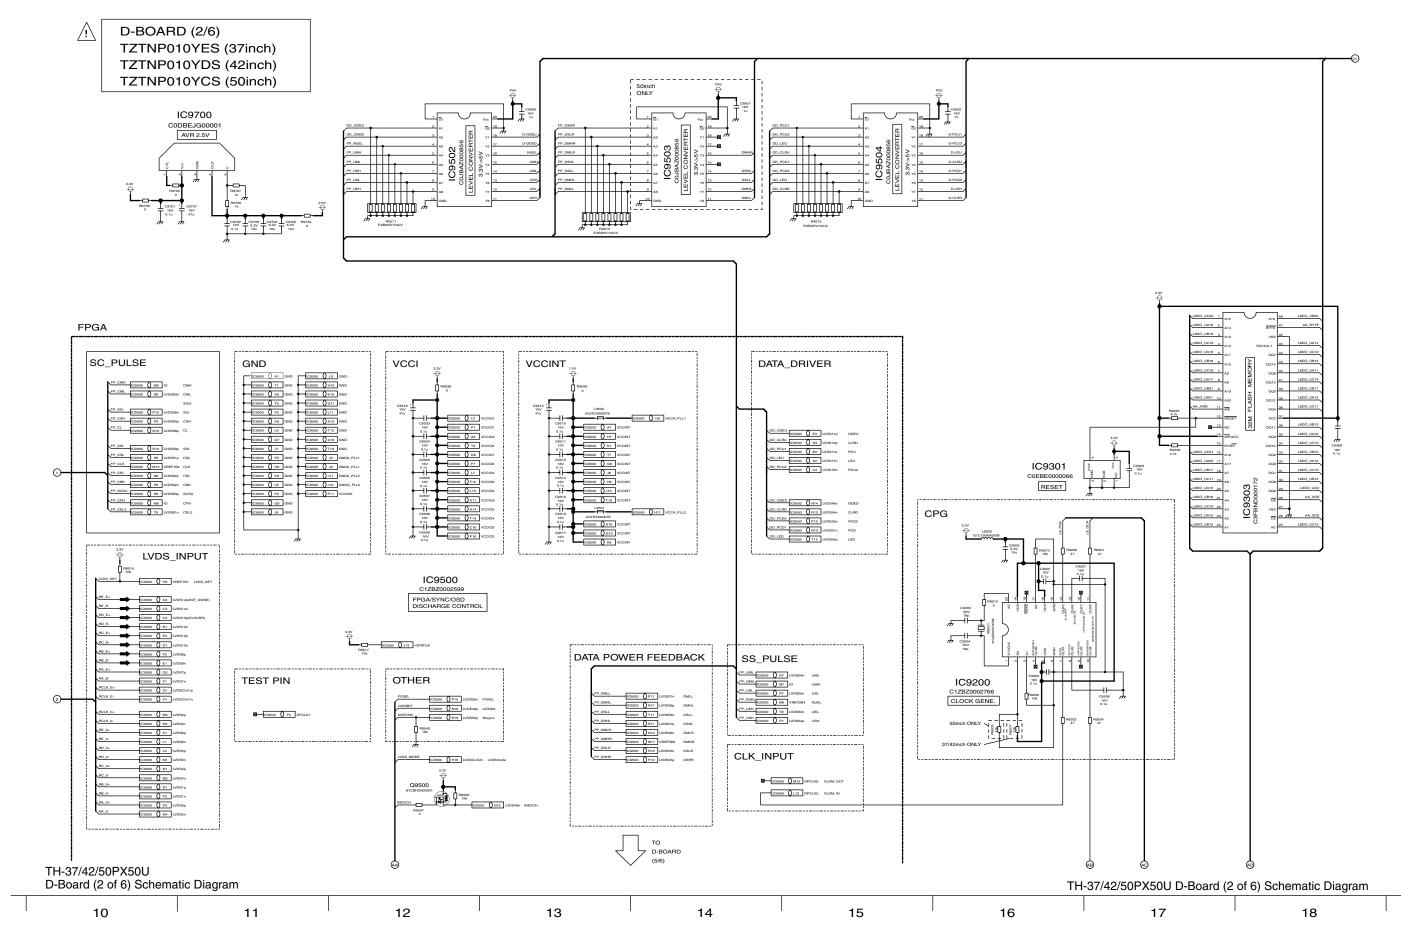


#### 13.52. D-Board (3 of 6) Schematic Diagram

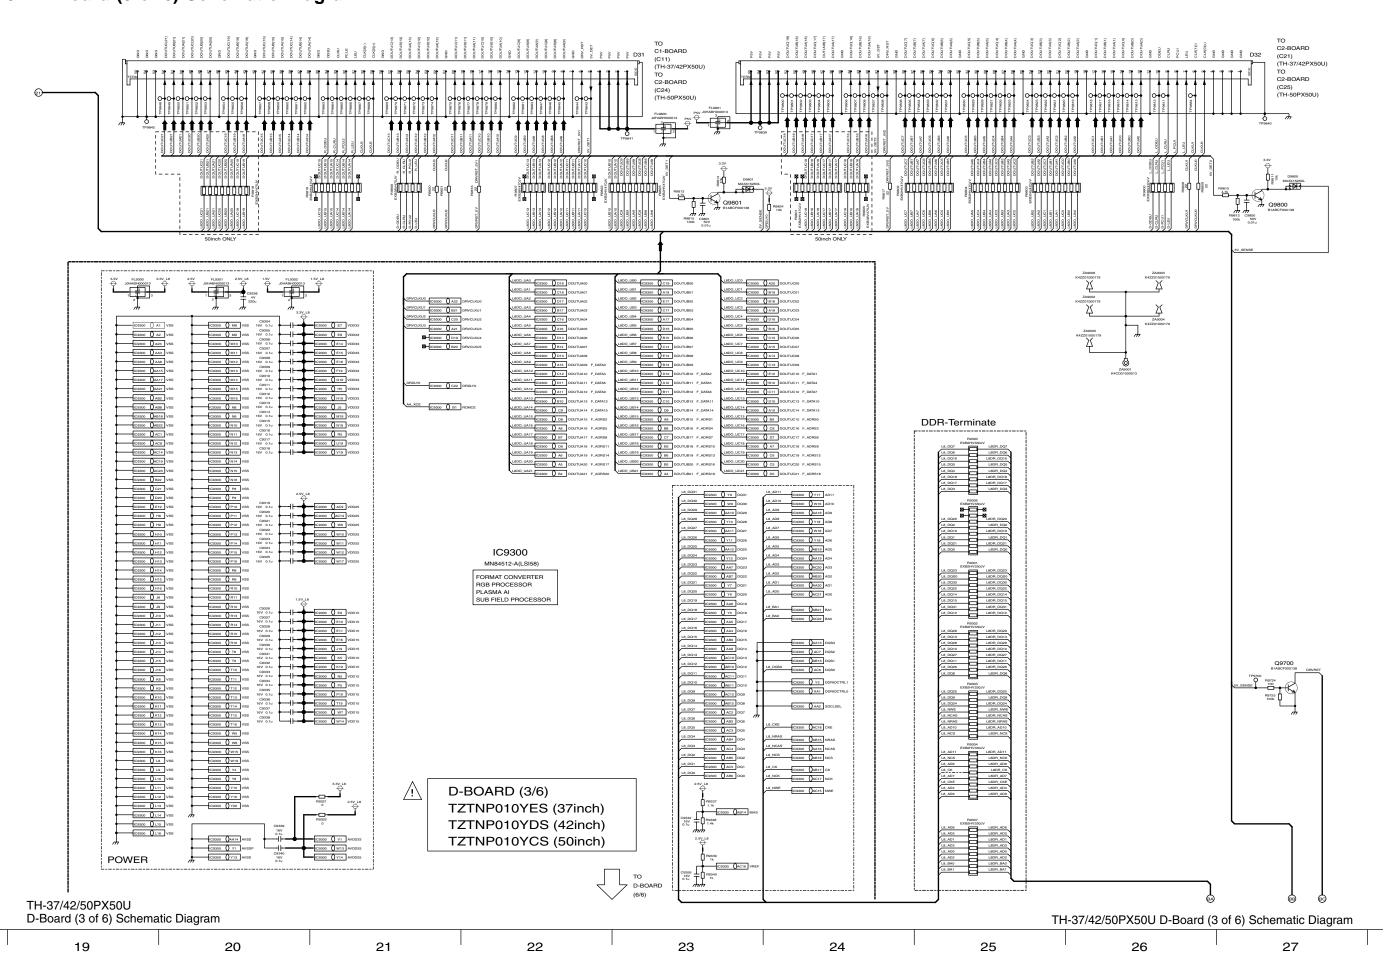


# 13.53. D-Board (4 of 6) Schematic Diagram

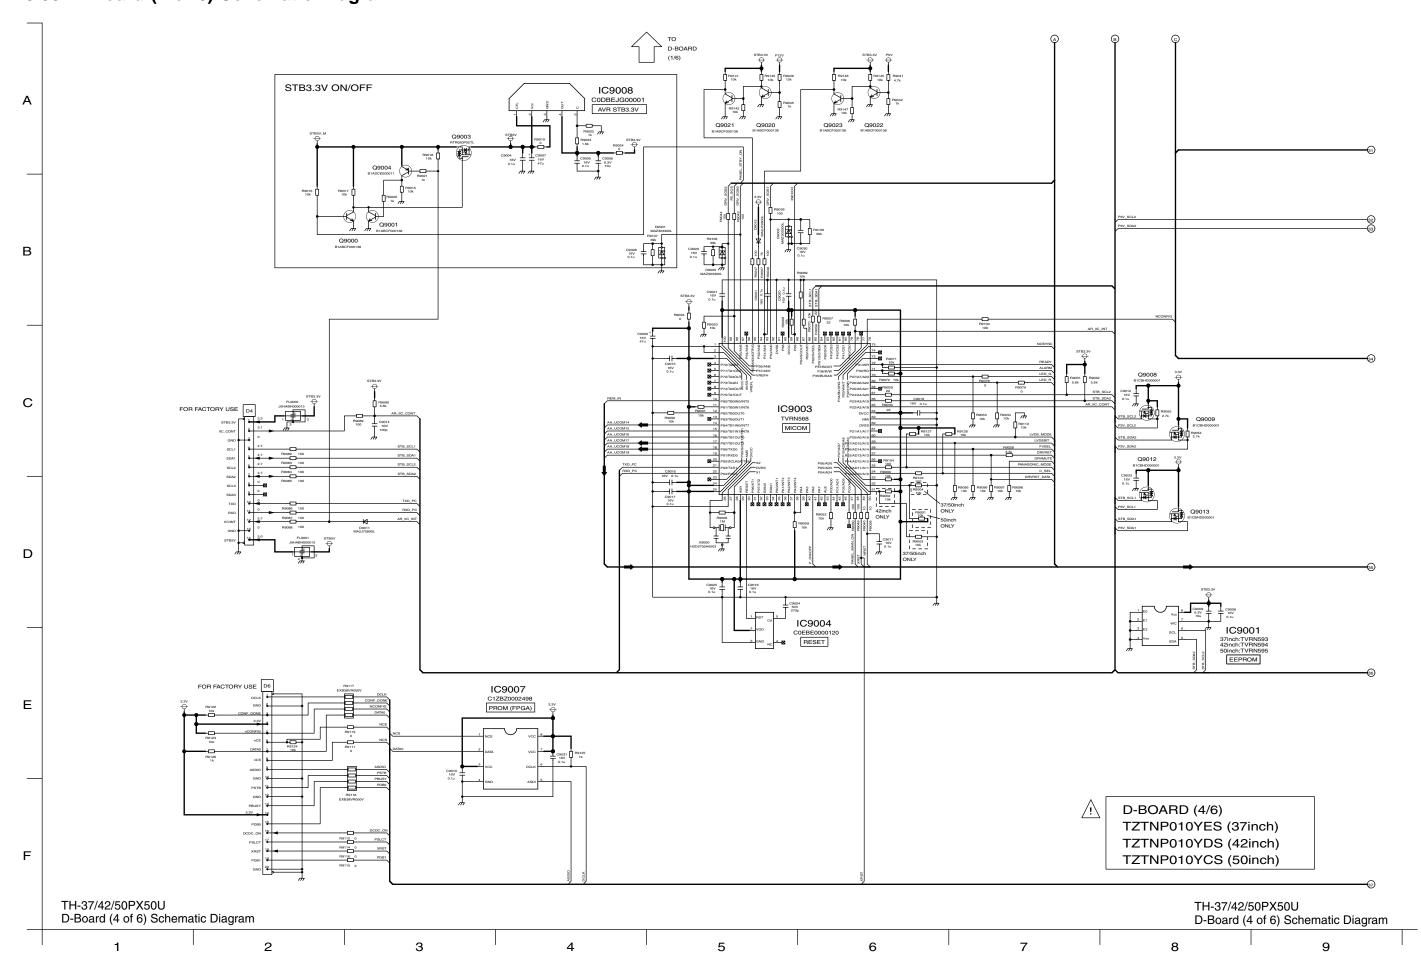


### 13.54. D-Board (5 of 6) Schematic Diagram

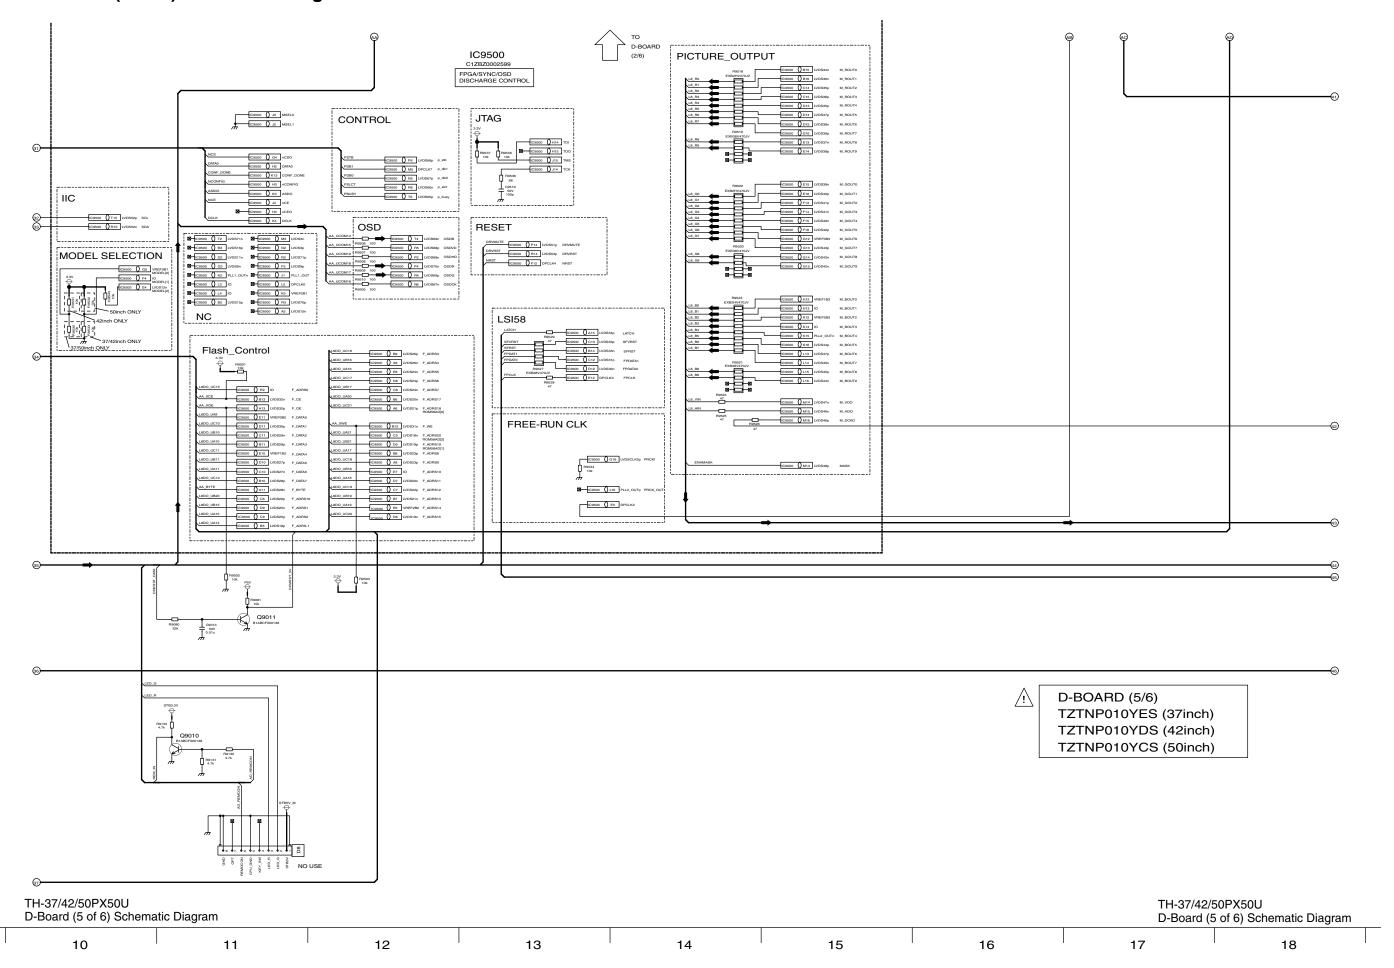

#### 13.55. D-Board (6 of 6) Schematic Diagram

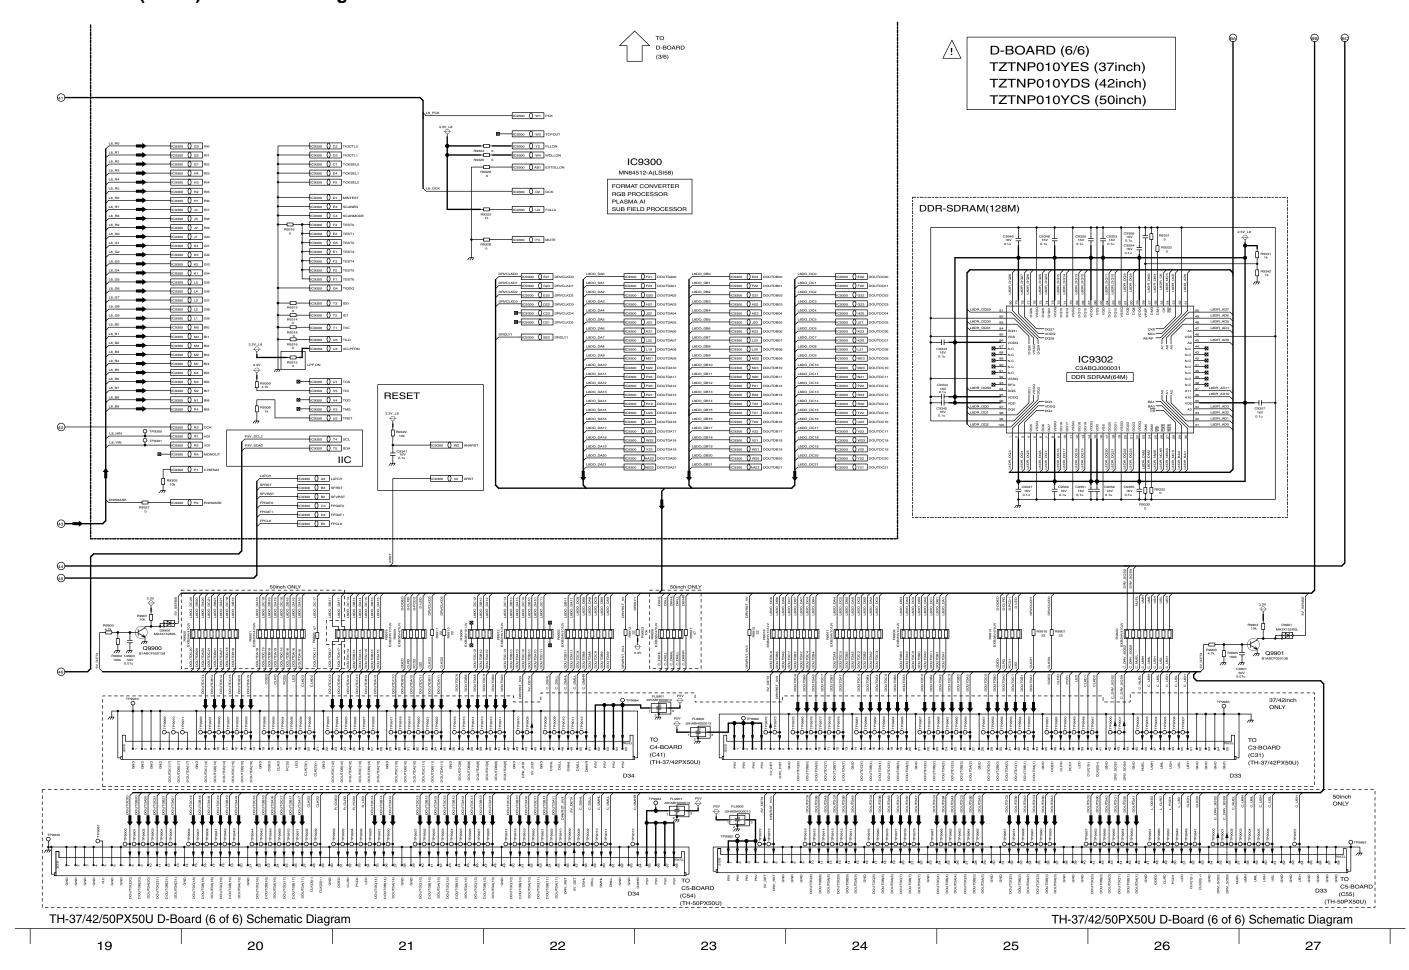


### 13.56. C1, C2, C3 and C4-Board Block Diagram (37, 42inch)

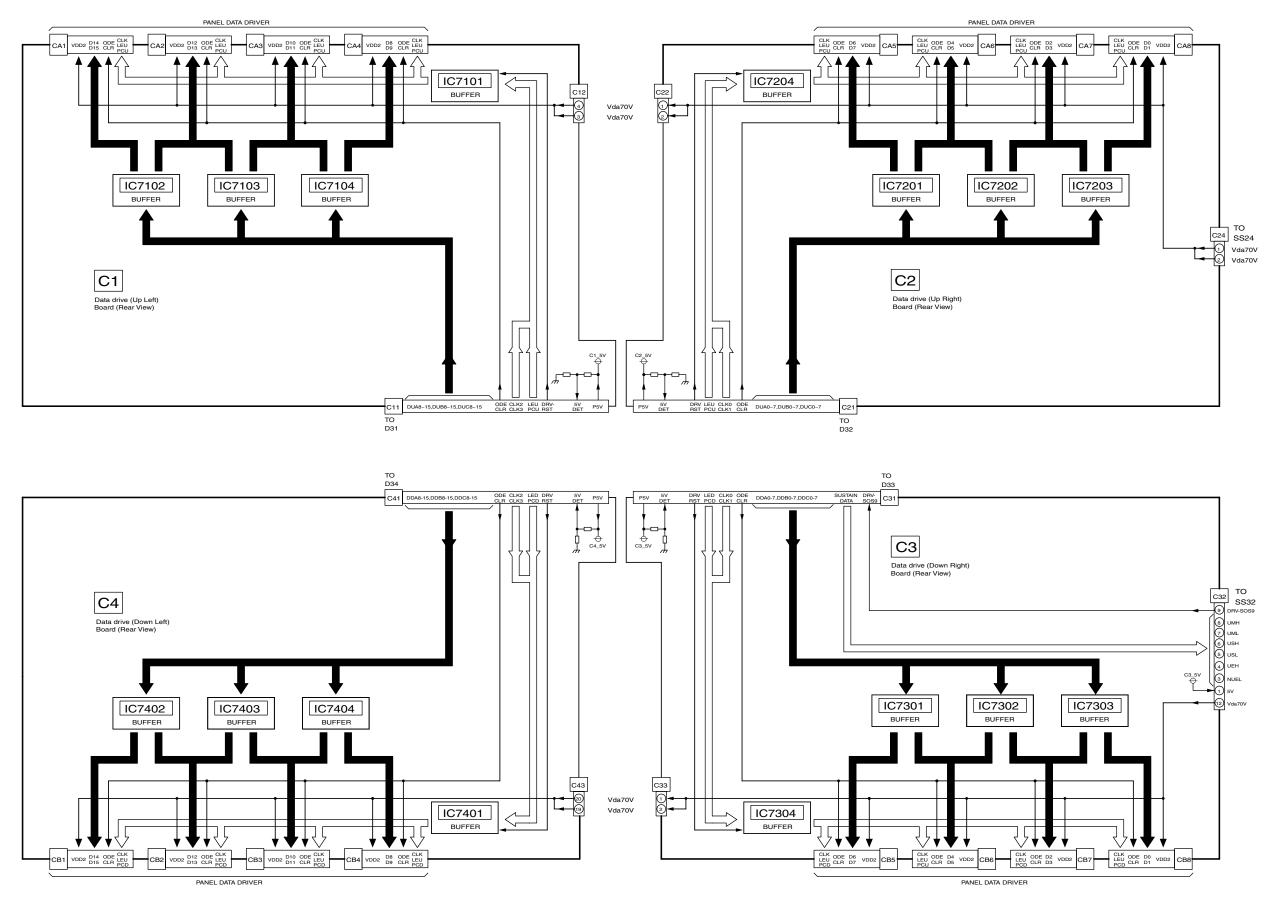



TH-37/42PX50U C1, C2, C3 and C4-Board Block Diagram

TH-37/42PX50U C1, C2, C3 and C4-Board Block Diagram

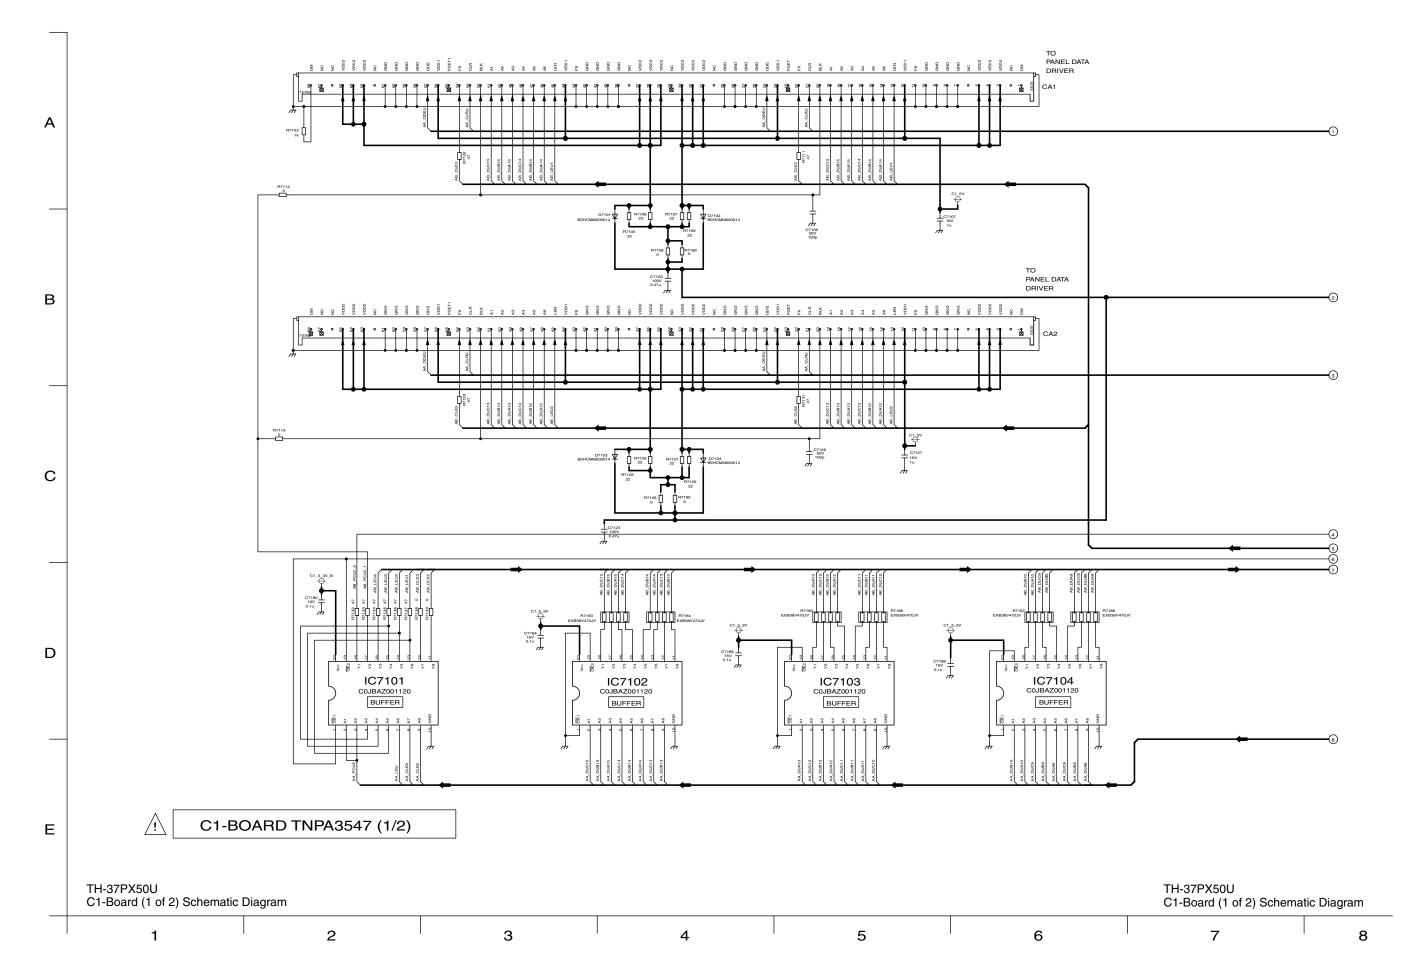


# 13.58. C1-Board (2 of 2) Schematic Diagram (37inch)

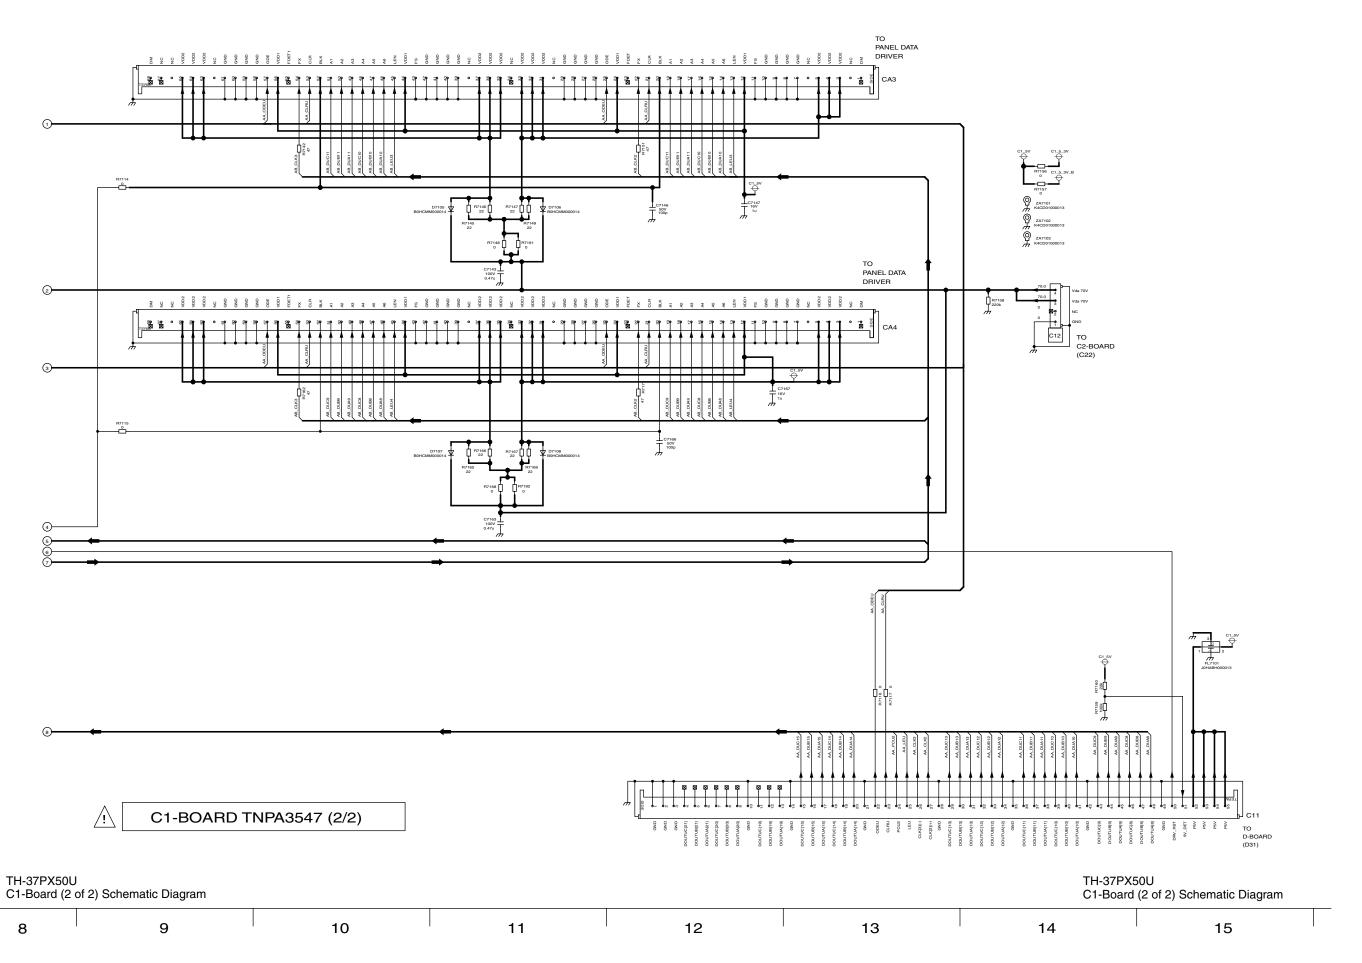


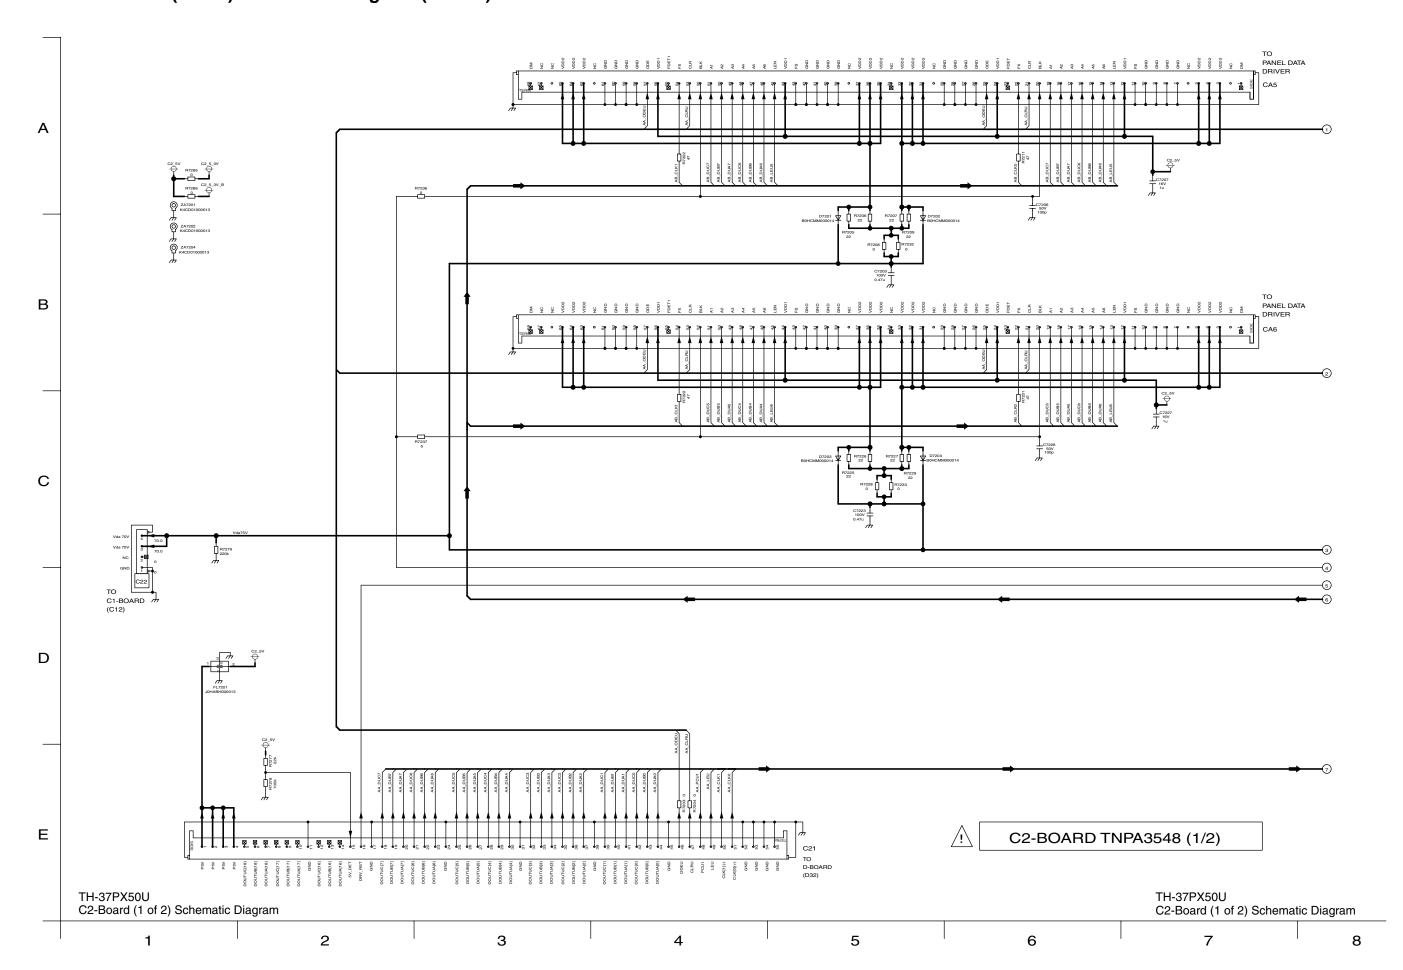


## 13.60. C2-Board (2 of 2) Schematic Diagram (37inch)

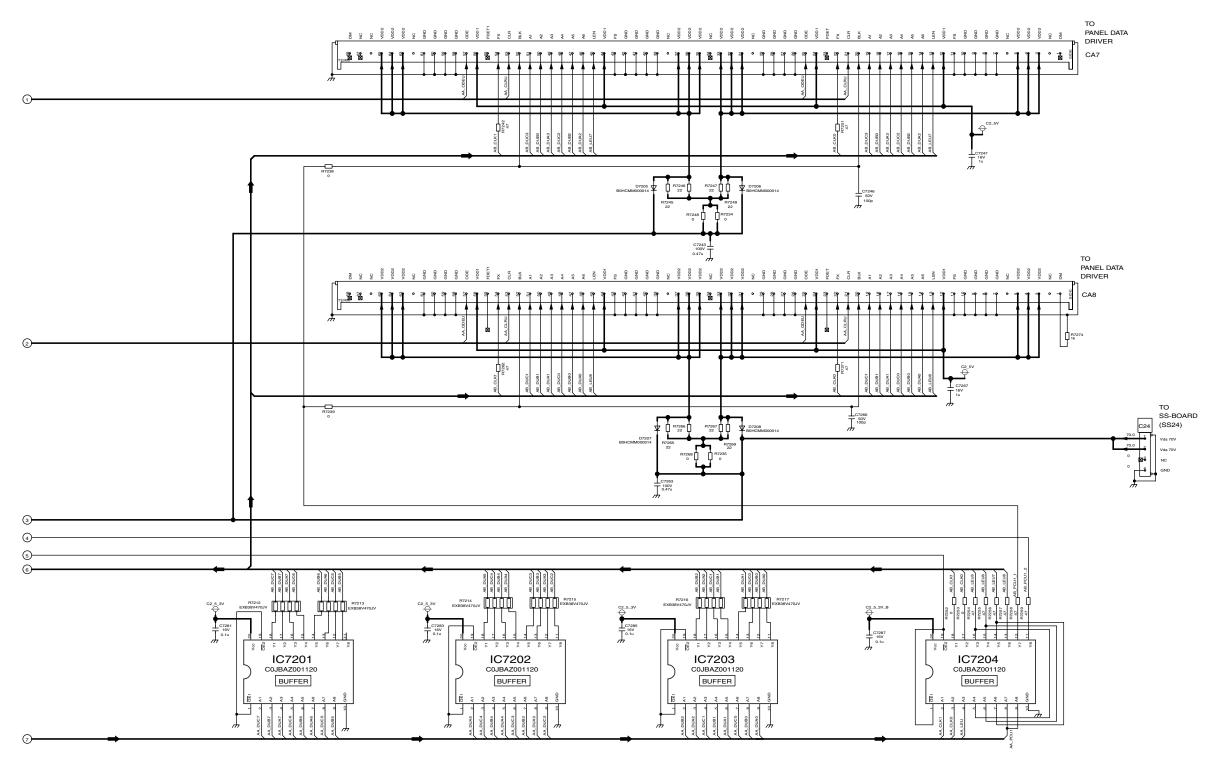








# 13.61. C3-Board (1 of 2) Schematic Diagram (37inch)

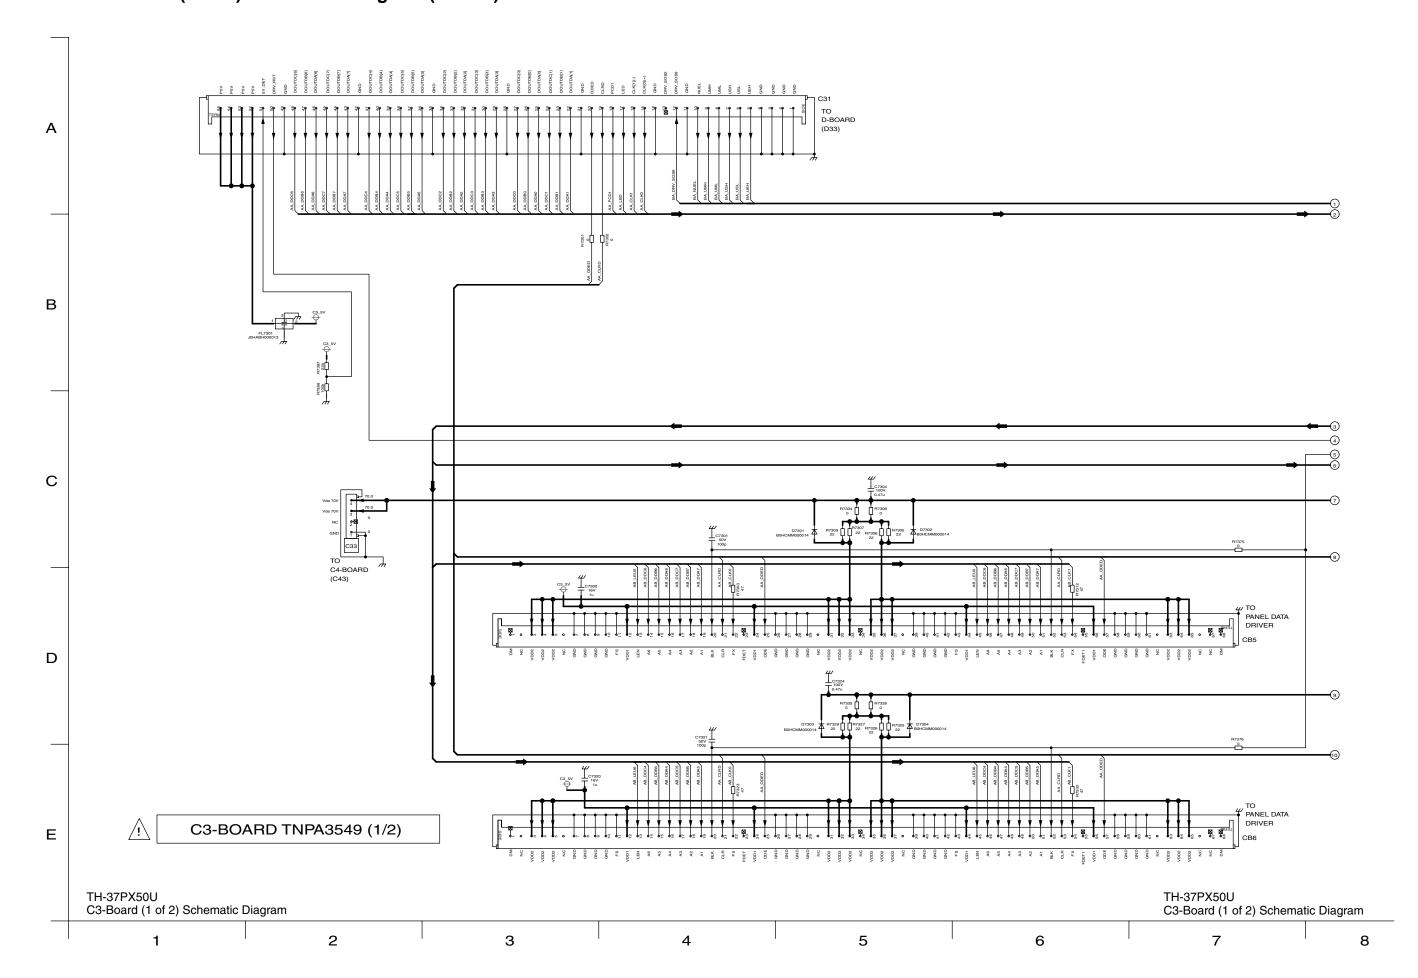


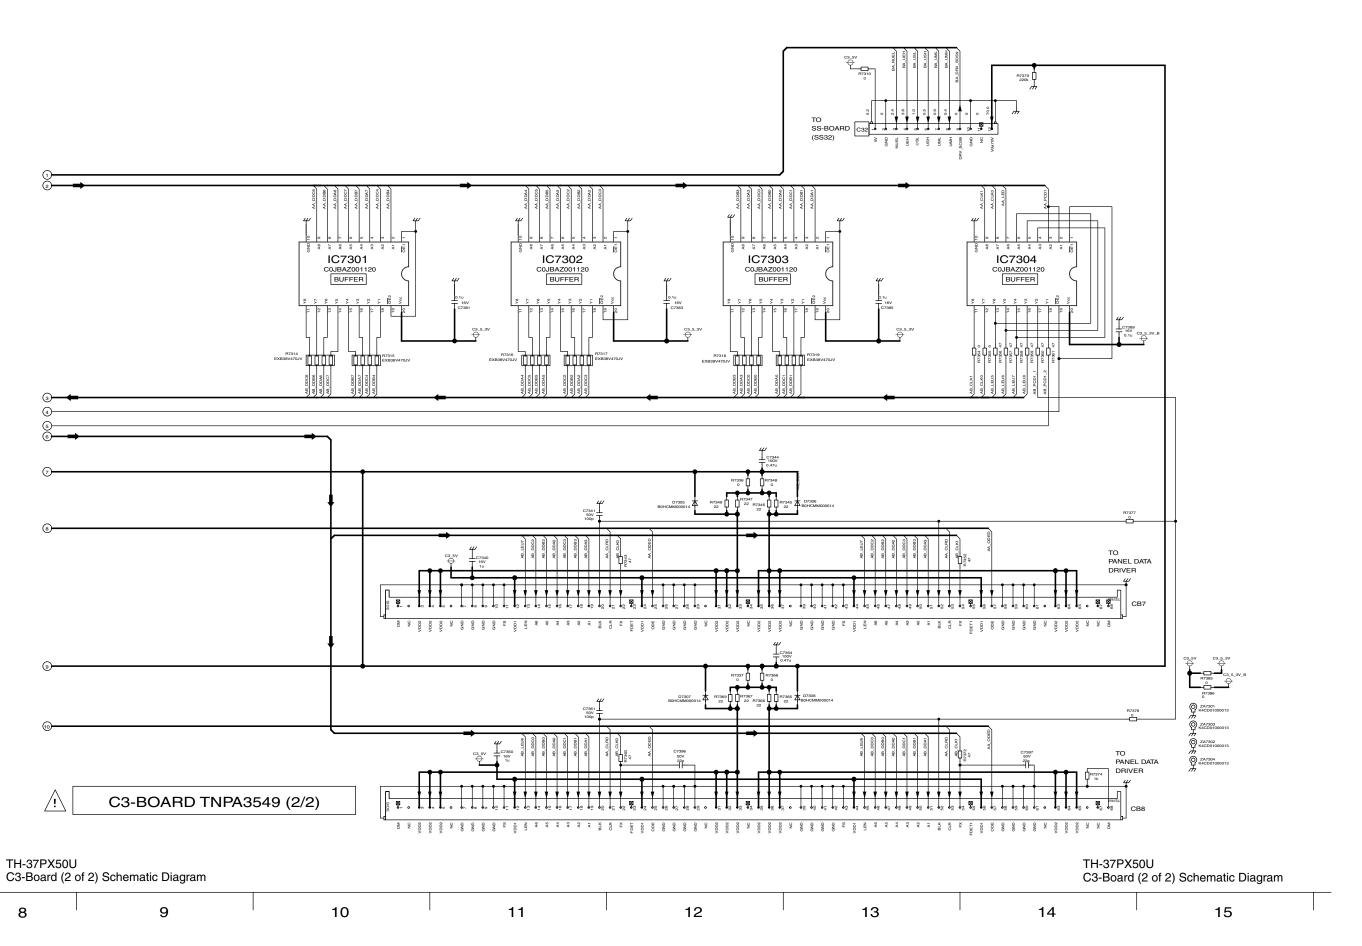


## 13.63. C4-Board (1 of 2) Schematic Diagram (37inch)

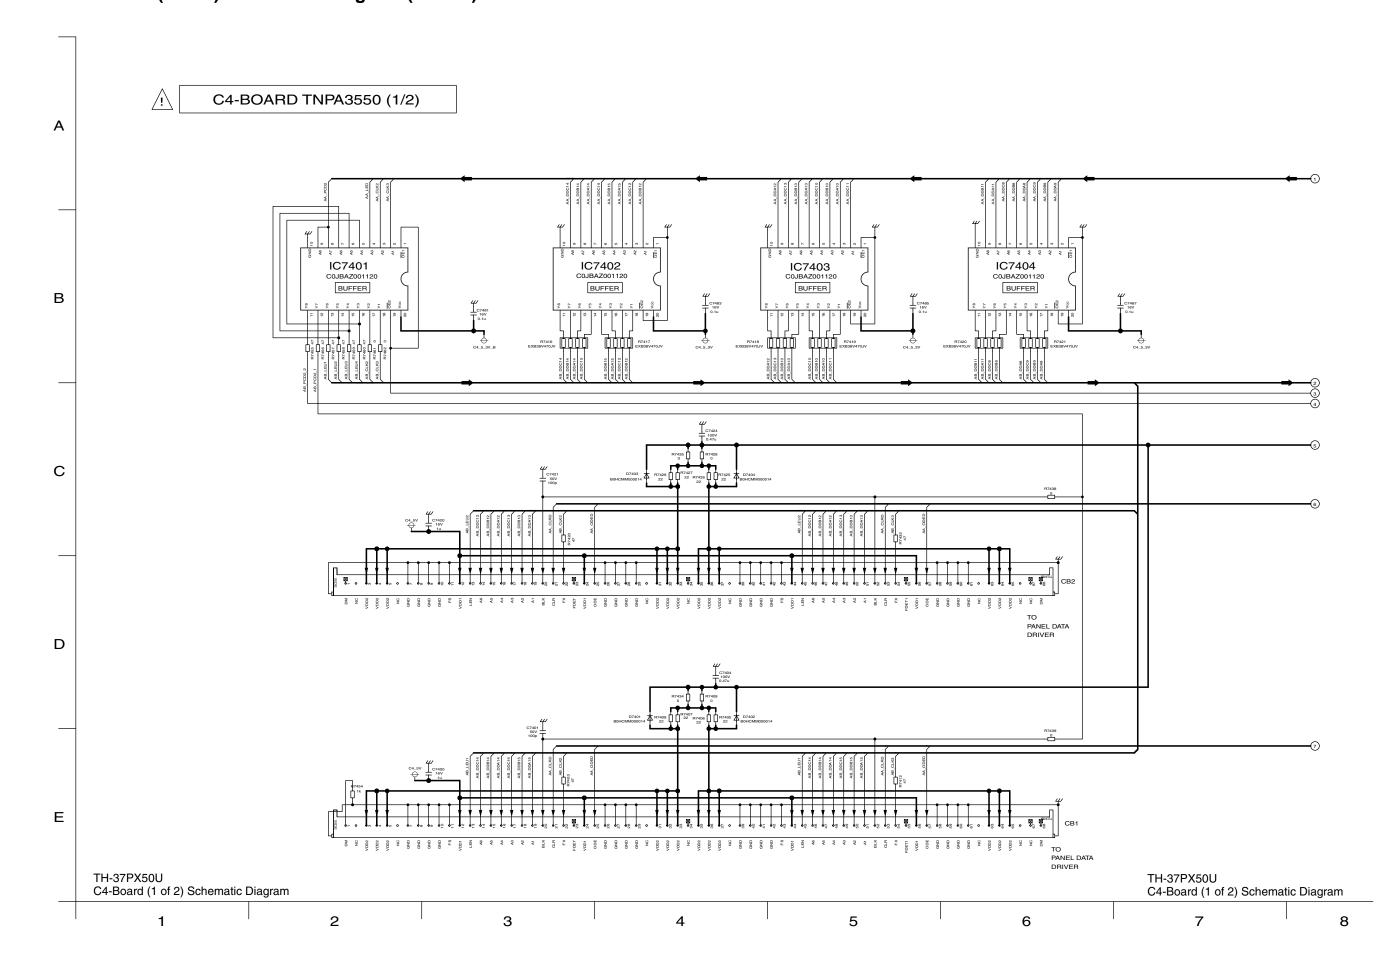

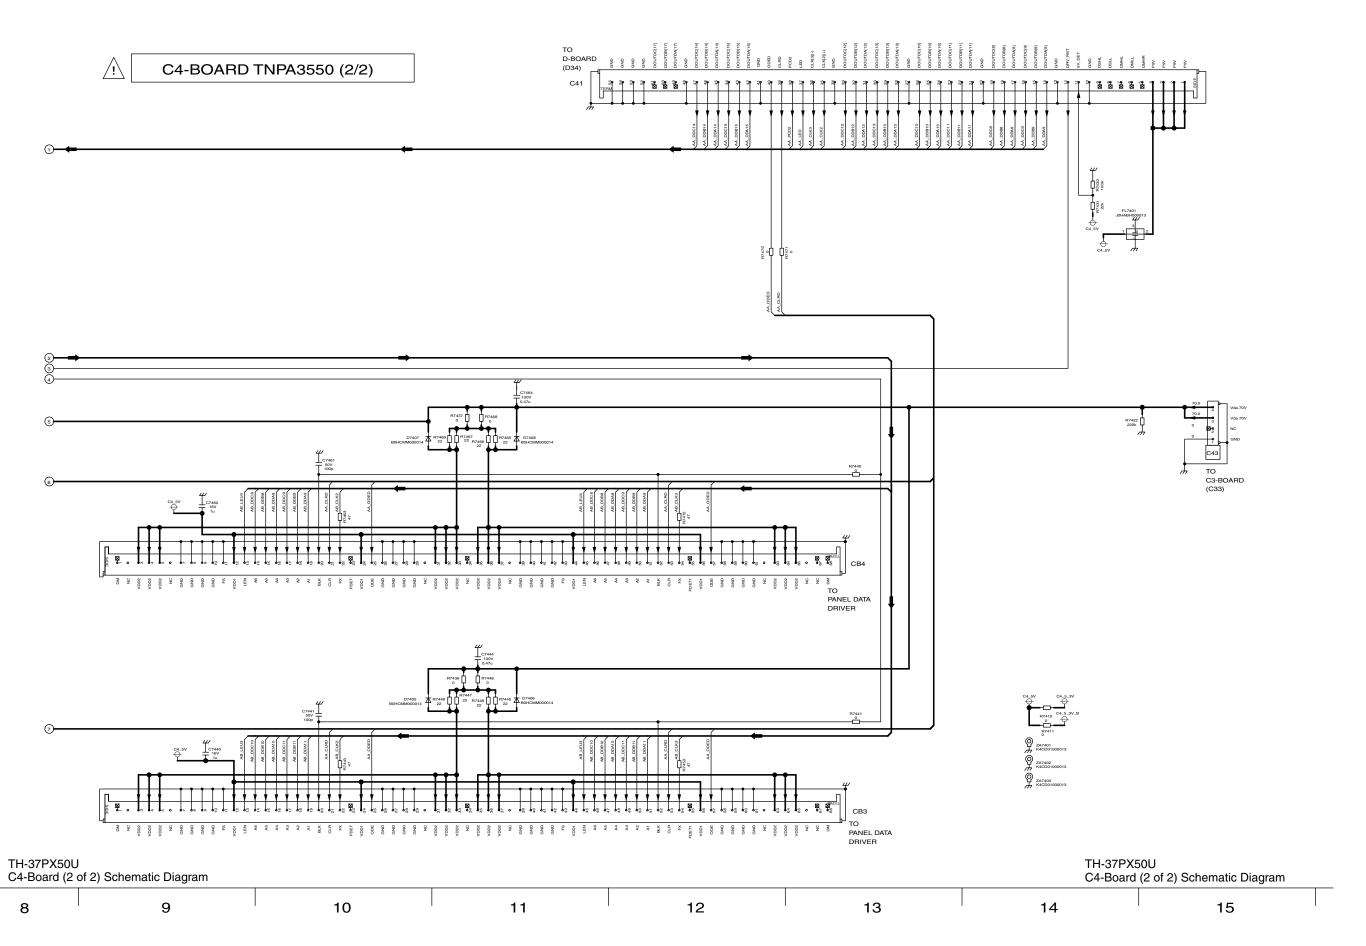


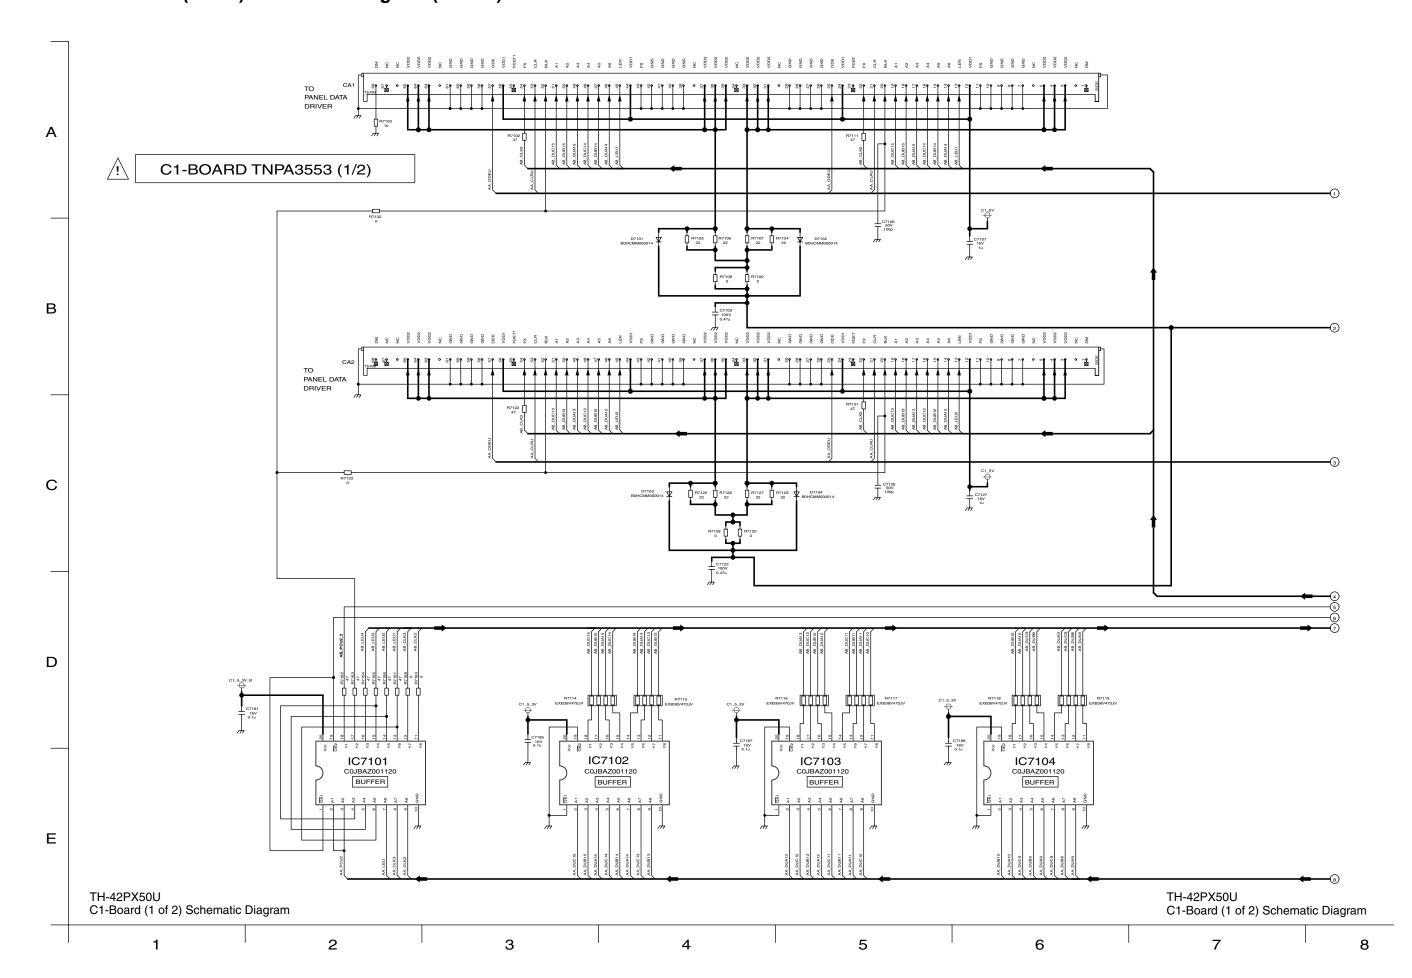


# 13.66. C1-Board (2 of 2) Schematic Dlagram (42inch)

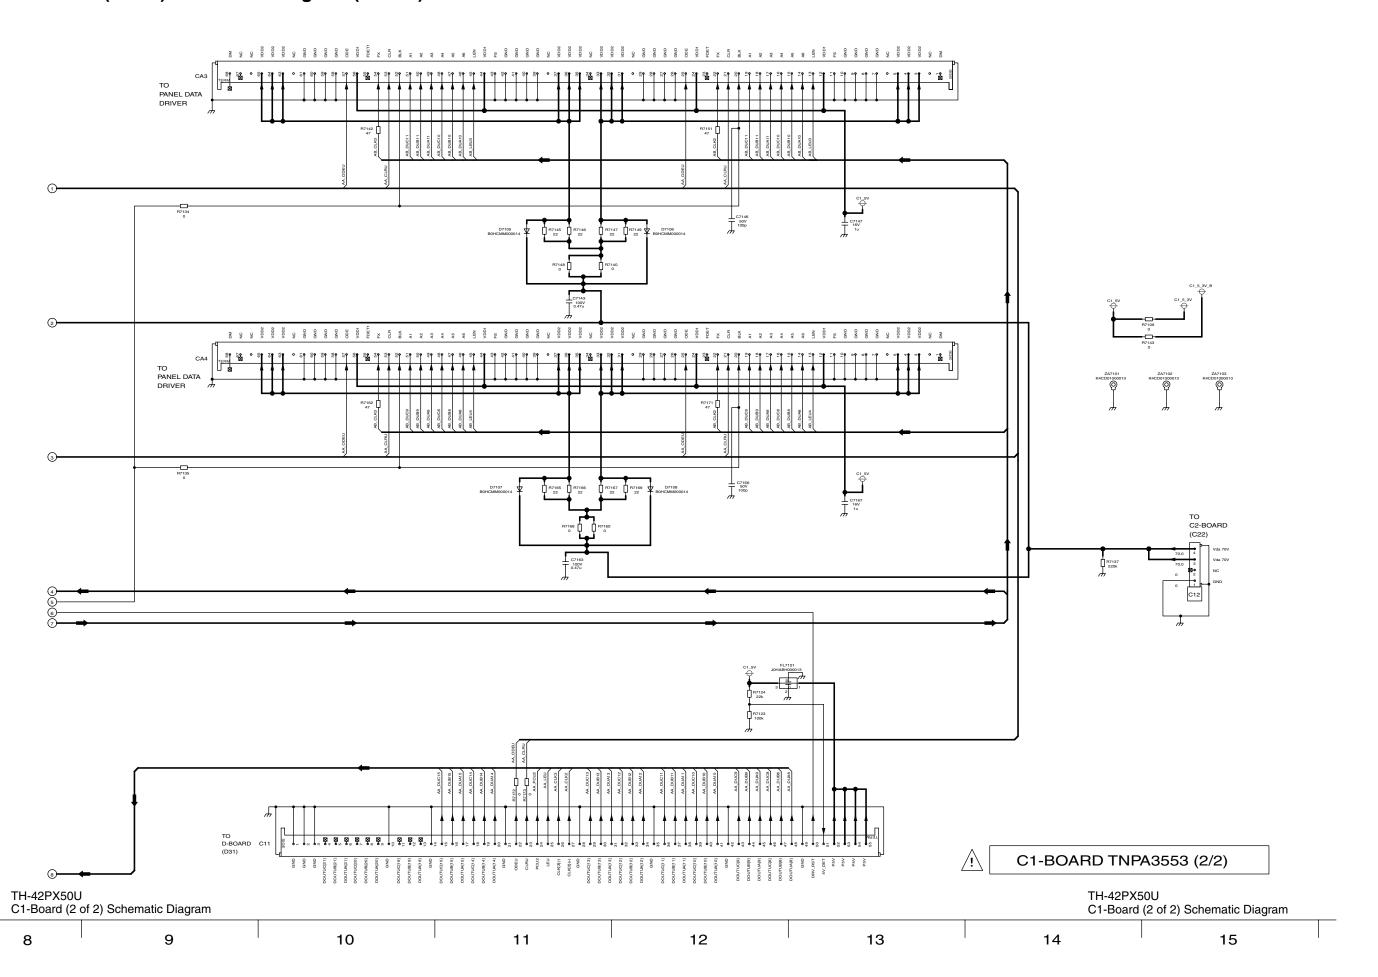

## 13.67. C2-Board (1 of 2) Schematic Diagram (42inch)

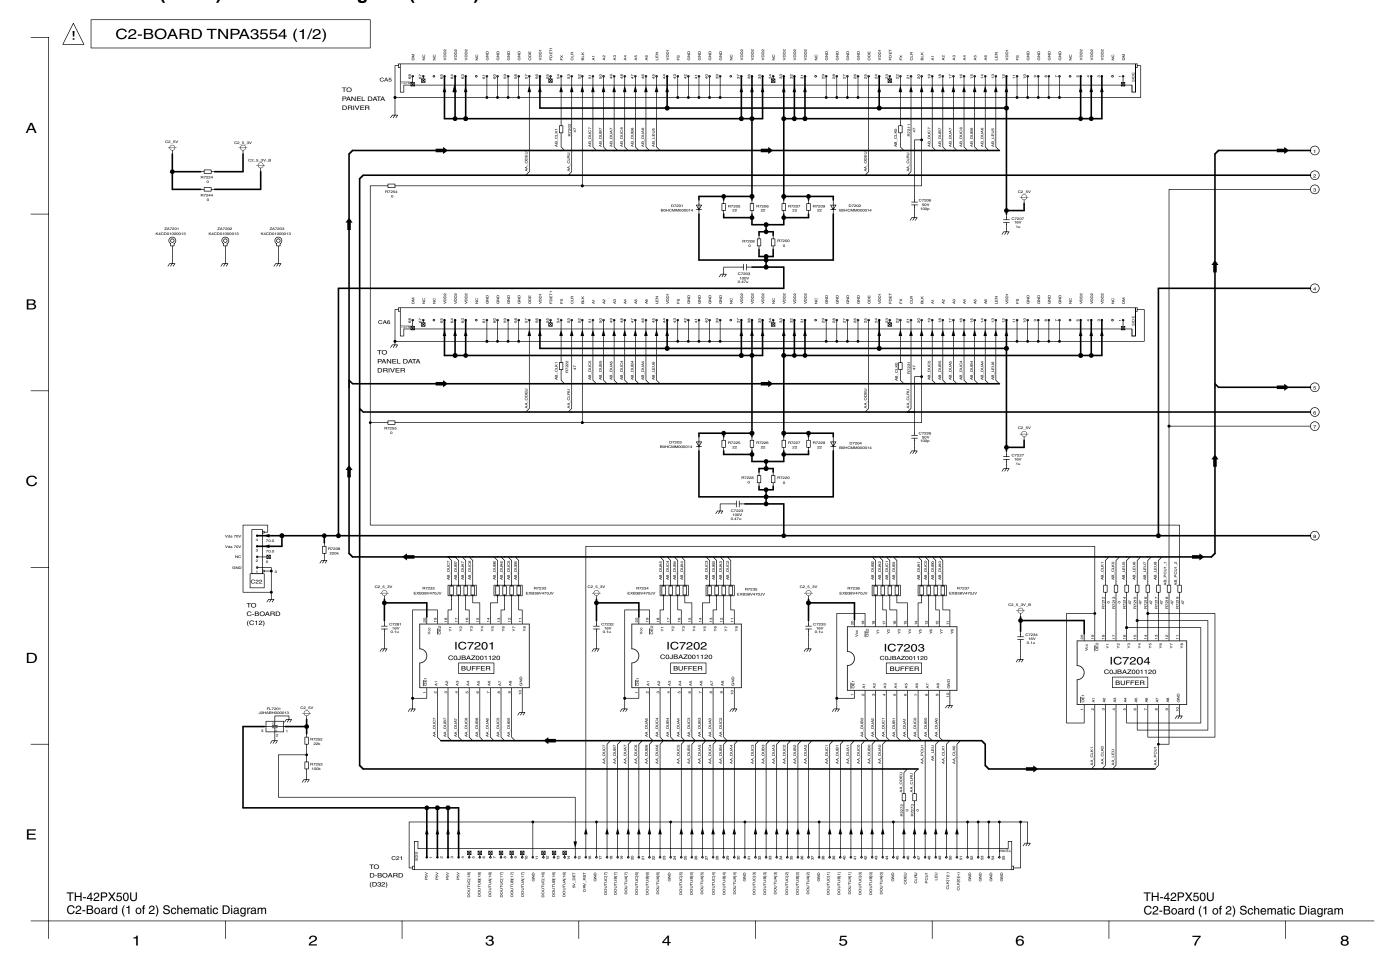


# 13.68. C2-Board (2 of 2) Schematic Diagram (42inch)

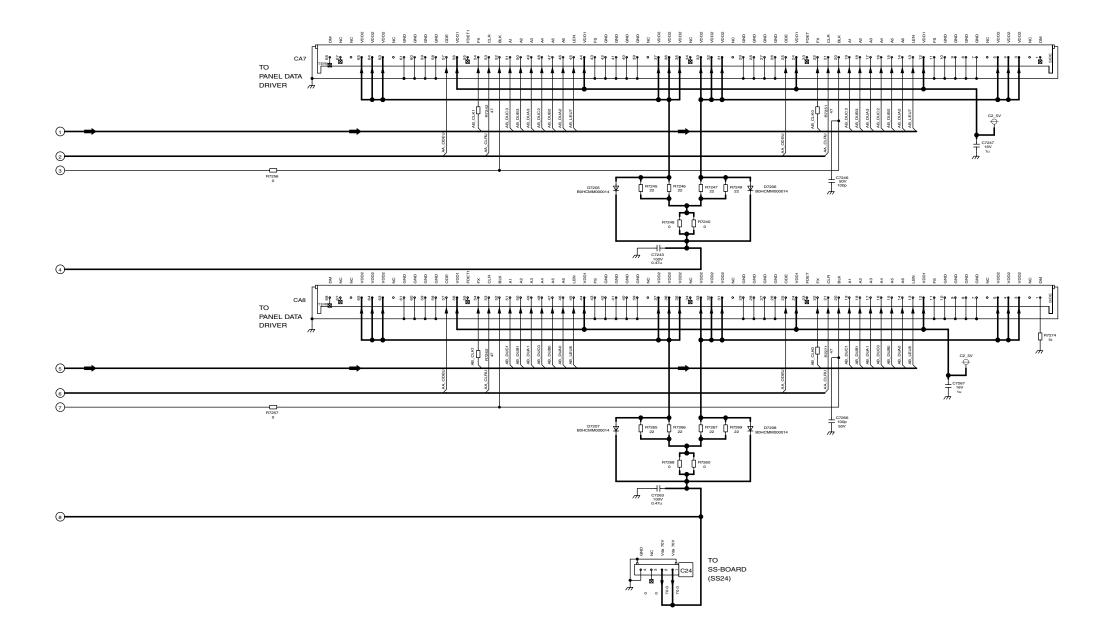





C2-BOARD TNPA3554 (2/2)

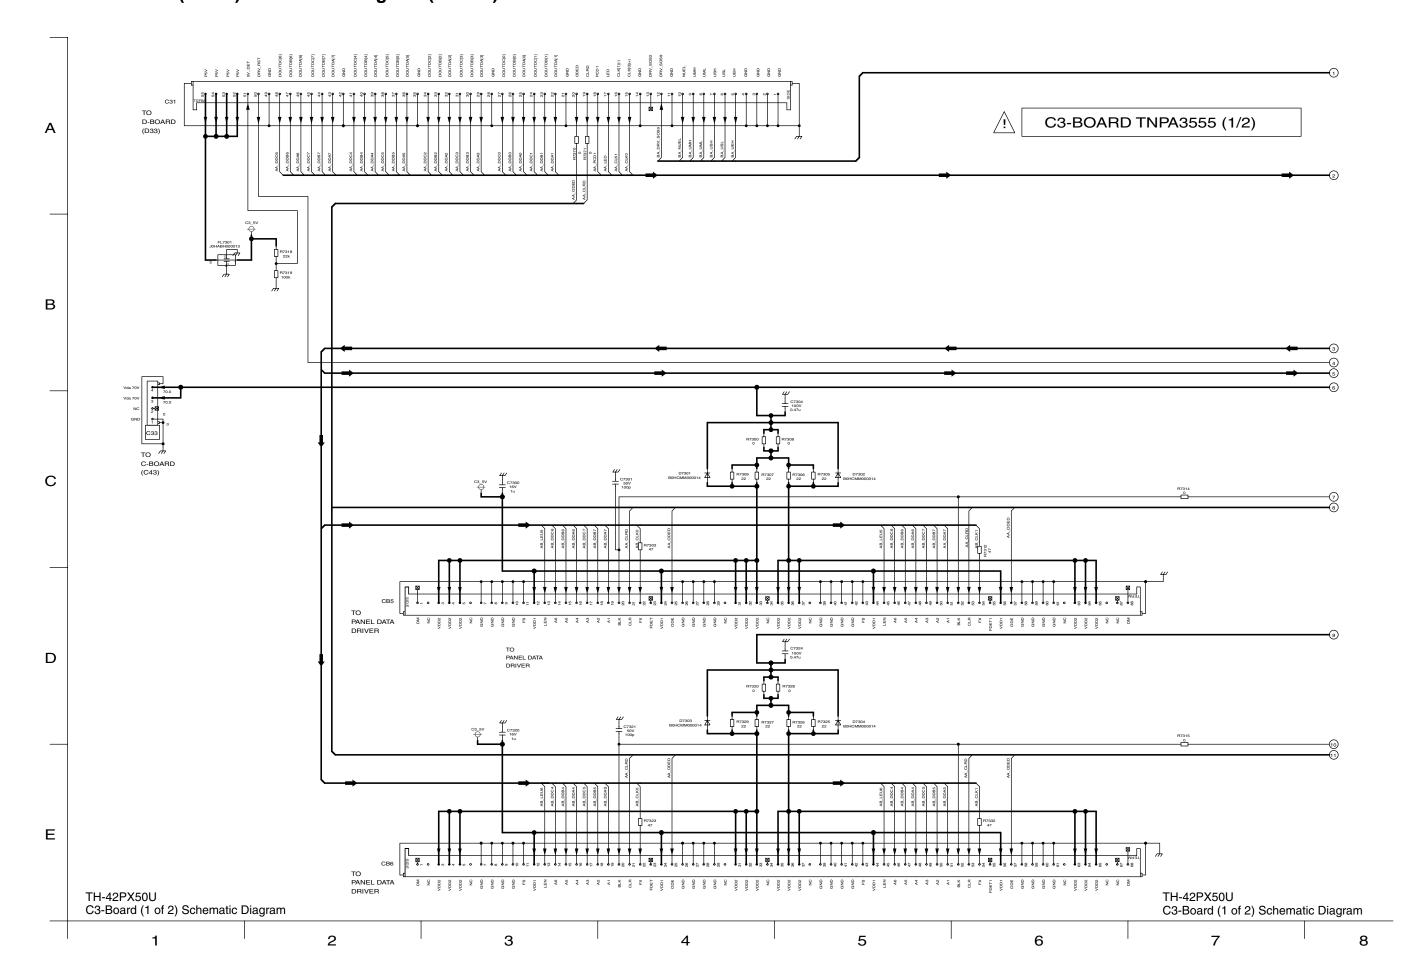


# 13.70. C3-Board (2 of 2) Schematic Diagram (42inch)

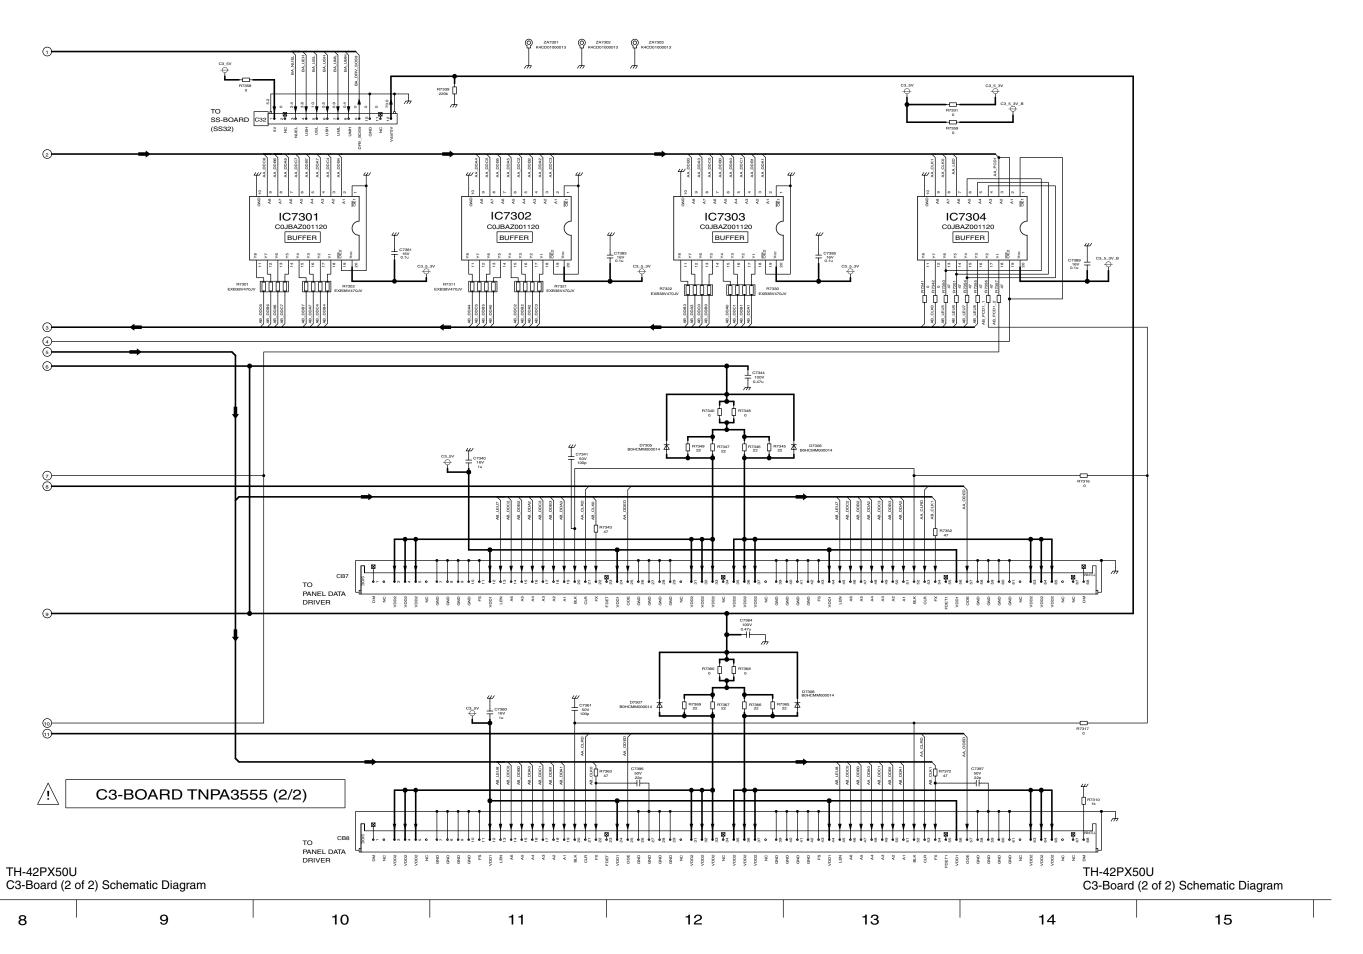


# 13.71. C4-Board (1 of 2) Schematic Diagram (42inch)

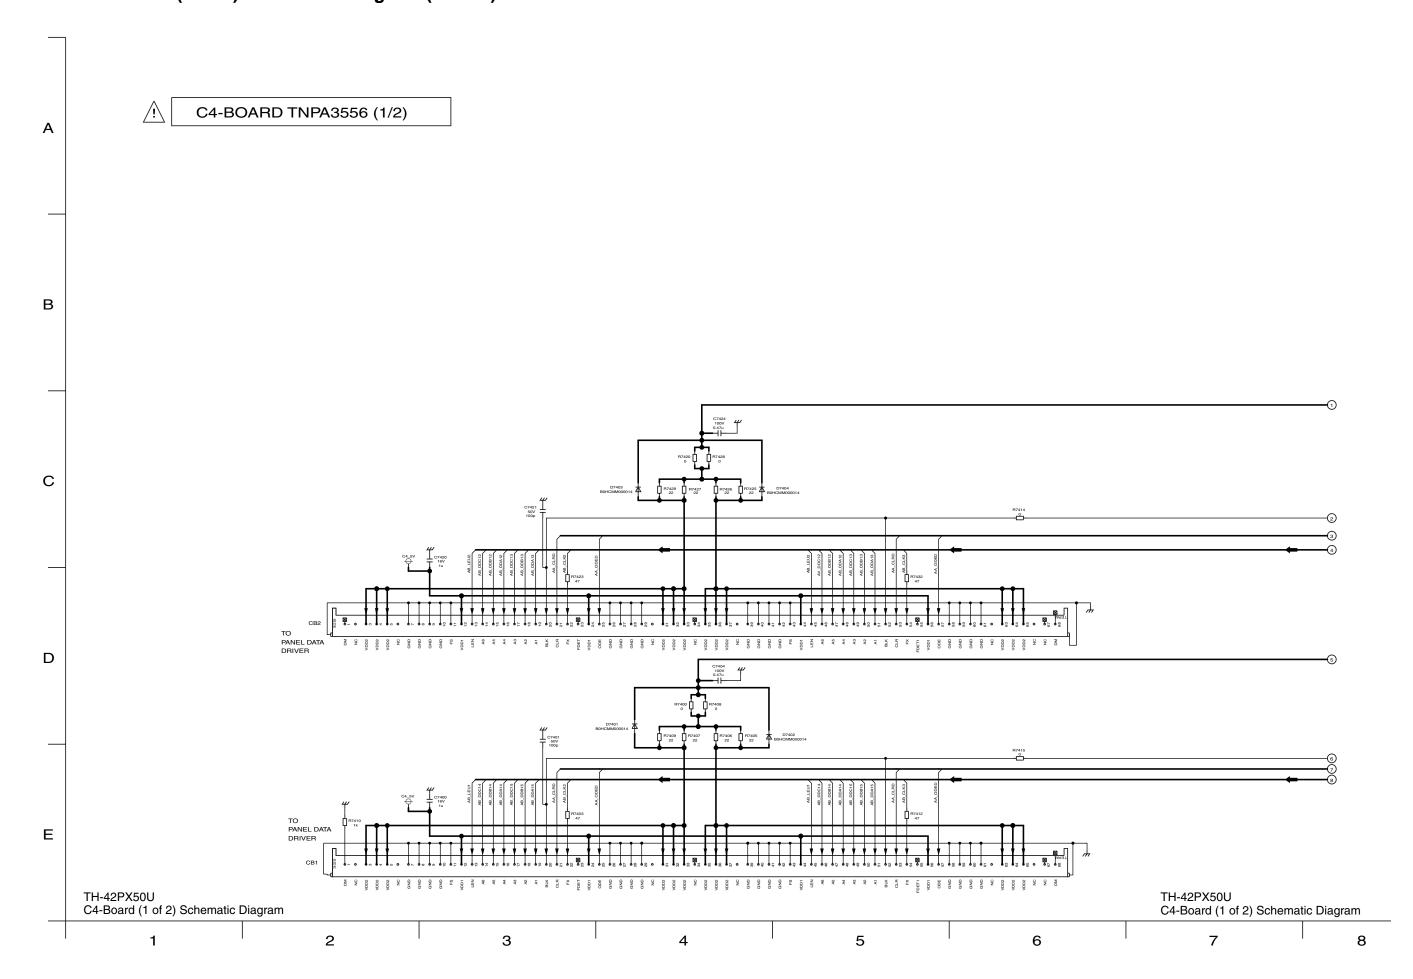


## 13.72. C4-Board (2 of 2) Schematic Diagram (42inch)

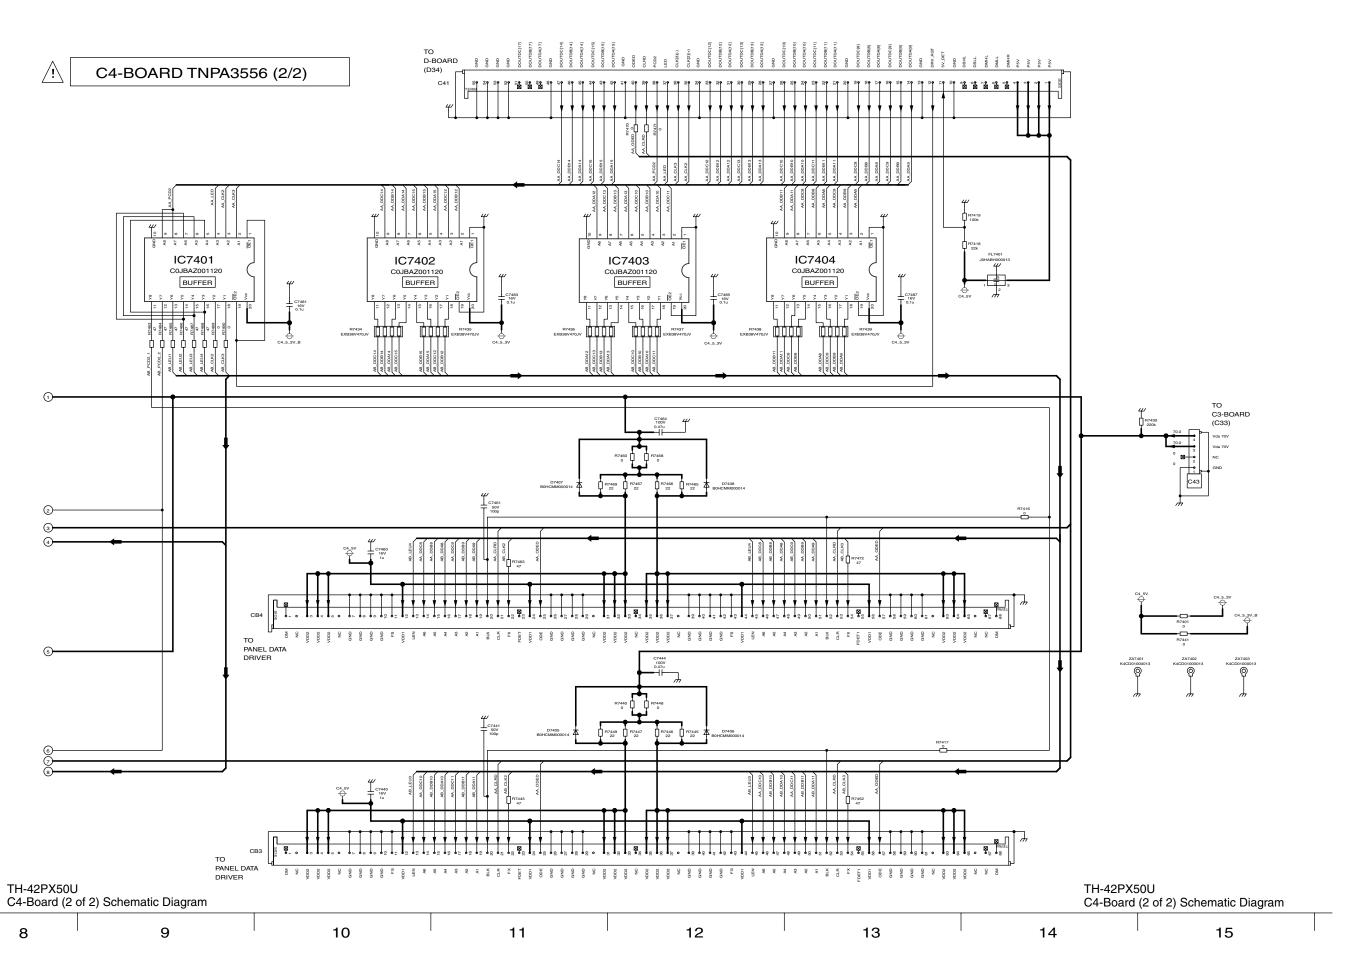


#### 13.73. C1, C2,C5 and C6-Board Block Diagram (50inch)

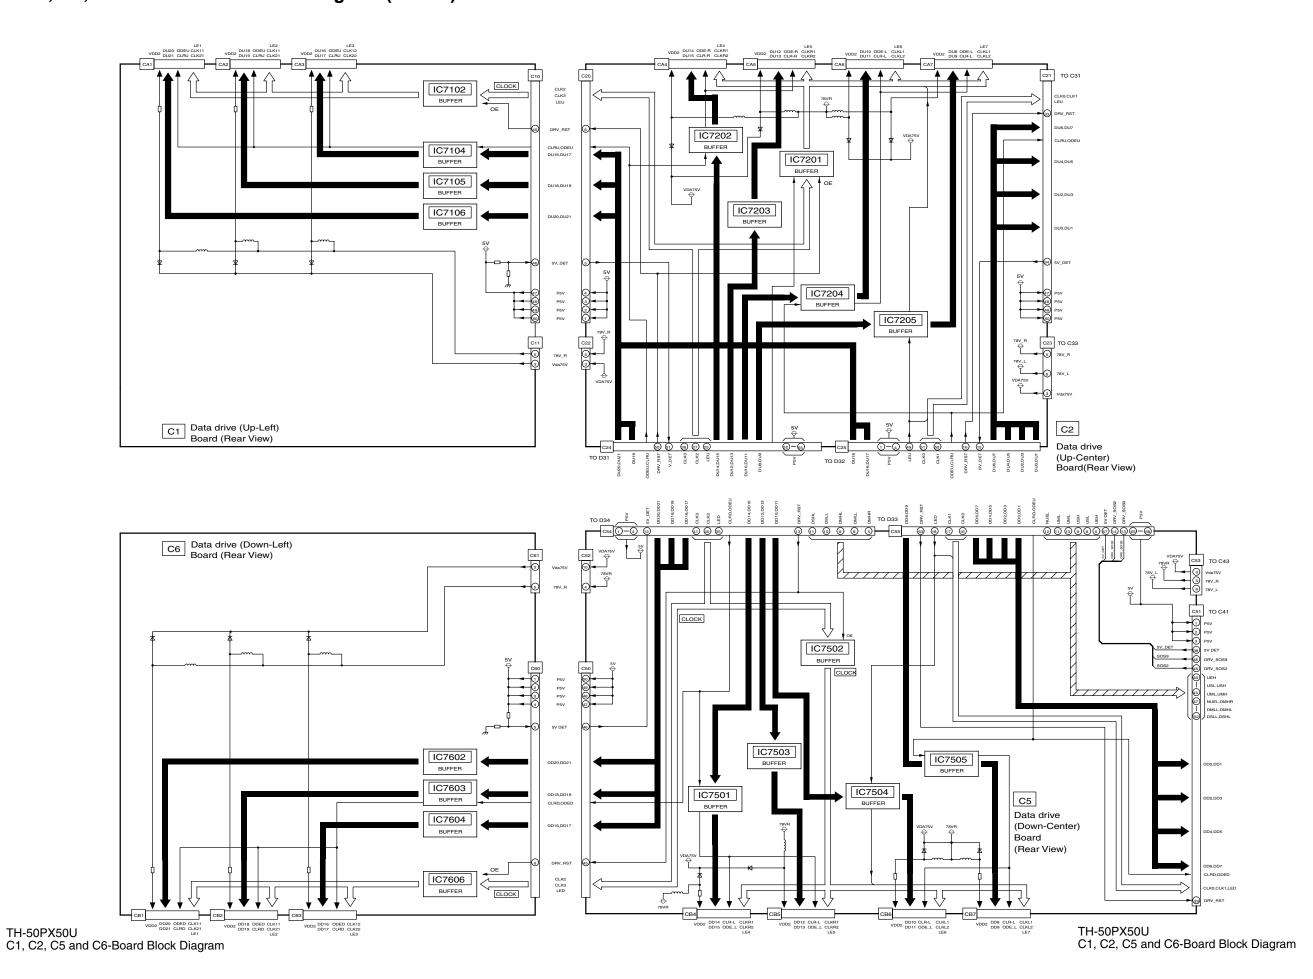

#### 13.74. C3 and C4-Board Block Diagram (50inch)

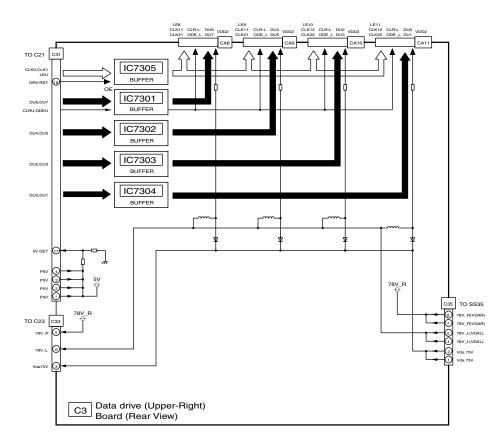

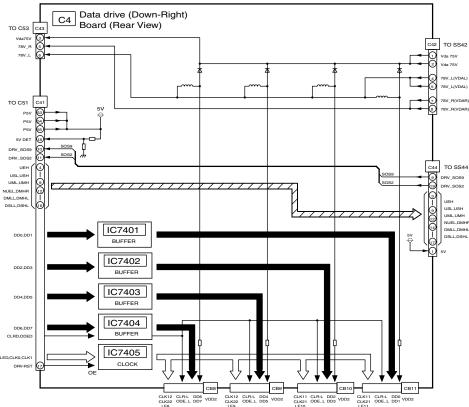


TH-50PX50U C3 and C4-Board Block Diagram TH-50PX50U C3 and C4-Board Block Diagram


## 13.75. C1-Board (1 of 2) Schematic Diagram (50inch)




## 13.76. C1-Board (2 of 2) Schematic Diagram (50inch)

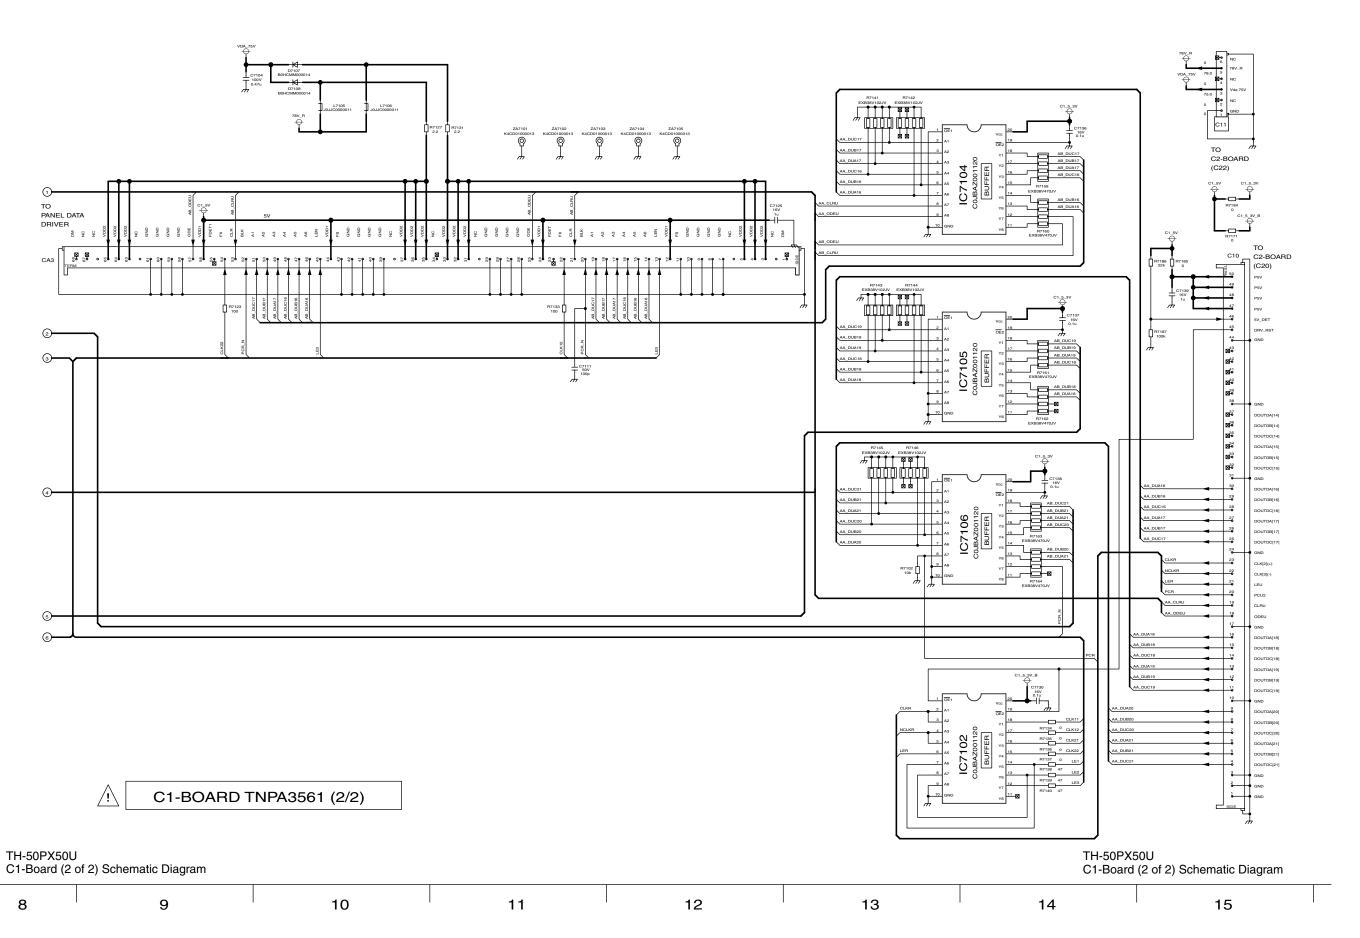


#### 13.77. C2-Board (1 of 2) Schematic Diagram (50inch)

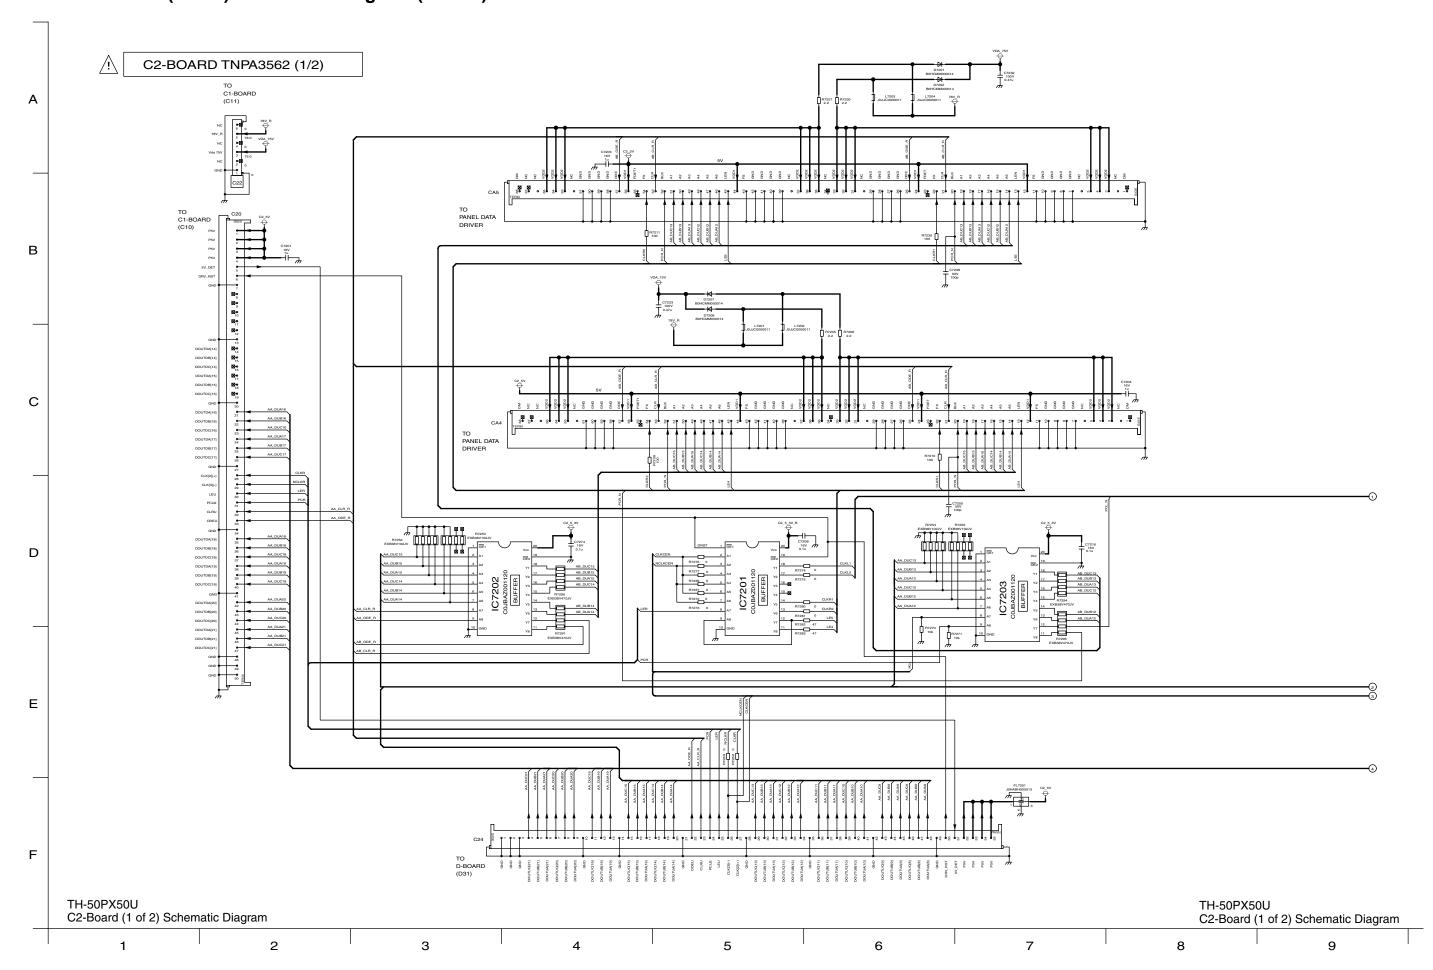


## 13.78. C2-Board (2 of 2) Schematic Diagram (50inch)

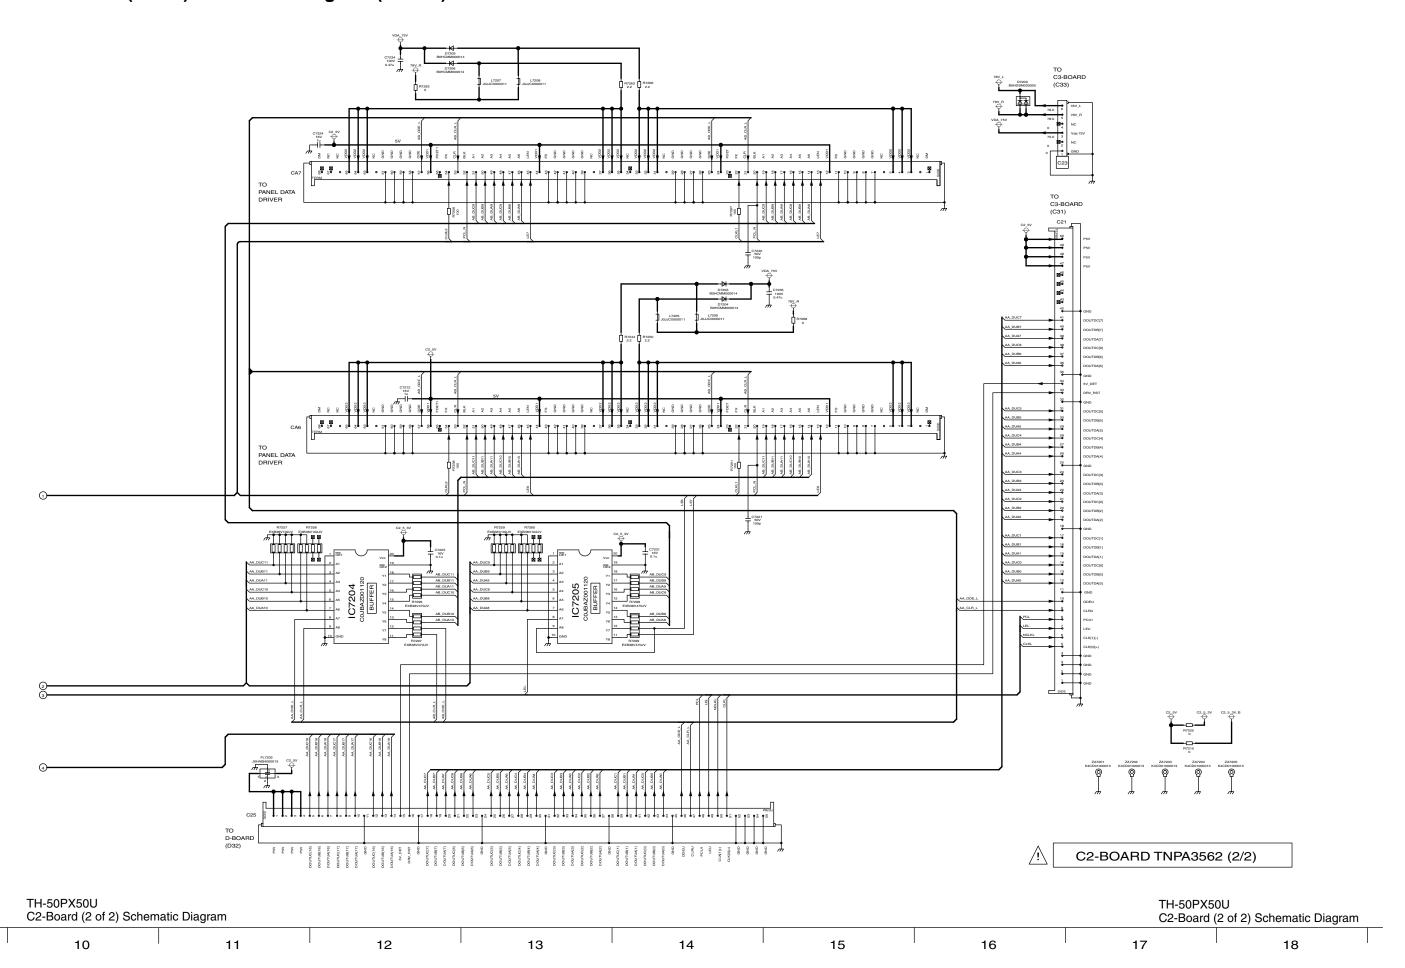

### 13.79. C3-Board (1 of 2) Schematic Diagram (50inch)

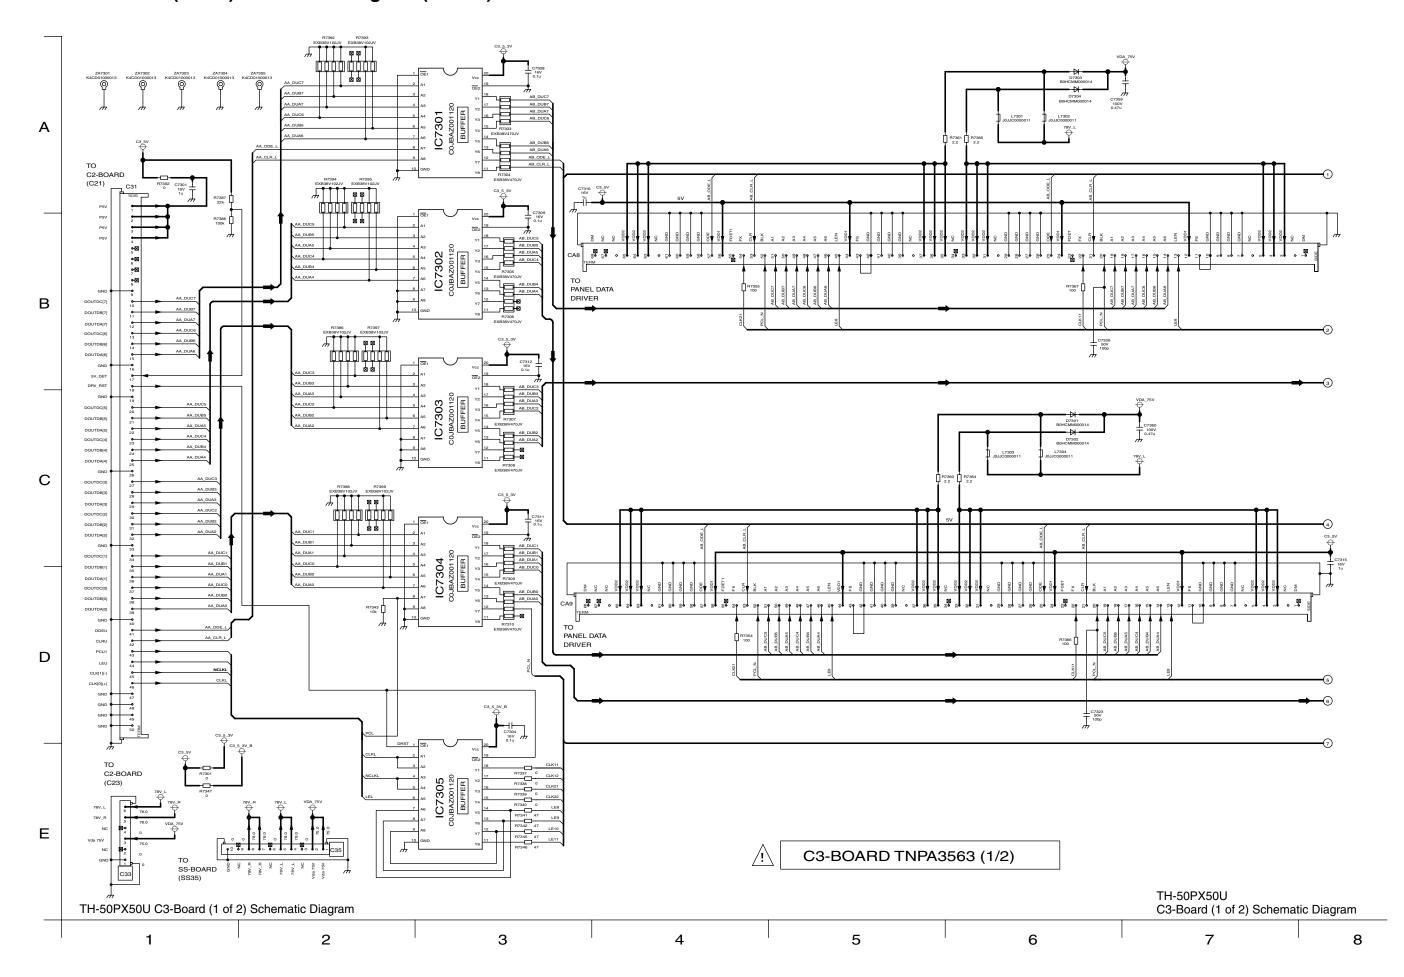



## 13.80. C3-Board (2 of 2) Schematic Diagram (50inch)

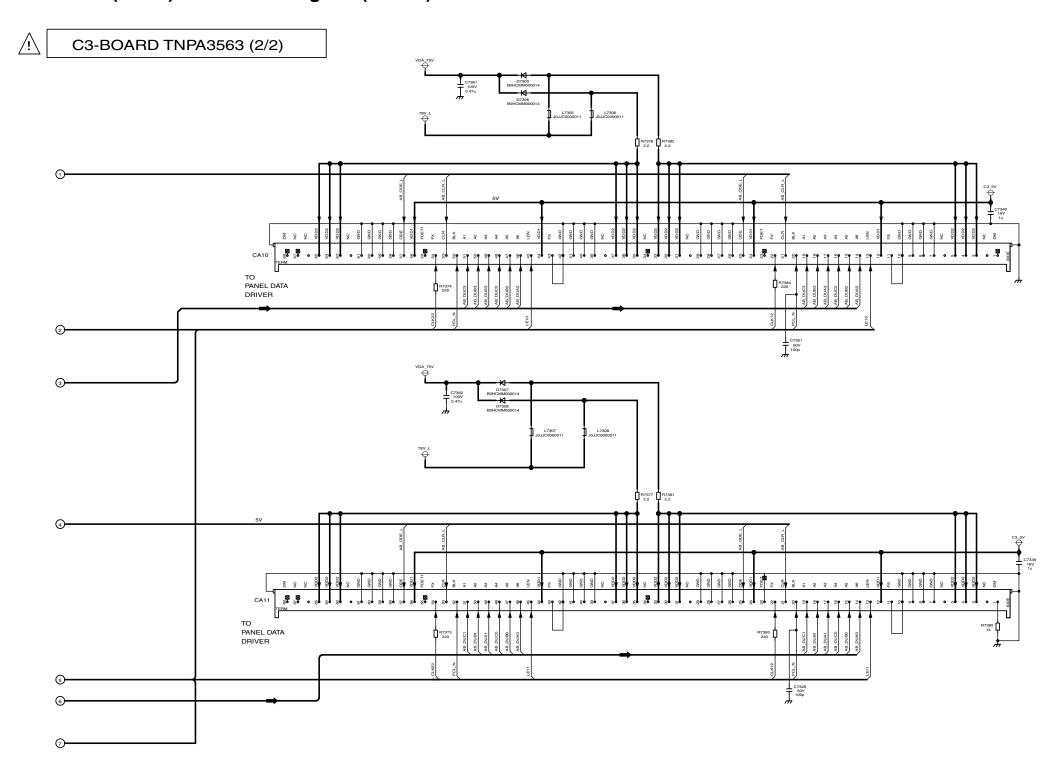




#### 13.81. C4-Board (1 of 2) Schematic Diagram (50inch)

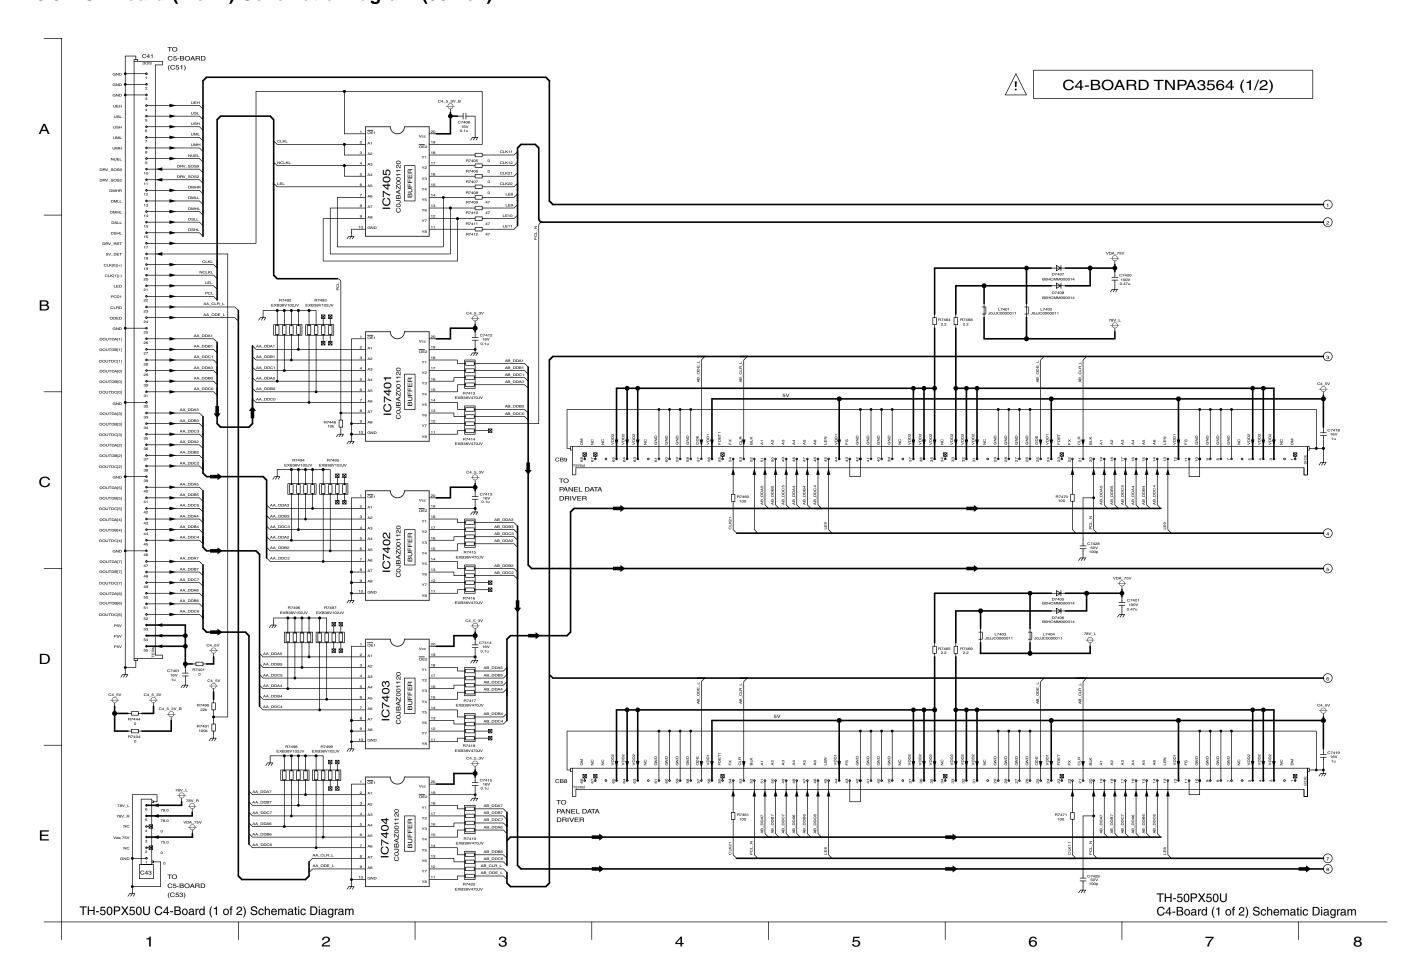


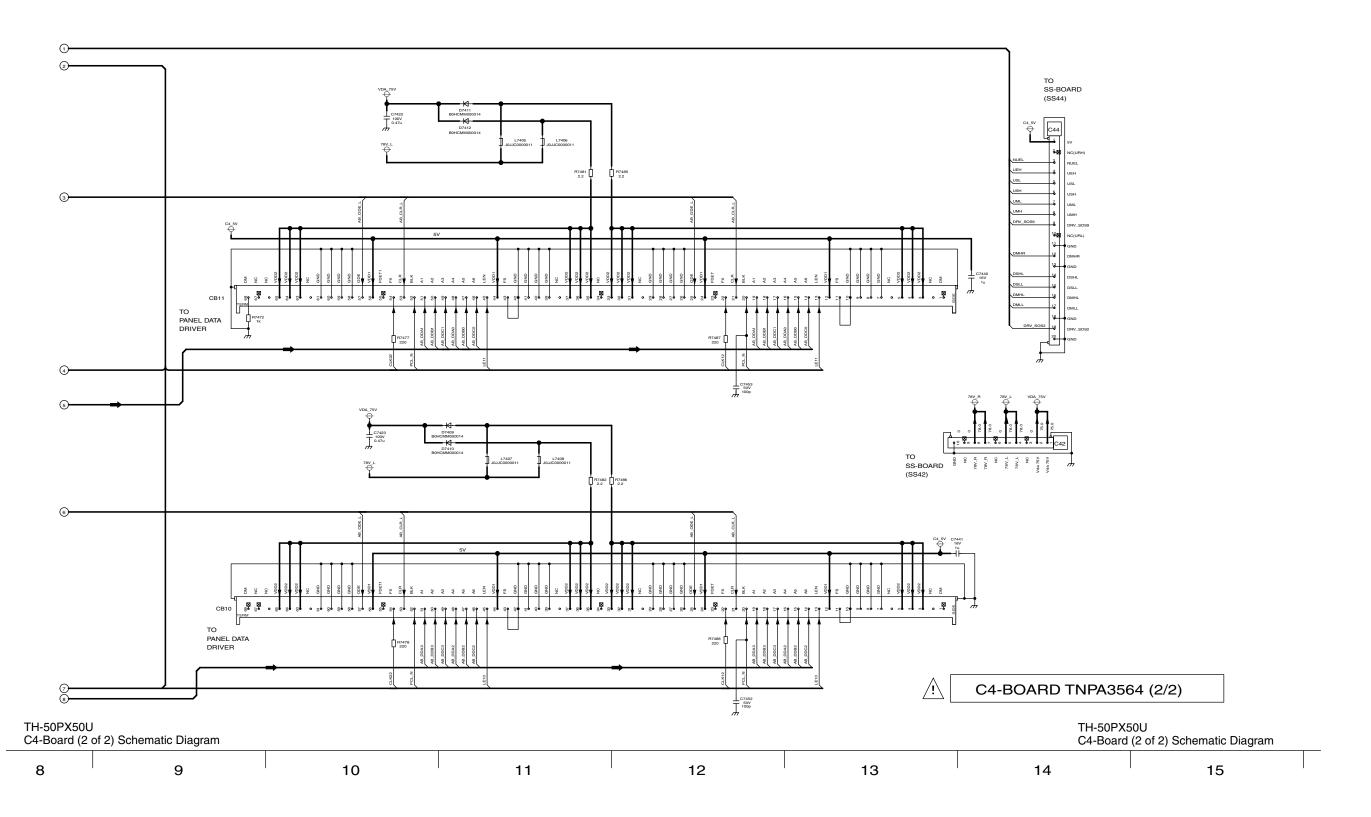


### 13.83. C5-Board (1 of 2) Schematic Diagram (50inch)

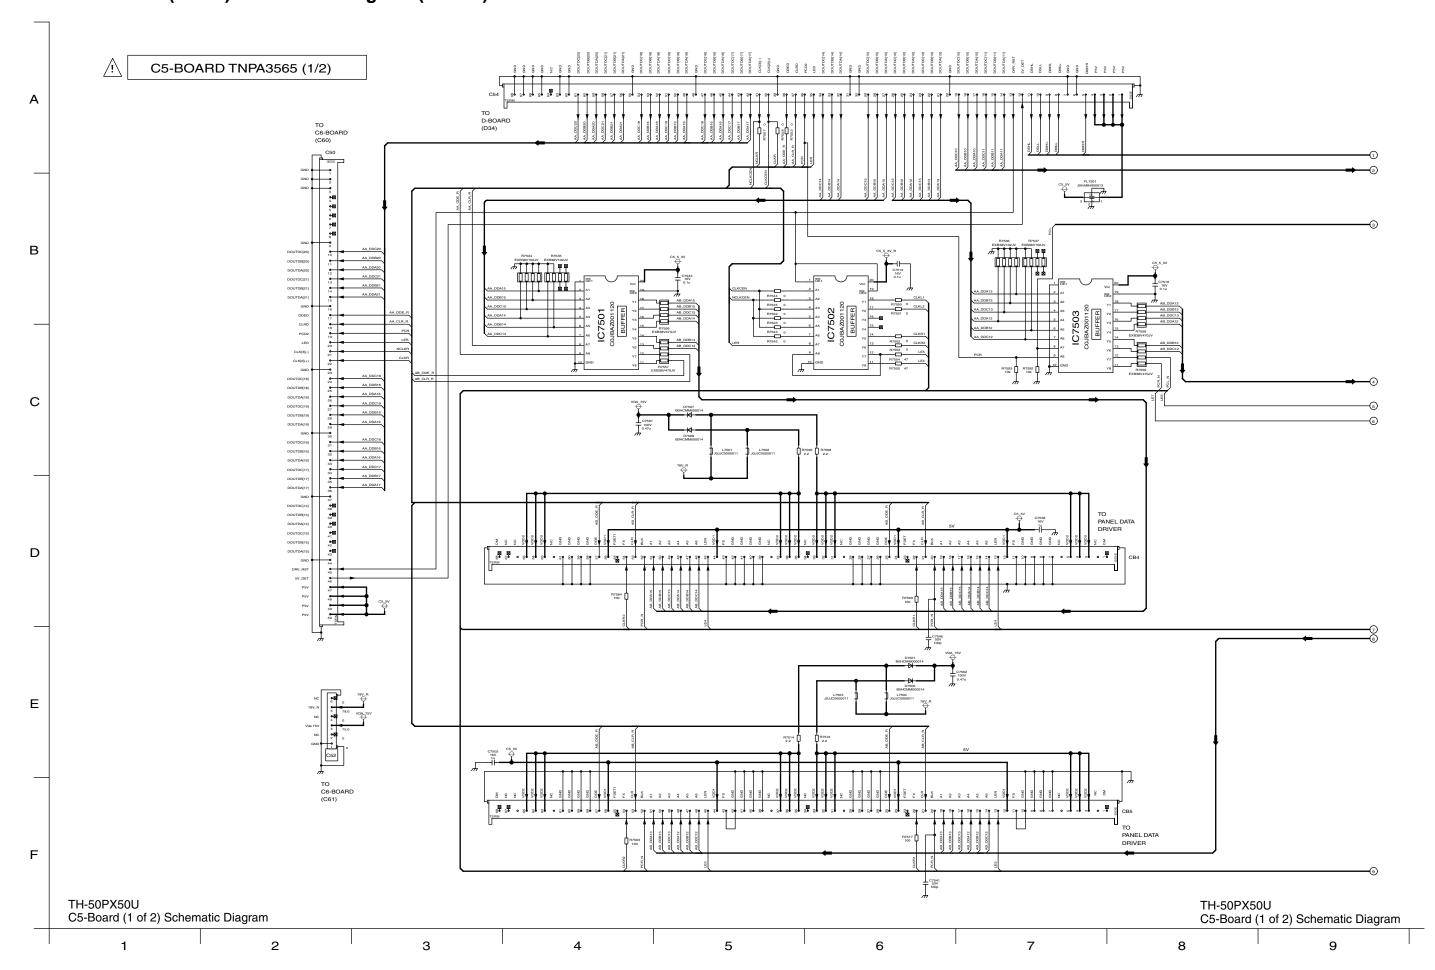


### 13.84. C5-Board (2 of 2) Schematic Diagram (50inch)

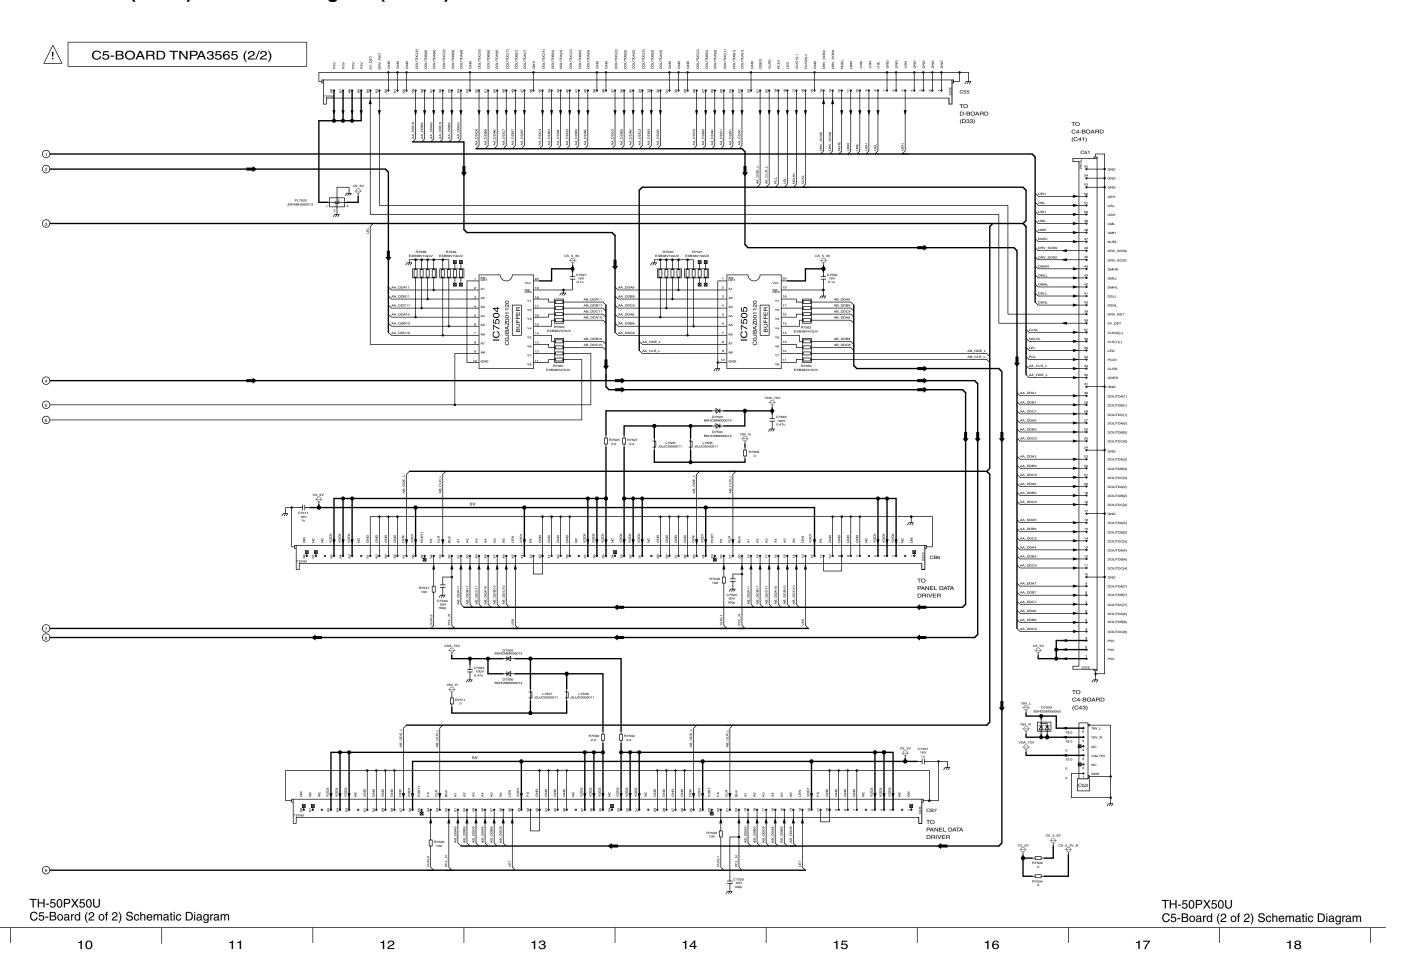


## 13.85. C6-Board (1 of 2) Schematic Diagram (50inch)

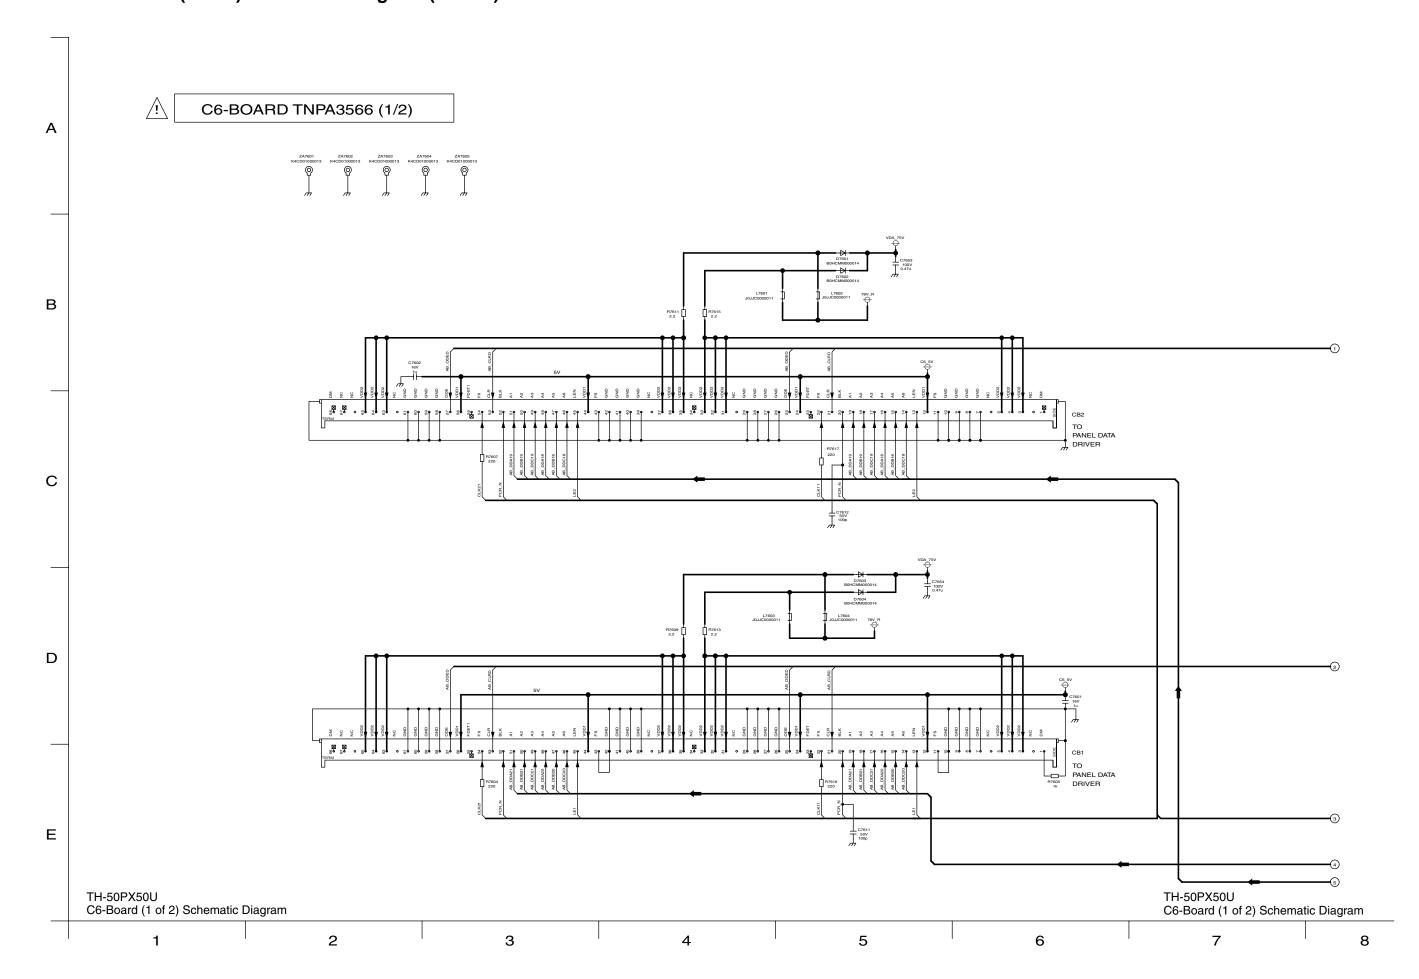

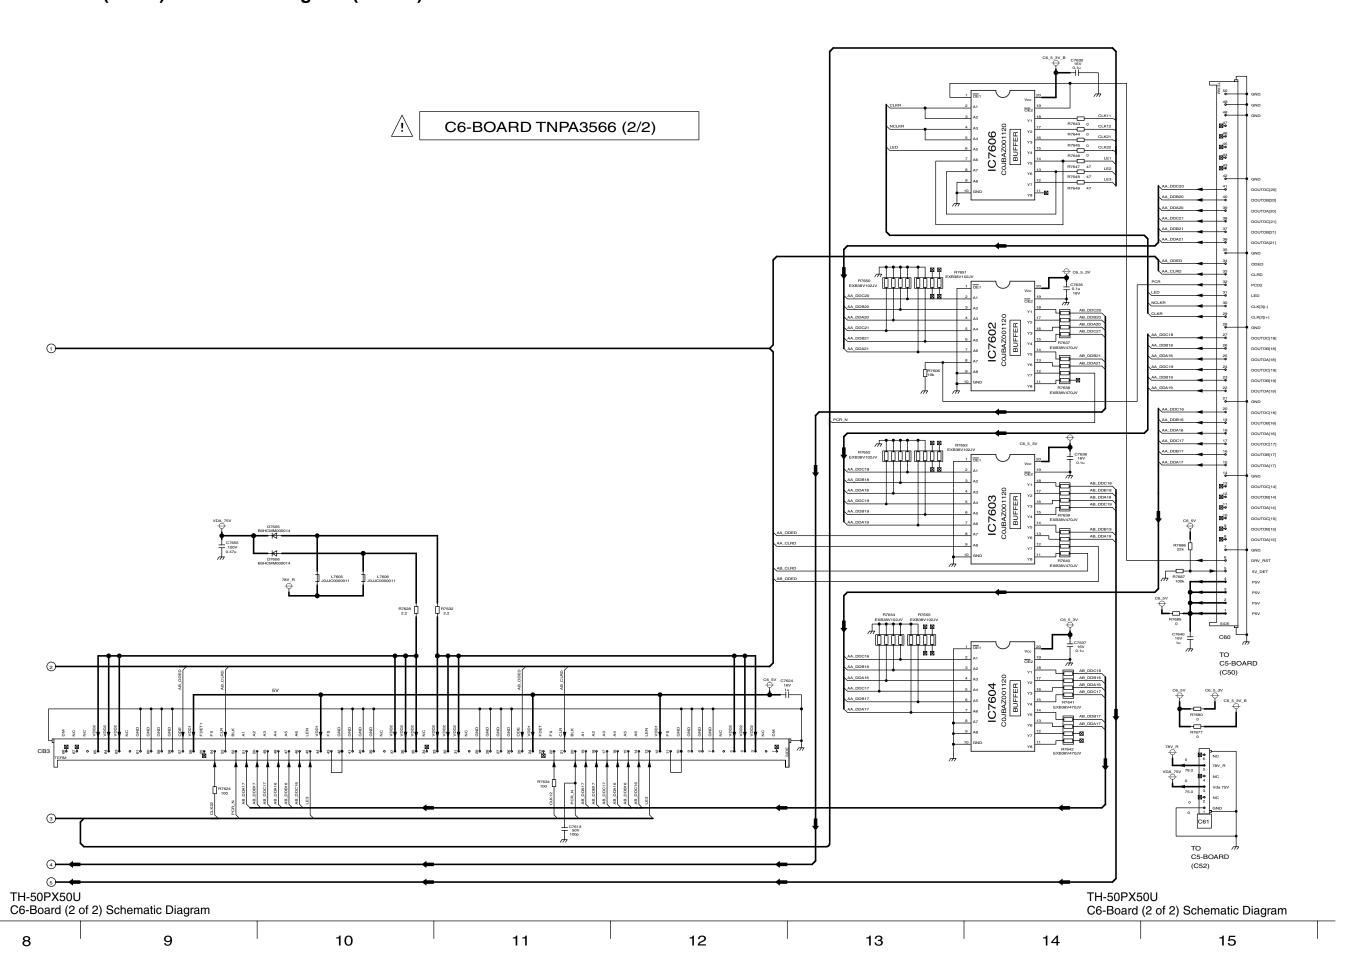



SC-Board Block Diagram

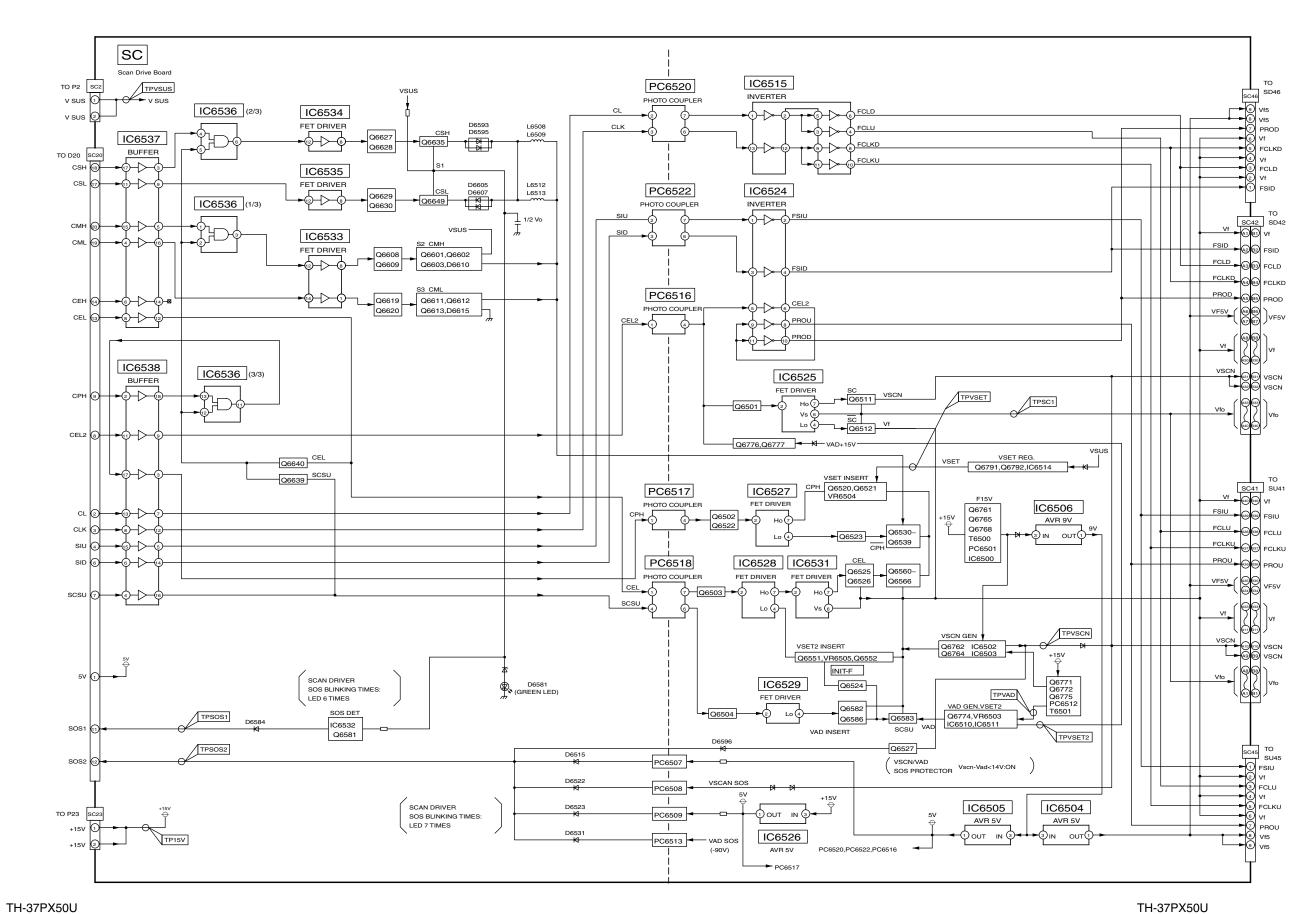


SC-Board Block Diagram

# 13.88. SC-Board (1 of 2) Schematic Diagram (37inch)

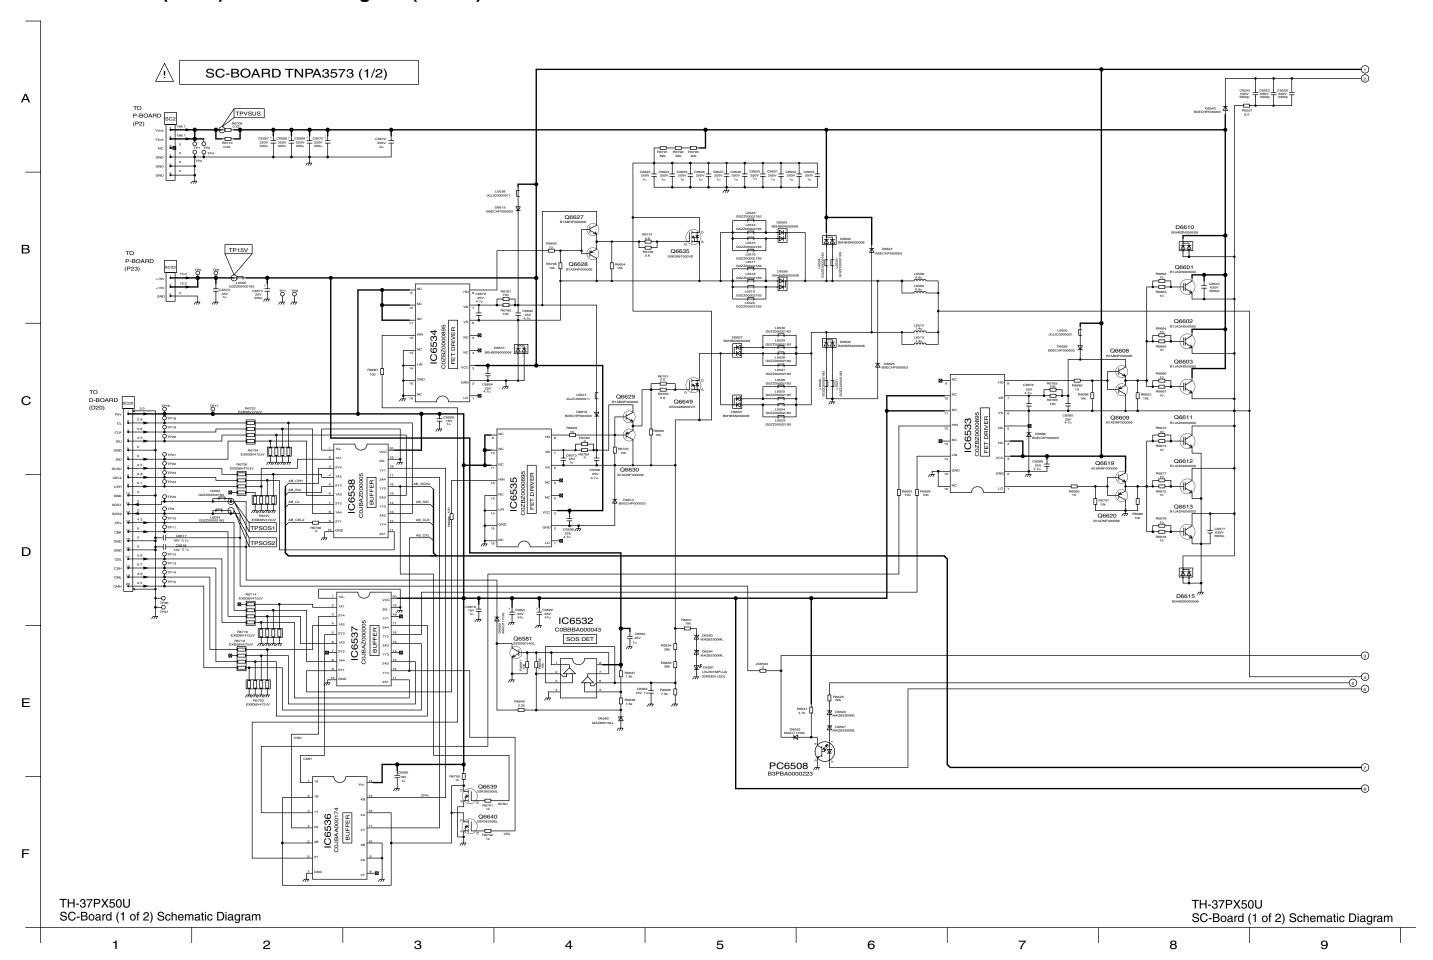

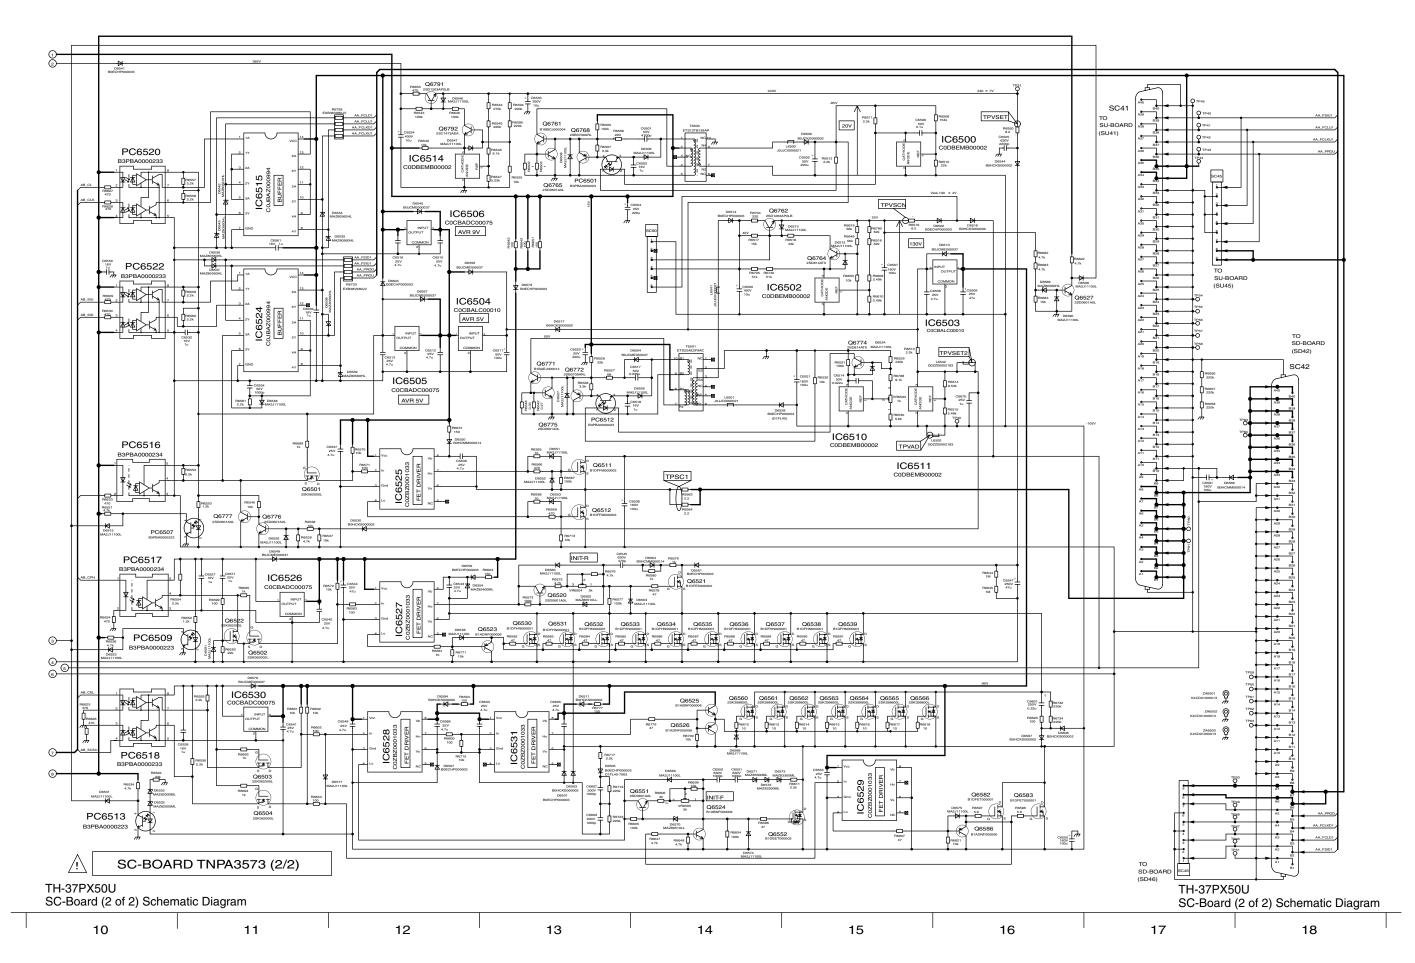

### 13.90. SC-Board Block Diagram (42inch)

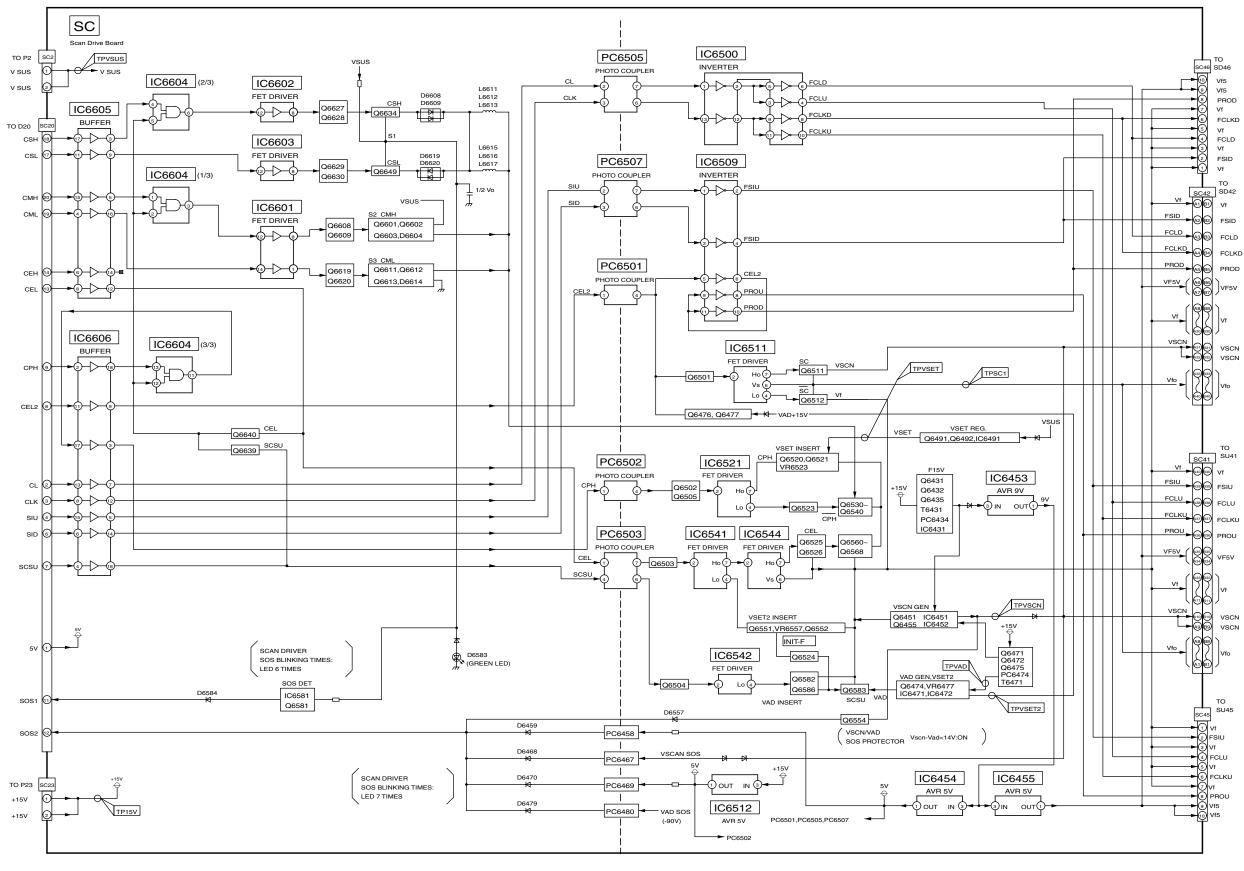


SC-Board Block Diagram


TH-42PX50U

TH-42PX50U SC-Board Block Diagram


# 13.91. SC-Board (1 of 2) Schematic Diagram (42inch)

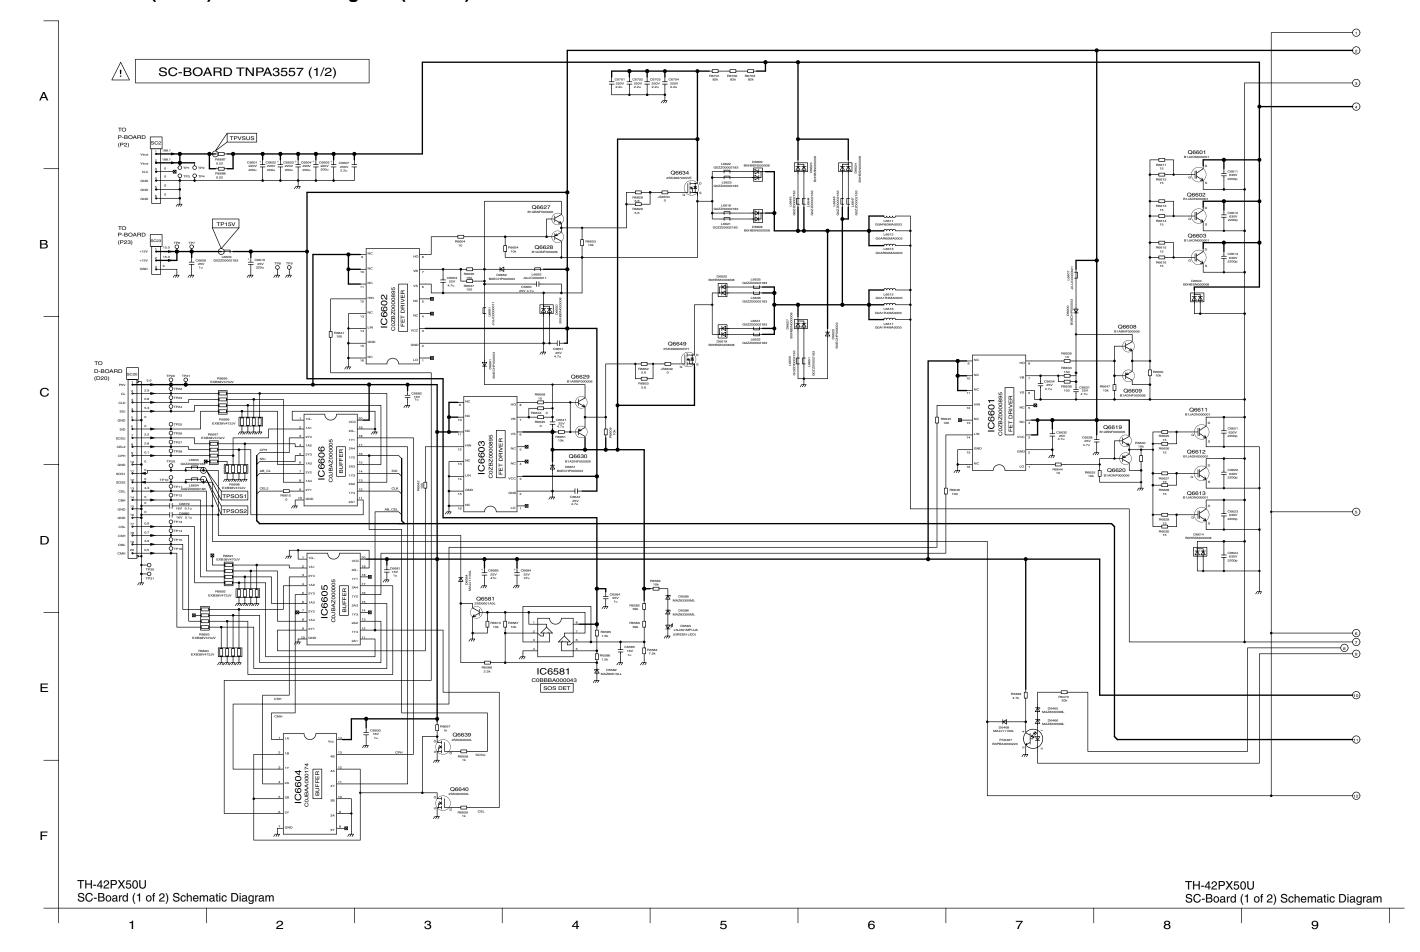

#### 13.92. SC-Board (2 of 2) Schematic Diagram (42inch)

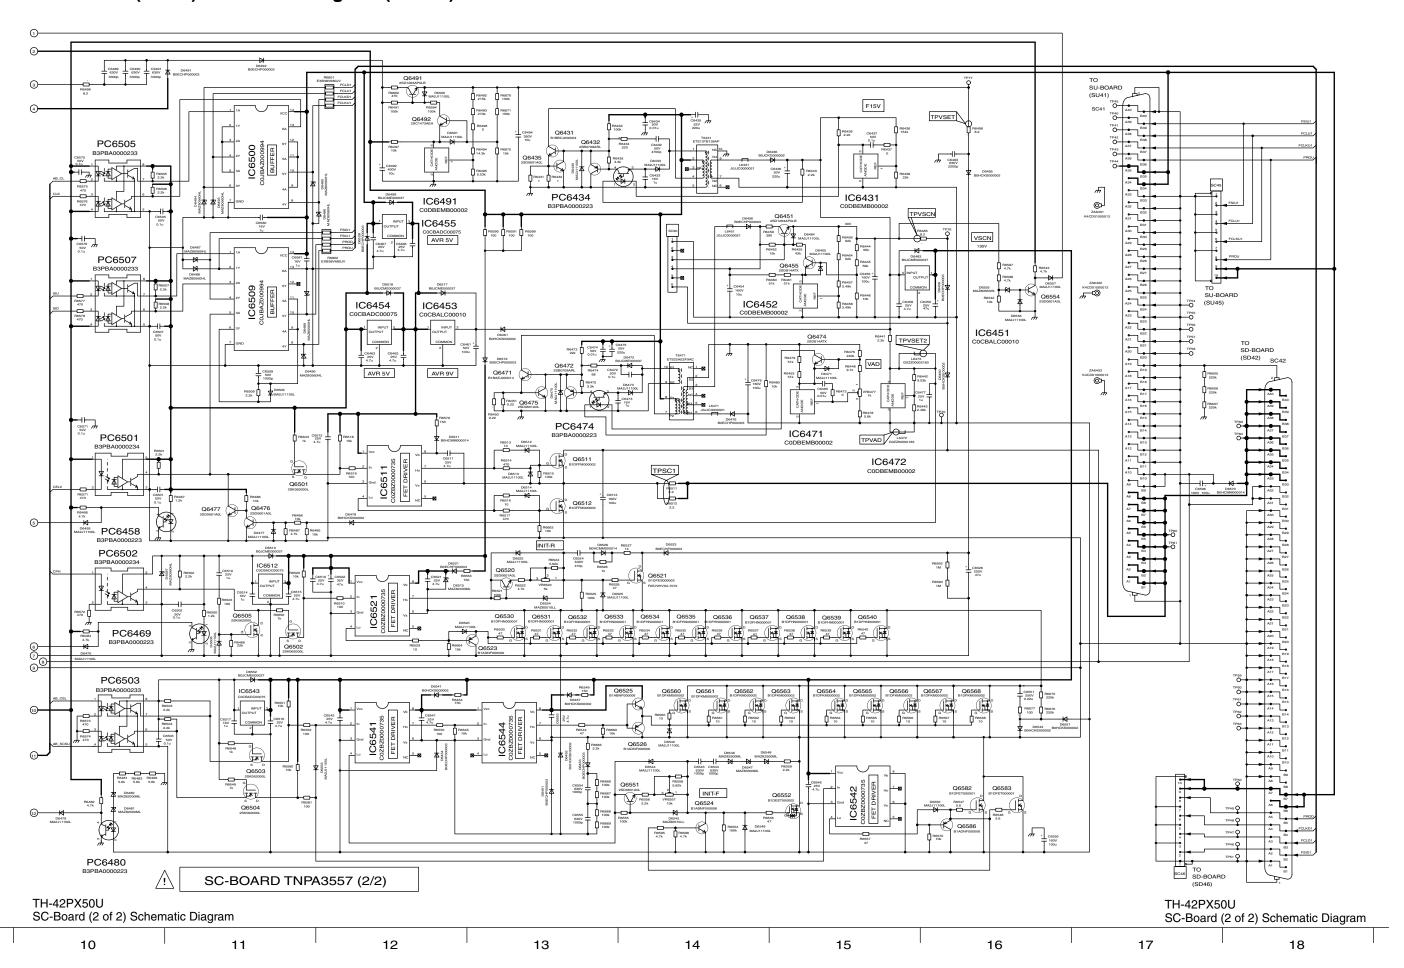


SC-Board Block Diagram

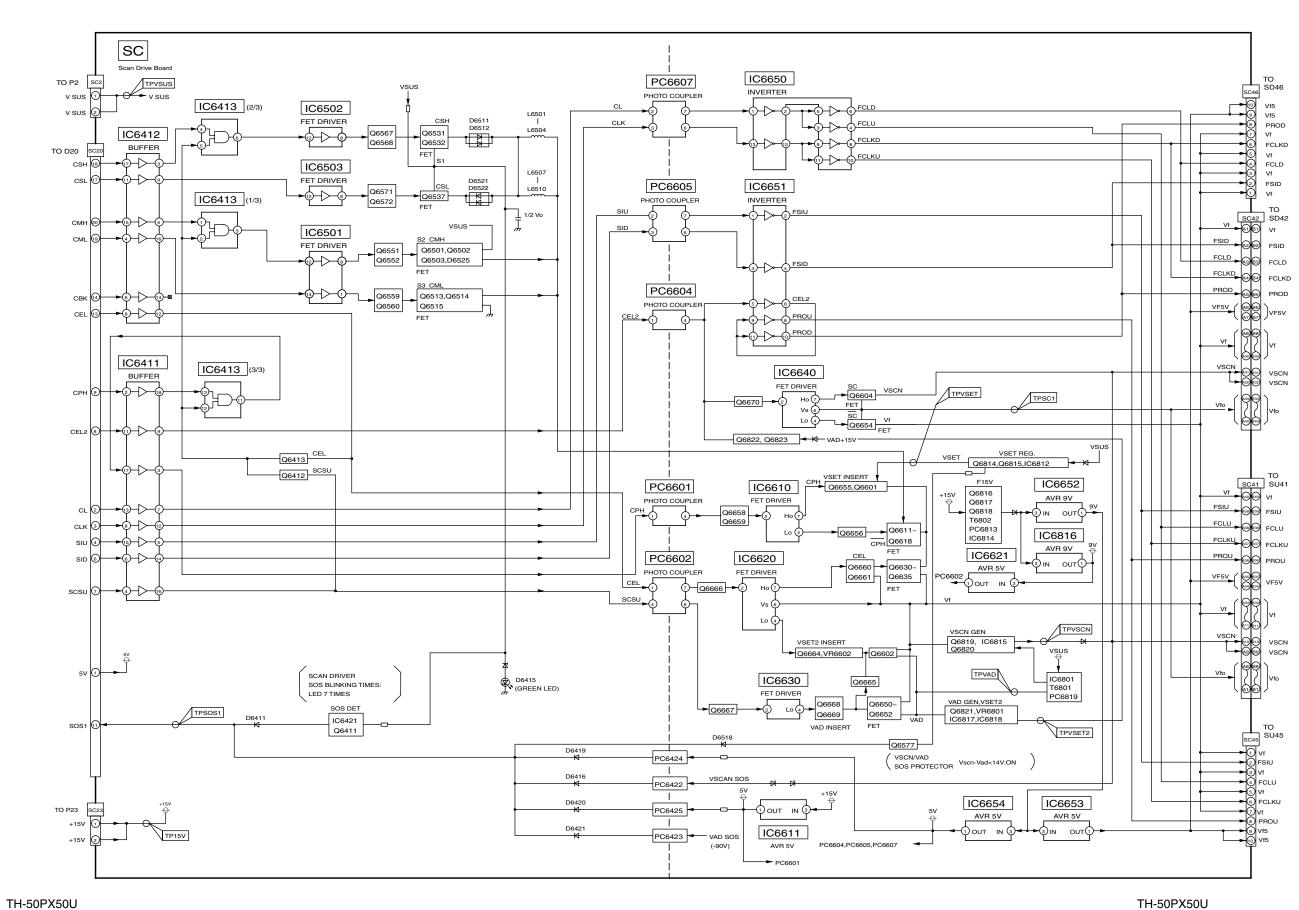


201


# 13.94. SC-Board (1 of 2) Schematic Diagram (50inch)

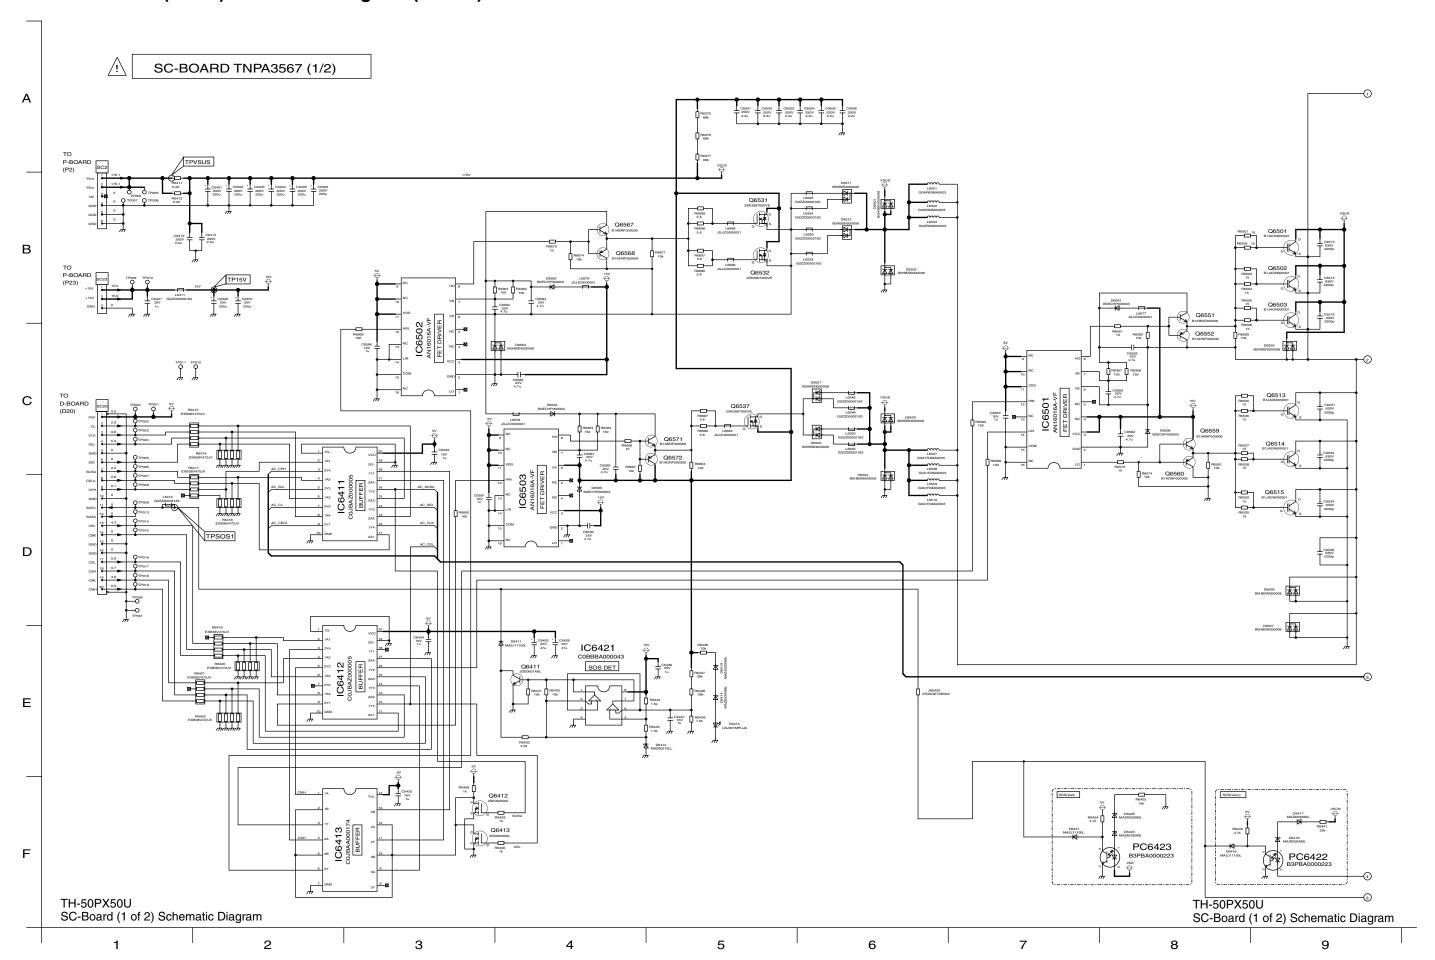

### 13.95. SC-Board (2 of 2) Schematic Diagram (50inch)

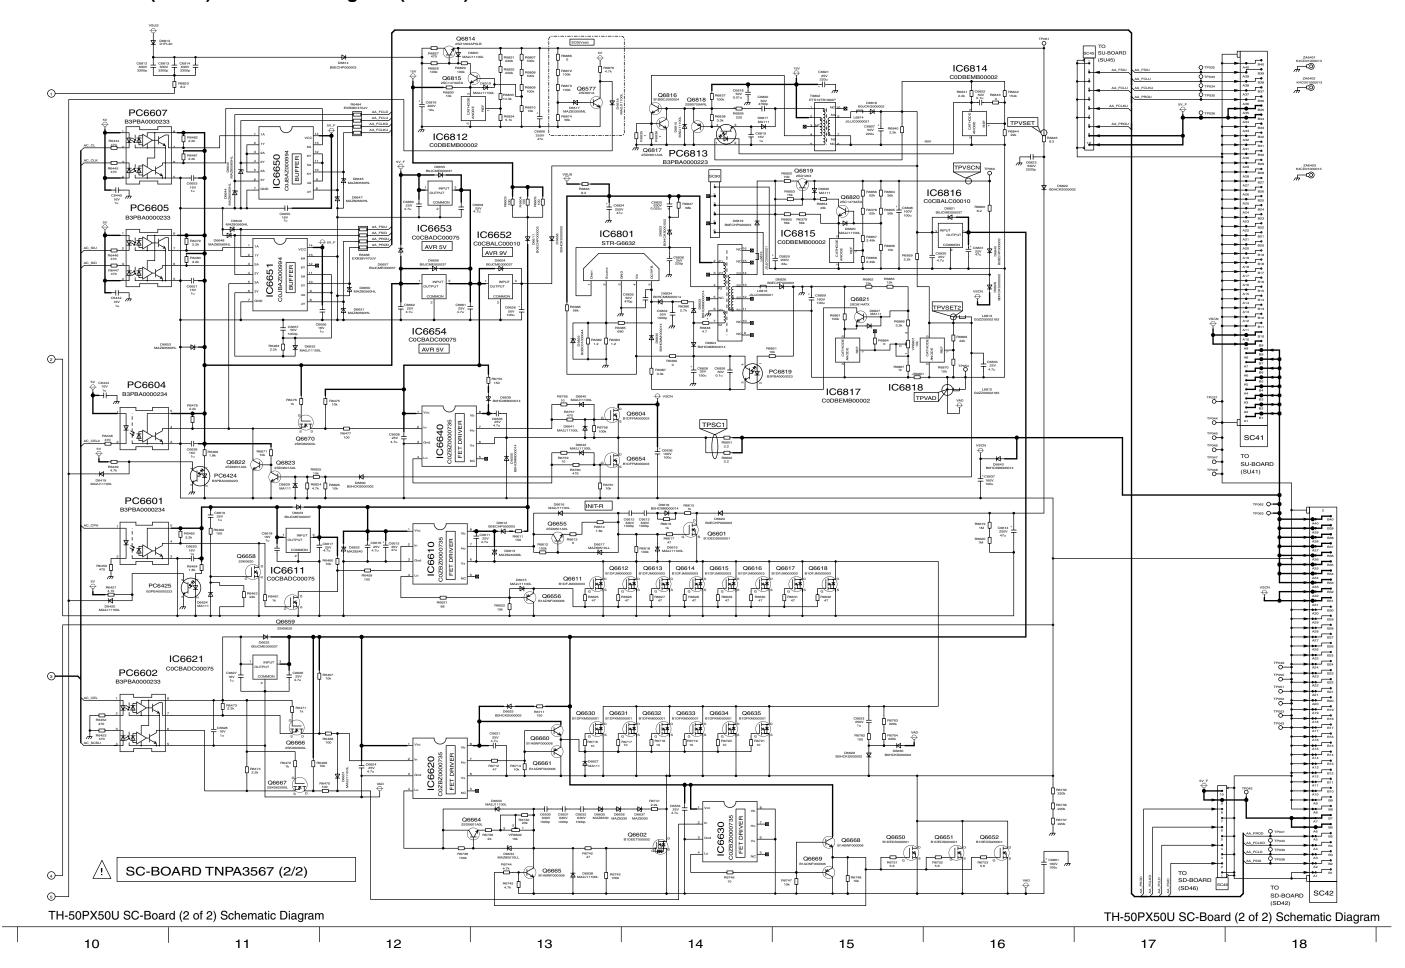



#### 13.96. SU-Board Block Diagram (37inch)

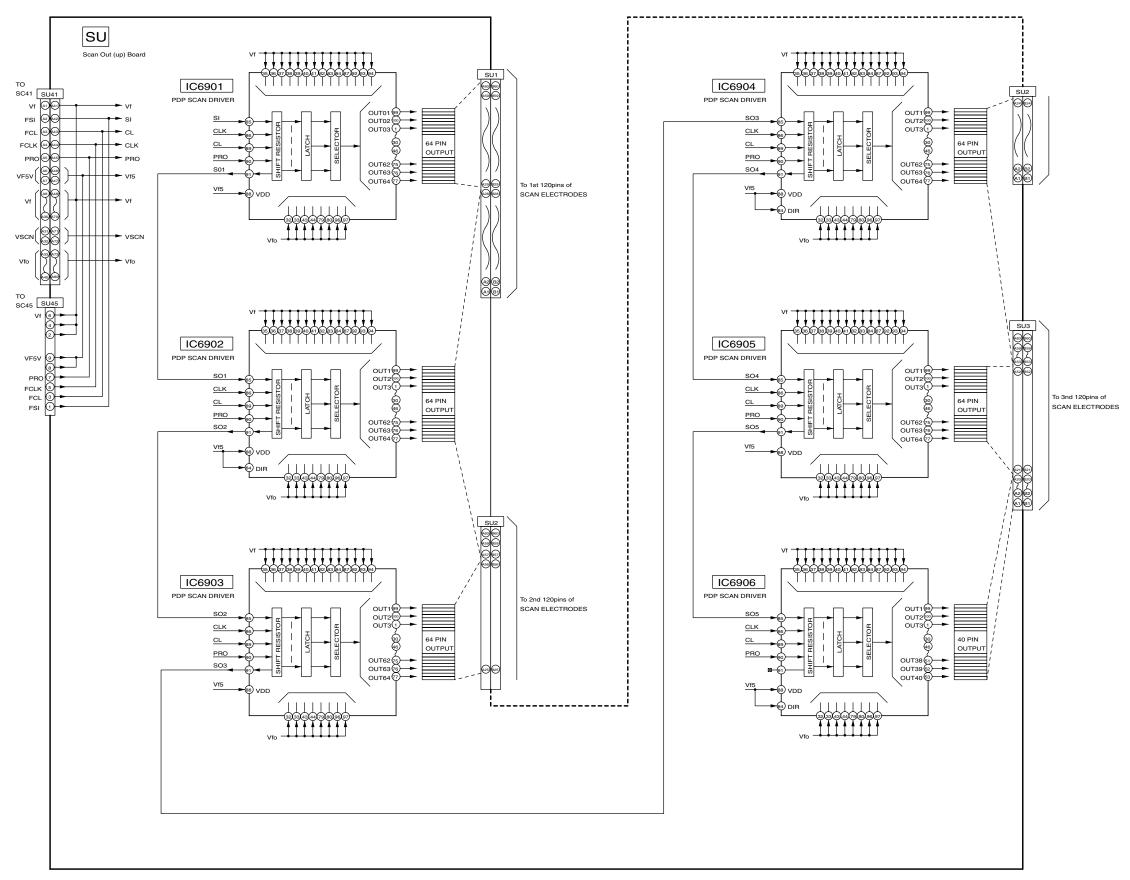


TH-37PX50U SU-Board Block Diagram TH-37PX50U SU-Board Block Diagram

## 13.97. SU-Board (1 of 2) Schematic Diagram (37inch)

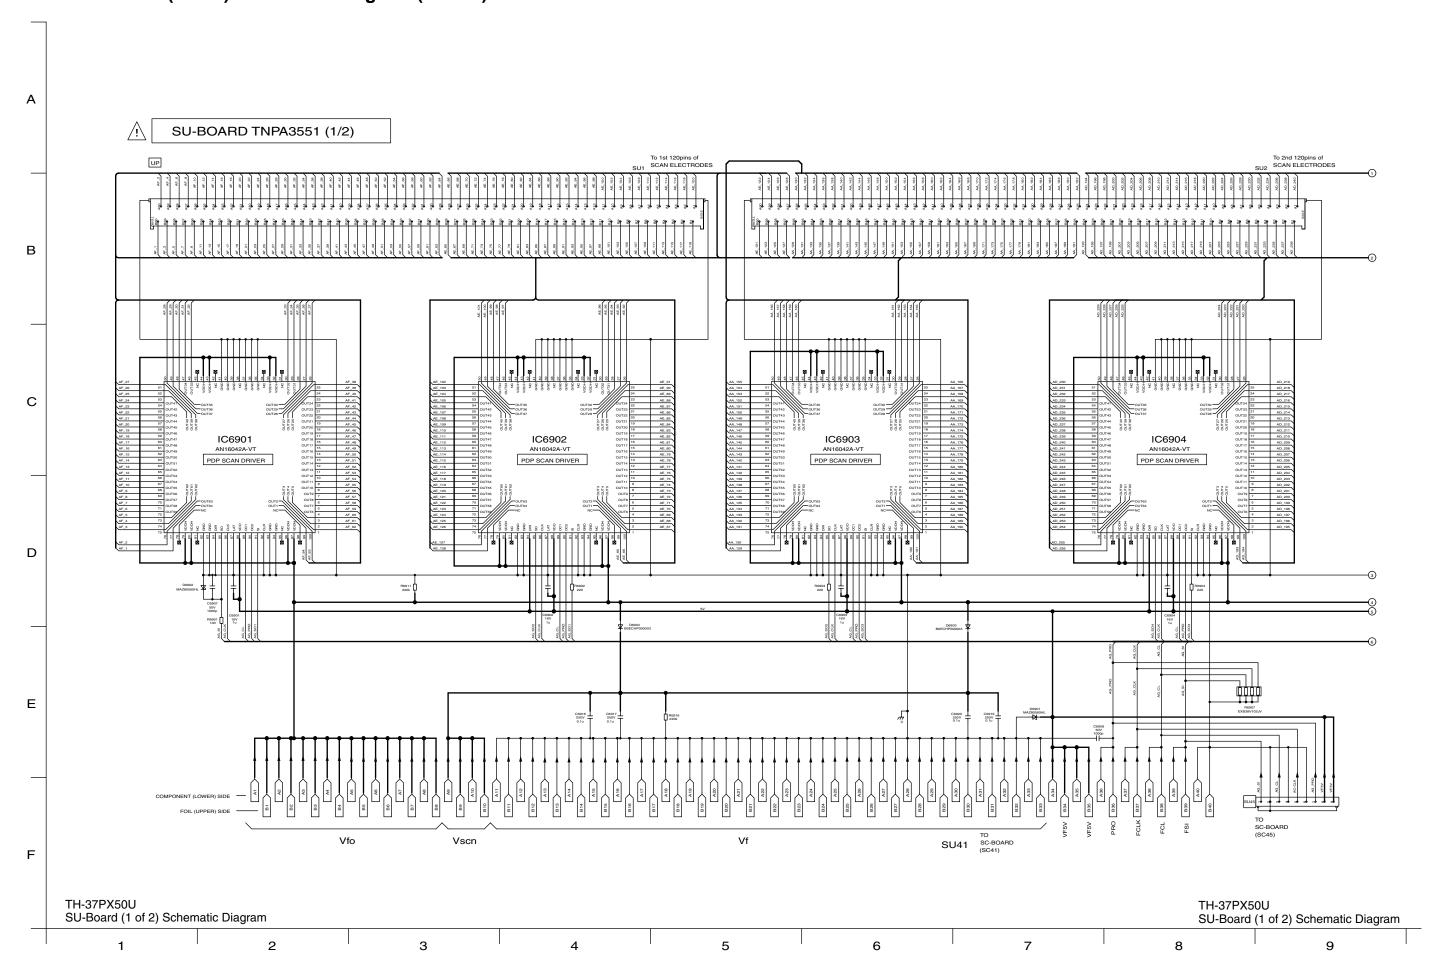

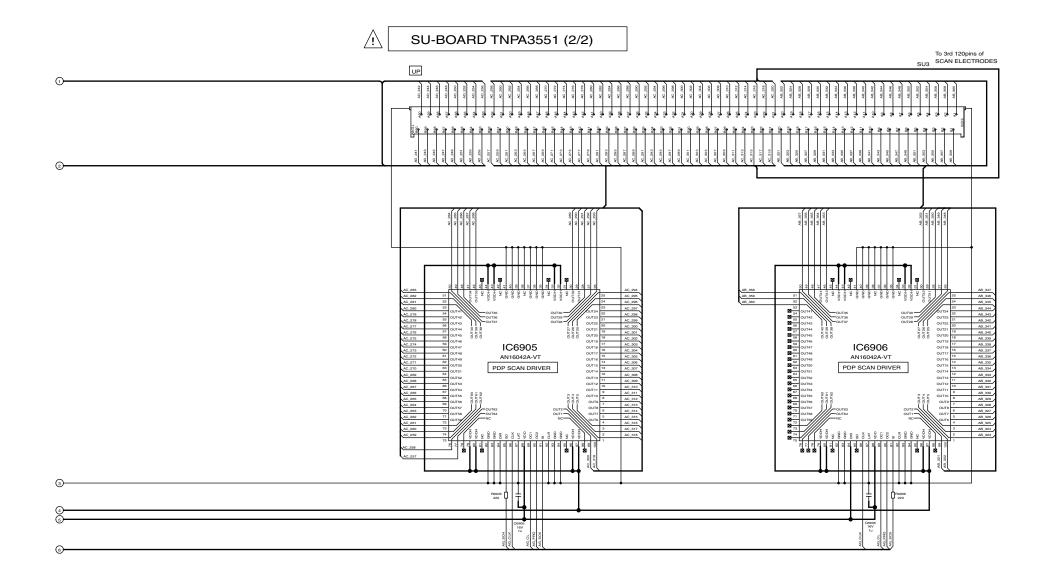




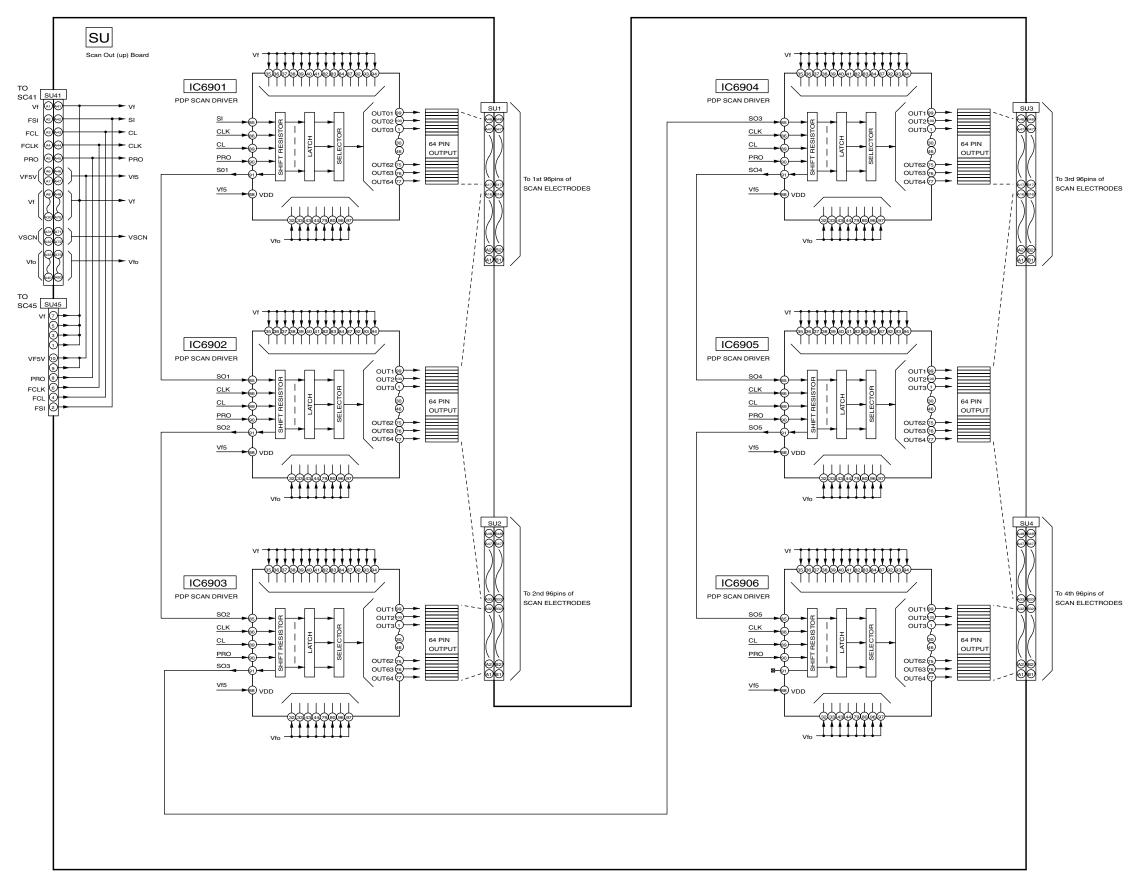



TH-42/50PX50U SU-Board Block Diagram TH-42/50PX50U SU-Board Block Diagram

#### 13.100. SU-Board (1 of 2) Schematic Diagram (42inch)

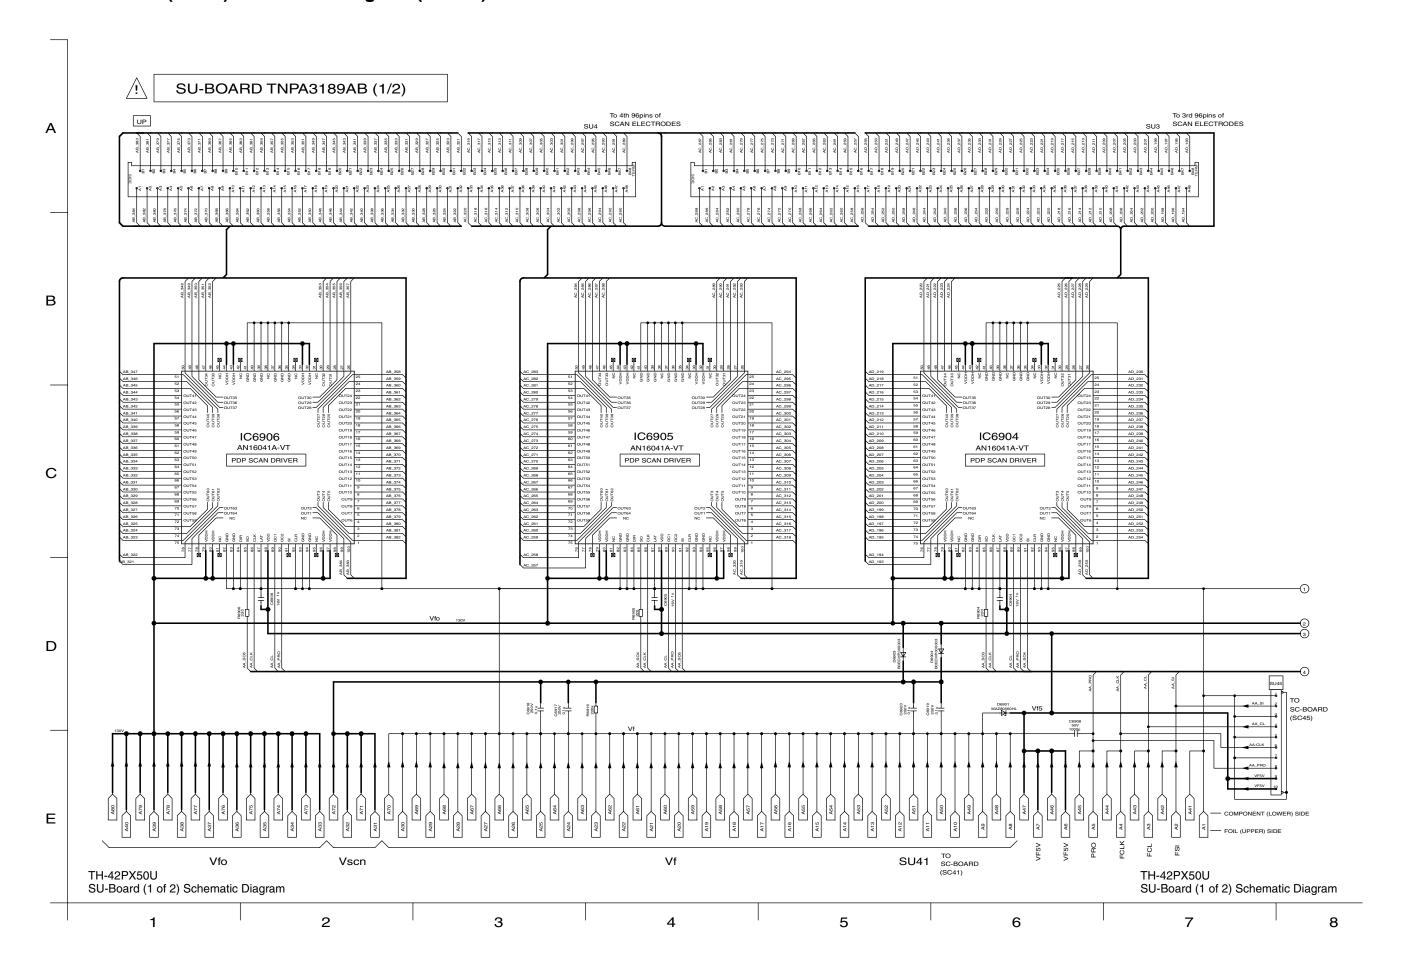


#### 13.101. SU-Board (2 of 2) Schematic Diagram (42inch)

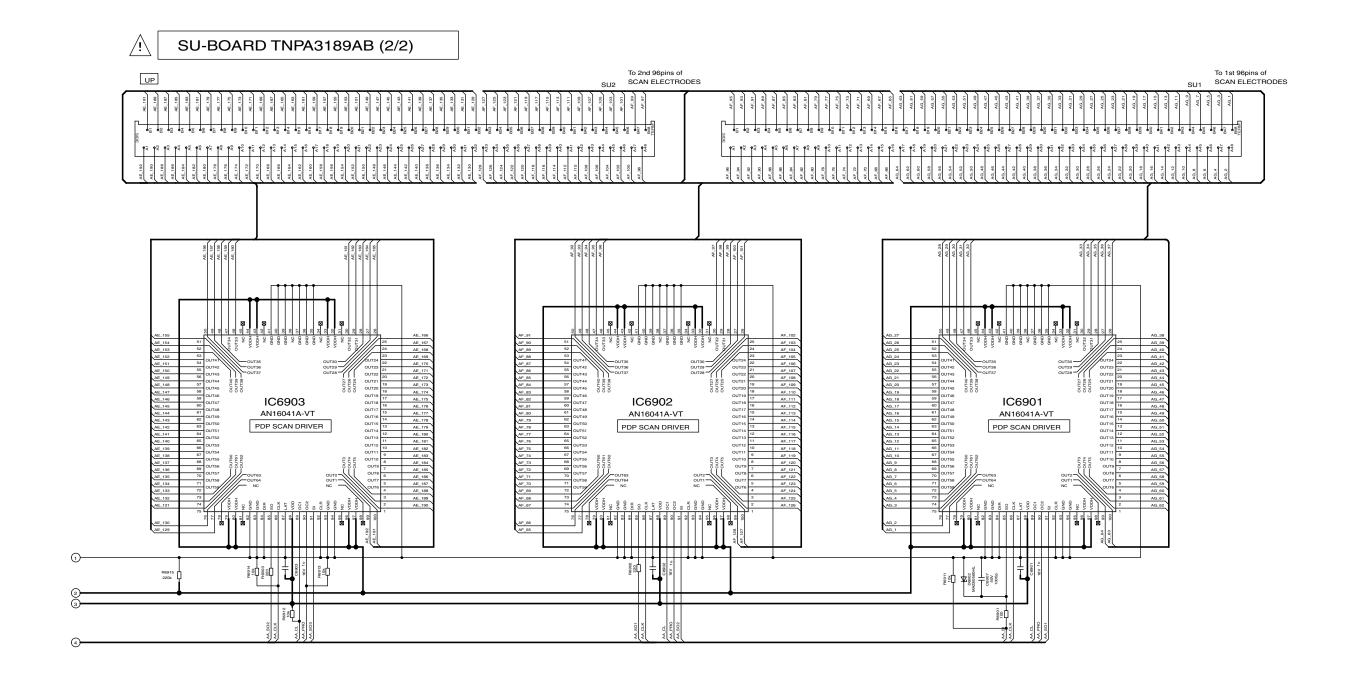





#### 13.102. SU-Board (1 of 2) Schematic Diagram (50inch)

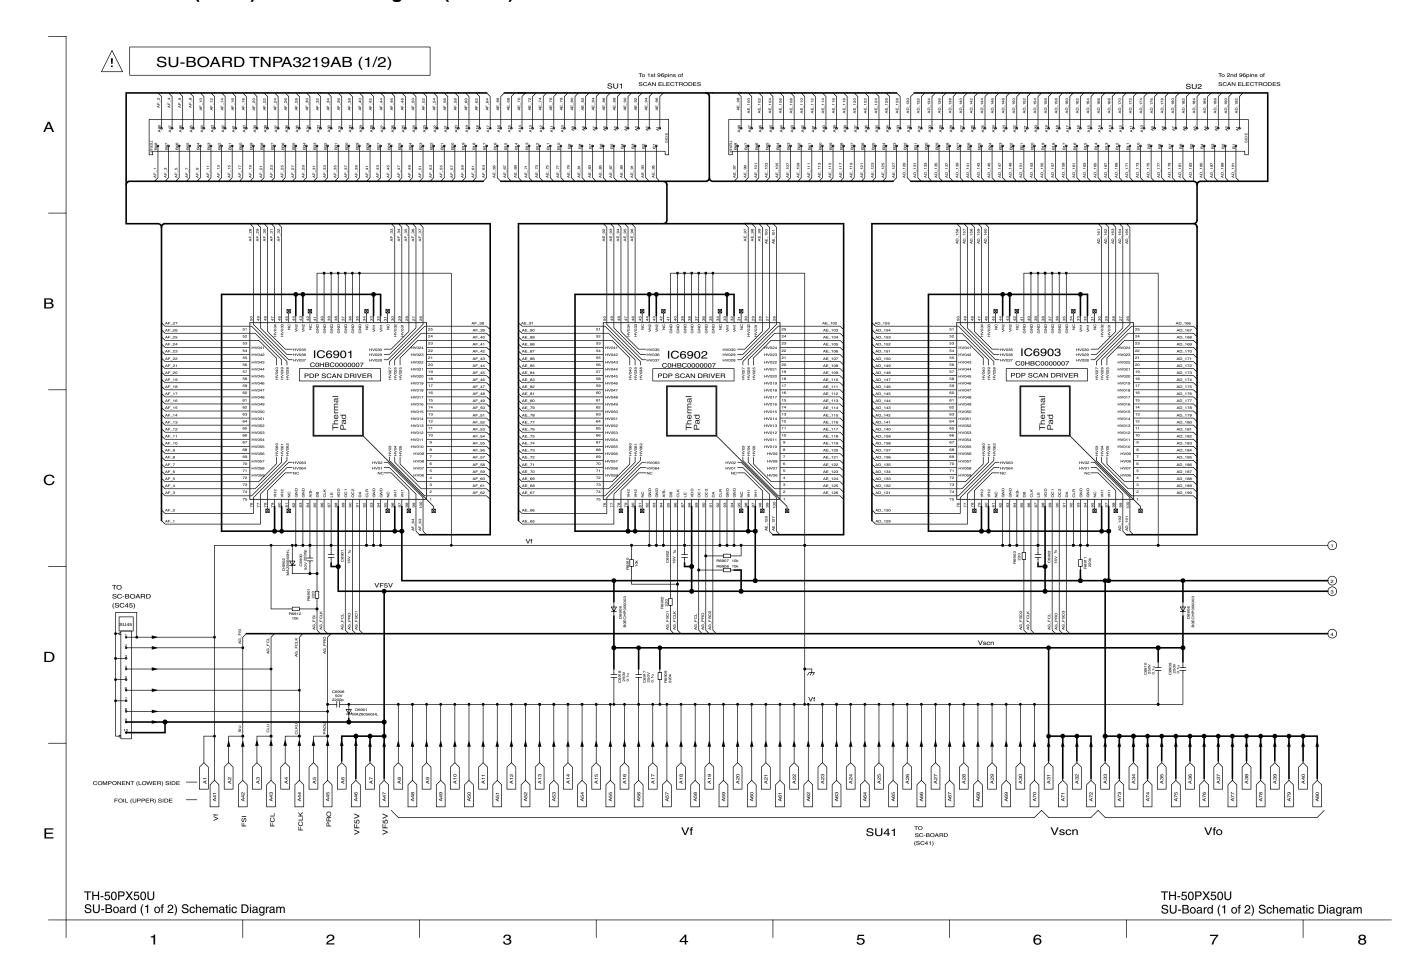


#### 13.103. SU-Board (2 of 2) Schematic Diagram (50inch)

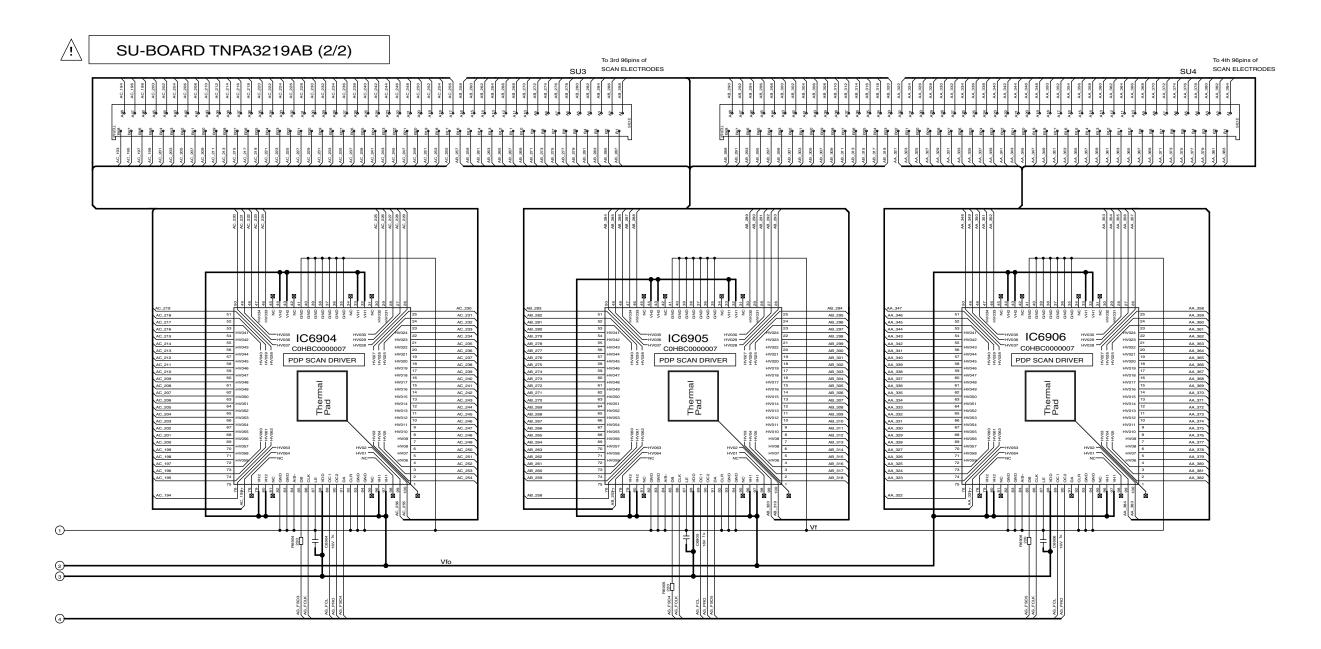




#### 13.104. SD-Board Block Diagram (37inch)

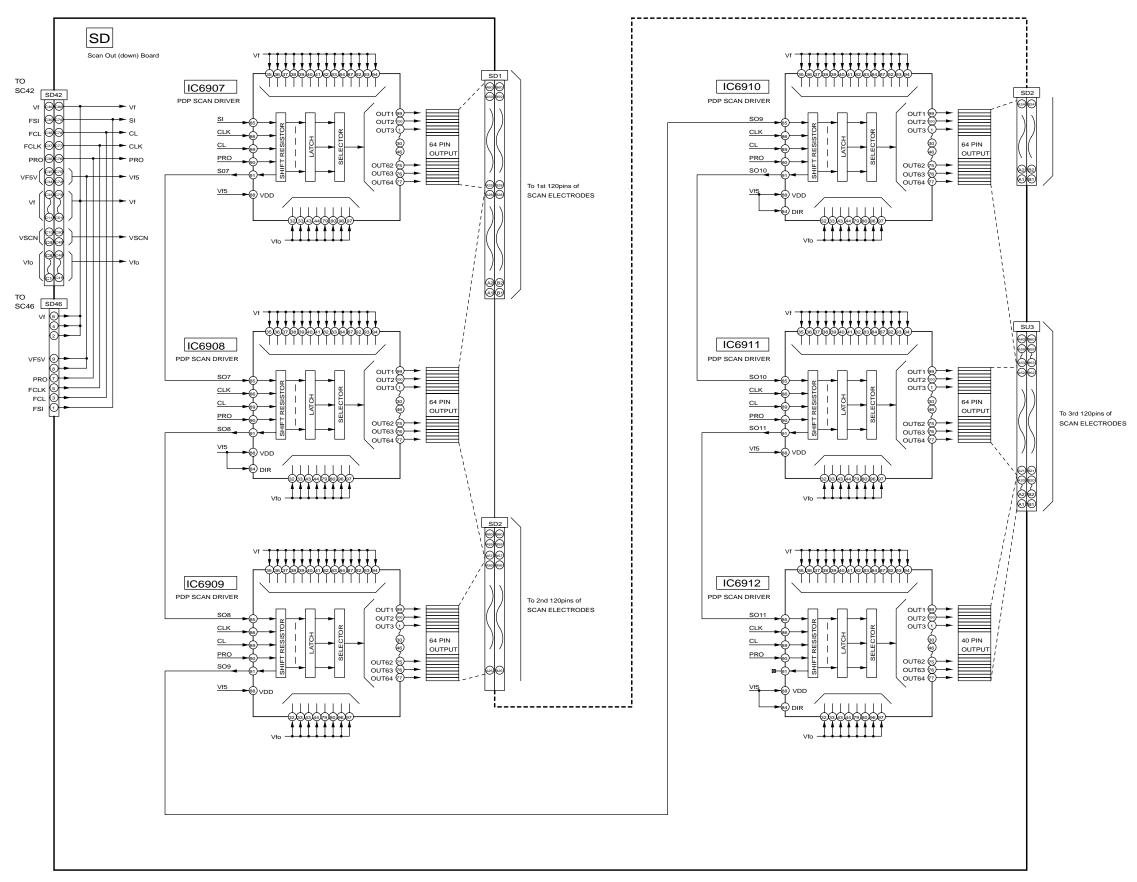


TH-37PX50U SD-Board Block Diagram TH-37PX50U SD-Board Block Diagram

### 13.105. SD-Board (1 of 2) Schematic Diagram (37inch)

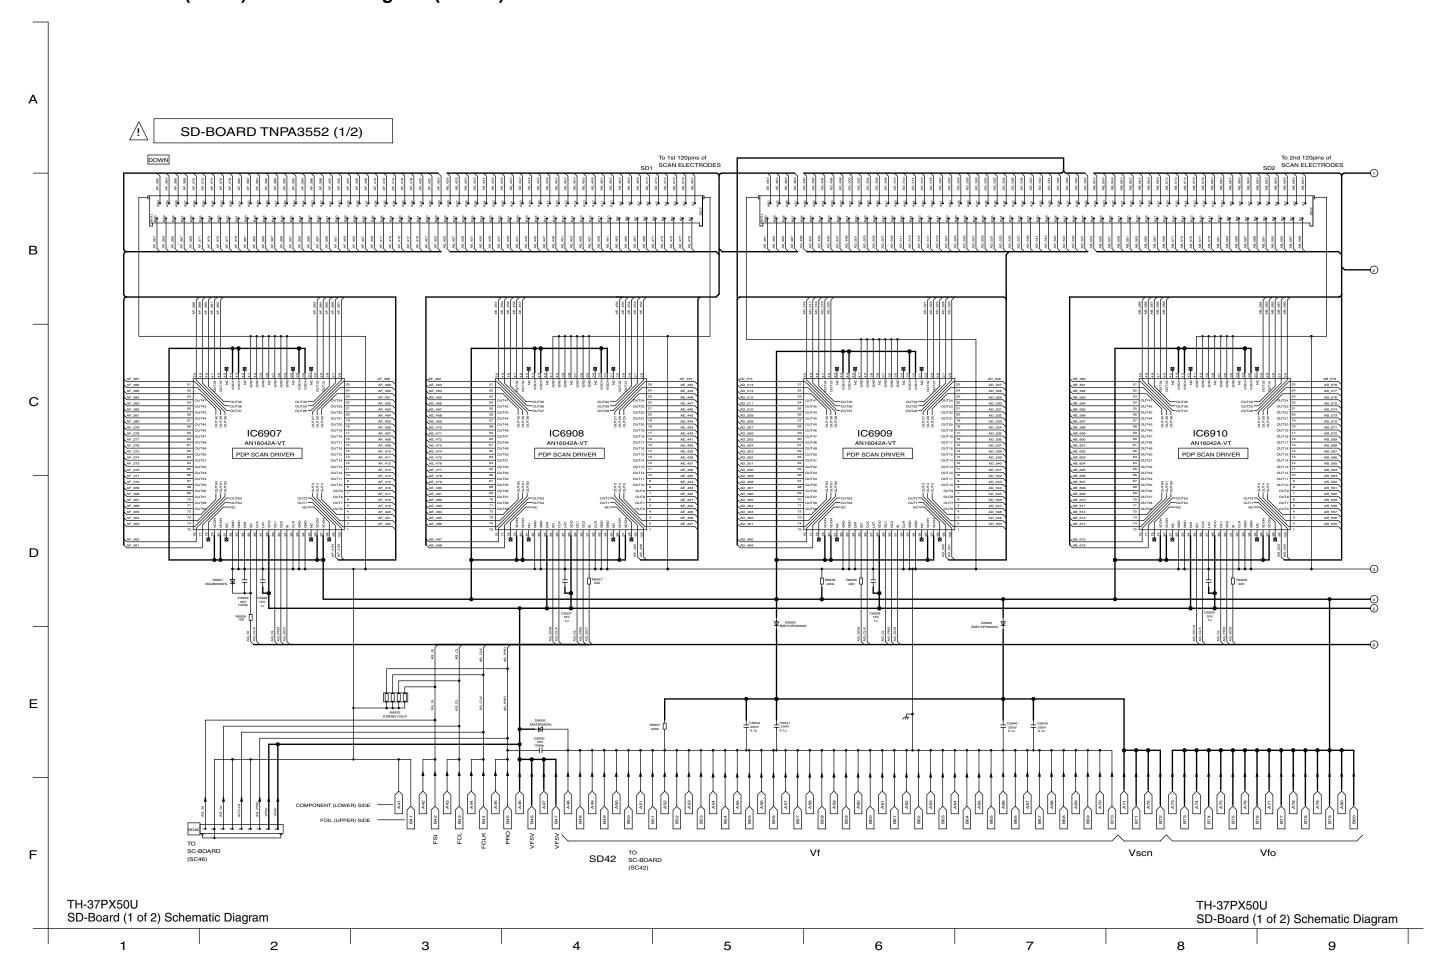


## 13.106. SD-Board (2 of 2) Schematic Diagram (37inch)

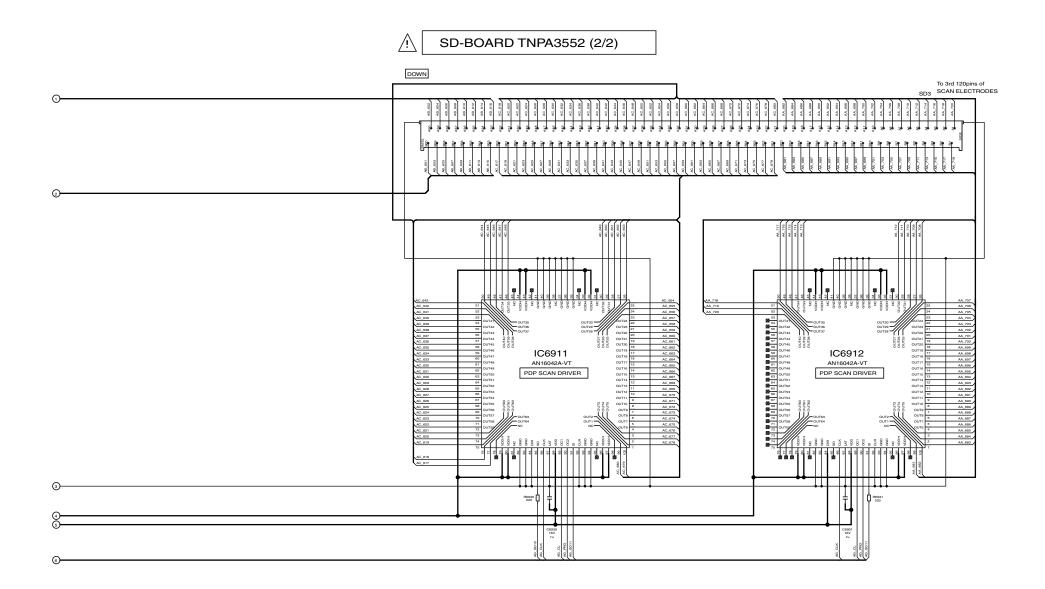




#### 13.107. SD-Board Block Diagram (42, 50inch)

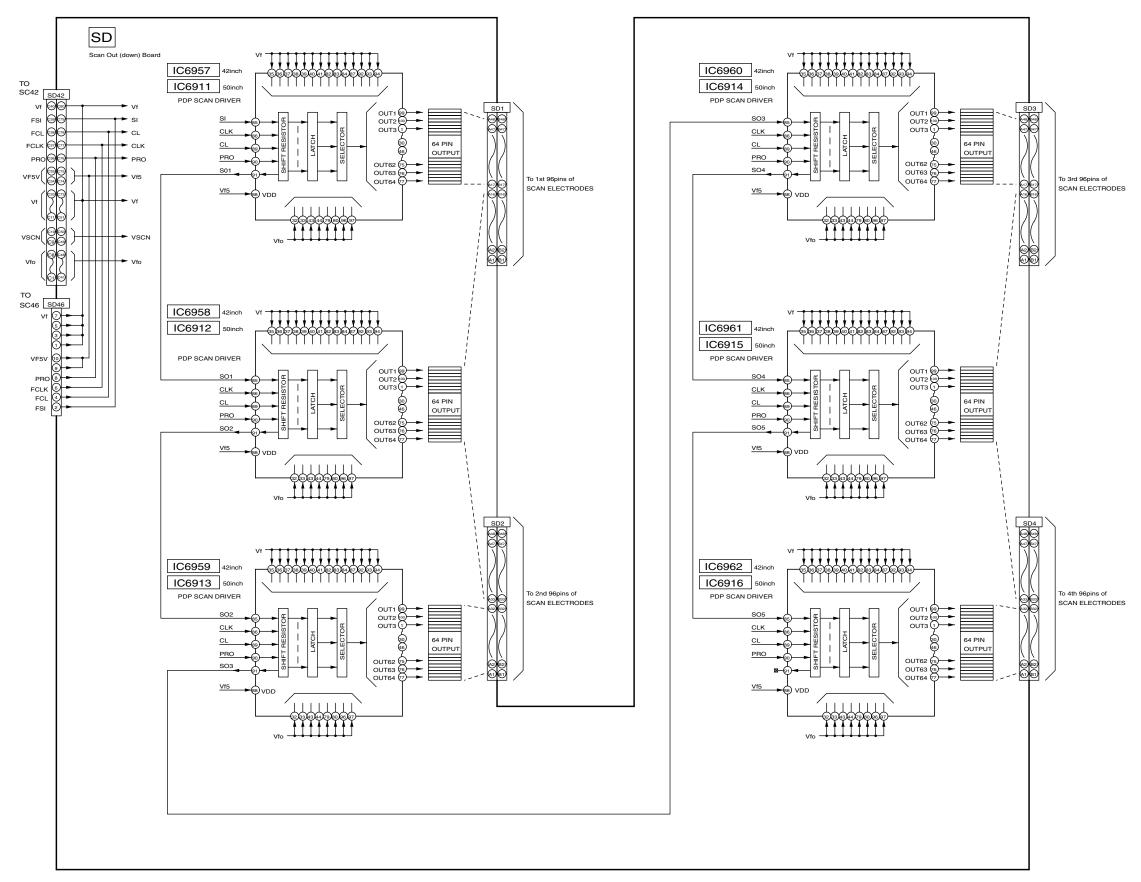



TH-42/50PX50U SD-Board Block Diagram TH-42/50PX50U SD-Board Block Diagram

#### 13.108. SD-Board (1 of 2) Schematic Diagram (42inch)

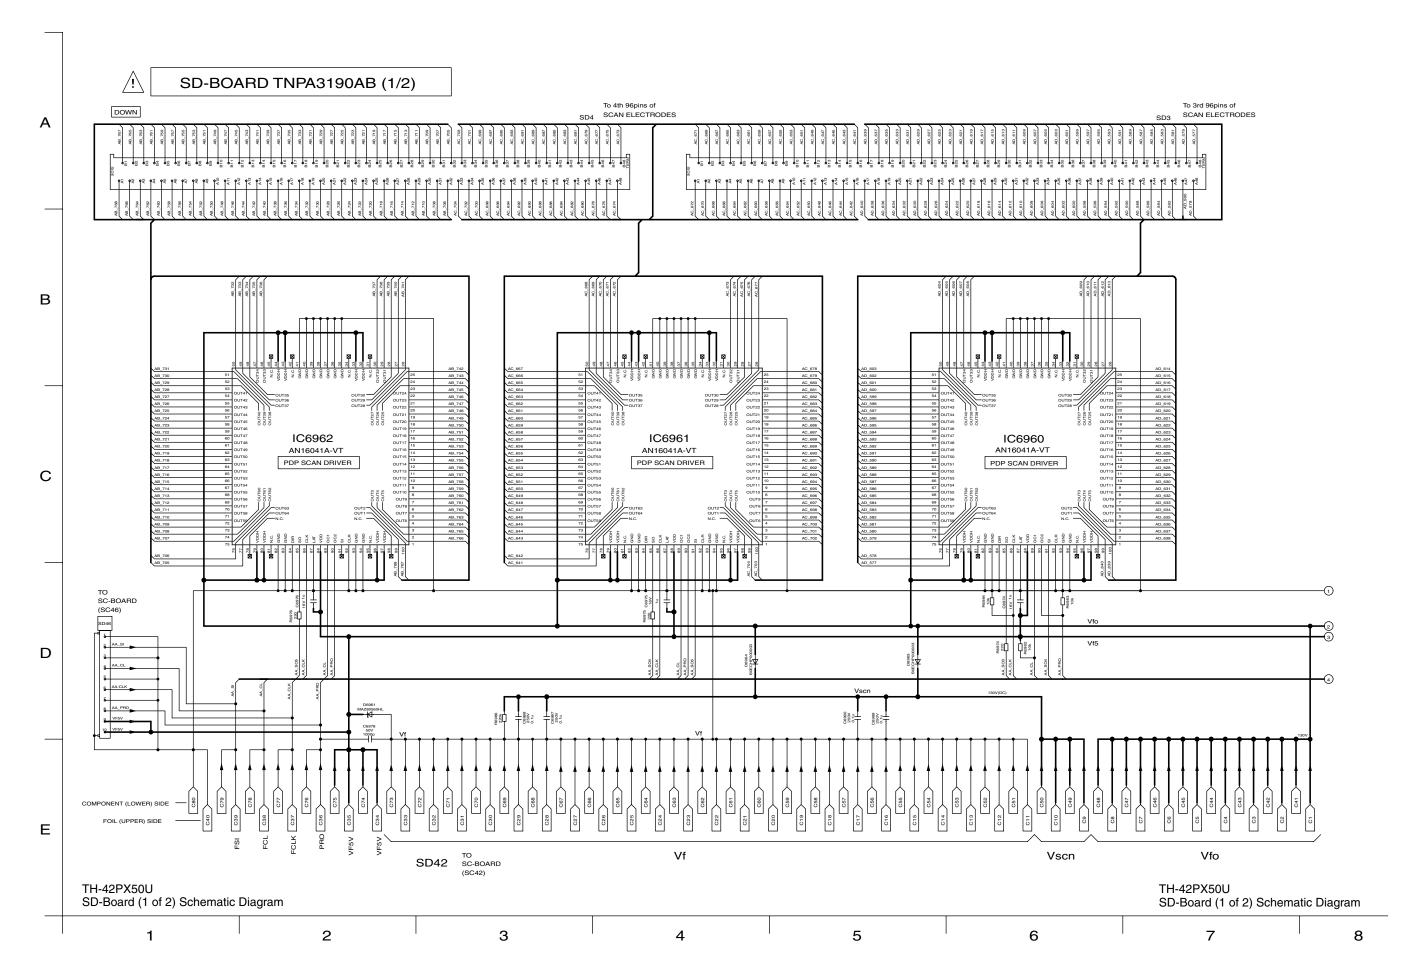


# 13.109. SD-Board (2 of 2) Schematic Diagram (42inch)

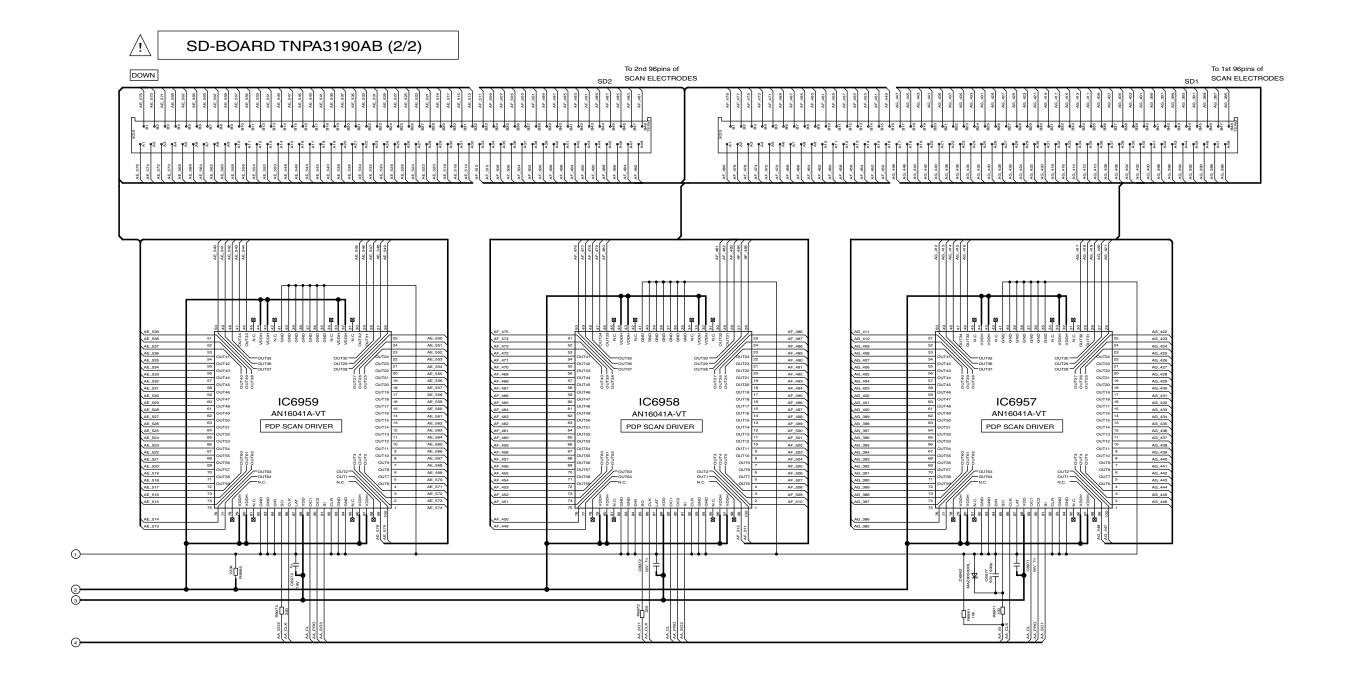




# 13.110. SD-Board (1 of 2) Schematic Diagram (50inch)

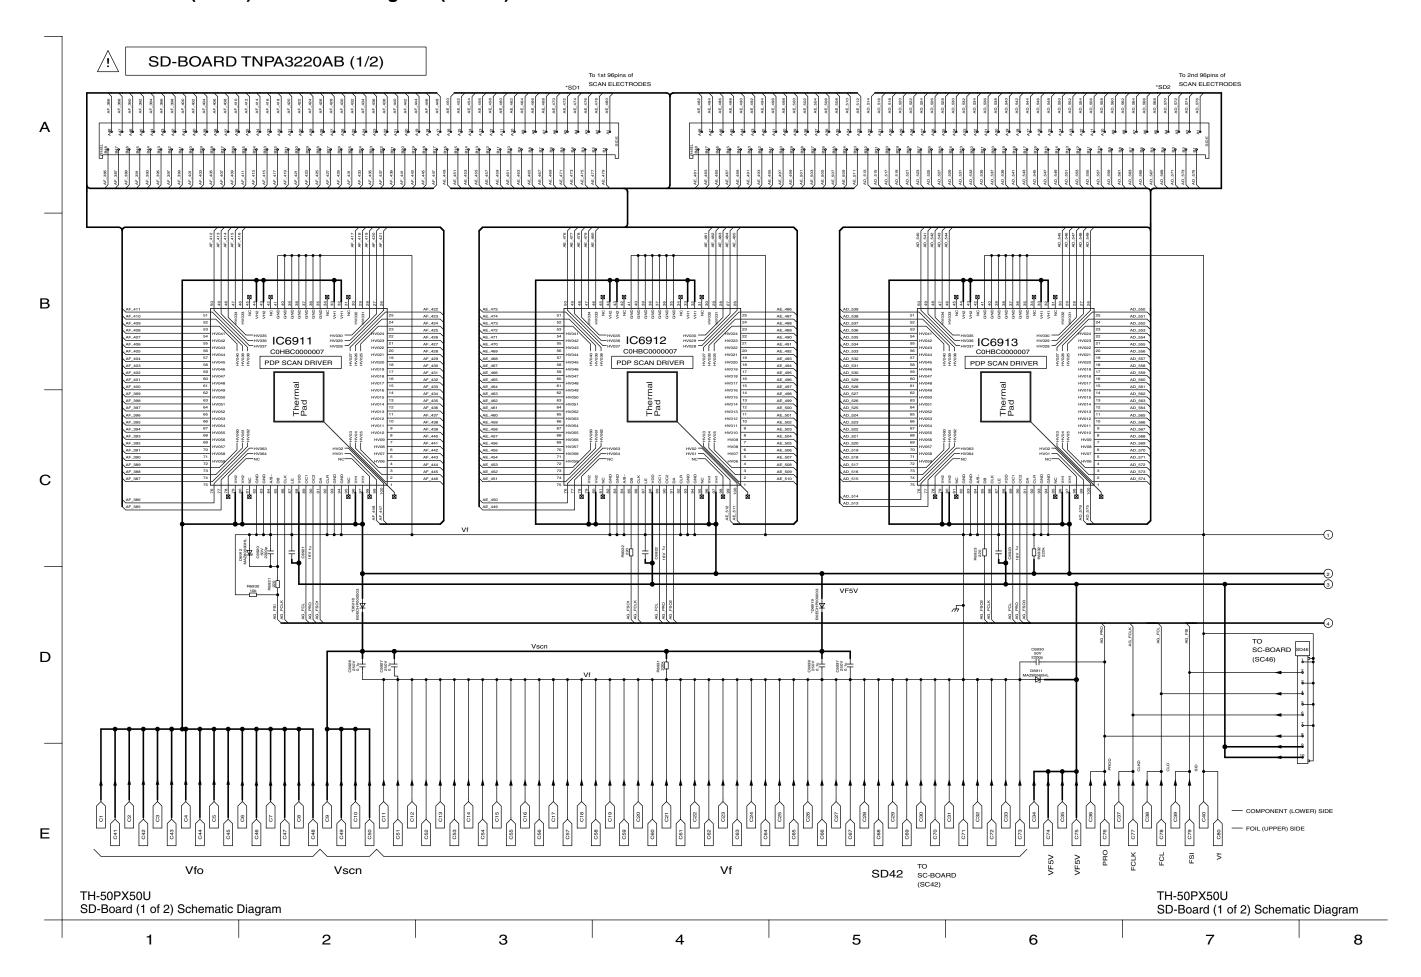


# 13.111. SD-Board (2 of 2) Schematic Diagram (50inch)

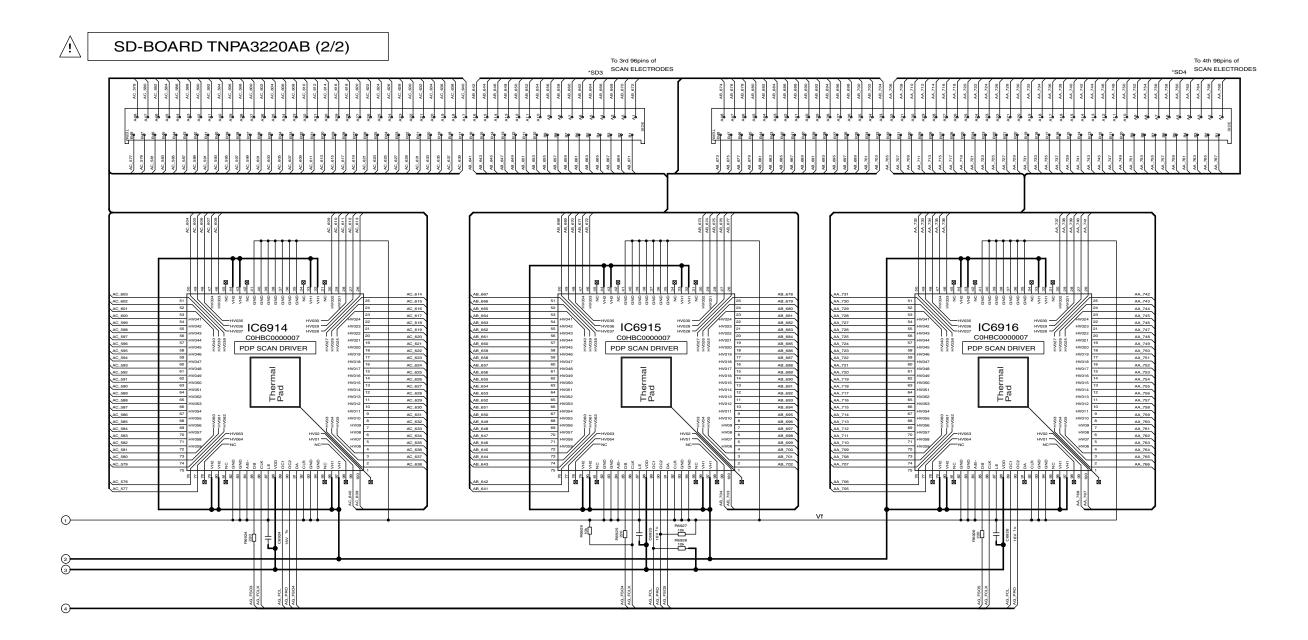




# 13.112. SS-Board Block Diagram (37inch)

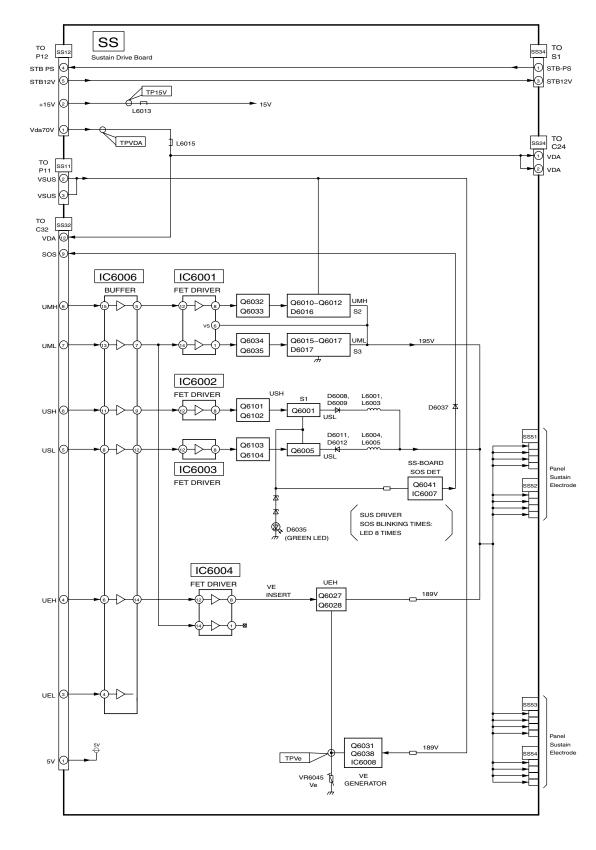


TH-37PX50U SS-Board Block Diagram TH-37PX50U SS-Board Block Diagram


# 13.113. SS-Board Schematic Diagram (37inch)

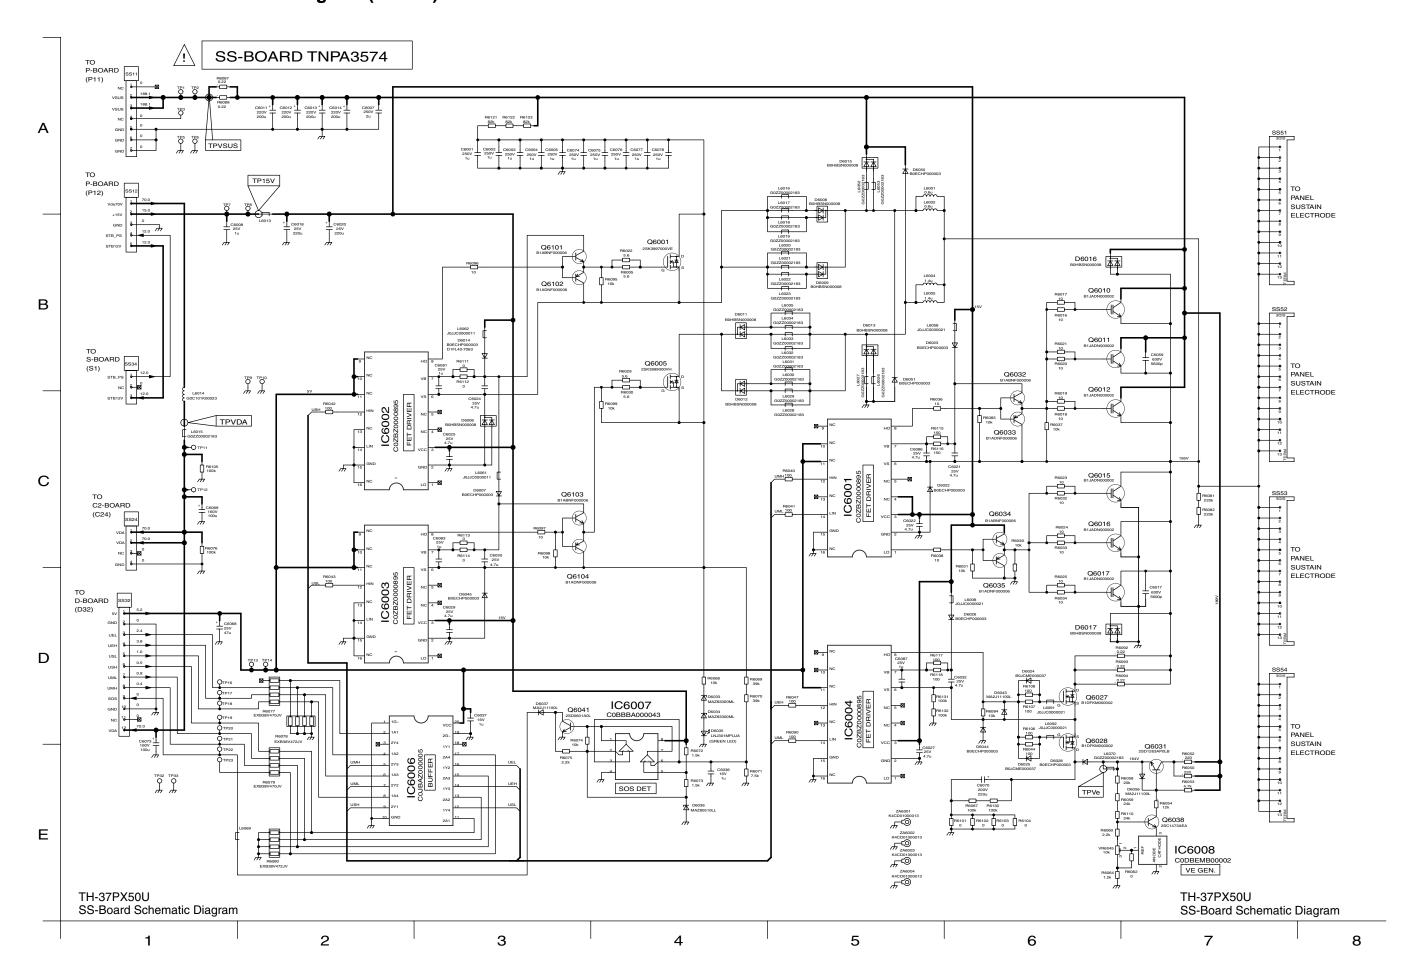


# 13.114. SS, SS2 and SS3-Board Block Diagram (42inch)

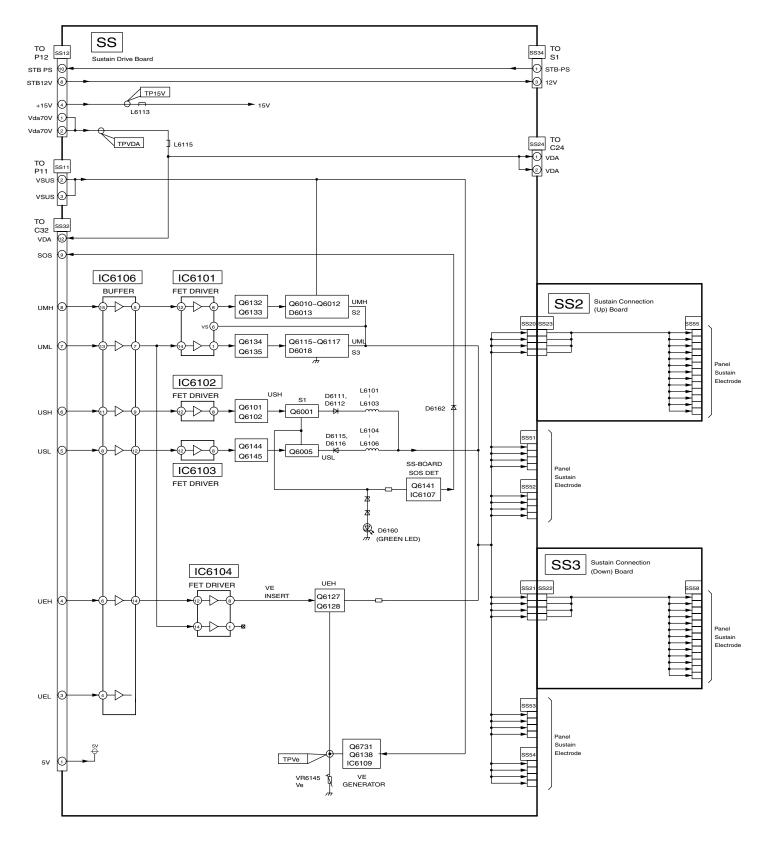

# 13.115. SS, SS2 and SS3-Board Schematic Diagram (42inch)

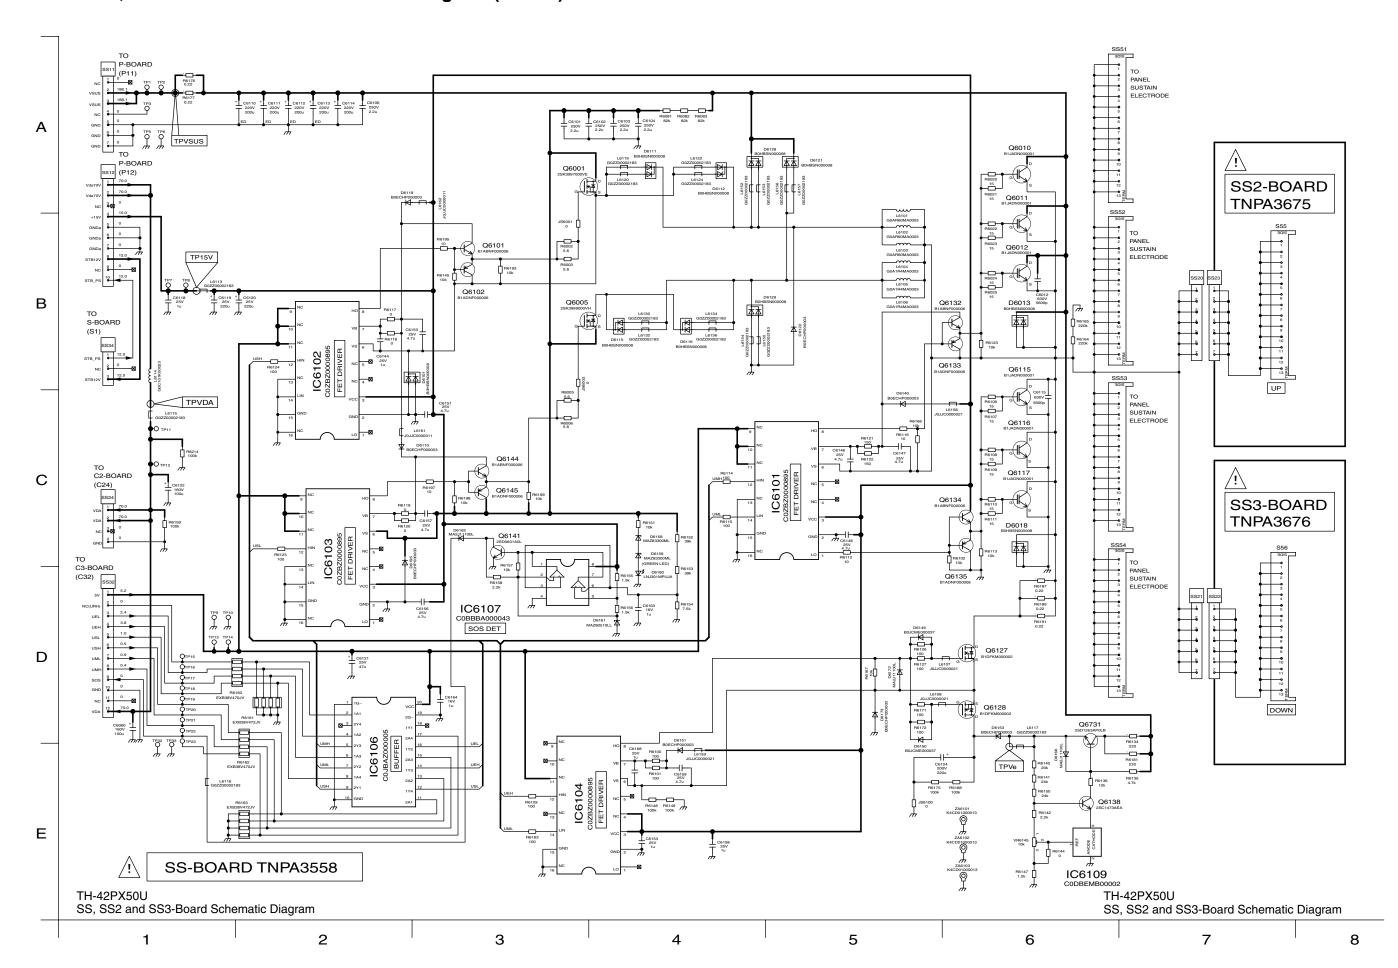


# 13.116. SS, SS2 and SS3-Board Block Diagram (50inch)

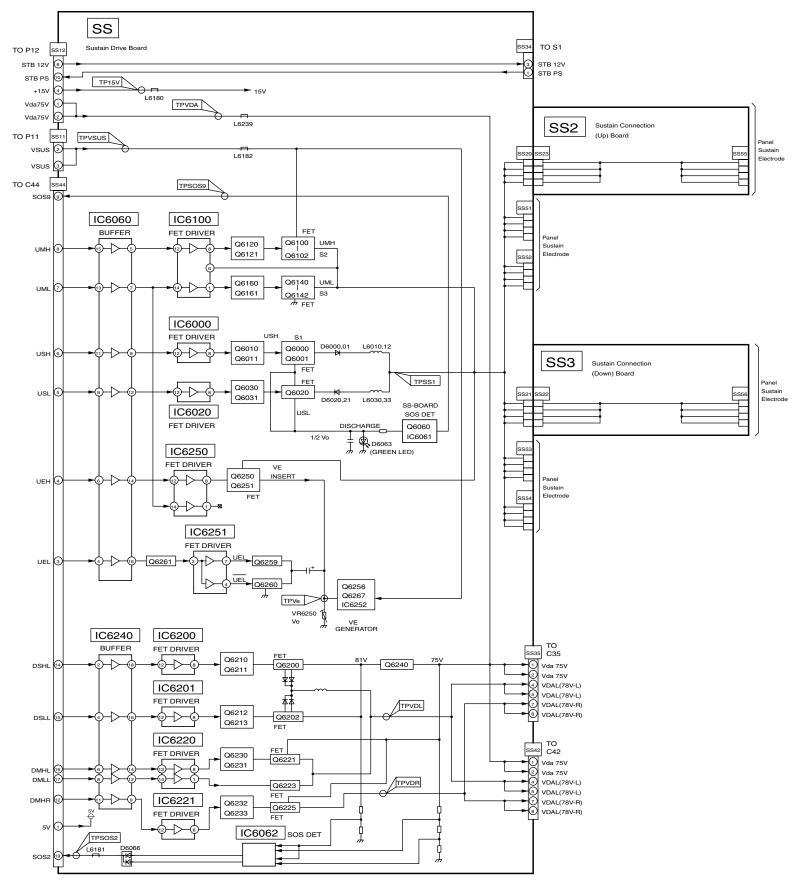


TH-50PX50U SS, SS2 and SS3-Board Block Diagram

# 13.117. SS-Board (1 of 2), SS2 and SS3 Schematic Diagram (50inch)

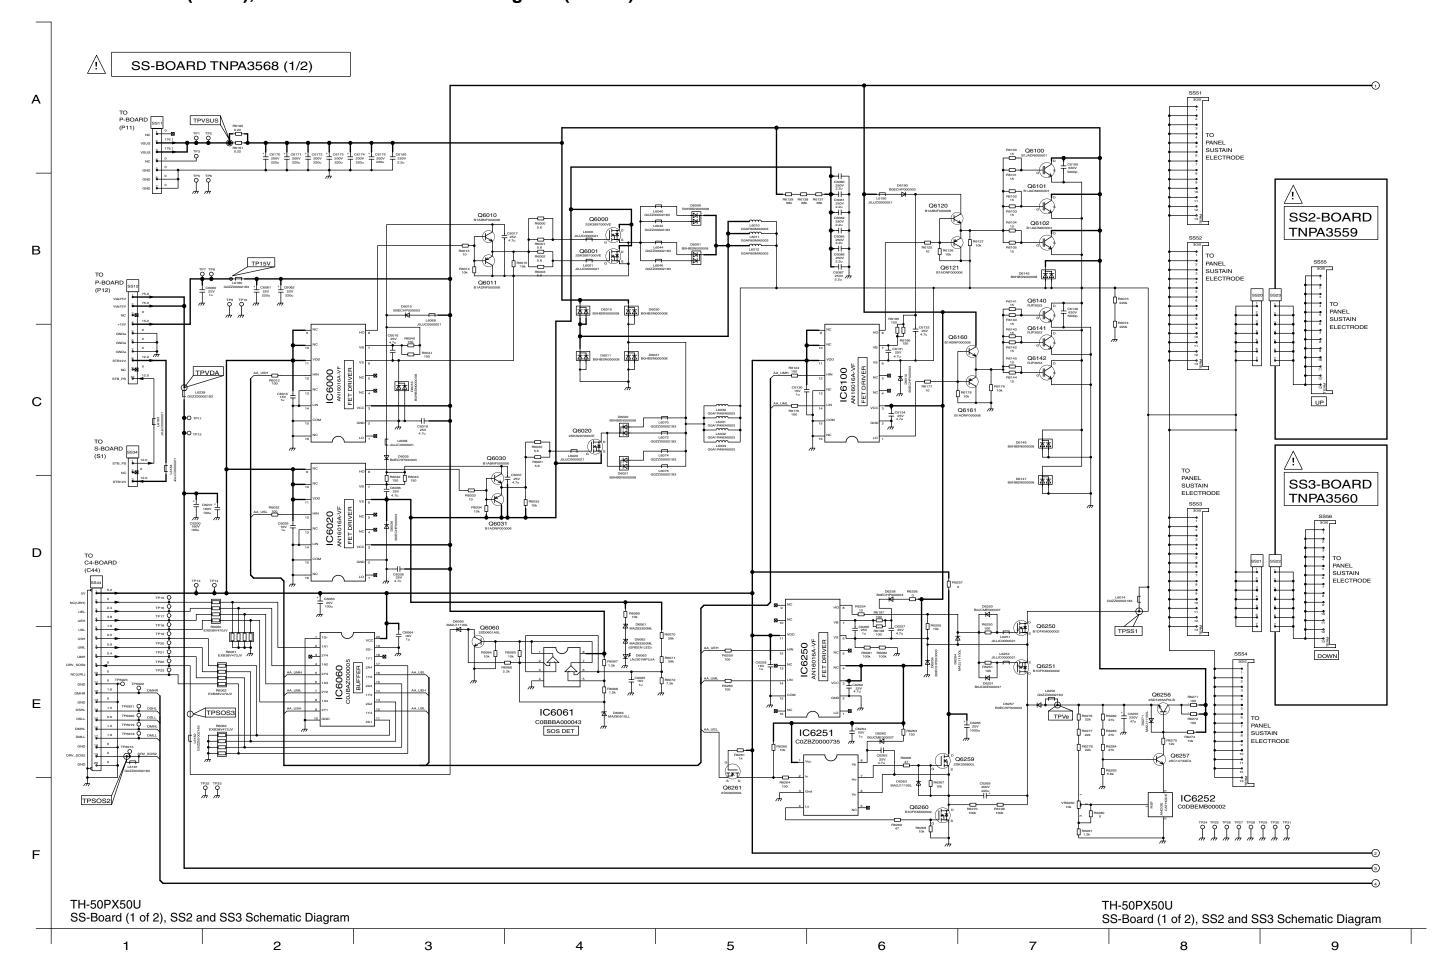


# 13.118. SS-Board (2 of 2) Schematic Diagram (50inch)

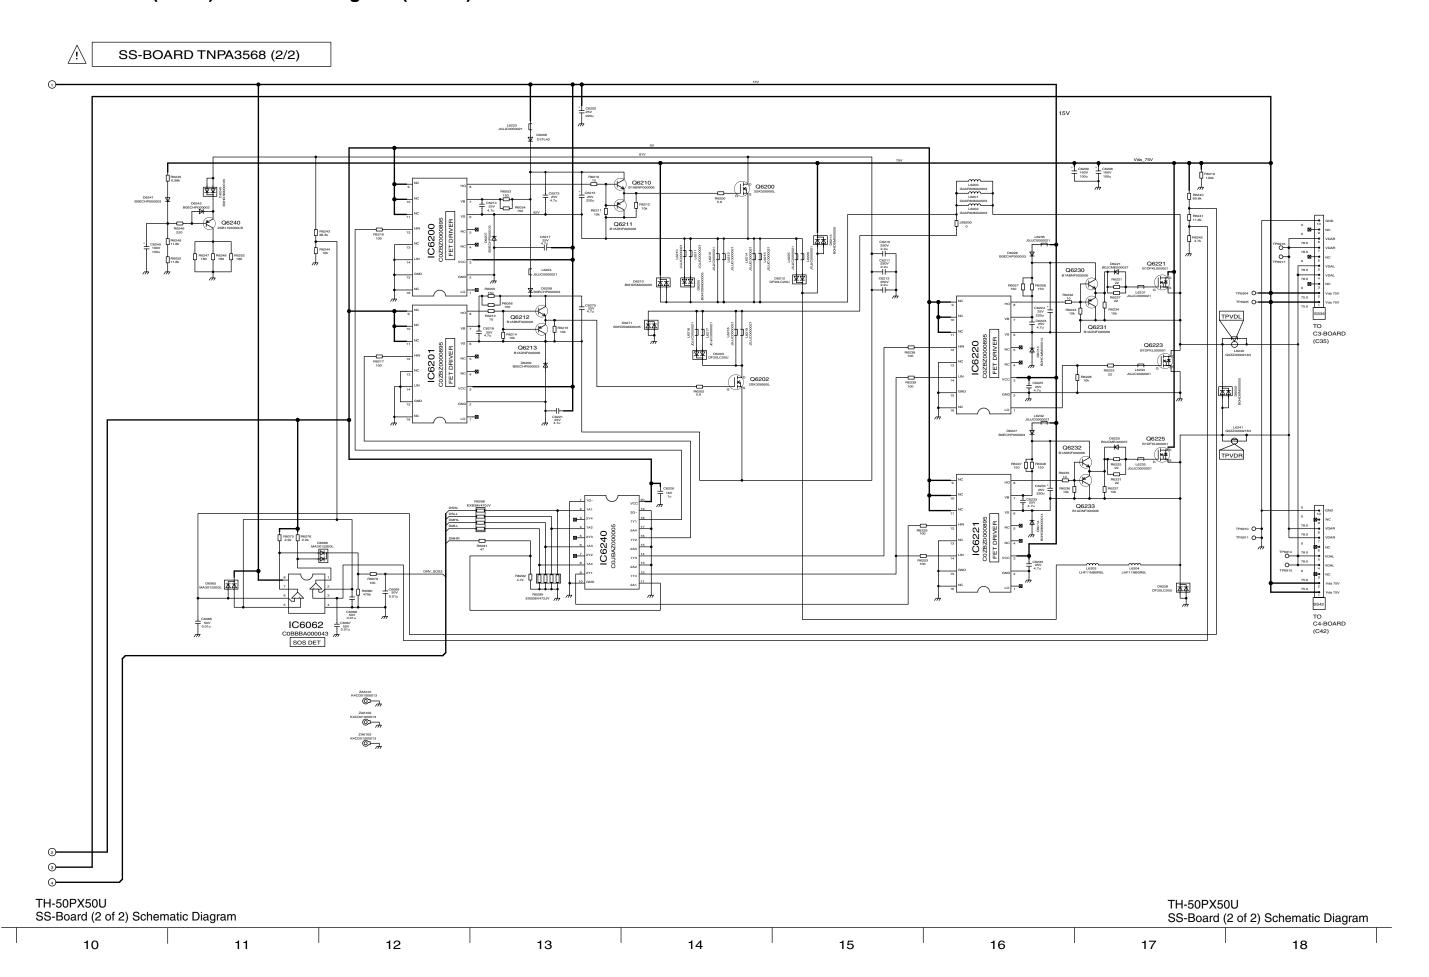


# 14 Parts Location & Mechanical Replacement Parts List


## 14.1. Parts Location

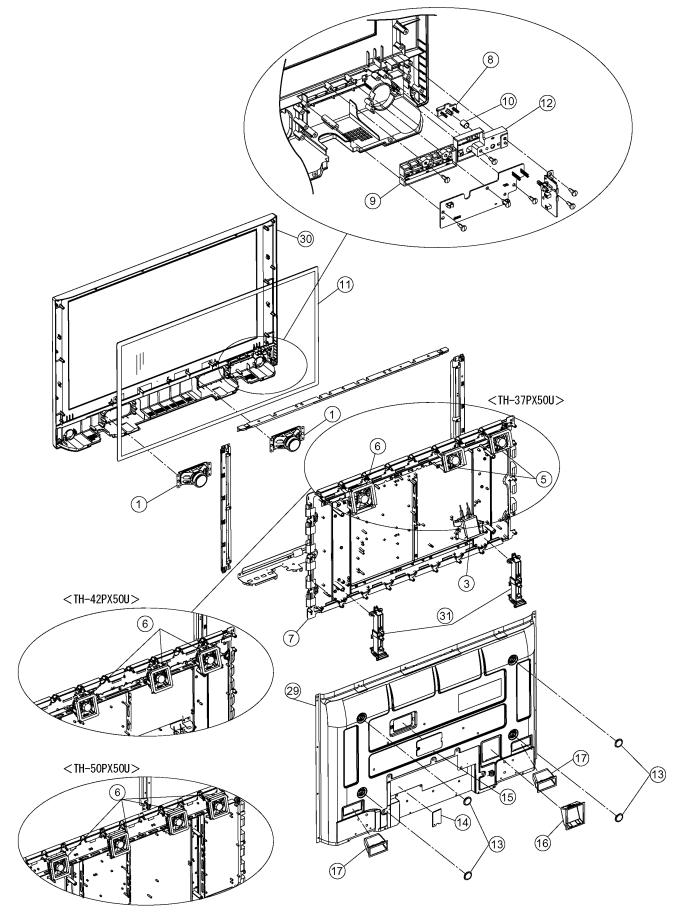


# 14.2. Pcaking Exploded Views (1)

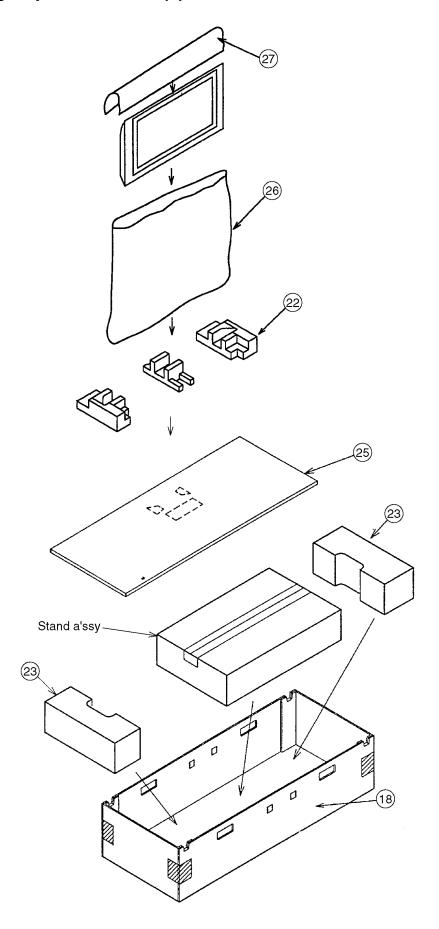

# 14.3. Pcaking Exploded Views (2)

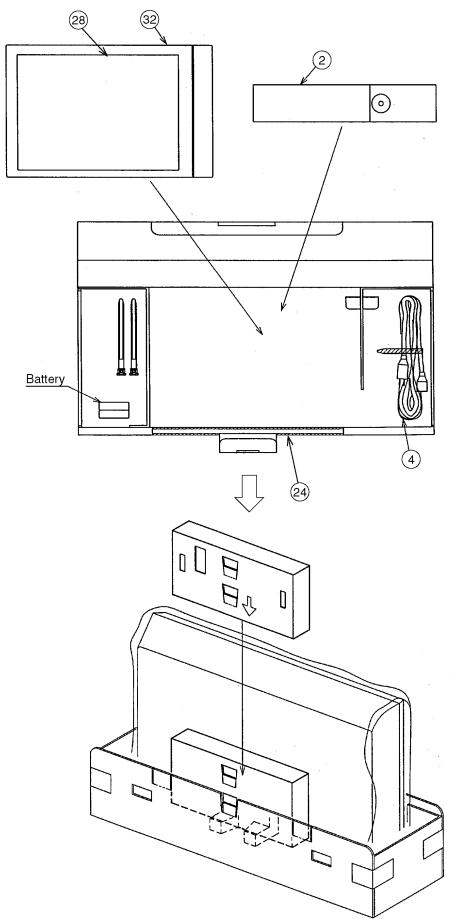

# TH-37PX50U / TH-42PX50U / TH-50PX50U 14.4. Pcaking Exploded Views (3)

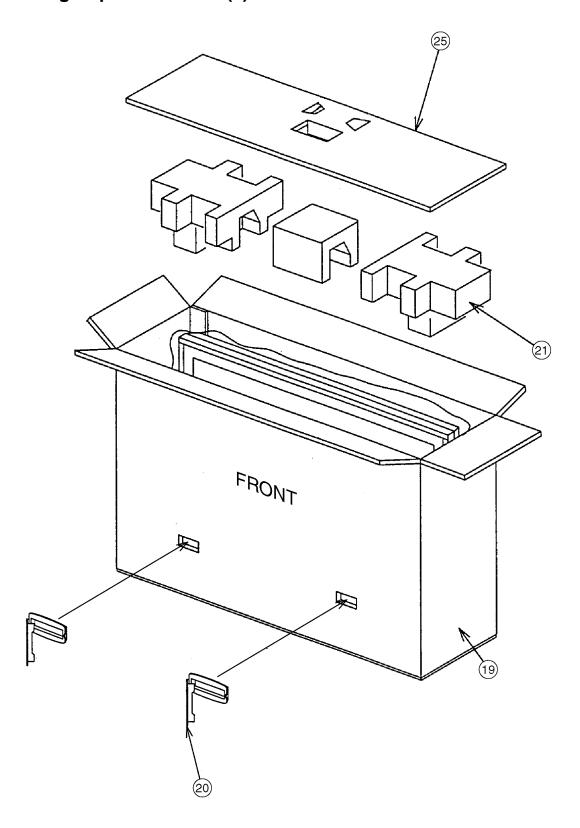

# 14.5. Mechanical Replacement Parts List

#### Note:

All parts except parts mentioned [PAVCA] in the Remarks column are supplied by AVC-SPC.

Parts mentioned [PAVCA] are supplied by PAVCA.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
1	EAS12S08A	SPEAKER	2	
2	EUR7627Z60	REMOTE CONTROL	1	
	J0KD00000095	FLAT CORE	4	TH-37/42PX50U
	J0KD00000095	FLAT CORE	2	TH-50PX50U
	J0KD00000096	FLAT CORE	2	TH-50PX50U
	J0KF00000018	FILTER	6	
	J0KG00000014	FILTER	4	
	K1LA12A00003	12P CONNECTOR	1	TH-37PX50U
	K1LB12A00018	12P CONNECTOR	1	TH-37PX50U
	K1YD68000002	CONNECTOR	2	TH-50PX50U
3	K2AH3H000034	AC-INLET	1	Δ
4	K2CG3DH00025	AC CORD	1	$\triangle$
	K4DJD0000017	F TERMINAL (3C TYPE)	2	
5	L6FAKEDH0009	FAN (SMALL)	2	TH-37PX50U
6	L6FALEFH0028	FAN	1	TH-37PX50U
6	L6FALEFH0028	FAN	3	TH-42PX50U
6	L6FALEFH0028	FAN	4	TH-50PX50U
7	MD37H08A1J	PLASMA DISPLAY PANEL	1	TH-37PX50U A
7	MD42H08A1J	PLASMA DISPLAY	1	TH-42PX50U A
7	MD50H08A1J	PLASMA DISPLAY PANEL	1	TH-50PX50U 🛆
	TBL63413-1	RUBBER	8	TH-37/42PX50U
	TBLA3339	STAND BASE (LEFT)	1	TH-37/42PX50U
	TBLA3340	STAND BASE (RIGHT)	1	TH-37/42PX50U
	TBLA3341	STAND POLE	2	TH-37/42PX50U
	TBLB3145	STAND BASE COVER	1	TH-37/42PX50U
	TBMA149	PANASONIC BADGE (SILVER)	1	
8	TBXA46302	POWER BUTTON	1	
9	TBXA46402	5KEYS BUTTON	1	
10	TES4G204	SPRING	1	
	THEL027N	SCREW	4	
	THEL035N	SCREW	118	TH-37PX50U
	THEL035N	SCREW	116	TH-42PX50U
	THEL035N	SCREW	159	TH-50PX50U
	THEL0429	SCREW	23	
	THEL0439	SCREW(FLOCK)	4	
	THTA0379	SCREW	2	
	THTD010N	SCREW	10	TH-37PX50U
	THTD010N	SCREW	9	TH-42PX50U
	<del> </del>		_	
	THTD010N	SCREW	12	TH-50PX50U
	THTD011J	SCREW	3	TH-37PX50U
	THTD011J	SCREW	4	TH-42/50PX50U
	TJSD00401	F TERMINAL (5C TYPE)	2	
11	TKGA5194	FRONT GLASS	1	TH-37PX50U
11	TKGA5195	FRONT GLASS	1	TH-42PX50U
11	TKGA5196	FRONT GLASS	1	TH-50PX50U
12	TKKC5208	PANEL LIGHT	1	
13	TKKL5231	COVER	4	
14	TKKL5306	ADJUSTMENT COVER (SMALL)	1	
15	TKKL5330	ADJUSTMENT COVER (LARGE)	1	
	TKKX5056	POWER BUTTON COVER	1	
16	TKPA94301	INLET COVER	1	
17	TKRA34802	B/COVER HANDLE	2	TH-37PX50U
17	TKRA46201	B/COVER HANDLE	2	TH-42/50PX50U
		SPONGE (TKG/UPPER/B	2	TH-42PX50U
	TMKG288	OTTOM)		

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	Tare No.	Description		NGMQI ND
	TMKG289	SPONGE (TKG/LEFT/RI GHT)	2	TH-42PX50U
	TMKG309	SPONGE (TKG/LEFT/RIGHT)	2	TH-37PX50U
	TMKG468-1	SPONGE	3	
	TMKG562	SPONGE	1	TH-37PX50U
	TMKG562	SPONGE	3	TH-42PX50U
	TMKG563	SPONGE	2	TH-37PX50U
	TMM15414-2	CLAMPER	2	
	TMM17499	CLAMPER	1	mr. 500**50**
	TMM23416 TMM25401	SPACER CLAMPER	11 9	TH-50PX50U
	TMM25401	CLAMPER	5	TH-42PX50U
	TMM25401	CLAMPER	7	TH-50PX50U
	TMM7464-2	CLAMPER	1	
	TMM7468-1	CLAMPER	3	
	TMME047	CLAMPER	7	TH-37PX50U
	TMME047	CLAMPER	6	TH-42PX50U
	TMME047	CLAMPER	6	TH-50PX50U
	TMME061	CLAMPER	5	TH-37/42PX50U
	TMME061	CLAMPER	4	TH-50PX50U
	TMME075	EDGE SADDLE	6	TH-37PX50U
	TMME075	EDGE SADDLE	4	TH-42PX50U
	TMME190	CLAMPER	1	TH-37/42PX50U
	TMME190	CLAMPER	<u>2</u> 5	TH-50PX50U
	TMME199	CLAMPER	8	TH-42PX50U
	TMME199	CLAMPER	2	TH-50PX50U
	TMME206	CLAMPER	2	30111300
	TMME226	CLAMPER	1	
	TMME253	CLAMPER	1	
	TMMJ068	RUBBER	10	TH-37PX50U
	TMMJ068	RUBBER	9	TH-42PX50U
	TMMJ068	RUBBER	12	TH-50PX50U
	TMMJ078	CUSHION (RUBBER)	8	TH-37PX50U
	TMMJ082	CUSHION (RUBBER)	4	TH-37PX50U
	TMMJ082	CUSHION (RUBBER)	12	TH-42PX50U
	TMMJ082	CUSHION (RUBBER)	16	TH-50PX50U
18	TMZX5050 TPC2AA4601	STAND BRACKET CARTON BOTTOM	1 1	TH-42PX50U
				PAVCA
18	TPCB78301	CARTON BOTTOM	1	TH-37PX50U PAVCA
18	TPC2AA4801	CARTON BOTTOM	1	TH-50PX50U PAVCA
19	TPCB75501	CARTON TOP	1	TH-37PX50U
19	TPCB75302	CARTON TOP	1	TH-42PX50U
19	TPCB75601	CARTON TOP	1	TH-50PX50U
				PAVCA A
20	TPD169487	JOINT	4	
21	TPD2AA04301	CUSHION TOP	1	
23	TPD2AA04501 TPD2AA04901	CUSHION BOTTOM CUSHION FOR STAND	1	
24	TPD2AF00661	ACCESSORIES BOX	1	
25	TPD2AF00711	TOP/BOTTOM PAD	2	TH-42PX50U
25	TPD2AF00721	TOP/BOTTOM PAD	2	TH-37PX50U PAVCA
25	TPD2AF00731	TOP/BOTTOM PAD	2	TH-50PX50U
32	TPE2A40055	BAG	1	PAVCA
26	TPE2AH0101	SET POLY COVER	1	PAVCA
27	TPE2AH0131	TOP PROTECT SHEET	1	PAVCA
28	TQB2AA0543	INSTRUCTION BOOK (ENGLISH)	1	PAVCA A
	TQEF035	POLY BAG	1	
	TQZH624	INSTRUCTION SHEET	1	
	TSXL438	CABLE (PA30- H30/DG20-PA2)	2	
	TSXL440	CABLE (D34-	2	TH-37/42PX50U
L		C41/D33-C31)		

	2PX50U / TH-50PX500	<del>-</del>	Baa	Remarks
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	TSXL448	CABLE(D31-C24/D32- C25)	2	TH-50PX50U
	TSXL449	CABLE(D33-C54/D34- C55)	2	TH-50PX50U
	TSXL450	CABLE(C10-C20/C21- C31/C50-60)	3	TH-50PX50U
	TSXL460	CABLE (Z50-H50)	1	
	TSXL461	CABLE (DG1-H1/DG2- H2)	2	
29	TTUA1149	REAR COVER	1	TH-42PX50U 🗥
29	TTUA1151	REAR COVER	1	TH-37PX50U /
29	TTUA1150			TH-50PX50U A
30	TXFKE01YCSU	REAR COVER	1	TH-50PX50U A
30	TXFKE01YCSU	ESCUTCHEON A'SSY ESCUTCHEON A'SSY	1	TH-42PX50U A
	+			
30	TXFKE01YESU	ESCUTCHEON A'SSY	1	TH-37PX50U 🗥
	TXFMM010ZES	STOPPER (STAND)	1	
31	TXFMZ01YFSUA	(LEFT OR RIGHT)	2	TH-37/42PX50U
31	TXFMZ01YCSUA	STAND BLOCK A'SSY (LEFT)	1	TH-50PX50U
31	TXFMZ02YCSUA	STAND BLOCK A'SSY (RIGHT)	1	TH-50PX50U
	TXJ/SWYFSE	SPEAKER LEAD	2	
	XTB3+10GFJ	SCREW	4	
	XTB4+12GFJ	SCREW	29	TH-37PX50U
	XTB4+12GFJ	SCREW	33	TH-42PX50U
	XTB4+12GFJ	SCREW	37	TH-50PX50U
	XTB4+12GFJK	SCREW	1	
	XTB4+15AFJK	SCREW	22	
	XTB4+8JFI	SCREW	8	TH-37/42PX50U
	XTB4+20GFJ	SCREW	10	TH-50PX50U
	XTV3+10JFJK	SCREW(HDMI)	1	
	XTW4+25DFJ	SCREW	14	TH-50PX50U
	MIWI: 23210	DCK2W		PAVCA
	XTW4+35DFJ	SCREW	12	TH-37PX50U
	XTW4+35DFJ	SCREW	10	TH-42PX50U
	XYC3+JF12FJ	SCREW	3	TH-50PX50U
	XYC4+FJ35FJK	SCREW	8	TH-37/42PX50U
	XYN3+F10FJ	SCREW	2	
	XYN3+F8FJ	SCREW	38	TH-37/42PX50U
	XYN3+F8FJ	SCREW	41	TH-50PX50U
	XYN3+J12FJ	SCREW	33	TH-37/42PX50U
	XYN3+J12FJ	SCREW	36	TH-50PX50U
	XYN3+J8FJ	SCREW ROHS	5	
	XYN3+J8FJ	SCREW ROHS	1	
	XYN3+J10FJ	SCREW	1	
	XYN4+E8FJ	SCREW(EARTH)	1	
	XYN5+C15FJ	SCREW	8	
	XYN5+F20J	SCREW	4	TH-37/42PX50U
	XYN5+F30FJK	SCREW	4	TH-37/42PX50U
	XZB12X25D03	SCREW	2	
	XZB7.5X9D05	SCREW	1	
	TPCB79101	CARTON BOX (STAND)	1	TH-37/42PX50U
	TPDA1120	CUSHTON TOP	1	TH-37/42PX50U
	TPDA1121	CUSHION BOTTOM	(1	TH-37/42PX50U
		(STAND)	$\vdash$	
	TXFBL010ZES	STAND A'SSY	1	TH-37/42PX50U
	TPDF1401	PAD BOTTOM (STAND)	1	
	TPEH270	POLY BAG (STAND)	1	
	TPCB79102	CARTON BOX (STAND)	1	TH-50PX50U
	TPDA1160	CUSHTON TOP	(1	TH-50PX50U
	TPDA1161	CUSHION BOTTOM	(1	TH-50PX50U
		(STAND)	$\vdash =$	
	TXFBL010APT	STAND A'SSY	1	TH-50PX50U
	TQZH656	INSTRUCTION SHEET	(1	TH-50PX50U

# 15 Electrical Replacement Parts List

### 15.1. Replacement Parts List Notes

#### **Important Safety Notice**

Components identified by A mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

### RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be avail-

able for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention.

After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

<u>1. Resistor</u> <u>2. Capacitor</u>

Example: Example:

ERD25TJ104 <u>C</u> 100KOHM, <u>J</u>, 1/4W ECKF1H103ZF <u>C</u> 0.01UF, <u>Z</u>, 50V

Type Allowance Type Allowance

Туре	Allowance
C : Carbon F : Fuse M : Metal Oxide Metal FIlm S : Solid W : Wire Wound	F:±1% G:±2% J:±5% K:±10% M:±20%

Туре	Allowance
C : Ceramic E : Electrolytic P : Polyester Polyprop lene T : Tantalum	C: ±0.25pF D: ±0.5pF F: ±1pF G: ±3pF J: ±5pF K: ±10pF L: ±15pF M: ±20pF P: +100%, -0% Z: +80%, -20%

# 15.2. Electrical Replacement Parts List (TH-37PX50U)

#### Note:

All parts except parts mentioned [PAVCA] in the Remarks column are supplied by AVC-SPC.

Parts mentioned [PAVCA] are supplied by PAVCA.

Ref. No. Part No. Part Name & Description  F401.40 K5D802BNA005 TIME LAG FUSE HIGH 2  C11 K1MN55BA0076 55F CONNECTOR 1  C12 K1KA04BA0107 4P CONNECTOR 1  C21 K1KA04BA0107 4P CONNECTOR 1  C22 K1KA04BA0107 4P CONNECTOR 1  C24 K1KA04BA0107 4P CONNECTOR 1  C31 K1MN55BA0076 55F CONNECTOR 1  C31 K1MN55BA0076 55F CONNECTOR 1  C32 K1KA12AA0153 12P CONNECTOR 1  C33 K1KA04BA0107 4P CONNECTOR 1  C34 K1KA04BA0107 4P CONNECTOR 1  C34 K1KA04BA0107 4P CONNECTOR 1  C35 K1KA04BA0107 4P CONNECTOR 1  C41 K1MN55BA0076 55P CONNECTOR 1  C41 K1MN55BA0076 5FO CONNECTOR 1  C42 K1KA04BA0107 4P CONNECTOR 1  C2300 ECJ1VF1H104Z C 0.1UF, Z, 50V 1  C2301 ECJ1VF1H104Z C 0.1UF, Z, 50V 1  C2301 ECJ1VF1H105Z C 1UF, Z, 10V 1  C2310, 1 ERJ8GEY0R00 M 0 OHM, 1/8W 2  1  C2335 ECJ3YB1A106M C 10UF, M, 6.3V 1  C2336 ECJ2VB1E104K C 0.10UF, K, 16V 1  C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1  C2341 ECJ1VC1H105Z C 1500PF, K, 50V 1  C2342 ECJ1VB1H15ZK C 1500PF, K, 50V 1  C2344 ECJ1XCH102J C 1000PF, J, 50V 1  C2346 ECJ1VF1H105Z C 1UF, Z, 10V 1  C2347 ECA1VHG470 E 47UF, 35V 1  C2348 ECJ1XCH102J C 1000PF, J, 50V 1  C2349 ECJ1XCHH010Z C 1000PF, J, 50V 1  C2340 ECJ2ZB1H562K C 5600PF, K, 50V 1  C2341 ECA1VHG470 E 47UF, 35V 1  C2342 ECJ1VB1H5ZK C 1500PF, K, 50V 1  C2343 ECJ3ZB1H562K C 5600PF, K, 50V 1  C2344 ECJ1XCH102J C 1000PF, J, 50V 1  C2345 ECJ1XCHH02J C 1000PF, J, 50V 1  C2346 ECJ1XCHH02J C 1000PF, J, 50V 1  C2347 ECA1VHG470 E 47UF, 35V 1  C2348 ECJ1XCH102J C 1000PF, K, 50V 1  C2350 ECJ2ZB1H562K C 5600PF, K, 50V 1  C2351 ECJ1XCHH02Z C 1000PF, K, 50V 1  C2352 ECJ1VB1C473K C 0.47UF, K, 16V 1  C2353 ECJ2ZB1H562K C 0.27UF, Z, 16V 1  C2354 ECJ2ZB1H00K C 0.10UF, K, 25V 1  C2355 ECJ2ZB1H00K C 0.10UF, K, 25V 1  C2356 ECJ3YB1A106M C 10UF, K, 50V 4  P0 C2374 ECA1HHG100 E 10UF, 50V 1  C2376 ECJ2ZB1H102K C 1000PF, K, 50V 4  P0 C2374 ECA1HHG100 E 10UF, 50V 1  C2376 ECJ2ZB1H102K C 1000PF, K, 50V 4  P0 C2374 ECA1HHG100 E 10UF, S0V 4  P0 C2374 ECA1HHG100 E 10UF, S0V 4  P0 C2374 ECA1HHG100 E 10UF, K, 50V 4  P0 C2430, ECJ2ZB1E104K C 0.1UF, K, 25V 2  P0 C2430, ECJ2ZB1E102K C 2.2UF	1 0113	mondoneu [F	AVCAJ are supplied	IJ i	, , , , , , , , , , , , , , , , , , , ,
F401.40 K5D802BNA005 TIME LAG FUSE HIGH 2  C11 K1MN55BA0076 55P CONNECTOR 1  C12 K1KA04BA0107 4P CONNECTOR 1  C22 K1KA04BA0107 4P CONNECTOR 1  C23 K1KA04BA0107 4P CONNECTOR 1  C24 K1KA04BA0107 4P CONNECTOR 1  C31 K1MN55BA0076 55P CONNECTOR 1  C31 K1MN55BA0076 55P CONNECTOR 1  C32 K1KA12AA0153 12P CONNECTOR 1  C33 K1KA04BA0107 4P CONNECTOR 1  C33 K1KA04BA0107 4P CONNECTOR 1  C41 K1MN55BA0076 55P CONNECTOR 1  C41 K1MN55BA0076 5P CONNECTOR 1  C42 K1KA12AA0153 12P CONNECTOR 1  C43 K1KA04BA0107 4P CONNECTOR 1  C2300 ECJ1VF1H104Z C 0.1UF, Z, 50V 1  C2301 ECJ1VF1H104Z C 0.1UF, Z, 50V 1  C2301 ECJ1VF1H105Z C 1UF, Z, 10V 1  C2310, 1 ERJ8GEY0R00 M 0 OHM, 1/8W 2  1  C2335 ECJ3YB1A106M C 10UF, M, 6.3V 1  C2336 ECJ1VB1E104K C 0.10UF, K, 25V 1  C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1  C2341 ECJ1XC1H221J C 220PF, J, 50V 1  C2342 ECJ1VB1H152K C 1500PF, K, 50V 1  C2344 ECJ1XCH102J C 1000PF, J, 50V 1  C2346 ECJ1VF1H105Z C 1UF, Z, 10V 1  C2347 ECA1VH6470 E 47UF, 35V 1  C2348 ECJ1XB1H562K C 5600PF, K, 50V 1  C2350 ECJ2ZB1H562K C 5600PF, K, 50V 1  C2341 ECJ1XCH102J C 1000PF, J, 50V 1  C2342 ECJ1VB1H152K C 1500PF, K, 50V 1  C2343 ECJ2XB1562K C 5600PF, K, 50V 1  C2344 ECJ1XCH102J C 1000PF, J, 50V 1  C2350 ECJ2ZB1H562K C 5600PF, K, 50V 1  C2351 ECJ1XB1H562K C 5600PF, K, 50V 1  C2352 ECJ1YB1H52K C 1500PF, K, 50V 1  C2353 ECJ2ZB1H562K C 5600PF, K, 50V 1  C2354 ECJ1XB1H562K C 5600PF, K, 50V 1  C2355 ECJ2ZB1H562K C 5600PF, K, 50V 1  C2356 ECJ2ZB1H562K C 5600PF, K, 50V 1  C2357 ECJ2XB1H562K C 5600PF, K, 50V 1  C2358 ECJ2ZB1H562K C 5600PF, K, 50V 1  C2359 ECJ2ZB1H562K C 5600PF, K, 50V 1  C2351 ECJ2ZB1H562K C 5600PF, K, 50V 1  C2352 ECJ1YB1C473K C 0.047UF, K, 16V 1  C2353 ECJ2ZB1H004K C 0.10UF, K, 25V 1  C2354 ECJ2ZB1H102K C 0.000PF, K, 50V 4  P3  C2374 ECA1HHG100 E 10UF, 50V 1  C2376 ECJ2ZB1H102K C 0.000PF, K, 50V 4  P3  C2428, ECJ2ZB1H102K C 1000PF, K, 50V 4  P3  C2428, ECJ2ZB1H102K C 1000PF, K, 50V 4  P3  C24280 ECJ1YF1A105Z C 1UF, Z, 10V 1		Part No.		Pcs	Remarks
2	No.		Description		
C11 K1MN55BA0076 55P CONNECTOR 1 C12 K1KA04BA0107 4P CONNECTOR 1 C21 K1KA04BA0107 4P CONNECTOR 1 C22 K1KA04BA0107 4P CONNECTOR 1 C24 K1KA04A0150 4P CONNECTOR 1 C31 K1MN55BA0076 55P CONNECTOR 1 C31 K1MN55BA0076 55P CONNECTOR 1 C32 K1KA12AA0153 12P CONNECTOR 1 C32 K1KA12AA0153 12P CONNECTOR 1 C33 K1KA04BA0107 4P CONNECTOR 1 C41 K1MN55BA0076 55P CONNECTOR 1 C41 K1MN55BA0076 55P CONNECTOR 1 C43 K1KA04BA0107 4P CONNECTOR 1 C43 K1KA04BA0107 4P CONNECTOR 1 C2300 ECJ1VF1H104Z C 0.1UF, Z, 50V 1 C2301 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2301 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2310, 1 ERJ8GEYORO0 M 0 OHM, 1/8W 2 1 C2335 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2337 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2341 ECJ1XC1H102J C 220PF, J, 50V 1 C2342 ECJ1VB1H52K C 1500PF, K, 50V 1 C2343 ECJ2XB1H562K C 5600PF, K, 50V 1 C2344 ECJ1XC1H102J C 1000PF, J, 50V 1 C2345 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2347 ECA1VHQ470 E 47UF, Z, 5V 1 C2348 ECJ1XC1H102J C 1000PF, J, 50V 1 C2349 ECJ1XB1H52K C 5600PF, K, 50V 1 C2349 ECJ1YB1H52K C 1500PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H102J C 1000PF, J, 50V 1 C2352 ECJ1YB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1YB1H04K C 0.10UF, K, 25V 1 C2355 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2356 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2376 ECJ2XB1H102K C 0.047UF, K, 50V 4 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2384 ECJ2XB1H102K C 1000PF, K, 50V 4 C2428, 2 ECJ2XB1E104K C 0.1UF, K, 25V 2 C24380 ECJ1YF1A105Z C UUF, Z, 10V 1		K5D802BNA005	TIME LAG FUSE HIGH	2	Δ
C12 K1KA04BA0107 4P CONNECTOR 1 C21 K1MN55BA0076 55P CONNECTOR 1 C22 K1KA04BA0107 4P CONNECTOR 1 C24 K1KA04BA0107 4P CONNECTOR 1 C31 K1MN55BA0076 55P CONNECTOR 1 C31 K1MN55BA0076 55P CONNECTOR 1 C32 K1KA12A0153 12P CONNECTOR 1 C33 K1KA04BA0107 4P CONNECTOR 1 C41 K1MN55BA0076 55P CONNECTOR 1 C41 K1MN55BA0076 55P CONNECTOR 1 C43 K1KA04BA0107 4P CONNECTOR 1 C2300 ECJ1VF1H104Z C 0.1UF, Z, 50V 1 C2301 ECJ1VF1H104Z C 0.1UF, Z, 50V 1 C2301 ECJ1VF1H104Z C 0.1UF, Z, 50V 1 C2310,1 ERJ8GEY0R00 M 0 OHM, 1/8W 2 1 C2335 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2338 ECJ3YB1A106M C 10UF, K, 25V 1 C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2341 ECJ1XC1H221J C 220PF, J, 50V 1 C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2344 ECJ1XC1H21J C 1000PF, J, 50V 1 C2346 ECJ1YB1A105Z C 1UF, Z, 10V 1 C2347 ECA1VHG470 E 47UF, Z, 10V 1 C2348 ECJ1XB1H562K C 1500PF, K, 50V 1 C2349 ECJ1YB1H152K C 1500PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1YB1H152K C 1500PF, K, 50V 1 C2352 ECJ1YB1H152K C 1500PF, K, 50V 1 C2353 ECJ1YB1H152K C 1500PF, K, 50V 1 C2355 ECJ2ZB1H562K C 5600PF, K, 50V 1 C2356 ECJ2XB1H562K C 5600PF, K, 50V 1 C2357 ECJ1YB1H152K C 1500PF, K, 50V 1 C2358 ECJ1YB1H152K C 1500PF, K, 50V 1 C2359 ECJ2XB1H562K C 0.27UF, Z, 16V 1 C2351 ECJ1XC1H20J C 1000PF, K, 50V 1 C2352 ECJ1YB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1YB1H02K C 0.10UF, K, 25V 1 C2354 ECJ1YB1H02K C 0.10UF, K, 50V 4 P9 C2364 ECJ2XB1H102K C 1000PF, K, 50V 4 P9 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 P9 C2384 ECJ2XB1H102K C 1000PF, K, 50V 4 P9 C2480 ECJ1YF1A105Z C 1UF, Z, 10V 1	2				
C12 K1KA04BA0107 4P CONNECTOR 1 C21 K1MN55BA0076 55P CONNECTOR 1 C22 K1KA04BA0107 4P CONNECTOR 1 C24 K1KA04BA0107 4P CONNECTOR 1 C31 K1MN55BA0076 55P CONNECTOR 1 C32 K1KA12A0153 12P CONNECTOR 1 C33 K1KA04BA0107 4P CONNECTOR 1 C34 K1KA04BA0107 4P CONNECTOR 1 C35 K1KA04BA0107 4P CONNECTOR 1 C41 K1MN55BA0076 55P CONNECTOR 1 C42 K1KA04BA0107 4P CONNECTOR 1 C43 K1KA04BA0107 4P CONNECTOR 1 C2300 ECJ1VF1H104Z C 0.1UF, Z, 50V 1 C2301 ECJ1VF1H104Z C 0.1UF, Z, 50V 1 C2301 ECJ1VF1H104Z C 0.1UF, Z, 50V 1 C2310,1 ERJ8GEY0R00 M 0 OHM, 1/8W 2 1 C2335 ECJ3YBLA106M C 10UF, M, 6.3V 1 C2336 ECJ3YBLA106M C 10UF, K, 25V 1 C2340 ECJ2FB1C274K C 0.047UF, K, 16V 1 C2341 ECJ1XC1H221J C 220PF, J, 50V 1 C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2344 ECJ1XC1H22J C 1000PF, K, 50V 1 C2344 ECJ1XC1H102J C 1000PF, J, 50V 1 C2346 ECJ1VB1H152K C 1500PF, K, 50V 1 C2347 ECA1VM6470 E 470F, 35V 1 C2348 ECJ1VB1H152K C 1500PF, K, 50V 1 C2349 ECJ1VB1H152K C 1500PF, K, 50V 1 C2349 ECJ1VB1H152K C 1500PF, K, 50V 1 C2349 ECJ1VB1H52K C 1500PF, K, 50V 1 C2349 ECJ1VB1H52K C 1500PF, K, 50V 1 C2349 ECJ1VB1H52K C 1500PF, K, 50V 1 C2350 ECJ2XB1F562K C 5600PF, K, 50V 1 C2351 ECJ1XB1H562K C 5600PF, K, 50V 1 C2352 ECJ1VB1H52K C 1500PF, K, 50V 1 C2353 ECJ1ZB1H560K C 0.047UF, K, 25V 1 C2353 ECJ1ZB1H560K C 0.047UF, K, 16V 1 C2355 ECJ2ZB1H560K C 0.047UF, K, 16V 1 C2356 ECJ2XB1H60M C 10UF, M, 6.3V 1 C2357 ECJ2XB1H00M C 10UF, M, 6.3V 1 C2358 ECJ2XB1H102K C 0.047UF, K, 50V 4 C2364 ECJ1XB1H102K C 0.00PF, K, 50V 4 C2376 ECJ2XB1H102K C 0.00PF, K, 50V 4 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2384 ECJ2XB1H102K C 1000PF, K, 50V 4 C2428, 2 ECJ2XB1E104K C 0.1UF, K, 25V 2					
C21 K1MN55BA0076 55P CONNECTOR 1  C22 K1KA04BA0107 4P CONNECTOR 1  C24 K1KA04AA0150 4P CONNECTOR 1  C31 K1MN55BA0076 55P CONNECTOR 1  C32 K1KA12AA0153 12P CONNECTOR 1  C33 K1KA12BA0107 4P CONNECTOR 1  C41 K1MN55BA0076 55P CONNECTOR 1  C41 K1MN55BA0076 55P CONNECTOR 1  C43 K1KA04BA0107 4P CONNECTOR 1  C2300 ECJ1VF1H104Z C 0.1UF, Z, 50V 1  C2301 ECJ1VF1H104Z C 0.1UF, Z, 50V 1  C2301 ECJ1VF1H104Z C 1UF, Z, 10V 1  C2310,1 ERJ8GEY0R00 M 0 OHM, 1/8W 2  1  C2335 ECJ3YB1A106M C 10UF, M, 6.3V 1  C2336 ECJ1VB1C473K C 0.047UF, K, 16V 1  C2340 ECJ2VB1E104K C 0.10UF, K, 25V 1  C2341 ECJ1VB1H152K C 1500PF, K, 50V 1  C2342 ECJ1VB1H152K C 1500PF, K, 50V 1  C2344 ECJ1XC1H102J C 1000PF, J, 50V 1  C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1  C2347 ECALVH04770 E 47UF, Z, 10V 1  C2348 ECJ1XC1H102J C 1000PF, J, 50V 1  C2349 ECJ1XB1H562K C 5600PF, K, 50V 1  C2349 ECJ1XC1H102J C 1000PF, J, 50V 1  C2349 ECJ1XC1H102J C 1000PF, J, 50V 1  C2349 ECJ1XC1H102J C 20PF, J, 50V 1  C2349 ECJ1XC1H102J C 1000PF, J, 50V 1  C2349 ECJ1XC1H102J C 1000PF, J, 50V 1  C2350 ECJ2XB1H562K C 5600PF, K, 50V 1  C2351 ECJ1XC1H102J C 1000PF, J, 50V 1  C2352 ECJ1XB1H562K C 5600PF, K, 50V 1  C2353 ECJ2XB1H562K C 5600PF, K, 50V 1  C2355 ECJ2XB1H562K C 5600PF, K, 50V 1  C2355 ECJ2XB1H562K C 5600PF, K, 50V 1  C2355 ECJ2XB1H562K C 0.047UF, K, 16V 1  C2355 ECJ2XB1H562K C 0.047UF, K, 16V 1  C2356 ECJ3XB1A106M C 10UF, M, 6.3V 1  C2376 ECJ2XB1H102K C 0.27UF, Z, 16V 1  C2376 ECJ2XB1H102K C 0.00PF, K, 50V 4  79  C2384 ECJ2XB1H102K C 1000PF, K, 50V 4  79  C2488 ECJ2XB1H102K C 1000PF, K, 50V 4  79  C2489 ECJ2XB1H102K C 1000PF, K, 50V 4					
C22 K1KA04BA0107 4P CONNECTOR 1 C24 K1KA04AA0150 4P CONNECTOR 1 C31 K1MN55BA0076 55P CONNECTOR 1 C32 K1KA12AA0153 12P CONNECTOR 1 C33 K1KA04BA0107 4P CONNECTOR 1 C41 K1MN55BA0076 55P CONNECTOR 1 C41 K1MN55BA0076 55P CONNECTOR 1 C43 K1KA04BA0107 4P CONNECTOR 1 C43 K1KA04BA0107 4P CONNECTOR 1 C2300 ECJ1VF1H104Z C 0.1UF, Z, 50V 1 C2301 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2301 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2310,1 ERJ8GEYOROO M 0 OHM, 1/8W 2 1 C2335 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2336 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2338 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2341 ECJ1XC1H221J C 220FF, J, 50V 1 C2342 ECJ1XC1H221J C 220FF, K, 50V 1 C2344 ECJ1XC1H102J C 1000FF, K, 50V 1 C2346 ECJ1YF1A105Z C 1UF, Z, 10V 1 C2347 ECA1VHG470 E 47UF, 35V 1 C2348 ECJ1XC1H221J C 220FF, J, 50V 1 C2349 ECJ1XC1H212J C 220FF, K, 50V 1 C2349 ECJ1XC1H212J C 220FF, J, 50V 1 C2348 ECJ1XC1H21J C 220FF, J, 50V 1 C2349 ECJ1XC1H212J C 220FF, J, 50V 1 C2349 ECJ1XC1H212J C 200FF, K, 50V 1 C2341 ECJ1XC1H210Z C 1000FF, K, 50V 1 C2342 ECJ1XC1H210Z C 1000FF, K, 50V 1 C2343 ECJ1XC1H210Z C 1000FF, K, 50V 1 C2344 ECJ1XC1H102J C 1000FF, K, 50V 1 C2351 ECJ1XC1H210Z C 1000FF, K, 50V 1 C2352 ECJ1YB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1YB1E104K C 0.10UF, K, 25V 1 C2355 ECJ2YB1H102K C 0.000FF, K, 50V 1 C2356 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 P9 C2384 ECJ1XB1H102K C 1000PF, K, 50V 4 P9 C2488,2 ECJ2XB1H102K C 1000PF, K, 50V 4 P9 C2488,2 ECJ2XB1H102K C 1000PF, K, 50V 4 P9 C2489,2 ECJ2XB1H102K C 1000PF, K, 50V 4 P9 C2480 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C24 K1KA04AA0150 4P CONNECTOR 1 C31 K1MN55BA0076 55P CONNECTOR 1 C32 K1KA12AA0153 12P CONNECTOR 1 C33 K1KA04BA0107 4P CONNECTOR 1 C41 K1MN55BA0076 55P CONNECTOR 1 C41 K1MN55BA0076 55P CONNECTOR 1 C43 K1KA04BA0107 4P CONNECTOR 1 C2300 ECJ1VF1H104Z C 0.1UF, Z, 50V 1 C2301 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2307 ECA1CMH101 E 100UF, 16V 1 C2310,1 ERJ8GEYOROO M 0 OHM, 1/8W 2 1 C2335 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2336 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2338 ECJ1VB1C473K C 0.27UF, Z, 16V 1 C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2341 ECJ1XC1H221J C 220PF, J, 50V 1 C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2344 ECJ1XC1H20J C 1000PF, J, 50V 1 C2344 ECJ1XC1H102J C 1000PF, J, 50V 1 C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2347 ECA1VHG470 E 47UF, 35V 1 C2348 ECJ1VB1H152K C 1500PF, K, 50V 1 C2349 ECJ1VB1H152K C 1500PF, K, 50V 1 C2349 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2349 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2349 ECJ1VB1H152K C 1500PF, K, 50V 1 C2349 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2349 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2349 ECJ1VB1H152K C 1500PF, K, 50V 1 C2349 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2349 ECJ1VB1H152K C 1500PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H102J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2374 ECA1HG100 E 10UF, S0V 1 C2374 ECA1HG100 E 10UF, S0V 1 C2374 ECA1HG100 E 10UF, S0V 1 C2374 ECA1HG100 E 10UF, K, 50V 4 PC2374 ECA1HG100 E 10UF, K, 50V 4 PC2375 ECJ2XB1H102K C 1000PF, K, 50V 4 PC2376 ECJ2XB1H102K C 1000PF, K, 50V 4 PC2377 ECJ2XB1H102K C 1000PF, K, 50V 4 PC2378 ECJ2XB1H102K C 1000PF, K, 50V 4 PC2428,2 ECJ2XB1H102K C 1UF, K, 25V 2 PC24300 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C31 K1MN55BA0076 55P CONNECTOR 1 C32 K1KA12AA0153 12P CONNECTOR 1 C33 K1KA04BA0107 4P CONNECTOR 1 C41 K1MN55BA0076 55P CONNECTOR 1 C43 K1KA04BA0107 4P CONNECTOR 1 C43 K1KA04BA0107 4P CONNECTOR 1 C2300 ECJ1VF1H104Z C 0.1UF, Z, 50V 1 C2301 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2307 ECA1CMH101 E 100UF, 16V 1 C2310,1 ERJ8GEYOROO M 0 OHM, 1/8W 2 1 C2335 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2336 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2340 ECJ1VB1H152K C 0.27UF, Z, 16V 1 C2341 ECJ1XC1H221J C 220PF, J, 50V 1 C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2344 ECJ1XC1H102J C 1000PF, J, 50V 1 C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2347 ECA1VH0470 E 47UF, 35V 1 C2348 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1XC1H221J C 220PF, J, 50V 1 C2341 ECA1VH0470 E 47UF, 35V 1 C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2343 ECJ2XB1H562K C 5600PF, K, 50V 1 C2345 ECJ1XC1H221J C 220PF, J, 50V 1 C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H221J C 220PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1XB1H152K C 1500PF, K, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2372 ECA1H0G100 E 10UF, K, 25V 1 C2374 ECA1H0G100 E 10UF, 50V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 P C2384 ECJ1XCH102J C 1000PF, K, 50V 4 P C2375 ECJ2XB1H102K C 1000PF, K, 50V 4 P C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 P C2377 ECA1H0G100 E 10UF, 50V 1 C2378 ECA1H0G100 E 10UF, 50V 1 C2379 ECA1H0G100 E 10UF, 50V 1 C2374 ECA1H0G100 E 10UF, 50V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 P C2384 ECJ2XB1H102K C 1000PF, K, 50V 4 P C2384 ECJ2XB1H102K C 1000PF, K, 50V 4 P C2384 ECJ2XB1H102K C 1000PF, K, 50V 4 P C2374 ECA1H0G100 E 10UF, 50V 1					
C32 K1KA12AA0153 12P CONNECTOR 1 C33 K1KA04BA0107 4P CONNECTOR 1 C41 K1MN55BA0076 55P CONNECTOR 1 C43 K1KA04BA0107 4P CONNECTOR 1 C2300 ECJ1VF1H104Z C 0.1UF, Z, 50V 1 C2301 ECJ1VF1H104Z C 1UF, Z, 10V 1 C2307 ECA1CMH101 E 100UF, 16V 1 C2310,1 ERJ8GEYOROO M 0 OHM, 1/8W 2 1 C2335 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2337 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2338 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2341 ECJ1XC1H221J C 220PF, J, 50V 1 C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2344 ECJ1XC1H102J C 1000PF, J, 50V 1 C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2347 ECA1VHG470 E 47UF, 35V 1 C2348 ECJ1VB1H152K C 1500PF, K, 50V 1 C2349 ECJ1VB1H152K C 1500PF, K, 50V 1 C2349 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1XCHD2J C 1000PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H02J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2355 ECJ2XB1H562K C 5600PF, K, 50V 1 C2355 ECJ2XB1H562K C 0.27UF, Z, 16V 1 C2356 ECJ3XB1A106M C 0.10UF, K, 25V 1 C2372 ECA1HHG100 E 10UF, S0V 1 C2374 ECA1HHG100 E 10UF, S0V 1 C2374 ECA1HHG100 E 10UF, S0V 1 C2376 ECJ2XB1H102K C 0.27UF, Z, 16V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C23776 ECJ2XB1H102K C 1000PF, K, 50V 4 C2378 ECJ2XB1H102K C 1000PF, K, 50V 4 C2379 ECJ2XB1H102K C 1000PF, K, 50V 4 C2374 ECJ2XB1H102K C 1000PF, K, 50V 4 C2375 ECJ2XB1H102K C 0.1UF, K, 25V 2 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2377 ECA13W11102K C 1000PF, K, 50V 4 C2378 ECJ2XB1H102K C 1000PF, K, 50V 4 C2379 ECJ2XB1H102K C 1000PF, K, 50V 4 C2370 ECJ2XB1H102K C 1000PF, K, 50V 4 C2371 ECJ2XB1H102K C 1000PF, K, 50V 1					
C33 K1KA04BA0107 4P CONNECTOR 1 C41 K1MN55BA0076 55P CONNECTOR 1 C43 K1KA04BA0107 4P CONNECTOR 1 C2300 ECJIVF1H104Z C 0.1UF, Z, 50V 1 C2301 ECJIVF1A105Z C 1UF, Z, 10V 1 C2307 ECA1CMH101 E 100UF, 16V 1 C2310,1 ERJ8GEYOROO M 0 OHM, 1/8W 2 1 C2335 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2337 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2338 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2341 ECJ1XC1H221J C 220PF, J, 50V 1 C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2344 ECJ1XC1H22J C 1000PF, K, 50V 1 C2346 ECJ2YB1A105Z C 1UF, Z, 10V 1 C2347 ECA1VH470 E 47UF, 35V 1 C2348 ECJ1VB1H152K C 1500PF, K, 50V 1 C2349 ECJ1VB1H52K C 5600PF, K, 50V 1 C2349 ECJ1VC1H221J C 220PF, J, 50V 1 C2349 ECJ1VC1H221J C 220PF, J, 50V 1 C2349 ECJ1VB1A105Z C 1UF, Z, 10V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H02J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2355 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2355 ECJ2FB1C47AK C 0.10UF, K, 25V 1 C2356 ECJ3XB1A106M C 10UF, M, 6.3V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HG100 E 10UF, 50V 1				_	
C41 K1MN55BA0076 55P CONNECTOR 1  C43 K1KA04BA0107 4P CONNECTOR 1  C2300 ECJ1VF1H104Z C 0.1UF, Z, 50V 1  C2301 ECJ1VF1H105Z C 1UF, Z, 10V 1  C2307 ECA1CMH101 E 100UF, 16V 1  C2310,1 ERJ8GEYOROO M 0 OHM, 1/8W 2  1  C2335 ECJ3YB1A106M C 10UF, M, 6.3V 1  C2337 ECJ1VB1C473K C 0.047UF, K, 16V 1  C2338 ECJ1VB1E104K C 0.10UF, K, 25V 1  C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1  C2341 ECJ1XC1H221J C 220PF, J, 50V 1  C2342 ECJ1VB1H152K C 1500PF, K, 50V 1  C2344 ECJ1XC1H102J C 1000PF, J, 50V 1  C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1  C2347 ECA1VHG470 E 47UF, 35V 1  C2348 ECJ1XC1H221J C 220PF, J, 50V 1  C2349 ECJ1XC1H221J C 220PF, J, 50V 1  C2351 ECJ1XC1H221J C 220PF, J, 50V 1  C2352 ECJ1VB1H52K C 1500PF, K, 50V 1  C2353 ECJ2XB1H562K C 5600PF, K, 50V 1  C2351 ECJ1XC1H102J C 1000PF, J, 50V 1  C2352 ECJ1VB1C473K C 0.047UF, K, 50V 1  C2353 ECJ1XB1H562K C 5600PF, K, 50V 1  C2355 ECJ2XB1H564X C 0.047UF, K, 16V 1  C2356 ECJ3XB1A106M C 10UF, K, 25V 1  C2377 ECA1HHG100 E 10UF, 50V 1  C2374 ECA1HHG100 E 10UF, 50V 1  C2376 ECJ2XB1H102K C 1000PF, K, 50V 4  79  C2384 ECJ2XB1H102K C 1000PF, K, 50V 4  79  C2384 ECJ2XB1H102K C 1000PF, K, 50V 4  79  C2374 ECA1HHG100 E 10UF, 50V 1  C2376 ECJ2XB1H102K C 1000PF, K, 50V 4  79  C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2  9  C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C43 K1KA04BA0107 4P CONNECTOR 1 C2300 ECJ1VF1H104Z C 0.1UF, Z, 50V 1 C2301 ECJ1VF1H104Z C 0.1UF, Z, 10V 1 C2307 ECA1CMH101 E 100UF, 16V 1 C2310,1 ERJ8GEY0R00 M 0 OHM, 1/8W 2 1 C2335 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2337 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2338 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2341 ECJ1XC1H221J C 220PF, J, 50V 1 C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2344 ECJ1XC1H102J C 1000PF, J, 50V 1 C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2347 ECA1VHG470 E 47UF, 35V 1 C2348 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1XC1H221J C 220PF, J, 50V 1 C2341 ECJ1XC1H221J C 1000PF, J, 50V 1 C2342 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2343 ECJ2XB1H562K C 5600PF, K, 50V 1 C2346 ECJ1XC1H221J C 220PF, J, 50V 1 C2350 ECJ2XB1H562K C 1500PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H102J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1XB1H562K C 0.10UF, K, 25V 1 C2356 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 4 79 C2384 ECJ2XB1H102K C 1000PF, K, 50V 4 79 C2348 ECJ2XB1H102K C 0.1UF, K, 25V 2 9 C2440 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C2301 ECJ1VF1A105Z C 1UF, Z, 10V 1  C2307 ECA1CMH101 E 100UF, 16V 1  C2310,1 ERJ8GEY0R00 M 0 OHM, 1/8W 2  C2335 ECJ3YB1A106M C 10UF, M,6.3V 1  C2337 ECJ1VB1C473K C 0.047UF, K, 16V 1  C2338 ECJ1VB1E104K C 0.10UF, K,25V 1  C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1  C2341 ECJ1XC1H221J C 220PF, J, 50V 1  C2342 ECJ1VB1H152K C 1500PF, K, 50V 1  C2344 ECJ1XC1H02J C 1000PF, J, 50V 1  C2346 ECJ1XC1H02J C 1000PF, J, 50V 1  C2347 ECA1VHG470 E 47UF, 35V 1  C2348 ECJ1XC1H221J C 220PF, J, 50V 1  C2349 ECJ1XB1H562K C 1500PF, K, 50V 1  C2349 ECJ1XC1H02J C 1000PF, J, 50V 1  C2350 ECJ2XB1H562K C 5600PF, K, 50V 1  C2351 ECJ1XC1H02J C 1000PF, J, 50V 1  C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1  C2353 ECJ1XB1C473K C 0.047UF, K, 16V 1  C2372 ECA1HHG100 E 10UF, 50V 1  C2374 ECA1HHG100 E 10UF, 50V 1  C2374 ECA1HHG100 E 10UF, 50V 4  87  C2448,2 ECJ2XB1H102K C 1000PF, K, 50V 4  87  C2428,2 ECJ2XB1H102K C 0.1UF, K, 25V 2  9  C2430 ECJ1XF1A105Z C 1UF, Z, 10V 1				1	
C2307 ECA1CMH101 E 100UF, 16V 1  C2310,1 ERJ8GEY0R00 M 0 OHM, 1/8W 2  1  C2335 ECJ3YB1A106M C 10UF, M,6.3V 1  C2337 ECJ1VB1C473K C 0.047UF, K, 16V 1  C2338 ECJ1VB1E104K C 0.10UF, K, 25V 1  C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1  C2341 ECJ1XC1H221J C 220PF, J, 50V 1  C2342 ECJ1VB1H152K C 1500PF, K, 50V 1  C2344 ECJ1XC1H22J C 1000PF, J, 50V 1  C2344 ECJ1XC1H02J C 1000PF, J, 50V 1  C2346 ECJ1XC1H02J C 1000PF, J, 50V 1  C2347 ECA1VHG470 E 47UF, 35V 1  C2348 ECJ1XC1H221J C 220PF, J, 50V 1  C2349 ECJ1XC1H221J C 220PF, K, 50V 1  C2350 ECJ2XB1H562K C 5600PF, K, 50V 1  C2351 ECJ1XC1H02J C 1000PF, J, 50V 1  C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1  C2353 ECJ1XB1E104K C 0.10UF, K, 25V 1  C2372 ECA1HHG100 E 10UF, 50V 1  C2374 ECA1HHG100 E 10UF, 50V 1  C2376 ECJ2XB1H102K C 1000PF, K, 50V 4  P  C2384 ECJ2XB1H102K C 1000PF, K, 50V 4  EC3376 ECJ2XB1H102K C 1000PF, K, 50V 4  EC3376 ECJ2XB1H102K C 1000PF, K, 50V 4  EC3384 ECJ2XB1H102K C 1000PF, K, 50V 4  EC3384 ECJ2XB1H102K C 1000PF, K, 50V 4  EC3384 ECJ2XB1H102K C 1000PF, K, 50V 4  EC3376 ECJ2XB1H102K C 1000PF, K, 50V 4  EC3384 ECJ2XB1H102K C 1000PF, K, 50V 4  EC3448 ECJ2XB1H102K C 0.1UF, K, 25V 2  EC3430 ECJ1VF1A105Z C 1UF, Z, 10V 1	C2300	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C2310,1 ERJ8GEY0R00 M 0 OHM, 1/8W 2 1 C2335 ECJ3YB1A106M C 10UF, M,6.3V 1 C2337 ECJ1YB1C473K C 0.047UF, K, 16V 1 C2338 ECJ1YB1E104K C 0.10UF, K,25V 1 C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2341 ECJ1XC1H221J C 220PF, J, 50V 1 C2342 ECJ1YB1H152K C 1500PF, K, 50V 1 C2344 ECJ1XC1H20J C 1000PF, K, 50V 1 C2344 ECJ1XC1H102J C 1000PF, J, 50V 1 C2346 ECJ1YF1A105Z C 1UF, Z, 10V 1 C2347 ECA1YB470 E 47UF, 35V 1 C2348 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1YB1H52K C 1500PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H21J C 220PF, J, 50V 1 C2352 ECJ1YB1C473K C 1500PF, K, 50V 1 C2353 ECJ1XC1H102J C 1000PF, J, 50V 1 C2355 ECJ2FB1C274K C 0.047UF, K, 16V 1 C2356 ECJ3YB1A106M C 10UF, K, 25V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, S0V 4 P9 C2384- ECJ2XB1H102K C 1000PF, K, 50V 4 P7 C2384- ECJ2XB1H102K C 1000PF, K, 50V 4 P7 C2384- ECJ2XB1H102K C 1000PF, K, 50V 4 P7 C2348- ECJ2XB1H102K C 1000PF, K, 50V 4 P7 C2348- ECJ2XB1H102K C 1000PF, K, 50V 4 P7 C2348- ECJ2XB1E104K C 0.1UF, K, 25V 2 P C24430 ECJ1YF1A105Z C 1UF, Z, 10V 1	C2301	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
1 C2335 ECJ3YB1A106M C 10UF, M,6.3V 1 C2337 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2338 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2341 ECJ1XC1H221J C 220PF, J, 50V 1 C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2343 ECJ2XB1H562K C 5600PF, K, 50V 1 C2344 ECJ1XC1H20J C 1000PF, J, 50V 1 C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2347 ECA1VHG470 E 47UF, 35V 1 C2348 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1VB1H52K C 1500PF, K, 50V 1 C2349 ECJ1VB1H52K C 1500PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H02J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2356 ECJ3YB1A106M C 10UF, M,6.3V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 87 C22428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1	C2307	ECA1CMH101	E 100UF, 16V	1	
C2337 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2338 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2341 ECJ1XC1H221J C 220PF, J, 50V 1 C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2343 ECJ2XB1H562K C 5600PF, K, 50V 1 C2344 ECJ1XC1H102J C 1000PF, J, 50V 1 C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2347 ECA1VHG470 E 47UF, 35V 1 C2348 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1XC1H221J C 220PF, J, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H102J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2356 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2376 ECJ2XB1A100M C 10UF, M, 6.3V 1 C2376 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2377 ECA1HHG100 E 10UF, 50V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2384 ECJ2XB1H102K C 0.1UF, K, 25V 2 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1		ERJ8GEY0R00	M 0 OHM, 1/8W	2	
C2337 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2338 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2341 ECJ1XC1H221J C 220PF, J, 50V 1 C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2343 ECJ2XB1H562K C 5600PF, K, 50V 1 C2344 ECJ1XC1H102J C 1000PF, J, 50V 1 C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2347 ECA1VHG470 E 47UF, 35V 1 C2348 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1XC1H221J C 220PF, J, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H102J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2356 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2376 ECJ2XB1A100M C 10UF, M, 6.3V 1 C2376 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2377 ECA1HHG100 E 10UF, 50V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2384 ECJ2XB1H102K C 0.1UF, K, 25V 2 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1		ECJ3YB1A106M	C 10UF, M,6.3V	1	
C2340 ECJ2FB1C274K C 0.27UF, Z, 16V 1  C2341 ECJ1XC1H221J C 220PF, J, 50V 1  C2342 ECJ1VB1H152K C 1500PF, K, 50V 1  C2343 ECJ2XB1H562K C 5600PF, K, 50V 1  C2344 ECJ1XC1H102J C 1000PF, J, 50V 1  C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1  C2347 ECA1VHG470 E 47UF, 35V 1  C2348 ECJ1XC1H221J C 220PF, J, 50V 1  C2349 ECJ1VB1H152K C 1500PF, K, 50V 1  C2350 ECJ2XB1H562K C 5600PF, K, 50V 1  C2351 ECJ1XC1H102J C 1000PF, J, 50V 1  C2352 ECJ1XC1H102J C 1000PF, J, 50V 1  C2353 ECJ1XC1H102J C 1000PF, J, 50V 1  C2353 ECJ1VB1C473K C 0.047UF, K, 16V 1  C2355 ECJ2FB1C274K C 0.27UF, Z, 16V 1  C2376 ECJ3YB1A106M C 10UF, M, 6.3V 1  C2377 ECA1HHG100 E 10UF, 50V 1  C2376 ECJ2XB1H102K C 1000PF, K, 50V 4  87  C2384 ECJ2XB1H102K C 1000PF, K, 50V 4  87  C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2  9  C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1				1	
C2341 ECJ1XC1H221J C 220PF, J, 50V 1 C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2343 ECJ2XB1H562K C 5600PF, K, 50V 1 C2344 ECJ1XC1H102J C 1000PF, J, 50V 1 C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2347 ECA1VHG470 E 47UF, 35V 1 C2348 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1VB1H152K C 1500PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H102J C 1000PF, J, 50V 1 C2352 ECJ1XC1H102J C 1000PF, J, 50V 1 C2353 ECJ1XC1H102J C 1000PF, J, 50V 1 C2355 ECJ2FB1C274K C 0.047UF, K, 16V 1 C2356 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2377 ECA1HHG100 E 10UF, 50V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2384 ECJ2XB1H102K C 1000PF, K, 50V 4 C2384 ECJ2XB1H102K C 1000PF, K, 50V 4 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1	C2338	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2342 ECJ1VB1H152K C 1500PF, K, 50V 1 C2343 ECJ2XB1H562K C 5600PF, K, 50V 1 C2344 ECJ1XC1H102J C 1000PF, J, 50V 1 C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2347 ECA1VHG470 E 47UF, 35V 1 C2348 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1VB1H152K C 1500PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H102J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2356 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2377 ECA1HHG100 E 10UF, 50V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2384 ECJ2XB1H102K C 1000PF, K, 50V 4 C2384 ECJ2XB1H102K C 1000PF, K, 50V 4 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1	C2340	ECJ2FB1C274K	C 0.27UF, Z, 16V	1	
C2343 ECJ2XB1H562K C 5600PF, K, 50V 1  C2344 ECJ1XC1H102J C 1000PF, J, 50V 1  C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1  C2347 ECA1VHG470 E 47UF, 35V 1  C2348 ECJ1XC1H221J C 220PF, J, 50V 1  C2349 ECJ1VB1H152K C 1500PF, K, 50V 1  C2350 ECJ2XB1H562K C 5600PF, K, 50V 1  C2351 ECJ1XC1H102J C 1000PF, J, 50V 1  C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1  C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1  C2356 ECJ2FB1C274K C 0.27UF, Z, 16V 1  C2372 ECA1HHG100 E 10UF, 50V 1  C2374 ECA1HHG100 E 10UF, 50V 1  C2376 ECJ2XB1H102K C 1000PF, K, 50V 4  C2384 ECJ2XB1H102K C 1000PF, K, 50V 4  C2384 ECJ2XB1H102K C 1000PF, K, 50V 4  EC2384 ECJ2XB1H102K C 1000PF, K, 50V 4  EC2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2  EC2430 ECJ1VF1A105Z C 1UF, Z, 10V 1	C2341	ECJ1XC1H221J	C 220PF, J, 50V	1	
C2344 ECJ1XC1H102J C 1000PF, J, 50V 1 C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1 C2347 ECA1VHG470 E 47UF, 35V 1 C2348 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1VB1H152K C 1500PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H102J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2355 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2376 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2377 ECA1HHG100 E 10UF, 50V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 C2378 ECJ2XB1H102K C 1000PF, K, 50V 4 C2379 ECJ2XB1H102K C 1000PF, K, 50V 4 ECJ2XB1 ECJ2XB1H102K C 1000PF, K, 50V 4 ECJ428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 ECJ430 ECJ1VF1A105Z C 1UF, Z, 10V 1	C2342			1	
C2346 ECJ1VF1A105Z C 1UF, Z, 10V 1  C2347 ECA1VHG470 E 47UF, 35V 1  C2348 ECJ1XC1H221J C 220PF, J, 50V 1  C2349 ECJ1VB1H152K C 1500PF, K, 50V 1  C2350 ECJ2XB1H562K C 5600PF, K, 50V 1  C2351 ECJ1XC1H102J C 1000PF, J, 50V 1  C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1  C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1  C2355 ECJ2PB1C274K C 0.27UF, Z, 16V 1  C2356 ECJ3YB1A106M C 10UF, M, 6.3V 1  C2372 ECA1HHG100 E 10UF, 50V 1  C2374 ECA1HHG100 E 10UF, 50V 1  C2376 ECJ2XB1H102K C 1000PF, K, 50V 4  P9  C2384 ECJ2XB1H102K C 1000PF, K, 50V 4  87  C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2  9  C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C2347 BCA1VHG470 E 47UF, 35V 1  C2348 BCJJKC1H221J C 220PF, J, 50V 1  C2349 BCJJVB1H152K C 1500PF, K, 50V 1  C2350 BCJZXB1H562K C 5600PF, K, 50V 1  C2351 BCJJKC1H102J C 1000PF, J, 50V 1  C2352 BCJJVB1C473K C 0.047UF, K, 16V 1  C2353 BCJJVB1E104K C 0.10UF, K, 25V 1  C2355 BCJZFB1C274K C 0.27UF, Z, 16V 1  C2356 BCJJXB1A106M C 10UF, M, 6.3V 1  C2372 BCA1HHG100 E 10UF, 50V 1  C2374 BCA1HHG100 E 10UF, 50V 1  C2376- BCJZXB1H102K C 1000PF, K, 50V 4  79  C2384- BCJZXB1H102K C 1000PF, K, 50V 4  87  C2428,2 BCJZXB1E104K C 0.1UF, K, 25V 2  9  C2430 BCJJVF1A105Z C 1UF, Z, 10V 1					
C2348 ECJ1XC1H221J C 220PF, J, 50V 1 C2349 ECJ1VB1H152K C 1500PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H102J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2355 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2356 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2376 ECJ2XB1H102K C 1000PF, K, 50V 4 79 C2384 ECJ2XB1H102K C 1000PF, K, 50V 4 87 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C2349 ECJ1VB1H152K C 1500PF, K, 50V 1 C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H102J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2355 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2356 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2376- ECJ2XB1H102K C 1000PF, K, 50V 4 79 C2384- ECJ2XB1H102K C 1000PF, K, 50V 4 87 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C2350 ECJ2XB1H562K C 5600PF, K, 50V 1 C2351 ECJ1XC1H102J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2355 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2356 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2376- ECJ2XB1H102K C 1000PF, K, 50V 4 79 C2384- ECJ2XB1H102K C 1000PF, K, 50V 4 87 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C2351 ECJ1XC1H102J C 1000PF, J, 50V 1 C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2355 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2356 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2376- ECJ2XB1H102K C 1000PF, K, 50V 4 79 C2384- ECJ2XB1H102K C 1000PF, K, 50V 4 87 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C2352 ECJ1VB1C473K C 0.047UF, K, 16V 1 C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2355 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2356 ECJ3YB1A106M C 10UF, M,6.3V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2376- ECJ2XB1H102K C 1000PF, K, 50V 4 79 C2384- ECJ2XB1H102K C 1000PF, K, 50V 4 87 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C2353 ECJ1VB1E104K C 0.10UF, K, 25V 1 C2355 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2356 ECJ3YB1A106M C 10UF, M, 6.3V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2376- ECJ2XB1H102K C 1000PF, K, 50V 4 79 C2384- ECJ2XB1H102K C 1000PF, K, 50V 4 87 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C2355 ECJ2FB1C274K C 0.27UF, Z, 16V 1 C2356 ECJ3YB1A106M C 10UF, M,6.3V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2376- ECJ2XB1H102K C 1000PF, K, 50V 4 79 C2384- ECJ2XB1H102K C 1000PF, K, 50V 4 87 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C2356 ECJ3YB1A106M C 10UF, M,6.3V 1 C2372 ECA1HHG100 E 10UF, 50V 1 C2374 ECA1HHG100 E 10UF, 50V 1 C2376- ECJ2XB1H102K C 1000PF, K, 50V 4 79 C2384- ECJ2XB1H102K C 1000PF, K, 50V 4 87 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1					
C2372 ECA1HHG100 E 10UF, 50V 1  C2374 ECA1HHG100 E 10UF, 50V 1  C2376- ECJ2XB1H102K C 1000PF, K, 50V 4  79  C2384- ECJ2XB1H102K C 1000PF, K, 50V 4  87  C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2  9  C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1				1	
C2376- ECJ2XB1H102K C 1000PF, K, 50V 4 79 C2384- ECJ2XB1H102K C 1000PF, K, 50V 4 87 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1	C2372	ECA1HHG100	E 10UF, 50V	1	
79 C2384- ECJ2XB1H102K C 1000PF, K, 50V 4 87 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1	C2374	ECA1HHG100	E 10UF, 50V	1	
87 C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1		ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2428,2 ECJ2XB1E104K C 0.1UF, K, 25V 2 9 C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1		ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2430 ECJ1VF1A105Z C 1UF, Z, 10V 1	C2428,2	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
		ECJ1VF1A105Z	C 1UF, Z, 10V	1	
I. I I	C2433,3			2	
4 C2437,3 ECJ2FB1A225K C 2.2UF, K, 10V 2 8	C2437,3	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
C2441,4 ECJ1XC1H221J C 220PF, J, 50V 2	C2441,4	ECJ1XC1H221J	C 220PF, J, 50V	2	
C2445,4 ECJ2FB1E105K C 1UF, K, 25V 2	C2445,4	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2449,5 ECA1EHG331 E 330UF, 25V 2	C2449,5	ECA1EHG331	E 330UF, 25V	2	
C2453,5 ECJ2FB1E105K C 1UF, K, 25V 2	C2453,5	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2457,5 ECJ2FB0J335K C 3.3UF, K, 16V 2	C2457,5	ECJ2FB0J335K	C 3.3UF, K, 16V	2	
C2461,6 ECJ2XB1H332K C 3300PF, K, 50V 2		ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2465,6 ECJ2FB1E105K C 1UF, K, 25V 2	_	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2469,7   ECJ2FB1E105K   C 1UF, K, 25V   2		ECJ2FB1E105K	C 1UF, K, 25V	2	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C2473,7	ECJ2FB1E105K	C 1UF, K, 25V	2	
	ECJ2FB1E105K	C 1UF, K, 25V	2	
	ECJ2FB1E224K	C 22UF, K, 25V	4	
	ECJ2XB1H332K	C 3300PF, K, 50V	2	
<u> </u>	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2512	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C2515	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2602		E 100UF, 16V	1	
C2603		C 0.1UF, Z, 16V	1	
C2606 C2607	ECJ1VB1H332K ECJ2FB1C684K	C 3300PF, K, 50V C 68UF, Z, 16V	1	
C2608		C 1UF, Z, 10V	1	
C2609		C 0.1UF, Z, 16V	1	
C2610- 14	ECJ1VF1A105Z	C 1UF, Z, 10V	5	
C2615	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C2616		C 68UF, Z, 16V	1	
C2617	ECJ1VB1H332K	C 3300PF, K, 50V	1	
C2620,2 1	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
6		C 0.047UF, K, 16V	2	
4		C 2.2UF, 16V	2	
		C 1UF, Z, 10V	1	
C2644- 50	ECJ1VF1A105Z	C 1UF, Z, 10V	7	
	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2652	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2654,5 5	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C2656	ECA1CHG101	E 100UF, 16V	1	
C2657	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2660,6	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2662 C2663		C 0.1UF, Z, 16V C 1UF, Z, 10V	1	
C2664	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2665-		C 0.1UF, Z, 16V	4	
C2670	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2672	ECA1CHG470	E 47UF, 16V	1	
C2673	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2675	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2676	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2678 C2684-	ECJ1VF1A105Z ECJ1VF1A105Z	C 1UF, Z, 10V C 1UF, Z, 10V	6	
89			1	
C2701 C2702	ECJ1XF1C104Z	E 100UF, 16V C 0.1UF, Z, 16V	1	
C2702	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2705	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2708	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2710	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2712	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2715	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2717 C2718	ECJ1VF1A105Z ECJ1XF1C104Z	C 1UF, Z, 10V C 0.1UF, Z, 16V	1	
C2723	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2725	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2729,3 0	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2733,3 4	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2736- 44		C 1UF, Z, 10V	9	
	1	C 1UF, Z, 10V	1	
C2750	ECA1HHG220	E 22UF, 50V	1	
C2775 C2776,7	ECJ2VF1C105Z	E 470UF, 25V C 1UF, Z, 16V	2	
7	2002 VF 1C1034	C 10F, 2, 10V		

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description	- 05	
C2779,8 0	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2783	ECA1HHG220	E 22UF, 50V	1	
C4001	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C4002	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4005,0 6	ECJ1XC1H180J	C 18PF, J, 50V	2	
C4008- 11	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4012	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
15		C 0.1UF, Z, 16V	3	
		C 100PF, J, 50V	1	
C4017,1 8		C 0.1UF, Z, 16V	2	
C4020		C 1UF, K, 16V	1	
C4021	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4024 C4025	ECJ1XC1H180J	C 18PF, J, 50V	1	
	ECJ1XC1H220J	C 22PF, J, 50V	1	
C4030 C4032	ECJ1XC1H101J ECJ1VB1H103K	C 100PF, J, 50V C 0.001UF, K, 50V	1	
	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4033	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
		C 0.047UF, Z, 16V	1	
		C 100PF, J, 50V	1	
	ECJ1VB1C105K	C 0.01UF, K, 16V	2	
C4051	ECJ1VB1A224K	C 0.22UF, Z, 50V	1	
C4053		C 0.22UF, Z, 50V	1	
C4054	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4055	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4057	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4059	ECJ3YB0J335K	C 33UF, J, 25V	1	
C4063	ECJ1XC1H561J	C 560PF, J, 50V	1	
		C 0.01UF, K, 16V	1	
C4071	EEEHPOJ470P	C 47PF, J,6.3V	1	
C4074	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4096	EEVHB1E330	E 33UF, 25V	1	
C4098	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4099,0 0	ECJ1VC1H120J	C 12PF, J, 50V	2	
C4102,0 3	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4104	ECJ1XC1H680J	C 68PF, J, 50V	1	
C4107	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4120	EEFCD0G560R	56UF,	1	
C4121	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4123	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C4124	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4126	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C4127	ECJ1VB1H153K	C 0.015UF, K, 50V	1	
C4129	EEVHB0J470R	E 47UF, 6.3V	1	
C4130	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
2	ECJ3XB0J106M	C 10DF T 16V	2	
C4133	EEEHB1C100R	C 10PF, J, 16V	1	
C4134 C4135- 37	ECJ1XC1H101J ECJ1XB1C104K	C 100PF, J, 50V C 0.1UF, Z, 16V	3	
C4141	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4141	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4143	EEVHB0J470R	E 47UF, 6.3V	1	
C4144	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4145- 47	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4148	ECJ1VB1H102K	C 1000PF, K, 50V	1	
C4149	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4155	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4160		C 1UF, K, 16V	1	
C4161	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4164	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
C4165	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	

Ref.	Part No.	Part Name & Description	Pcs	Remarks
	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
		C 0.1UF, Z, 16V	2	
2				
C4184	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4186	ECJ1XB1C104K		1	
C4191		C 0.1UF, Z, 16V	1	
C4203	EEVHB0J470R	E 47UF, 6.3V	1	
C4205	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4208-	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
	EEVHB1C470P	E 47UE. 16V	1	
C4216	ECJ1VB1H103K		1	
		C 180PF, J, 50V	2	
8		C 33PF, J, 50V	2	
0				
C4221		C 0.001UF, K, 50V	1	
C4222		E 47UF, 16V	1	
C4224	EEEHB1C100R	C 10PF, J, 16V	1	
C4225		C 0.010UF, K, 16V	1	
C4227	F1J0J1060004	C 0.010UF, K, 16V	1	
C4229,3	ECJ1XB1C104K		2	
C4231		E 47UF, 16V	1	
C4232,3	EEEHP1C100R	C 10PF, J, 16V	2	
C4234,3 5	ECJ1VB1H272K	C 2700PF, K, 50V	2	
C4236	EEVHB0J470R	E 47UF, 6.3V	1	
C4237- 48	ECJ1XB1C104K	C 0.1UF, Z, 16V	12	
C4249	EEVHB0J470R	E 47UF, 6.3V	1	
C4250- 54	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4259	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4260	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4261	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4262	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4263- 65	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4267-	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
		C 1UF, K, 16V	1	
C4272	EEVHB0J470R	E 47UF, 6.3V	1	
C4273- 78	ECJ1XB1C104K	C 0.1UF, Z, 16V	6	
C4279	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4280	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4295	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4296	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4297	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4298	EEEHB0J330R	C 33PF, J, 6.3V	1	
C4299,0 0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4301	EEEHB0J220R	C 22PF, J, 6.3V	1	
C4302	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4304	EEVHB0J470R	E 47UF, 6.3V	1	
C4305- 15	ECJ1XB1C104K	C 0.1UF, Z, 16V	11	
C4316	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4317- 21	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4324,2 5	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4326	EEVHB0G221P	E 220UF, 4V	1	
C4327	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4328	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4329	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4330	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4331 C4332-	EEVHB0J470R ECJ1XB1C104K	E 47UF, 6.3V C 0.1UF, Z, 16V	1 4	
35 C4336	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
	1	1 , -, -, -, -, -, -, -, -, -, -, -,		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4338	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
		C 1UF, Z, 10V	1	
C4456	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4457	ECJ1XB0J105K	C 1UF, K, 16V	1	
	ECJ1XB0J105K		1	
			<del>                                     </del>	
C4461	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
4	F1K1A1060010		2	
6		C 1000PF, J, 50V	2	
C4468,6 9	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C4470- 73	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4474- 77	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4478- 81	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4482- 84	ECJ1XC1H102J	C 1000PF, J, 50V	3	
C4486- 90	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4492	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4493,9 4	ECJ1VB1H103K	C 0.001UF, K, 50V	2	
	ECJ1XB0J105K	C 1UF, K, 16V	3	
	ECJ1XC1H102J	C 1000PF, J, 50V	16	
	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4515	EEFCD0G560R	56UF,	1	
C4516-	ECJ1VB1H103K	C 0.001UF, K, 50V	12	
27 C4528	EC.T1 VP1 C1 0 4 77	C 0 1HP 7 1617	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V		
	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
37			<b>⊢_</b> ⊢	
C4587	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C4588	EEEHB0G221P	C 220PF, J, 4V	1	
C4589	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4590	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C4591	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4780	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4781- 84	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4785	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4787	EEVHB0J470R	E 47UF, 6.3V	1	
C4788	ECJ1XB1C104K		1	
C4789	ECJ1VB1H103K	+	1	
	ECJ1XB0J105K		1	
C4790				
C4791 C4792-	ECJ1XC1H101J ERJ3GEY0R00	C 100PF, J, 50V M 0 OHM, 1/16W	5	
96	EG T13701771 00-	G 0 001777 77 50		
C4797	ECJ1VB1H103K	<del> </del>	1	
C4798	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4799	EEEHB1C100R	C 10PF, J, 16V	1	
C4800	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4802	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4803	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C5601	ECA1HM220	E 22UF, 50V	1	
C5604	ECA1HHG100	E 10UF, 50V	1	
C5605	EEUFC1E102	E 1000UF, 25V	1	
C5606	EEUFC1C821	E 820UF, 16V	1	
C5608	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5609	ECA1HM220	E 22UF, 50V	1	
C5611	EEUFC1E102	E 1000UF, 25V	1	
C5612	EEUFC1C821SB	E 820UF, 16V	1	
C5613	ECJ2XB1E104K		1	
		C 0.1UF, K, 25V	1	
C5616	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
-	EEUFC1C821SB ECJ2XB1E104K	E 820UF, 16V C 0.1UF, K, 25V	2	
9 C5622	EEUFC1C821	E 820UF, 16V	1	
C5623	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C5626	11 101011			
C5626 C5631	EEUFC1C102	E 1000UF, 16V	1	

	1			
Ref.	Part No.	Part Name &	Pcs	Remarks
No. C5641-	ECJ2VF1C104Z	Description C 0.1UF, Z, 16V	4	
44	ECUZVFICIU4Z	C 0.10F, Z, 10V	*	
C5670	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5672	ECA1HM220	E 22UF, 50V	1	
C5673	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5685	ECA1HHG100	E 10UF, 50V	1	
C5686	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5801,0	EEUFC1E471	E 470UF, 25V	2	
2		_ 45 05		
C5803	EEUFC1E470	E 47UF, 25V	1	
C5805 C5809	ECJ2VF1C105Z ECJ3XF1E105Z	C 1UF, Z, 16V C 1UF, Z, 25V	1	
C5810	ECA1EHG470	E 47UF, 25V	1	
C5813	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5818	ECA1CM471	E 470UF, 16V	1	
C5820	ECA1CM102	E 1000UF, 16V	1	
C5821	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5823	ECA1CM222	E 2200UF, 16V	1	
C6001-	ECQE2105RKB	P 1UF, 250V	5	
05				
C6007	ECWF2205JS	P 2UF, 250V	1	
C6008	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6011- 14	F2A2T201A001	E 200UF,	4	
C6017	F1L2J562A022	C 5600UF, K,6.3V	1	
C6017	EEUFC1E221	E 220UF, 25V	1	
C6020	EEUFC1E221	E 220UF, 25V	1	
C6021,2	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
2				
C6024,2	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
5				
C6027	F1L1E4750004	C 4.7UF, 25V	1	
C6029,3	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6032	F1L1E4750004	C 4.7UF, 25V	1	
C6036,3	TCUY1C105ZFN	C 1UF, 16V	2	
7		,		
C6059	F1L2J562A022	C 5600UF, K,6.3V	1	
C6068	EEUFC1E470	E 47UF, 25V	1	
C6069	ECA2CM101	E 100UF, 160V	1	
C6070	ECA2DHG221	E 220UF, 200V	1	
C6073	ECA2CM101	E 100UF, 160V	1	
C6074- 78	ECQE2105RKB	P 1UF, 250V	5	
C6081	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6083	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6086	F1L1E4750004	C 4.7UF, 25V	1	
C6087	F1K1E1050001	C 1UF, Z, 25V	1	
C6500	ECA2CHG100	E 10UF, 160V	1	
C6501	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C6502	TCUY1C105ZFN	C 1UF, 16V	1	
C6504	EEUFC1E221	E 220UF, 25V	1	
C6505	ECA1HM221	E 220UF, 50V	1	
C6506	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C6507	ECA2CM101	E 100UF, 160V	1	
C6508	F1L1E4750004	C 4.7UF, 25V	1	
C6509	EEUFC1E470	E 47UF, 25V	1	
C6511	ECA1HM101	E 100UF, 50V	1	
C6512,1	F1L1E4750004	C 4.7UF, 25V	2	
C6514	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C6515,1	F1L1E4750004	C 4.7UF, 25V	2	
6				
C6517	ECJ2XB1H393K	C 0.039UF, K, 50V	1	
C6518	TCUY1C105ZFN	C 1UF, 16V	1	
C6520	EEUFC1E221	E 220UF, 25V	1	
C6521	ECA2CM101	E 100UF, 160V	1	
C6522,2	F1K2J332A014	C 3300UF, K,6.3V	2	
3 C6524	E222C1002017	E 100HE 4007	1	
C6524 C6525	F2A2G100A017 ECJ3XB2J222K	E 100UF, 400V C 2200PF, K,630V	1	
C6526	F1K2J332A014	C 3300UF, K,6.3V	1	
C6527,2	TCUY1C105ZFN	C 1UF, 16V	2	
8			L	
C6532	TCUY1C105ZFN	C 1UF, 16V	1	
C6533	ECA2VHG100	E 10UF, 350V	1	
	<del></del>			

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ECJ2XC1H102J		1	
	F1L1E4750004	C 4.7UF, 25V	2	
-	ECA2CM101	E 100UF, 160V	1	
	F1L1E4750004	C 4.7UF, 25V	2	
1		-		
C6543	F1L1E4750004	C 4.7UF, 25V	1	
C6544	ECA1VM470	E 47UF, 35V	1	
C6545 C6547	F1K2J471A014 ECA2EHG470	C 470UF, K,6.3V E 47UF, 250V	1	
C6547				
	F1L1E4750004 F1K2J102A014	C 4.7UF, 25V C 1000PF,	2	
1				
C6553	F1L1E4750004	C 4.7UF, 25V	1	
C6555	ECA2CM101	E 100UF, 160V	1	
C6559	TCUY1C105ZFN	C 1UF, 16V	1	
C6561,6 2	TCUY1C105ZFN	C 1UF, 16V	2	
C6563	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6564	TCUY1C105ZFN	C 1UF, 16V	1	
C6566	TCUY1C105ZFN	C 1UF, 16V	1	
C6567- 70	F2A2T201A001	E 200UF,	4	
C6571	ECJ3YB1E105K	C 1UF, K, 25V	1	·
C6572	ECWF2205JS	P 2UF, 250V	1	
C6573	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6574	EEUFC1E221	E 220UF, 25V	1	
C6577	F1L2J562A022	C 5600UF, K,6.3V	1	
C6585,8 6	F1L1E4750004	C 4.7UF, 25V	2	
C6589	F1L1E4750004	C 4.7UF, 25V	1	
C6591	ECA2CM101	E 100UF, 160V	1	
C6596	F1L1E4750004	C 4.7UF, 25V	1	
C6598	F1L1E4750004	C 4.7UF, 25V	1	
C6601	ECQE2224KF	P 2.2UF, K,250V	1	
C6602- 05	F1L1E4750004	C 4.7UF, 25V	4	
C6607	ECJ3FC2D102J	C 1000PF, J,200V	1	
C6609	ECJ3FC2D102J	C 1000PF, J,200V	1	
C6617,1 8	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C6619,2 0	TCUY1C105ZFN	C 1UF, 16V	2	
C6621,2 2	EEUFC1E470	E 47UF, 25V	2	
C6623- 27	ECQE2105RKB	P 1UF, 250V	5	
C6633	F1L2J562A022	C 5600UF, K,6.3V	1	
C6649- 53	ECQE2105RKB	P 1UF, 250V	5	
C6670	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6672	F1L1E4750004	C 4.7UF, 25V	1	
C6673	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6676	F1L1E4750004	C 4.7UF, 25V	1	
C6901- 06	TCUY1C105ZFN	C 1UF, 16V	6	
	ECJ2XB1H102K	C 1000PF, K, 50V	2	
	F1L2E1040002	E 1000UF, 25V	4	
C6917- 20 C6926- 31	TCUY1C105ZFN	C 1UF, 16V	6	
20 C6926- 31		C 1UF, 16V	6 2	
20 C6926- 31 C6932,3 3 C6940-	TCUY1C105ZFN ECJ2XB1H102K			
20 C6926- 31 C6932,3 3 C6940- 43	TCUY1C105ZFN ECJ2XB1H102K	C 1000PF, K, 50V	2	
20 C6926- 31 C6932,3 3 C6940- 43 C7103	TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002	C 1000PF, K, 50V  E 1000UF, 25V  C 0.47UF, 6.3V  C 100PF, J, 50V	2 4	
20 C6926- 31 C6932,3 3 C6940- 43 C7103	TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002 ECJ3XB2A474K	C 1000PF, K, 50V E 1000UF, 25V C 0.47UF, 6.3V	2 4	
20 C6926- 31 C6932,3 3 C6940- 43 C7103 C7106 C7107 C7123	TCUY1C105ZFN  ECJ2XB1H102K  F1L2E1040002  ECJ3XB2A474K  ECJ1XC1H101J  TCUY1C105ZFN  ECJ3XB2A474K	C 1000PF, K, 50V E 1000UF, 25V  C 0.47UF, 6.3V C 100PF, J, 50V C 1UF, 16V C 0.47UF, 6.3V	2 4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
20 C6926- 31 C6932,3 3 C6940- 43 C7103 C7106 C7107 C7123	TCUY1C105ZFN  ECJ2XB1H102K  F1L2E1040002  ECJ3XB2A474K  ECJ1XC1H101J  TCUY1C105ZFN  ECJ3XB2A474K  ECJ1XC1H101J	C 1000PF, K, 50V E 1000UF, 25V  C 0.47UF, 6.3V C 100PF, J, 50V C 1UF, 16V C 0.47UF, 6.3V C 100PF, J, 50V	2 4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
20 C6926- 31 C6932,3 3 C6940- 43 C7103 C7106 C7107 C7123 C7126 C7127	TCUY1C105ZFN  ECJ2XB1H102K  F1L2E1040002  ECJ3XB2A474K  ECJ1XC1H101J  TCUY1C105ZFN  ECJ3XB2A474K  ECJ1XC1H101J  TCUY1C105ZFN	C 1000PF, K, 50V  E 1000UF, 25V  C 0.47UF, 6.3V  C 100PF, J, 50V  C 1UF, 16V  C 0.47UF, 6.3V  C 100PF, J, 50V  C 1UF, 16V	2 4 1 1 1 1 1 1	
20 C6926- 31 C6932,3 3 C6940- 43 C7103 C7106 C7107 C7123 C7126 C7127 C7143	TCUY1C105ZFN  ECJ2XB1H102K  F1L2E1040002  ECJ3XB2A474K  ECJ1XC1H101J  TCUY1C105ZFN  ECJ3XB2A474K  ECJ1XC1H101J  TCUY1C105ZFN  ECJ3XB2A474K	C 1000PF, K, 50V  E 1000UF, 25V  C 0.47UF, 6.3V  C 100PF, J, 50V  C 1UF, 16V  C 0.47UF, 6.3V  C 100PF, J, 50V  C 1UF, 16V  C 0.47UF, 6.3V	2 4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
20 C6926- 31 C6932,3	TCUY1C105ZFN  ECJ2XB1H102K  F1L2E1040002  ECJ3XB2A474K  ECJ1XC1H101J  TCUY1C105ZFN  ECJ3XB2A474K  ECJ1XC1H101J  TCUY1C105ZFN	C 1000PF, K, 50V  E 1000UF, 25V  C 0.47UF, 6.3V  C 100PF, J, 50V  C 1UF, 16V  C 0.47UF, 6.3V  C 100PF, J, 50V  C 1UF, 16V	2 4 1 1 1 1 1 1	

Ref.	Part No.	Part Name & Description	Pcs	Remarks
C7166	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7167	TCUY1C105ZFN		1	
C7180	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7184	<b>.</b>	C 0.1UF, Z, 16V	1	
C7186	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7188	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7203		C 0.47UF, 6.3V	1	
C7206	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7207	TCUY1C105ZFN		1	
C7223	<b>†</b>	C 0.47UF, 6.3V	1	
C7226	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7227		C 1UF, 16V	1	
C7243		C 0.47UF, 6.3V	1	
C7246	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7247	TCUY1C105ZFN		1	
C7263		C 0.47UF, 6.3V	1	
C7266		C 100PF, J, 50V	1	
C7267	TCUY1C105ZFN	C 1UF, 16V	1	
C7281	<del> </del>	C 0.1UF, Z, 16V	1	
C7283		C 0.1UF, Z, 16V	1	
C7285		C 0.1UF, Z, 16V	1	
C7287	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7300	<u> </u>	C 1UF, 16V	1	
	-		1	
C7301 C7304	ECJ1XC1H1013 ECJ3XB2A474K	C 100PF, J, 50V C 0.47UF, 6.3V	1	
	<u> </u>		1	
C7320	TCUY1C105ZFN			
C7321	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7324		C 0.47UF, 6.3V	1	
C7340	TCUY1C105ZFN	C 1UF, 16V	1	
C7341	<del></del>	C 100PF, J, 50V	1	
C7344		C 0.47UF, 6.3V	1	
C7360	TCUY1C105ZFN		1	
C7361	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7364		C 0.47UF, 6.3V	1	
C7381	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7383	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7385		C 0.1UF, Z, 16V	1	
C7389	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7396,9	ECJ1XC1H220J	C 22PF, J, 50V	2	
C7400	TCUY1C105ZFN	C THE 16V	1	
C7401		C 100PF, J, 50V	1	
C7404	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7420		C 1UF, 16V	1	
C7421		C 100PF, J, 50V	1	
C7424	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7440	TCUY1C105ZFN	C 1UF, 16V	1	
C7441	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7444	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7440	TCUY1C105ZFN	C 1UF, 16V	1	
C7461	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7464	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7481	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7483	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7485	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7487	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C8099,0	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
1	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
4				
C8105 C8106,0	EEEHB0G101R ECJ1VB0J105K	C 100PF, J, 4V C 1UF, K, 6.3V	2	
7				
C8108	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8109	EEEHB0G101R	C 100PF, J, 4V	1	
C8110,1	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8112	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8113-	ECJ0EB1A104K	C 0.1UF, K, 10V	6	
18		C 0.1UF, K, 10V	2	
1		5 5.152, K, 10V		

50U / TH-42F	PX50U / TH-50PX50L	]		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8144	ECJ0EB1A104K	C 0 111E F 1037	1	
C8145	ECJ0EB1C103K	C 0.1UF, K, 10V	1	
	ECJ0EB1C103K	CO.010UF, K, 16V	1	
		CO.010UF, K, 16V	+ +	
C8164	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8200	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
	ECJ0EF1H103Z	C 0.01UF, Z, 50V	1	
C8202,0	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8204 C8205	EEEHB0J221P EEEHB1H220P	C 220PF, J, 6.3V C 22PF, J, 50V	1	
	EEEHB0J221P	C 220PF, J, 6.3V	2	
7		0 22011, 0, 0.51		
C8208	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8209	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8210	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8211	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8214	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8215	ECJ0EC1H200J	C 200PF, K, 50V	1	
C8216	ECJ0EB1H271K	C 270PF, D, 50V	1	
C8217	ECJ0EC1H560J	C 560PF, K, 50V	1	
C8218,1	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8220	ECJ0EB1H102K	C 1000PF, K, 50V	1	
		C 270PF, K, 50V	1	
		C 1000PF, K, 50V	1	
C8223	ECJ0EC1H220J	C 220PF, K, 50V	1	
C8224,2	ECJ0EF1H103Z	C 0.01UF, Z, 50V	2	
5 C8226	EEEHB1C470P	C 47PF, J, 16V	1	
		C 100PF, K, 50V	1	
	ECJ0EF1H103Z	C 0.01UF, Z, 50V	2	
C8230	ECJ0EC1H120J	C 120PF, K, 50V	1	
	ECJ0EF1C104Z		1	
C8231		C 1000PF, K, 50V	1	
C8234,3	ECJ0EB1H102K ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
5				
C8237	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8238,3 9	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8240	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8241-	ECJ0EB1H102K	C 1000PF, K, 50V	3	
43				
C8244	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8245	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8246	EEEHB0G470R	C 47PF, J, 4V	1	
C8247	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8248	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8249- 51	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C8252	ECJ0EB1H222K	C 2200UF, Z, 50V	1	
C8253-	ECJ0EB1C103K	C0.010UF, K, 16V	3	
55 C8256	ECJ0EB1H102K	C 1000PF, K, 50V	1	
			t t	
C8258,5	ECJ0EB1C103K ECJ0EB1H102K	C 1000PF, K, 16V	2	
9	_		$\vdash$	
C8262	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8263	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8264,6	ECJ0EB1H102K	C 1000PF, K, 50V	2	
5			-	
5 C8266	ECJ0EB1C103K	C0.010UF, K, 16V	1	
	ECJ0EB1C103K ECJ0EB1H102K	C0.010UF, K, 16V C 1000PF, K, 50V	1	
C8266			t t	
C8266 C8267	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8266 C8267 C8270	ECJ0EB1H102K ECJ1VF1A105Z	C 1000PF, K, 50V C 1UF, Z, 10V	1	
C8266 C8267 C8270 C8271	ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1H102K	C 1000PF, K, 50V C 1UF, Z, 10V C 1000PF, K, 50V C 0.1UF, K, 10V	1 1 1	
C8266 C8267 C8270 C8271 C8272 C8273	ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1H102K ECJ0EB1A104K	C 1000PF, K, 50V C 1UF, Z, 10V C 1000PF, K, 50V	1 1 1	
C8266 C8267 C8270 C8271 C8272 C8273 C8275,7	ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1H102K ECJ0EB1A104K ECJ0EB1C103K ECJ0EB1C103K	C 1000PF, K, 50V C 1UF, Z, 10V C 1000PF, K, 50V C 0.1UF, K, 10V C0.010UF, K, 16V C0.010UF, K, 16V	1 1 1 1 1 2	
C8266 C8267 C8270 C8271 C8272 C8273 C8275,7 6 C8277	ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1H102K ECJ0EB1A104K ECJ0EB1C103K ECJ0EB1C103K	C 1000PF, K, 50V C 1UF, Z, 10V C 1000PF, K, 50V C 0.1UF, K, 10V C0.010UF, K, 16V C0.010UF, K, 16V	1 1 1 1 2	
C8266 C8267 C8270 C8271 C8272 C8273 C8275,7	ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1H102K ECJ0EB1A104K ECJ0EB1C103K ECJ0EB1C103K	C 1000PF, K, 50V C 1UF, Z, 10V C 1000PF, K, 50V C 0.1UF, K, 10V C0.010UF, K, 16V C0.010UF, K, 16V	1 1 1 1 1 2	

Ref.				
	Part No.	Part Name &	Pcs	Remarks
No.		Description	L	
C8282	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8286-		C 1000PF, K, 50V	3	
88				
C8289	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8289			1	
		C 100PF, K, 50V		
C8291	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8292,9	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
3				
C8294-	ECJ0EB1H102K	C 1000PF, K, 50V	4	
97				
C8298-	ECJ0EB1A104K	C 0.1UF, K, 10V	4	
01				
C8302	ECJ0EF1H103Z	C 0.01UF, Z, 50V	1	
C8303	EEEHB1C470P	C 47PF, J, 16V	1	
C8304,0	ECJ0EC1H150J	C 150PF, K, 50V	2	
5				
C8306	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
		C 0.10UF, Z, 16V	3	
10	ECOORTICIO42	C 0.100F, 2, 10V		
	PCT1VP131057	C 1UF, Z, 10V	2	
2	ECJ1VF1A105Z	C 10F, 4, 10V		
	EGT0EE1 G1 0 4 5	C 0 10TE 7 1CT	-	
C8313- 15	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
	BBBID 1 C1 11	G 10DB 7 11-	-	
C8316	EEEHB1C100R	C 10PF, J, 16V	1	
C8317-	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
19			<u> </u>	
C8320		C 1UF, Z, 10V	1	
C8321-	ECJ0EF1C104Z	C 0.10UF, Z, 16V	6	
26				
C8327	EEEHB1C100R	C 10PF, J, 16V	1	
C8328-	ECJ0EF1C104Z	C 0.10UF, Z, 16V	4	
31			<u> </u>	
C8332	ECJ1XB1C153K	C 0.015UF, Z, 16V	1	
C8333-	ECJ0EF1C104Z	C 0.10UF, Z, 16V	4	
36	_			
C8337	EEEHB1C100R	C 10PF, J, 16V	1	
C8338-	ECJ0EF1C104Z	C 0.10UF, Z, 16V	16	
53		5 0.100F, Z, 10V	- "	
	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
6	PC00EDIWI04K	C 0.10F, K, 10V		
	EC.T0EE1C1045	C 0 10175 7 1677	2	
8	ECJ0EF1C104Z	C 0.10UF, Z, 16V		
	BGT0BB1G104-	G 0 10HH 7 16H	-	
C8360	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8362	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8365	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8368-	ECJ0EF1C104Z	C 0.10UF, Z, 16V	7	
		, -,	, ,	
74				
ı	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
74		C 0.1UF, K, 10V		
74 C8375 C8377	ECGRL0G680R	C 0.1UF, K, 10V C 68PF, J, 4V	1	
74 C8375 C8377 C8378	ECGRL0G680R EEEHB0G101R	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V	1 1 1	
74 C8375 C8377 C8378 C8379	ECGRL0G680R EEEHB0G101R EEEHB0J101P	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V	1 1 1	
74 C8375 C8377 C8378 C8379 C8380-	ECGRL0G680R EEEHB0G101R	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V	1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V	1 1 1 1 5	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V	1 1 1 1 5	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V	1 1 1 1 5	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.10UF, Z, 16V	1 1 1 1 5	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, Z, 16V	1 1 1 1 5	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.10UF, Z, 16V	1 1 1 1 5	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, Z, 16V	1 1 1 1 5	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, Z, 16V	1 1 1 1 5 1 2	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.10UF, Z, 16V	1 1 1 5 1 2	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8414	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V	1 1 1 5 1 2 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8390,9 1 C8408 C8409 C8410 C8413 C8414 C8415	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V	1 1 1 1 5 1 2 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8414 C8415 C8416	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C104Z ECJ0EB1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 0.10UF, Z, 16V	1 1 1 1 5 1 2 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8414 C8415 C8416 C8417	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 0.10UF, Z, 16V C 0.47PF, J, 16V	1 1 1 1 5 1 2 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8414 C8415 C8416 C8417 C8418	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.10UF, X, 16V C 0.10UF, Z, 16V C 68PF, J, 4V E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V	1 1 1 1 5 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8414 C8415 C8416 C8417	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 0.10UF, Z, 16V C 0.47PF, J, 16V	1 1 1 1 5 1 2 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8414 C8415 C8416 C8417 C8418	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.10UF, X, 16V C 0.10UF, Z, 16V C 68PF, J, 4V E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V	1 1 1 1 5 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380-84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8414 C8415 C8416 C8417 C8418 C8425	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EB1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V	1 1 1 1 5 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8414 C8415 C8416 C8417 C8418 C8425 C8426 C8427	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V	1 1 1 1 5 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8414 C8415 C8416 C8417 C8418 C8425 C8426 C8427 C8428	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.001UF, Z, 16V C 0.001UF, Z, 16V C 0.001UF, Z, 16V C 0.001UF, Z, 16V	1 1 1 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8414 C8415 C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.001UF, Z, 16V C 0.001UF, Z, 16V C 0.001UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, Z, 16V	1 1 1 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8410 C8413 C8414 C8415 C8416 C8417 C8418 C8427 C8428 C8427 C8440,4	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.001UF, Z, 16V C 0.001UF, Z, 16V C 0.001UF, Z, 16V C 0.001UF, Z, 16V	1 1 1 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8410 C8413 C8414 C8415 C8416 C8417 C8418 C8427 C8428 C8427 C8440,4 1	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.01UF, Z, 16V C 0.10UF, K, 10V	1 1 1 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8410 C8413 C8414 C8415 C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437 C8440,4 1 C8445	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.1UF, K, 10V C 0.1UF, K, 10V	1 1 1 1 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8410 C8413 C8414 C8415 C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437 C8446 C8445 C8446	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.10F, K, 10V	1 1 1 1 5 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8415 C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437 C8440,4 1 C8445 C8446 C8449	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.10UF, Z, 10V C 0.10UF, Z, 10V C 0.10UF, Z, 16V C 0.10UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.10F, K, 10V C 0.068UF, K, 16V C 1000PF, K, 50V	1 1 1 1 1 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8414 C8415 C8416 C8417 C8418 C8425 C8426 C8427 C84428 C8437 C84440,4 1 C8445 C8446 C8449 C8450-	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.10F, K, 10V	1 1 1 1 5 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1	
74 C8375 C8377 C8378 C8379 C8380- 84 C8386 C8390,9 1 C8408 C8409 C8410 C8413 C8415 C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437 C8440,4 1 C8445 C8446 C8449	ECGRL0G680R EEEHB0G101R EEEHB0J101P ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1C103K ECJ0EF1C104Z ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1A104K	C 0.1UF, K, 10V C 68PF, J, 4V C 100PF, J, 4V C 100PF, J, 6.3V C 0.10UF, Z, 16V C 0.10UF, Z, 10V C 0.10UF, Z, 10V C 0.10UF, Z, 16V C 0.10UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.10F, K, 10V C 0.068UF, K, 16V C 1000PF, K, 50V	1 1 1 1 5 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1	

Ref. No.	Part No.	Part Name &	Pcs	Remarks
	ECJ0EB1A104K	Description C 0.1UF, K, 10V	1	
		C 4.7UF, K, 16V	2	
	ECJ0EB1H102K	C 1000PF, K, 50V	1	
	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
		CO.010UF, K, 16V	1	
	ECJ0EB1H102K	C 1000PF, K, 50V	1	
		C 0.33UF, K,6.3V	1	
	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8475,7	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
		C 1UF, K, 6.3V	1	
C8479,8		CO.010UF, K, 16V	2	
C8482	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8484-	EEEHB1C470P	C 47PF, J, 16V	3	
86				
		C 470PF, K, 50V	1	
C8496	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
		C 4.7UF, Z, 10V	1	
		C 0.1UF, K, 10V	1	
4		C 0.1UF, K, 10V	2	
C8507,0 8	ECJ2FF1A475Z	C 4.7UF, Z, 10V	2	
C8509	EEEHB1C470P	C 47PF, J, 16V	1	
C8511	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C8515	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8516	EEEHB1C470P	C 47PF, J, 16V	1	
	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8520,2 1	ECJ0EC1H181J	C 180PF, K, 50V	2	
C8522,2 3	ECJ0EC1H390J	C 390PF, K, 50V	2	
C8529	ECJ0EC1H080C	C 8PF, D, 50V	1	
C8530	ECJ0EC1H221J	C 220PF, K, 50V	1	
C8531	ECJ1VB1H123K	C 0.012UF, K, 50V	1	
	ECJ0EB1H182K	C 1800UF, Z, 50V	1	
	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	ECJ0EB1A104K ECJ1VB1H103K	C 0.1UF, K, 10V	1	
		C 0.001UF, K, 50V C 0.1UF, K, 10V	1	
			1	
C8546,4		C 0.1UF, K, 16V	2	
7 C8551	ECJ0EB1C103K	C0.010UF, K, 16V	1	
	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
		C 390PF, K, 50V	1	
		C 820PF, D, 50V	1	
	ECJ1VB1H123K	C 0.012UF, K, 50V	1	
	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8559	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8561	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8562	F1J1A106A043	C 0.010UF, K, 16V	1	
C8563	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8564	F1J1A106A043	C 0.010UF, K, 16V	1	
C8567	ECGRL0G680R	C 68PF, J, 4V	1	
	ECJ2FB0J106M	C 10UF, Z,6.3V	1	
	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
		C 10UF, Z,6.3V	1	
	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
	ECJ0EB1A104K ECJ0EB1A104K	C 0.1UF, K, 10V	1	
וריצוקטי ו	ECGRL0G680R	C 0.1UF, K, 10V C 68PF, J, 4V	1	
	LOCKLOGOOK		2	
C8594	ECJ0EB1C103K	C0.010UF, K, 16V		
C8594	ECJ0EB1C103K	CU.0100F, R, 16V		
C8594 C8595,9 6 C8597	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8594 C8595,9 6 C8597 C8598	ECJ0EB1A104K ECJ0EB1C103K	C 0.1UF, K, 10V C0.010UF, K, 16V	1 1	
C8594 C8595,9 6 C8597 C8598 C8600	ECJ0EB1A104K ECJ0EB1C103K	C 0.1UF, K, 10V	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C8602-	ECJ0EB1C103K	CO.010UF, K, 16V	3	
C8605	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8606		CO.010UF, K, 16V	1	
C8607	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8608	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8609	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8610	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8611,1	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8613	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8614	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8615,1		C 0.1UF, K, 10V	2	
6				
C8617	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8620	ECJ0EB1A104K		1	
C8621	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8622	ECGRLOG680R	C 68PF, J, 4V	2	
0	ECOUEFICIU42	C 0.10UF, Z, 16V	^	
	ECJ0EC1H820J	C 820PF, K, 50V	2	
4				
		M 10KOHM,J,1/16W	1	
I .	ECJ0EC1H150J	C 150PF, K, 50V	2	
1 C9000	EEEHB1C470P	C 47PF, J, 16V	1	
C9001	ECJ1XF1C104Z		1	
C9004,0		C 0.1UF, Z, 16V	2	
5				
C9006	F1J0J1060004	C 0.010UF, K, 16V	1	
C9007	<del> </del>	C 47PF, J, 16V	1	
C9008		C 0.1UF, Z, 16V	1	
C9009	F1J0J1060004		1	
C9010- 12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9013	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9014	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9015-	ECJ1XF1C104Z	C 0.1UF, Z, 16V	8	
22				
C9023		C 47PF, J, 16V	1	
		C 270PF, J, 50V	1	
C9025	ECJ1XF1C104Z ECJ2VF1C105Z	C 1UF, Z, 16V C 1UF, Z, 16V	2	
7	ECUZVFICIUSZ	C 10F, Z, 10V		
C9028-	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
31				
C9033	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
6	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
2				
C9203	ECJ1XC1H150J	C 15PF, J, 50V	1	
C9204	ECJ1VC1H080C	C 8PF, C, 50V	1	
C9205	F1J0J1060004	C 0.010UF, K, 16V	1	
C9206,0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9303	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9304-	ECJ1XB1C104K	C 0.1UF, Z, 16V	54	
57				
C9358	EEEHB0G221P	C 220PF, J, 4V	1	
C9359	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9360	ECJ1XF1C104Z	C 1UE 7 16V	1	
C9500 C9502	ECJ2VF1C105Z ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C9502	ECJ2VF1C103Z ECJ1XB1C104K	C 1UF, Z, 16V C 0.1UF, Z, 16V	10	
12				
C9513	EEEHB1C470P	C 47PF, J, 16V	1	
C9514-	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
17	BBBUD1 04505	G 47DB 7 7 7	-	
C9518	EEEHB1C470P	C 47PF, J, 16V	1	
C9519 C9701,0	ECJ1XC1H101K ECJ1XF1C104Z	C 100PF, K, 50V C 0.1UF, Z, 16V	2	
2		0.10F, Z, 10V		
C9703	F1J0J1060004	C 0.010UF, K, 16V	1	
C9705,0	F1J0J1060004	C 0.010UF, K, 16V	2	
6			_	
C9707	EEEHB1C470P	C 47PF, J, 16V	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C9712,1 3	F1J0J1060004	C 0.010UF, K, 16V	2	
C9714,1 5	ECGRL0G680R	C 68PF, J, 4V	2	
C9716	ECJ1XC1H220J	C 22PF, J, 50V	1	
C9718	ECJ1XC1H220J	C 22PF, J, 50V	1	
C9719,2 0	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C9721,2 2	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
4	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C9725	ECJ1XC1H102J	C 1000PF, J, 50V	1	
	ECJ1XC1H102J ECJ3XF1C475Z	C 1000PF, J, 50V C 4.7UF, Z, 16V	2	
9 C9730,3 1	EEEHB1C470P	C 47PF, J, 16V	2	
	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9733	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9734,3	EEEHB1C470P	C 47PF, J, 16V	2	
C9736	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9739,4 0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9741	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9742	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9743,4 4	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
1		C 0.010UF, Z, 50V	2	
C9900,0 1	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
CA1-A8	K1MN68BA0002	68P CONNECTOR	8	
CB1-B8	K1MN68BA0002	68P CONNECTOR	8	
D3	K1KA30AA0009	30P CONNECTOR	1	
D4	K1KA14A00248	14P CONNECTOR	1	
D5	K1KA31A00007	31P CONNECTOR	1	
D6	K1KA20A00310	20P CONNECTOR	1	
D8	K1KA08AA0104	8P CONNECTOR	1	
D20	K1KA20AA0008	20P CONNECTOR	1	
D25	K1KA20AA0009	20P CONNECTOR	1	
D31,32	K1MN55BA0076	55P CONNECTOR	2	
D33,34	K1MN55BA0094	55P CONNECTOR	2	
D2300,0	MA111	DIODE	2	
			-	
4	MA111	DIODE	2	
4 D2315,1 6	B0JCDD000002	DIODE	2 2	
4 D2315,1 6 D2319,2			2	
4 D2315,1 6 D2319,2 0 D2332	B0JCDD000002	DIODE	2	
4 D2315,1 6 D2319,2 0 D2332 D2512	B0JCDD000002 B0JCDD000002 MA111	DIODE DIODE	2 2	
4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1	B0JCDD000002  B0JCDD0000002  MA111  MA8056M	DIODE DIODE DIODE ZENER DIODE	2 2 1 1	
4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4	B0JCDD000002  B0JCDD0000002  MA111  MA8056M  MA152K	DIODE DIODE DIODE ZENER DIODE DIODE	2 2 1 1 2	
4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523	B0JCDD000002  B0JCDD0000002  MA111  MA8056M  MA152K  B3AAA0000770	DIODE DIODE DIODE ZENER DIODE DIODE DIODE	2 2 1 1 2 2 1 1	
4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524	B0JCDD000002  B0JCDD0000002  MA111  MA8056M  MA152K  B3AAA0000770  MA152K	DIODE DIODE DIODE ZENER DIODE DIODE DIODE DIODE	2 2 1 1 2 2 1 1 1 1	
4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2523 D2524	B0JCDD000002  B0JCDD0000002  MA111  MA8056M  MA152K  B3AAA0000770  MA152K  MA8056M	DIODE DIODE DIODE ZENER DIODE DIODE DIODE DIODE DIODE ZENER DIODE	2 2 1 1 2 1 1 1	
4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-	B0JCDD000002  B0JCDD0000002  MA111  MA8056M  MA152K  B3AA0000770  MA152K  MA8056M  B0BC01100001	DIODE DIODE DIODE ZENER DIODE	2 2 1 1 2 1 1 1 1	
4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619- 24 D2640- 60	B0JCDD000002  B0JCDD0000002  MA111  MA8056M  MA152K  B3AA0000770  MA152K  M8056M  B0BC01100001  MA152  MA8140M  MA8140M	DIODE DIODE  DIODE  ZENER DIODE	2 2 1 1 2 1 1 1 1 1 6 6 21	
4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619- 24 D2640- 60 D4012-	B0JCDD000002  B0JCDD0000002  MA111  MA8056M  MA152K  B3AA0000770  MA152K  MA8056M  B0BC01100001  MA152  MA8140M	DIODE  DIODE  DIODE  ZENER DIODE	2 2 1 1 1 2 1 1 1 1 1 6 6	
4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D26619- 24 D2640- 60 D4012- 14	B0JCDD000002  B0JCDD000002  MA111  MA8056M  MA152K  B3AAA0000770  MA152K  MA8056M  B0BC01100001  MA152  MA8140M  MA8140M  MA729  MA728	DIODE  DIODE  DIODE  ZENER DIODE	2 2 1 1 1 2 1 1 1 1 1 6 21 3 1 1	
D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24 D2640-60 D4012-14 D4016 D4025-27	B0JCDD000002  B0JCDD0000002  MA111  MA8056M  MA152K  B3AA0000770  MA152K  MA8056M  B0BC01100001  MA152  MA8140M  MA729  MA728  MA111	DIODE  DIODE  DIODE  ZENER DIODE  DIODE  DIODE  DIODE  DIODE  DIODE  DIODE  ZENER DIODE  DIODE  ZENER DIODE  ZENER DIODE  DIODE  ZENER DIODE  DIODE  DIODE  DIODE  DIODE  DIODE	2 2 1 1 1 2 1 1 1 1 1 6 2 1 3 1 3 3 1 3 3	
4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24 D2640-60 D4012-14 D4016 D4025-27 D4029	B0JCDD000002  B0JCDD000002  MA111  MA8056M  MA152K  B3AA0000770  MA152K  MA8056M  B0BC01100001  MA152  MA8140M  MA729  MA728  MA111  MA3036L	DIODE  DIODE  DIODE  ZENER DIODE	2 2 1 1 2 2 1 1 1 1 1 1 1 6 2 1 3 1 3 1 1 3	
4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24 D2640-60 D4012-14 D4016 D4025-27 D4029 D5610	B0JCDD000002  B0JCDD0000002  MA111  MA8056M  MA152K  B3AA0000770  MA152K  MA8056M  B0BC01100001  MA152  MA8140M  MA729  MA728  MA111  MA3036L  MA3036L  MA3078900L	DIODE  DIODE  DIODE  ZENER DIODE  DIODE  DIODE  DIODE  DIODE  ZENER DIODE  DIODE  ZENER DIODE  ZENER DIODE	2 2 1 1 1 2 1 1 1 1 1 6 2 1 3 1 1 3 1 1 1	
4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24 D2640-60 D4012-14 D4016 D4025-27 D4029	B0JCDD000002  B0JCDD000002  MA111  MA8056M  MA152K  B3AA0000770  MA152K  MA8056M  B0BC01100001  MA152  MA8140M  MA729  MA728  MA111  MA3036L	DIODE  DIODE  DIODE  ZENER DIODE	2 2 1 1 2 2 1 1 1 1 1 1 1 6 2 1 3 1 3 1 1 3	

Ref.	Domt No.	Part Name &	Dag	Domonica
No.	Part No.	Description	Pcs	Remarks
D5616	B0BC6R600005	DIODE	1	
D5617	B0BC01100001	DIODE	1	
D5618	B0BC03900015	DIODE	1	
D5637,3	MA152	DIODE	2	
D5639	MA3047H	ZENER DIODE	1	
D5640	MA3039H	ZENER DIODE	1	
D5641	MA152	DIODE	1	
D5642	MA3100H	ZENER DIODE	1	
D5643	MA152	DIODE	1	
D5644	MA3068M	ZENER DIODE	1	
D5645- 47	MA152	DIODE	3	
D5649	MA111	DIODE	1	
D5801	B0JCME000037	DIODE	1	
D5804	MA3120M	ZENER DIODE	1	
D5805,0	MA152	DIODE	2	
D5807	MA111	DIODE	1	
D6006	B0HBSN000008	DIODE	1	
D6007	B0ECHP000003	DIODE	1	
D6008,0	B0HBSN000008	DIODE	2	
D6011- 13	B0HBSN000008	DIODE	3	
D6014	B0ECHP000003	DIODE	1	
D6015- 17	B0HBSN000008	DIODE	3	
D6022,2	B0ECHP000003	DIODE	2	
D6024,2	B0JCME000037	DIODE	2	
D6026	B0ECHP000003	DIODE	1	
D6028	B0ECHP000003	DIODE	1	
D6033,3 4	MA8330M	ZENER DIODE	2	
D6035	LNJ301MPUJA	LED	1	
D6036	MA8051L	ZENER DIODE	1	
D6036 D6037	MA8051L MA111	ZENER DIODE DIODE	1 1	
D6036 D6037 D6043 D6044,4	MA8051L	ZENER DIODE	1	
D6036 D6037 D6043 D6044,4 5 D6050,5	MA8051L MA111 MA111	ZENER DIODE DIODE DIODE	1 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5	MA8051L MA111 MA111 B0ECHP000003	ZENER DIODE DIODE DIODE DIODE	1 1 1 2	
D6036 D6037 D6043 D6044,4 5 D6050,5	MA8051L MA111 MA111 BOECHP000003 BOECHP000003	ZENER DIODE DIODE DIODE DIODE DIODE	1 1 1 2	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0	MA8051L MA111 MA111 BOECHP000003 BOECHP000003	ZENER DIODE DIODE DIODE DIODE DIODE DIODE	1 1 1 2 2	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0 2	MA8051L MA111 MA111 B0ECHP000003 B0ECHP000003 MA111 B0ECHP000003	ZENER DIODE DIODE DIODE DIODE DIODE DIODE DIODE	1 1 1 2 2 2	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0 2 D6503 D6504 D6505	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0ECHP000003 B0HCKS000002 B0JCME000037 B0ECHP000003	ZENER DIODE	1 1 1 2 2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0 2 D6503 D6504 D6505 D6506	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0ECHP000003 B0HCKS000002 B0JCME000037 B0ECHP000003 MA111	ZENER DIODE	1 1 1 2 2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0 2 D6503 D6504 D6505 D6506 D6507	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 B0ECHP000003 MA111 B0ECHP000003	ZENER DIODE	1 1 1 2 2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6056 D6503 D6504 D6505 D6506 D6507 D6508	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 B0ECHP000003 MA111 B0ECHP000003 MA111	ZENER DIODE	1 1 1 2 2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0 2 D6503 D6504 D6505 D6506 D6507	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0HCKS000002 B0JCME000037 B0ECHP000003 MA111 B0ECHP000003	ZENER DIODE	1 1 1 2 2 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6550 2 D6503 D6504 D6505 D6506 D6507 D6508 D6509	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0ECHP000003 B0HCKS000002 B0JCME000037 B0ECHP000003 MA111 B0ECHP000003 MA111 B0ECHP000003	ZENER DIODE	1 1 1 2 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6550 D6503 D6504 D6505 D6506 D6507 D6508 D6509 D6510	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0ECHP000003 B0HCKS000002 B0JCME000037 B0ECHP000003 MA111 B0ECHP000003 MA111 B0JCKG000002 B0JCKG000002	ZENER DIODE	1 1 1 2 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0 2 D6503 D6504 D6505 D6506 D6507 D6508 D6509 D6511 D6512,1 3 D6514	MA8051L  MA111  B0ECHP000003  B0ECHP000003  MA111  B0ECHP000003  B0HCKS000002  B0JCME000037  B0ECHP000003  MA111  B0ECHP000003  B0HCKS000002  B0JCKG000002  B0JCKG000002	ZENER DIODE	1 1 1 2 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0 2 D6503 D6504 D6505 D6506 D6507 D6508 D6509 D6511 D6512,1 3 D6514 D6515	MA8051L  MA111  B0ECHP000003  B0ECHP000003  MA111  B0ECHP000003  B0HCKS000002  B0JCME000037  B0ECHP000003  MA111  B0ECHP000003  MA111  B0JCKG000002  B0JCME000037  B0HCKS000002  MA111  B0JCKG000003  MA111  B0JCKG000003  MA111	ZENER DIODE	1 1 1 2 2 1 1 1 1 1 1 1 1 1 2 2 1 1 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0 2 D6503 D6504 D6505 D6506 D6507 D6508 D6507 D6510 D6511 D6512,1 3 D6514 D6515 D6516,1 7	MA8051L  MA111  B0ECHP000003  B0ECHP000003  MA111  B0ECHP000003  B0HCKS000002  B0JCME000037  B0ECHP000003  MA111  B0ECHP000003  MA111  B0JCKG000002  B0JCME000037  B0HCKS000002  B0JCME000037  B0HCKS000002	ZENER DIODE	1 1 1 2 2 1 1 1 1 1 1 1 1 1 1 1 2 2 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D65501,0 2 D6503 D6504 D6505 D6506 D6507 D6508 D6509 D6510 D6511 D6512,1 3 D6514 D6515 D6516,1 7 D6520,2	MA8051L  MA111  B0ECHP000003  B0ECHP000003  MA111  B0ECHP000003  B0HCKS000002  B0JCME000037  B0ECHP000003  MA111  B0ECHP000003  MA111  B0JCKG000002  B0JCME000037  B0HCKS000002  MA111  B0HCKS000002  MA111  B0HCKS000002  MA111  B0HCKS000002	ZENER DIODE	1 1 1 2 2 1 1 1 1 1 1 1 2 2 1 1 1 2	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0 2 D6503 D6504 D6505 D6506 D6507 D6508 D6509 D6510 D6511 D6512,1 3 D6514 D6515 D6516,1 7 D6520,2 1 D6522-24	MA8051L  MA111  B0ECHP000003  B0ECHP000003  MA111  B0ECHP000003  B0HCKS000002  B0JCME000037  B0ECHP000003  MA111  B0ECHP000003  MA111  B0JCKG000002  B0JCME000037  B0HCKS000002  MA111  B0HCKS000002  MA111  MA111  MA111	ZENER DIODE	1 1 1 2 2 1 1 1 1 1 1 1 1 1 1 1 2 2 2 2	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0 2 D6503 D6504 D6505 D6506 D6507 D6508 D6509 D6511 D6512,1 3 D6514 D6515 D6516,1 7 D6520,2 1 D6522-24 D6526,2 7	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0ECHP000003 B0HCKS000002 B0JCME000037 B0ECHP000003 MA111 B0JCKG000002 B0JCME000037 B0HCKS000002 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 MA111 MA111	ZENER DIODE	1 1 1 1 2 2 1 1 1 1 1 2 2 1 1 1 1 2 2 2 3 3 2 2	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0 2 D6503 D6504 D6505 D6506 D6507 D6508 D6507 D6510 D6511 T6512,1 3 D6514 D6515 D6516,1 7 D6520,2 1 D6522-24 D6526,2 7 D6528	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0ECHP000003 B0HCKS000002 B0JCME000037 B0ECHP000003 MA111 B0ECHP000003 MA111 B0JCKG000002 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 B0HCKS000003	ZENER DIODE	1 1 1 2 2 1 1 1 1 2 2 2 3 3 2 2 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6501,0 2 D6503 D6504 D6505 D6506 D6507 D6508 D6507 D6510 D6511 D6512,1 3 D6514 D6515 D6516,1 7 D6520,2 1 D6522-24 D65226,2 7 D6528 D6529	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0ECHP000003 B0HCKS000002 B0JCME000037 B0ECHP000003 MA111 B0ECHP000003 MA111 B0JCKG000002 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 B0ECHP000003 MA111 B0ECHP000003 MA111 B0ECHP000003 MA111 B0ECHP000003 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111	ZENER DIODE	1 1 1 2 2 1 1 1 1 2 2 2 3 3 2 2 1 1 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6050 C2 D6503 D6504 D6505 D6506 D6507 D6508 D6507 D6508 D6510 D6511 D6512,1 3 D6514 D6515 D6516,1 7 D6520,2 1 D6522-24 D6526,2 7 D6528 D6529 D6530	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0ECHP000003 B0HCKS000002 B0JCME000037 B0ECHP000003 MA111 B0ECHP000003 MA111 B0JCKG000002 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 B0HCKS000003 MA111 B0HCKS000002	ZENER DIODE	1 1 1 2 2 1 1 1 1 2 2 2 3 3 2 2 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6050,5 1 D6056 D6501,0 2 D6503 D6504 D6505 D6506 D6507 D6508 D6507 D6508 D6510 D6511 D6512,1 3 D6514 D6515 D6516,1 7 D6520,2 1 D6522-24 D6526,2 7 D6528 D6529 D6530 D6531 D6532,3	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0ECHP000003 B0HCKS000002 B0JCME000037 B0ECHP000003 MA111 B0ECHP000003 MA111 B0JCKG000002 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 B0ECHP000003 MA111 B0ECHP000003 MA111 B0ECHP000003 MA111 B0ECHP000003 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111	ZENER DIODE	1 1 1 2 2 1 1 1 1 2 2 2 3 3 2 2 1 1 1 1	
D6036 D6037 D6043 D6044,4 5 D6050,5 1 D6056 D6056 D6501,0 2 D6503 D6504 D6505 D6506 D6507 D6508 D6507 D6508 D6511 D6512,1 3 D6514 D6515 D6516,1 7 D6520,2 1 D6522-24 D6526,2 7 D6528 D6529 D6530 D6531	MA8051L MA111 B0ECHP000003 B0ECHP000003 MA111 B0ECHP000003 B0HCKS000002 B0JCME000037 B0ECHP000003 MA111 B0ECHP000003 MA111 B0JCKG000002 B0JCME000037 B0HCKS000002 MA111	ZENER DIODE  DIODE	1 1 1 1 2 2 1 1 1 1 2 2 2 3 3 2 2 1 1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	D0000000000000000000000000000000000000	Description		
D6540,4	B0ECHP000003	DIODE	2	
D6542,4	MA8056H	ZENER DIODE	2	
	B0HCKS000002	DIODE	1	
D6545	B0JCME000037	DIODE	1	
D6546-	MA111	DIODE	3	
48	D0 70000000	DT0DE		
D6549 D6550	B0JCME000037 B0HCMM000014	DIODE	1	
D6551-	MA111	DIODE	3	
53 D6554	MA8240M	ZENER DIODE	1	
	B0JCME000037	DIODE	2	
7	wa 1 1 1	DIODE	1	
D6558 D6559	MA111 B0ECHP000003	DIODE	1	
D6560	MA111	DIODE	1	
D6561	B0ECHP000003	DIODE	1	
D6562	MA8051L	ZENER DIODE	1	
D6563	MA111	DIODE	1	
D6564	B0HCMM000014	DIODE	1	
D6566	B0HCMM000014	DIODE	1	
D6568,6 9	MA111	DIODE	2	
D6570	MA8051L	ZENER DIODE	1	
D6571- 73	MA8330M	ZENER DIODE	3	
D6574,7 5	MA111	DIODE	2	
D6576	B0JCME000037	DIODE	1	
D6577	MA111	DIODE	1	
D6579	B0ECHP000003	DIODE	1	
D6580	MA8051L	ZENER DIODE	1	
D6581	LNJ301MPUJA	LED	1	
D6582	MA111	DIODE	1	
D6583,8	MA8330M	ZENER DIODE	2	
D6585,8	B0ECHP000003	DIODE	2	
D6589	MA8056H	ZENER DIODE	1	
D6590,9 1	MA111	DIODE	2	
D6593	B0HBSN000008	DIODE	1	
D6594	B0HCKS000002	DIODE	1	
D6595	B0HBSN000008	DIODE	1	
D6596	MA111	DIODE	1	
D6597	B0HCKS000002	DIODE	1	
D6604	BOECHPOOOOO3	DIODE	1	
D6605 D6606	BOHESNOOOOO8	DIODE	1	
D6606	B0HCKS000002 B0HBSN000008	DIODE	4	
10				
D6613 D6614	BOHBSNOOOOO8	DIODE	1	
D6614 D6615	BOECHPOOOOO3 BOHBSNOOOOO8	DIODE	1	
D6618,1	BOECHPOOOOO3	DIODE	2	
_	B0ECHP000003	DIODE	2	
D6901,0	MA8056H	ZENER DIODE	2	
	B0ECHP000003	DIODE	2	
	MA8056H	ZENER DIODE	2	
	B0ECHP000003	DIODE	2	
D7101- 08	B0HCMM000014	DIODE	8	
D7201- 08	B0HCMM000014	DIODE	8	
D7301- 08	B0HCMM000014	DIODE	8	
D7401-	B0HCMM000014	DIODE	8	
D8200	B0DDBG000002	DIODE	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
l .	LNJ208R8ARA	LED	2	
4				
D8207	-	DIODE	1	
D8208	K7JAAAA00001		1	
D8210	MA728	DIODE	1	
D8215		ZENER DIODE	1	
	B0JCDD000002		1	
D8219 D8221	MA8024LTX	DIODE ZENER DIODE	1	
D8221 D9000-	MA3033	ZENER DIODE	3	
02	MASOSS	ZEREK DIODE	,	
D9011,1	MA728	DIODE	2	
2				
D9015,1	MA152K	DIODE	2	
6	M3 700	DIODE	2	
D9700,0	MA/28	DIODE		
D9800,0	MA152K	DIODE	2	
1				
D9900,0	MA152K	DIODE	2	
1				
DG1,G2		40P CONNECTOR	2	
DG3		20P CONNECTOR	1	
DG5		21P CONNECTOR	1	
DG15	<del> </del>	60P CONNECTOR	1	
DG20	K1MN30A00068	30P CONNECTOR	1	
DG22	K1KBB0A00006	CONNECTOR	1	
DT04	K1NA68B00037	68P CONNECTOR	1	
DT07	<del> </del>	4P CONNECTOR	1	
DT09	K1NA09D00004		1	
DT12	K1KAB0A00011	CONNECTOR	1	
Et 4003 -	J0HABH000012	LC FILTER	8	
10	CONADNOCOLZ	LC FILIER		
FL4012	J0HABH000012	LC FILTER	1	
FL4014-	J0HABB000004	LC FILTER	4	
17				
FL4018-	J0JBD0000043	CHIP INDUCTOR	3	
20				
FL4021- 23	J0HABH000012	LC FILTER	3	
FL7101	J0HABH000013	LC FILTER	1	
FL7201		LC FILTER	1	
FL7301	J0HABH000013		1	
FL7401	J0HABH000013	LC FILTER	1	
FL8202,		LC FILTER	2	
03			_	
FL8215	J0HAAB000004	LC FILTER	1	
FL8224-	J0HAAB000004	LC FILTER	17	
40				
FL8258	J0HAAB000004	LC FILTER	1	
FL8260	J0HAAB000004	LC FILTER	1	
FL8262,	J0MAB0000164	LC FILTER	2	
63	TOUXBUOO012	ור פוויים	F	
FL9000-	J0HABH000013	LC FILTER	5	
FL9300-	J0HABH000013	LC FILTER	3	
02				
FL9701,	J0HABH000012	LC FILTER	2	
02	T0#75==00====	I G		
FL9703,	J0HABH000013	LC FILTER	2	
FL9800,	J0HABH000013	LC FILTER	2	
01				
FL9900,	J0HABH000013	LC FILTER	2	
01				
H1,H2	K1MN40B00045	40P CONNECTOR	2	
н7	K1KA12AA0178	12P CONNECTOR	1	
H21		10P CONNECTOR	1	
H22	<b>+</b>	11P CONNECTOR	1	
H30	K1MN30A00068	30P CONNECTOR	1	
H50	K1MN35A00013	35P CONNECTOR	1	
	maro 5 4 6 5	GT 116DED		
HMM1-M4	TMM25401	CLAMPER	4	L

	PX50U / TH-50PX50U	_		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
NO.		Description		
IC2301	C1BB00000969	IC	1	
IC2305,	C1BB00000818	IC	2	
06				
IC2602	C1AB00002123	IC	1	
IC2605	AN15861A-VT	IC	1	
IC2608	C1BB00001017	IC	1	
IC4001	COABBB000289	IC	1	
IC4002	C0FBBK000038	IC	1	
IC4004 IC4005	TC74HC4066TL MN102H90MTZ1	IC	1	
IC4005	TVRN467	IC	1	
IC4008	TVRN469	IC	1	
IC4010	C0EBF0000431	IC	1	
IC4011	C0CBCAC00275	IC	1	
IC4012	COCBCBF00009	IC	1	
IC4015	C0EBE0000336	IC	1	
IC4016	COCBCAC00275	IC	1	
IC4018	C1AB00002298	IC	1	
IC4020	COCBCAC00136	IC	1	
IC4022	C0DBEJG00001	IC	1	
IC4024	C1ZBZ0002790	IC	1	
IC4025	C0JBAP000020	IC	1	
IC4026	C1AB00002234	IC	1	
IC4027	C3ABQJ000040	IC	1	
IC4028	C0DBZFG00055 C0EBF0000335	IC	1	
IC4030 IC4031	COCBCAC00136	IC	1	
IC5601,	NOBF2DE00001	DC-DC CONVERTER	2	
02	NODI ZDZOGOGI	De de convenien		
IC5603	C0DBAJB00004	IC	1	
IC5801	C0DBAZG00034	IC	1	
IC5803	C0DAEZH00017	IC	1	
IC6001-	C0ZBZ0000895	IC	4	
04			_	
IC6006	C0JBAZ000005	IC	1	
IC6007	NJM2903M AN1431M	INTEGRATED CIRCUIT	1	
IC6008 IC6500	AN1431M	LINEAR IC LINEAR IC	1	
IC6502	AN1431M	LINEAR IC	1	
IC6503,	COCBALCO0010	IC	2	
04				
IC6505,	C0CBADC00075	IC	2	
06				
IC6510, 11	AN1431M	LINEAR IC	2	
IC6514	AN1431M	LINEAR IC	1	
IC6511	C0JBAZ000994	IC	1	
IC6524	C0JBAZ000994	IC	1	
IC6525	C0ZBZ0001033	IC	1	
IC6526	C0CBADC00075	IC	1	
IC6527-	C0ZBZ0001033	IC	3	
29				
IC6530	COCBADCO0075	IC	1	
IC6531	C0ZBZ0001033	IC CONTROL CIRCUIT	1	
IC6532	NJM2903M C0ZBZ0000895	INTEGRATED CIRCUIT	3	
IC6533- 35	C02B20000895	IC	3	
IC6536	C0JBAA000174	IC	1	
IC6537,	C0JBAZ000005	IC	2	
38				
	AN16042A-VT	IC	12	
12	G0 TB 7 7 0 0 1 1 0 0	TO	Α	
IC7101- 04	C0JBAZ001120	IC	4	
IC7201-	C0JBAZ001120	IC	4	
04				
	C0JBAZ001120	IC	4	
IC7301-	I			
04			4	I
04 IC7401-	C0JBAZ001120	IC	*	
04 IC7401- 04				
04 IC7401-	C0JBAZ001120 C3ABRG000061	ıc	2	
04 IC7401- 04 IC8009,				
04 IC7401- 04 IC8009,	C3ABRG000061	IC	2	

	T			Г
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC8202	C0JBAS000245	IC	1	
IC8203,	C0JBAS000223	IC	2	
04	COODINGOODE		_	
IC8205	NJM2904V	INTEGRATED CIRCUIT	1	
IC8206,	C1AB00002221	IC	2	
07				
IC8209	C1AB00001860	IC	1	
IC8211	MN884321A	IC	1	
IC8216	C1ZBZ0002437	IC	1	
IC8219	C0ZBZ0000782	IC	1	
IC8220	COCBCACOO161	IC	1	
IC8222	C3FBRG000004	IC	1	
IC8223	C3ZBP0000019	IC	1	
IC8227 IC8228	C0EBE0000336	IC	1	
IC8229	C3EBKC000014	IC	1	
IC8230	C0JBAZ002183	IC	1	
IC8232	MC14066BF	MOS IC (LOGIC)	1	
IC8235	CODBZFF00004	IC (LOGIC)	1	
IC8240	MN2WS0025A-A	IC	1	
IC8241,	CODBAZZO0122	IC	2	
42			_	
IC8244	C0FBAK000019	IC	1	
IC8245	C1AB00002221	IC	1	
IC9001	TVRN593	IC	1	
IC9003	TVRN568	IC	1	
IC9004	C0EBE0000120	IC	1	
IC9005,	C0JBAZ000856	IC	2	
06				
IC9007	TVRN466	IC	1	
IC9008	CODBEJG00001	IC	1	
IC9200	C1ZBZ0002769 MN84512-A	IC	1	
IC9300	<del> </del>	IC (LOCIC)	1	
IC9301 IC9302	PST9128NR C3ABQJ000031	IC (LOGIC)	1	
IC9302	TVRN511	IC	1	
IC9500	C1ZBZ0002599	IC	1	
IC9502	C0JBAZ000856	IC	1	
IC9502	C0JBAZ000856	IC	1	
IC9700	C0DBEJG00001	IC	1	
IC9702	CODBAZHO0020	IC	1	
JK2601	K1U939A00001	CONNECTOR	1	
JK2605	K2HA204A0041	JACK	1	
JS2304-	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
11				
JS2312	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2317- 24	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS2329-	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
32				
JS2606,	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
07				
JS2614-	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
17 JS2620,	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
21	EKUJGETUKUU	M 0 OHM, 1/10W		
JS2624	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2627,	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
28		. ,		
JS2630-	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
37				
JS2645	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2652- 63	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
JS2672-	ERJ6GEY0R00	M 0 OHM, 1/10W	16	
87				
JS2692-	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
03				
JS2705-	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
12 JS2714-	ERJ6GEY0R00	M O OHM 1/10m	12	
25	EKOOGEIOKOO	M 0 OHM, 1/10W	12	
JS2726	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2729	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref.	Dowt No.	Down Name C	Dag	Domonka
No.	Part No.	Part Name & Description	Pcs	Remarks
JS2737, 38	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2740- 42	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS2744- 49	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
JS2760- 68	ERJ6GEY0R00	M 0 OHM, 1/10W	9	
JS4003	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
15	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
21	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
26	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
35	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
39	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS4041	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
50	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
JS4054	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4059- 63	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
JS4067	ERJ3GEY0R00	M 0 OHM, 1/16W	1	·
JS5601	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5609- 12	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS5801, 02	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
08	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
17	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS5819	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS6503	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
K1	K1KA12BA0053	12P CONNECTOR	1	
K1 K2	K1KA12BA0053 K1KA02BA0061	2P CONNECTOR	1	
L2305,0	G0A100ZA0033	CHOKE COIL	2	
L2312,1	G0A100ZA0033	CHOKE COIL	2	
L2316- 19	J0JJC0000011	CHIP INDUCTOR	4	
L2615	J0JHC0000078	CHIP INDUCTOR	1	
L2617	J0JHC0000078	CHIP INDUCTOR	1	
L4002,0 3	J0JHC0000078	CHIP INDUCTOR	2	
L4006	J0JHC0000078	CHIP INDUCTOR	1	
L4008	Ј0ЈНС0000078	CHIP INDUCTOR	1	
L4008 L4012	J0JHC0000078 J0JCC0000241	CHIP INDUCTOR CHIP INDUCTOR	1	
L4008 L4012 L4013	J0JHC0000078 J0JCC0000241 J0JHC0000078	CHIP INDUCTOR CHIP INDUCTOR CHIP INDUCTOR	1 1 1	
L4008 L4012 L4013 L4019 L4021,2	J0JHC0000078 J0JCC0000241	CHIP INDUCTOR CHIP INDUCTOR	1	
L4008 L4012 L4013 L4019	J0JHC0000078 J0JCC0000241 J0JHC0000078 J0JHC0000078	CHIP INDUCTOR CHIP INDUCTOR CHIP INDUCTOR CHIP INDUCTOR	1 1 1	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2	J0JHC0000078 J0JCC0000241 J0JHC0000078 J0JHC00000078 J0JHC0000045	CHIP INDUCTOR CHIP INDUCTOR CHIP INDUCTOR CHIP INDUCTOR CHIP INDUCTOR	1 1 1 1 2	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2	J0JHC0000078 J0JCC0000241 J0JHC0000078 J0JHC0000078 J0JHC0000045 J0JHC0000078	CHIP INDUCTOR	1 1 1 1 2	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2 5 L4027	J0JHC0000078 J0JCC0000241 J0JHC0000078 J0JHC0000078 J0JHC0000045 J0JHC0000078	CHIP INDUCTOR	1 1 1 1 2 2	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2 5 L4027 L4028	J0JHC0000078 J0JCC0000241 J0JHC0000078 J0JHC0000045 J0JHC0000078 J0JHC0000078 J0JHC0000078	CHIP INDUCTOR	1 1 1 1 2 2	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2 5 L4027 L4028 L4031 L4035 L4036	J0JHC0000078 J0JCC0000241 J0JHC0000078 J0JHC0000045 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078	CHIP INDUCTOR	1 1 1 1 2 2 2 1 1 1 1 1	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2 5 L4027 L4028 L4031 L4035 L4036 L4037-39	J0JHC0000078 J0JCC0000241 J0JHC0000078 J0JHC0000045 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078	CHIP INDUCTOR	1 1 1 1 2 2 2 1 1 1	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2 5 L4027 L4028 L4031 L4035 L4036 L4037	J0JHC0000078 J0JCC0000241 J0JHC0000078 J0JHC0000045 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078 J0JHC0000078	CHIP INDUCTOR	1 1 1 1 2 2 2 1 1 1 1 1	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2 5 L4027 L4028 L4031 L4035 L4036 L4037-39 L4040,4 1 L4043	J0JHC0000078 J0JC00000241 J0JHC0000078	CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR	1 1 1 1 2 2 2 1 1 1 1 1 3 2	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2 5 L4027 L4028 L4031 L4035 L4036 L4037- 39 L4040,4 1 L4043 L4044	J0JHC0000078 ERJ3GEY0R00 J0JCC0000241 ERJ3GEY0R00	CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR  M 0 OHM, 1/16W	1 1 1 1 2 2 2 1 1 1 1 1 1 2 2 2 1 1 1 1	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2 5 L4027 L4028 L4031 L4035 L4036 L4037 39 L4040,4 1 L4043 L4044	J0JHC0000078 ERJ3GEY0R00 J0JHC0000078	CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR	1 1 1 1 2 2 2 1 1 1 1 1 3 2 2 1 1 1 1 2 1 2	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2 5 L4027 L4028 L4031 L4035 L4036 L4037 39 L4040,4 1 L4043 L4044 L4047,4 8 L5604	J0JHC0000078 ERJ3GEY0R00 J0JHC00000241 ERJ3GEY0R00 J0JHC0000078	CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR  CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR	1 1 1 1 2 2 2 1 1 1 1 3 2 1 1 1 2 1 1 1 1	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2 5 L4027 L4028 L4031 L4035 L4036 L4037 39 L4040,4 1 L4043 L4047,4 8 L5604 L5605	J0JHC0000078 J0JC00000241 J0JHC0000078 G0JHC0000078 G0JHC0000078 G0JHC0000078 G0JHC0000078 G0JHC0000078 G0JHC0000078 G0JHC0000078 G0JHC0000078 G0JHC0000078	CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR  CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR  CHIP INDUCTOR  CHIP INDUCTOR  CHIP INDUCTOR  CHIP INDUCTOR  CHIP INDUCTOR  CHOKE COIL  CHOKE COIL	1 1 1 1 2 2 2 1 1 1 1 3 2 1 1 1 2 1 1 1 1	
L4008 L4012 L4013 L4019 L4021,2 2 L4024,2 5 L4027 L4028 L4031 L4035 L4036 L4037 39 L4040,4 1 L4043 L4044 L4047,4 8 L5604	J0JHC0000078 ERJ3GEY0R00 J0JHC00000241 ERJ3GEY0R00 J0JHC0000078	CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR  CHIP INDUCTOR  M 0 OHM, 1/16W  CHIP INDUCTOR	1 1 1 1 2 2 2 1 1 1 1 3 2 1 1 1 2 1 1 1 1	

No.   Description				_	/ IN-42P X300 / IN-
L5608	Ref.	Part No.	Part Name &	Pcs	Remarks
L5609					
L5510	L5608	G1C100MA0072	CHOKE COIL	1	
L5511 01A150ZAD007 CROKE COIL 1  L5512 00A220GA0002 CROKE COIL 1  L5513 0A220GA0002 CROKE COIL 1  L5515 0A220GA0002 CROKE COIL 1  L5515 0A220GA0002 CROKE COIL 1  L5516 01A150ZAD007 CROKE COIL 1  L5516 0A220GA0002 CROKE COIL 1  L55801 GOCIOLKO023 PEAKING COIL 1  L5803 GA220GA0002 CROKE COIL 1  L5803 GA220GA0002 CROKE COIL 1  L5803 GA220GA0002 CROKE COIL 1  L5808 GA100GA0013 CROKE COIL 1  L6001, GAREGMAD003 CROKE COIL 2  2  L6004, GAREGMAD003 CROKE COIL 2  L6004, GOAIRAMAD003 CROKE COIL 1  L6013 GOZZO0002183 PEAKING COIL 1  L6014 GOCIOLKO0023 PEAKING COIL 1  L6015 GOZZO002183 PEAKING COIL 1  L6016, GOJJCO000021 CRIP INDUCTOR 1  L6052, GOZZO0002183 PEAKING COIL 2  3  L6056, GOZZO0002183 PEAKING COIL 2  L6069, GOZZO0002183 PEAKING COIL 2  L6059, GOZZO0002183 PEAKING COIL 2  L6050, O JOJJCO000021 CRIP INDUCTOR 2  L6050, O JOJJCO000021 CRIP INDUCTOR 2  L6050, O GOZZO0002183 PEAKING COIL 3  ACCESSOR GOZZO0002183 PEAKING COIL 3  L6505 GOZZO0002183 PEAKING COIL 3  L6505 GOZZO0002183 PEAKING COIL 3  L6505 JOJJCO000021 CRIP INDUCTOR 1  L6505 GOZZO0002183 PEAKING COIL 3  L6505 JOJJCO000021 CRIP INDUCTOR 1  L6505 GOZZO0002183 PEAKING COIL 1  L6505 GOZZO0002183 PEAKING COIL 1  L6507 GOZZO0002183 PEAKING COIL 1  L6508 JOJJCO00001 CRIP INDUCTOR 1  L6514 JOJJCO00001 CRIP INDUCTOR 1  L6520 GOZZO0002183 PEAKING COIL 1  L6520 GOZZO0002183 PEAKING COIL 1  L6521 GOZZO0000183 PEAKING COIL 1  L6231 JOJJCO000045 CRIP INDUCTOR 1  L6232 GOZZO0002183 PEAKING COIL 1  L6232 LLMARSOMB INDUCTION COIL 1  L6232 LLMARSOMB INDUCTION COIL 1  L6232 LLMARSOMB INDUCTION COIL 1  L6233 JOHCONOO45 CRIP INDUCTOR 1  L6231 LEQUAL SALARADO CRIP INDUCTOR 1  L6232 LLMARSOMB INDUCTION C	L5609	TALL08N120KA	INDUCTION COIL	1	
L5612	L5610	G1C470MA0077	INDUCTION COIL	1	
L5612	L5611	G1A150ZA0007	CHOKE COIL	1	
L5613,1 G1A150ZA0007 CHOKE COIL 2  4 4 5615 G0A220GA0002 CHOKE COIL 1 L5616 G1A150ZA0007 CHOKE COIL 1 L5616 G1A150ZA0007 CHOKE COIL 1 L5801 G0IO1K00023 PEAKING COIL 1 L5802 TALLORNIO1KA INDUCTION COIL 1 L5803 G0A220GA0002 CHOKE COIL 1 L5808 G0A100GA0013 CHOKE COIL 1 L6001,0 G0ARGWAMA0003 CHOKE COIL 2 L6004,0 G0A1R4MA0003 CHOKE COIL 2 L6004,1 G0OIK00021 CHIP INDUCTOR 1 L6013 G0ZZ00002183 PEAKING COIL 1 L6014 G0CIOK00023 PEAKING COIL 9 23 L6026- G0ZZ00002183 PEAKING COIL 1 L6052,5 G0ZZ00002183 PEAKING COIL 2 24 L6069,7 G0ZZ00002183 PEAKING COIL 2 25 L6069,7 G0ZZ00002183 PEAKING COIL 2 26 L6069,7 G0ZZ00002183 PEAKING COIL 2 27 L6069,7 G0ZZ00002183 PEAKING COIL 2 28 L6500,0 J0JJC0000021 CHIP INDUCTOR 2 29 L6500,0 J0JJC0000021 CHIP INDUCTOR 2 20 L6500,0 J0JJC0000021 CHIP INDUCTOR 1 L6500,0 J0JJC0000021 CHIP INDUCTOR 2 20 L6500,0 J0JJC0000021 CHIP INDUCTOR 1 L6500,0 J0JJC0000021 CHIP INDUCTOR 1 L6500,0 J0JJC0000021 CHIP INDUCTOR 2 20 L6501,0 J0JJC0000021 CHIP INDUCTOR 1 L6503 G0ZZ00002183 PEAKING COIL 3 3 L6504 G0ZZ00002183 PEAKING COIL 3 4 L6505 G0ZZ00002183 PEAKING COIL 1 L6506 GARGWAMB INDUCTION COIL 1 L6206 ELJNATHMB INDUCTOR 1 L6207 ELJNATHMB INDUCTOR 1 L6208 ELJNATHMB INDUCTOR COIL 1 L6208 ELJNATHMB INDUCTION COIL 1 L6208 ELJNATHMB INDUCTION COIL 1 L	L5612	G0A220GA0002	CHOKE COIL	1	
4				2	
L5615 G0A220GA0002 CHOKE COIL 1 L5616 G1A150ZA0007 CHOKE COIL 1 L5801 G0Z101K00023 PRAKING COIL 1 L5803 G0A220GA0002 CHOKE COIL 1 L5803 G0A20GA0002 CHOKE COIL 1 L5803 G0A20GA0003 CHOKE COIL 1 L5808 G0A10GA0013 CHOKE COIL 1 L5810 G0A10GA0013 CHOKE COIL 1 L5810 G0A10GA0013 CHOKE COIL 1 L5810 G0A10GA0013 CHOKE COIL 2 L6001, 0 GOARGOMA0003 CHOKE COIL 2 L6001, 0 GOARGOMA0003 CHOKE COIL 2 L6003 J0JJC0000021 CHIF INDUCTOR 1 L6013 G0ZZ00002183 PRAKING COIL 1 L6014 G0C101K00023 PRAKING COIL 1 L6015 G0ZZ00002183 PRAKING COIL 1 L6015 G0ZZ00002183 PRAKING COIL 1 L6016 G0Z200002183 PRAKING COIL 2 3 L6052, 5 G0ZZ00002183 PRAKING COIL 2 2 L6069, 7 G0ZZ0000218 PRAKING COIL 2 L6069, 7 G0ZZ000021 CHIF INDUCTOR 1 L6061, 6 J0JJC0000021 CHIF INDUCTOR 2 L6069, 7 G0ZZ00002183 PRAKING COIL 2 L6050, 0 J0JJC0000021 CHIF INDUCTOR 2 L6500, 0 J0JJC0000021 CHIF INDUCTOR 1 L6500, 0 J0JJC0000021 CHIF INDUCTOR 1 L6500, 0 G0ZZ00002183 PRAKING COIL 3 44 L6505 G0ZZ00002183 PRAKING COIL 2 9 L6512, 1 G0A1R4MA0003 CHOKE COIL 2 9 L6512, 1 G0A1R4MA0003 CHOKE COIL 2 9 L6513- G0ZZ00002183 PRAKING COIL 1 L6504 G0ZZ00002183 PRAKING COIL 1 L6505 G0ZZ00002183 PRAKING COIL 1 L650		01111302110007	CHOKE COLE	~	
L5516 G1A150ZA0007 CHOKE COIL 1 L5801 G0C10IK00023 PEAKING COIL 1 L5802 TALLOSNIOIRA INDUCTION COIL 1 L5803 G0A220GA0002 CHOKE COIL 1 L5808 G0A100GA0013 CHOKE COIL 1 L5808 G0A100GA0013 CHOKE COIL 1 L6001,0 G0AR60MA0003 CHOKE COIL 2 L6008 J0JJC0000021 CHIF INDUCTOR 1 L6008 J0JJC0000021 CHIF INDUCTOR 1 L6013 G0ZZ00002183 PEAKING COIL 1 L6014 G0C10IK00023 PEAKING COIL 1 L6015- G0ZZ00002183 PEAKING COIL 1 L6026- G0ZZ00002183 PEAKING COIL 1 L6038 J0JJC0000001 CHIF INDUCTOR 1 L6038 J0JJC00000101 CHIF INDUCTOR 1 L6061,6 J0JJC0000011 CHIF INDUCTOR 1 L6061,6 J0JJC0000011 CHIF INDUCTOR 2 L6069,7 G0ZZ00002183 PEAKING COIL 2 L6059,9 J0JJC0000001 CHIF INDUCTOR 2 L6059,9 J0JJC0000011 CHIF INDUCTOR 2 L6059,0 J0JJC0000021 CHIF INDUCTOR 2 L6500,0 J0JJC0000021 CHIF INDUCTOR 2 L6500,0 J0JJC0000021 CHIF INDUCTOR 2 L6505 J0JJC0000021 CHIF INDUCTOR 2 L6505 J0JJC0000021 CHIF INDUCTOR 1 L6506 G0ZZ00002183 PEAKING COIL 3 04 CHIF INDUCTOR 1 L6505 J0JJC0000021 CHIF INDUCTOR 1 L6506 G0ZZ00002183 PEAKING COIL 3 04 CHIF INDUCTOR 1 L6507 G0ZZ00002183 PEAKING COIL 3 04 CHIF INDUCTOR 1 L6508 J0JJC000001 CHIF INDUCTOR 1 L6509 J0JJC000001 CHIF INDUCTOR 1 L6505 J0JJC0000021 CHIF INDUCTOR 1 L6505 J0JJC000001 CHIF INDUCTOR 1 L6505 J0JJC000001 CHIF INDUCTOR 1 L6505 J0JJC000001 CHIF INDUCTOR 1 L6506 G0ZZ00002183 PEAKING COIL 3 04 CHIF INDUCTOR 1 L6505 J0JJC000001 CHIF INDUCTOR 1 L6505 J0JJC000001 CHIF INDUCTOR 1 L6507 J0JJC000001 CHIF INDUCTOR 1 L6508 J0JHC0000045 CHIF INDUCTOR 1 L6200- ELJPA270KB INDUCTION COIL 1 L6200- ELJPA37NB INDUCTION COIL 1 L6201 ELJNA47NB INDUCTION COIL 1 L6202 ELJNA47NB INDUCTION COIL 1 L6203 ELJNA47NB INDUCTION COIL 1 L6204 ELJNA47NB INDUCTION COIL 1 L6207 ELJNA47NB INDUCTION COIL 1 L6208 ELJNA47NB INDUCTION COIL 1 L6209 J0JHC0000045 CHIF INDUCTOR 1 L6211 ELJNA47NB INDUCTION COIL 1 L6212 ELJNA1ROSF INDUCTION COIL 1 L6213 J0JHC0000045 CHIF INDUCTOR 1 L6214 ELJNA1ROSF INDUCTION COIL 1 L6215 L6214 J0JHC0000045 CHIF INDUCTOR 5 L6214 L6218 J0JHC0000045 CHIF INDUCTOR COIL 1 L6218 J0JHC0000045 CHIF INDUCTOR 5 L6211 ELJNA1ROSF INDU		G0A220GA0002	CHOKE COIL	1	
L5801   GOC101K00023   PEAKING COIL   1   1   1   1   1   1   1   1   1		l		1	
L5802 TALL08N101KA INDUCTION COIL 1 L5803 G0A220GA0002 CHOKE COIL 1 L5808 G0A100GA0013 CHOKE COIL 1 L5810 G0A100GA0013 CHOKE COIL 1 L5810 G0A100GA0013 CHOKE COIL 1 L5810 G0A10GA0013 CHOKE COIL 2 L6004,0 G0AR6MA0003 CHOKE COIL 2 L6008 J0JJC0000021 CHIP INDUCTOR 1 L6013 G0ZZ00002183 PEAKING COIL 1 L6015- G0ZZ00002183 PEAKING COIL 1 L6015- G0ZZ00002183 PEAKING COIL 1 L60525- G0ZZ00002183 PEAKING COIL 2 S L6006,7 G0ZZ00002183 PEAKING COIL 2 CHIP INDUCTOR 1 L6015- J0JJC0000021 CHIP INDUCTOR 1 L6051,6 J0JJC0000021 CHIP INDUCTOR 2 L60609,7 G0ZZ00002183 PEAKING COIL 2 S L6050,0 J0JJC0000021 CHIP INDUCTOR 2 L6050,0 J0JJC0000021 CHIP INDUCTOR 2 L6505- J0JJC0000021 CHIP INDUCTOR 1 L6508,0 G0ZZ00002183 PEAKING COIL 3 G0ZZ00002183 PEAKING COIL 3 G0ZZ00002183 PEAKING COIL 3 G0ZZ00002183 PEAKING COIL 3 G0ZZ00002183 PEAKING COIL 1 L6508,0 G0ZZ00002183 PEAKING COIL 2 G0ZZ00002183 PEAKING COIL 1 L6508,0 G0ZZ00002183 PEAKING COIL 1 L6508,0 G0ZZ00002183 PEAKING COIL 1 L6508,0 G0ZZ00002183 PEAKING COIL 1 L65141 J0JJC000001 CHIP INDUCTOR 1 L65141 J0JJC000001 CHIP INDUCTOR 1 L6542- G0ZZ00002183 PEAKING COIL 3 HEAVING COIL 1 L6541 J0JJC000001 CHIP INDUCTOR 1 L6541 J0JJC000001 CHIP INDUCTOR 1 L6542- G0ZZ00002183 PEAKING COIL 1 L6543- J0JJC0000001 CHIP INDUCTOR 1 L6541 L6206 ELJNA55NMB INDUCTION COIL 1 L6206 ELJNA50NMB INDUCTION COIL 1 L6207 ELJNA5NMB INDUCTION COIL 1 L6208 ELJNA16NMF INDUCTION COIL 1 L6209 J0JJC00000045 CHIP INDUCTOR 1 L6211 ELJNA16NF INDUCTION COIL 1 L6212 ELJNA17NMB INDUCTION COIL 1 L6213 J0JHC0000045 CHIP INDUCTOR 1 L6214 LJNA18NF INDUCTION COIL 1 L6215 LJNA16NMB INDUCTION COIL 1 L6216 LJNA16NMB INDUCTION COIL 1 L6217 ELJNA16NF INDUCTION COIL 1 L6218 J0JHC0000045 CHIP INDUCTOR 5 L6211 ELJNA16NF INDUCTON COIL 1 L6213 J0JHC0000045 CHIP				<del>  .  </del>	
L5803   G0A220GA0002   CHOKE COIL   1				<del> </del>	
L5810   GOA100GA0013   CHOKE COIL   1	L5802	TALL08N101KA	INDUCTION COIL	1	
L5810   GOA100GA0013   CHOKE COIL   1   1   1   1   1   1   1   1   1	L5803	G0A220GA0002	CHOKE COIL	1	
L6001,0 GOAR60MA0003 CHOKE COIL 2 5 5 6 6004,0 GOARAMA0003 CHOKE COIL 2 5 5 6 6008 J0JJC0000021 CHIP INDUCTOR 1 60013 GOZZ00002183 PEAKING COIL 1 6015- GOZZ00002183 PEAKING COIL 1 6016- GOZZ00002183 PEAKING COIL 1 60502- GOZZ00002183 PEAKING COIL 10 6052,5 GOZZ00002183 PEAKING COIL 2 6058 J0JJC0000021 CHIP INDUCTOR 1 60606,6 J0JJC0000011 CHIP INDUCTOR 2 6069,7 GOZZ00002183 PEAKING COIL 2 6069,7 GOZZ00002183 PEAKING COIL 2 60500,0 J0JJC0000021 CHIP INDUCTOR 1 65502- GOZZ00002183 PEAKING COIL 3 65503- GOZZ00002183 PEAKING COIL 1 65505 GOZZ00002183 PEAKING COIL 1 65508,0 GOAR60MA0003 CHOKE COIL 2 9 60515- GOZZ00002183 PEAKING COIL 2 9 6052000 GOZZ00002183 PEAKING COIL 1 65523- GOZZ00002183 PEAKING COIL 1 65523- GOZZ00002183 PEAKING COIL 6 60503,0 GOZZ00002183 PEAKING COIL 12 84 66541 J0JJC0000011 CHIP INDUCTOR 1 66542- GOZZ00002183 PEAKING COIL 12 84 66541 J0JJC0000012 CHIP INDUCTOR 1 66542- GOZZ00002183 PEAKING COIL 1 66542- GOZZ00002183 PEAKING COIL 1 665437,3 J0JJC0000011 CHIP INDUCTOR 1 66541 FEATGROUPH INDUCTOR 1 66542- GOZZ00002183 PEAKING COIL 1 66542- GOZZ00002183 PEAKING COIL 1 66542- GOZZ00002183 PEAKING COIL 1 66542- GOZZ0000018 PEAKING COIL 1 66542	L5808	G0A100GA0013	CHOKE COIL	1	
2	L5810	G0A100GA0013	CHOKE COIL	1	
S	L6001,0	GOAR60MA0003	CHOKE COIL	2	
S	2				
L6008 J0JJC0000021 CHIP INDUCTOR 1 L6013 G0Z200002183 PEARING COIL 1 L6014 G0C101K00023 PEARING COIL 1 L6015- 23 PEARING COIL 1 L6026- 35 PEARING COIL 2 36 PEARING COIL 2 37 PEARING COIL 2 38 PEARING COIL 2 39 PEARING COIL 2 30 PEARING COIL 2 30 PEARING COIL 2 30 PEARING COIL 2 31 PEARING COIL 2 32 PEARING COIL 2 34 PEARING COIL 2 35 PEARING COIL 2 36 PEARING COIL 2 37 PEARING COIL 2 38 PEARING COIL 2 39 PEARING COIL 2 40 PEARING COIL 3 40 PEARING COIL 3 40 PEARING COIL 3 41 PEARING COIL 3 42 PEARING COIL 3 43 PEARING COIL 3 44 PEARING COIL 2 45 PEARING COIL 3 46 PEARING COIL 3 46 PEARING COIL 3 46 PEARING COIL 3 47 PEARING COIL 3 48 PEARING COIL 4 48 PEARING COIL 4 49 PEARING COIL 12 40 PEARING COIL 12 40 PEARING COIL 12 41 PEARING COIL 12 42 PEARING COIL 12 43 PEARING COIL 12 44 PEARING COIL 12 45 PEARING COIL 12 46 PEARING COIL 12 46 PEARING COIL 12 47 PEARING COIL 12 48 PEARING COIL 12 49 PEARING COIL 12 40 PEARING COIL 12 40 PEARING COIL 12 40 PEARING COIL 12 41 PEARING COIL 12 42 PEARING COIL 12 43 PEARING COIL 12 44 PEARING COIL 12 45 PEARING COIL 12 46 PEARING COIL 12 46 PEARING COIL 12 47 PEARING COIL 12 48 PEARING COIL 12 49 PEARING COIL 12 40 PEARING COIL 12 40 PEARING COIL 12 41 PEARING COIL 12 42 PEARING COIL 12 43 PEARING COIL 12 44 PEARING COIL 12 45 PEARING COIL 12 46 PEARING COIL 12 46 PEARING COIL 12 47 PEARING COIL 12 48 PEARING COIL 12 49 PEARING COIL 12 49 PEARING COIL 12 40 PEARING COIL 12 40 PEARING COIL 12 40 PEARING COIL 12 41 PEARING COIL 12 42 PEARING COIL 12 43 PEARING COIL 12 44 PEARING COIL 12 45 PEARING COIL 12 46 PEARING COIL 12 46 PEARING COIL 12 47 PEARING COIL 12 48 PEARING COIL 12 49 PEARING COIL 12 49 PEARING COIL 12 40 PEARING COIL 12 40 PEARING COIL 12 40 PEARING COIL 12 40 PEARING COIL 12 41 PEARING COIL 12 41 PEARING COIL 12 42 PEARI	L6004,0	G0A1R4MA0003	CHOKE COIL	2	
L6013 G0ZZ00002183 PEAKING COIL 1 L6014 G0C101K00023 PEAKING COIL 1 L6015- G0ZZ00002183 PEAKING COIL 1 L6026- G0ZZ00002183 PEAKING COIL 10 35 L6052,5 G0ZZ00002183 PEAKING COIL 2 3 L6058 J0JJC0000021 CHIP INDUCTOR 1 L60601,6 J0JJC0000011 CHIP INDUCTOR 2 2 L60609,7 G0ZZ00002183 PEAKING COIL 2 0 L6091,9 J0JJC0000021 CHIP INDUCTOR 2 L6509,0 J0JJC0000021 CHIP INDUCTOR 2 L6505- G0ZZ00002183 PEAKING COIL 3 04 L6505- J0JJC0000021 CHIP INDUCTOR 1 L6505- G0ZZ00002183 PEAKING COIL 3 04 L6505- J0JJC0000021 CHIP INDUCTOR 1 L6506 G0ZZ00002183 PEAKING COIL 3 05 J0JJC0000021 CHIP INDUCTOR 1 L6505 G0ZZ00002183 PEAKING COIL 1 L6505 G0ZZ0002183 PEAKING COIL 2 3 CHOKE COIL 2 3 CHOKE COIL 2 3 CHOKE COIL 2 3 CHOKE COIL 3 3 CHOKE COIL 3 3 CHOKE COIL 3 4 CHOKE COIL 4 4 CHOMAN COUL 4 4 CHOKE COIL 3 4 CHOKE COIL 3 4 CHOKE COIL 3 4 CHOKE COIL 3 4 CHOKE COIL 4 4 CHOKE COIL 3 4 CHOKE COIL 3 4 CHOKE COIL 3 4 CHOKE COIL 3 4 CHOKE COIL 4 4 CHOKE COIL 3 4 CHOKE COIL 3 4 CHOKE COIL 3 4 CHOKE COIL 3 4 CHOKE COIL 4 4 CHOKE COIL 3 5 CHOKE COIL 3 5 CHOKE COIL 3 5 CHOKE COIL 3 5	5				
L6014 GOC101K00023 PEAKING COIL 1 L6015- GOZZO0002183 PEAKING COIL 9 23 L6026- GOZZO0002183 PEAKING COIL 10 35 L60525, GOZZO0002183 PEAKING COIL 10 36 L60525, GOZZO0002183 PEAKING COIL 2 3 L6058 JOJJC0000011 CHIP INDUCTOR 1 L60616, JOJJC0000011 CHIP INDUCTOR 2 2 L60699, GOZZO0002183 PEAKING COIL 2 0 L65000, JOJJC0000021 CHIP INDUCTOR 2 2 L65000, JOJJC0000021 CHIP INDUCTOR 2 1 L65005 GOZZO0002183 PEAKING COIL 3 04 L6505 JOJJC0000021 CHIP INDUCTOR 1 L6506 GOZZO0002183 PEAKING COIL 1 L6505 GOZZO0002183 PEAKING COIL 1 L6508, GOAR60MA0003 CHOKE COIL 2 3 L6511- GOZZO0002183 PEAKING COIL 1 L6505 GOZZO0002183 PEAKING COIL 1 L6505 GOZZO0002183 PEAKING COIL 1 L6505 GOZZO0002183 PEAKING COIL 2 3 L6514 JOJJC000001 CHIP INDUCTOR 2 8 L6537, JOJJC000001 CHIP INDUCTOR 1 L6541 JOJJC000001 CHIP INDUCTOR 1 L6541 JOJJC000001 CHIP INDUCTOR 1 L6541 JOJC000001 CHIP INDUCTOR 1 L6541 GOZZO0002183 PEAKING COIL 3 44 L8096 JOJHC0000045 CHIP INDUCTOR 1 L6204 ELJNASCNMB INDUCTION COIL 4 03 L6204 ELJNASCNMB INDUCTION COIL 1 L6205 ELJNA47NMB INDUCTION COIL 1 L6206 ELJNA5NMB INDUCTION COIL 1 L6207 ELJNA47NMB INDUCTION COIL 1 L6208 ELJNAA7NMB INDUCTION COIL 1 L6209 JOJHC0000045 CHIP INDUCTOR 1 L6201 ELJNATOMF INDUCTION COIL 1 L62021 ELJNARSJF INDUCTION COIL 1 L6203 ELJNARSJF INDUCTION COIL 1 L6204 ELJNARSJF INDUCTION COIL 1 L6205 ELJNARSJF INDUCTION COIL 1 L6207 ELJNARSJF INDUCTION COIL 1 L6208 ELJNARSJF INDUCTION COIL 1 L6209 JOJHC0000045 CHIP INDUCTOR 1 L6211 ELJNARSJF INDUCTION COIL 1 L6212 ELJNARSJF INDUCTION COIL 1 L6212 ELJNARSJF INDUCTION COIL 1 L6213 ELJNARSJF INDUCTION COIL 1 L6214 ELJNARSJF INDUCTION COIL 1 L6215 ELJNARSJF INDUCTION COIL 1 L6216 ELJNARSJF INDUCTION COIL 1 L6217 ELJNARSJF INDUCTION COIL 1 L6218 JOJHC0000045 CHIP INDUCTOR 5 L6211 ELJNARSJF INDUCTION COIL 1 L6212 ELJNARSJF INDUCTION COIL 1 L6213 ELJNARSJF INDUCTION COIL 1 L6214 ELJNARSJF INDUCTION COIL 1 L6215 ELJNARSJF INDUCTION COIL 1 L6216 ELJNARSJF INDUCTION COIL 1 L6217 ELJNARSJF INDUCTION COIL 1 L6218 LJNARSJF INDUCTION COIL 1 L6219 ELJNARSJF INDUCTION COIL 1 L6211	L6008	J0JJC0000021	CHIP INDUCTOR	1	
L6014 GOC101K00023 PEAKING COIL 1 L6015- GOZZO0002183 PEAKING COIL 9 23 L6026- GOZZO0002183 PEAKING COIL 10 35 L60525, GOZZO0002183 PEAKING COIL 10 36 L60525, GOZZO0002183 PEAKING COIL 2 3 L6058 JOJJC0000011 CHIP INDUCTOR 1 L60616, JOJJC0000011 CHIP INDUCTOR 2 2 L60699, GOZZO0002183 PEAKING COIL 2 0 L65000, JOJJC0000021 CHIP INDUCTOR 2 2 L65000, JOJJC0000021 CHIP INDUCTOR 2 1 L65005 GOZZO0002183 PEAKING COIL 3 04 L6505 JOJJC0000021 CHIP INDUCTOR 1 L6506 GOZZO0002183 PEAKING COIL 1 L6505 GOZZO0002183 PEAKING COIL 1 L6508, GOAR60MA0003 CHOKE COIL 2 3 L6511- GOZZO0002183 PEAKING COIL 1 L6505 GOZZO0002183 PEAKING COIL 1 L6505 GOZZO0002183 PEAKING COIL 1 L6505 GOZZO0002183 PEAKING COIL 2 3 L6514 JOJJC000001 CHIP INDUCTOR 2 8 L6537, JOJJC000001 CHIP INDUCTOR 1 L6541 JOJJC000001 CHIP INDUCTOR 1 L6541 JOJJC000001 CHIP INDUCTOR 1 L6541 JOJC000001 CHIP INDUCTOR 1 L6541 GOZZO0002183 PEAKING COIL 3 44 L8096 JOJHC0000045 CHIP INDUCTOR 1 L6204 ELJNASCNMB INDUCTION COIL 4 03 L6204 ELJNASCNMB INDUCTION COIL 1 L6205 ELJNA47NMB INDUCTION COIL 1 L6206 ELJNA5NMB INDUCTION COIL 1 L6207 ELJNA47NMB INDUCTION COIL 1 L6208 ELJNAA7NMB INDUCTION COIL 1 L6209 JOJHC0000045 CHIP INDUCTOR 1 L6201 ELJNATOMF INDUCTION COIL 1 L62021 ELJNARSJF INDUCTION COIL 1 L6203 ELJNARSJF INDUCTION COIL 1 L6204 ELJNARSJF INDUCTION COIL 1 L6205 ELJNARSJF INDUCTION COIL 1 L6207 ELJNARSJF INDUCTION COIL 1 L6208 ELJNARSJF INDUCTION COIL 1 L6209 JOJHC0000045 CHIP INDUCTOR 1 L6211 ELJNARSJF INDUCTION COIL 1 L6212 ELJNARSJF INDUCTION COIL 1 L6212 ELJNARSJF INDUCTION COIL 1 L6213 ELJNARSJF INDUCTION COIL 1 L6214 ELJNARSJF INDUCTION COIL 1 L6215 ELJNARSJF INDUCTION COIL 1 L6216 ELJNARSJF INDUCTION COIL 1 L6217 ELJNARSJF INDUCTION COIL 1 L6218 JOJHC0000045 CHIP INDUCTOR 5 L6211 ELJNARSJF INDUCTION COIL 1 L6212 ELJNARSJF INDUCTION COIL 1 L6213 ELJNARSJF INDUCTION COIL 1 L6214 ELJNARSJF INDUCTION COIL 1 L6215 ELJNARSJF INDUCTION COIL 1 L6216 ELJNARSJF INDUCTION COIL 1 L6217 ELJNARSJF INDUCTION COIL 1 L6218 LJNARSJF INDUCTION COIL 1 L6219 ELJNARSJF INDUCTION COIL 1 L6211	L6013			1	
L6015- G0ZZ00002183 PEAKING COIL 9  L6026- G0ZZ00002183 PEAKING COIL 10  L6052,5 G0ZZ00002183 PEAKING COIL 2  L6058 JOJJC0000021 CHIP INDUCTOR 1  L6061,6 JOJJC0000021 CHIP INDUCTOR 2  L6069,7 G0ZZ00002183 PEAKING COIL 2  L6091,9 JOJJC0000021 CHIP INDUCTOR 2  L6500,0 JOJJC0000021 CHIP INDUCTOR 2  L65002- G0ZZ00002183 PEAKING COIL 3  4  L6505 JOJJC0000021 CHIP INDUCTOR 1  L6506 G0ZZ00002183 PEAKING COIL 3  L6508,0 GOARGOMA0003 CHOKE COIL 2  G0ZZ00002183 PEAKING COIL 1  L6508,0 GOARGOMA0003 CHOKE COIL 2  L6512,1 GOAIR4MA0003 CHOKE COIL 2  L6512,1 GOAIR4MA0003 CHOKE COIL 2  L6512,1 GOZZ00002183 PEAKING COIL 6  L6523- G0ZZ00002183 PEAKING COIL 12  L6541 JOJJC0000011 CHIP INDUCTOR 2  L6542 G0ZZ00002183 PEAKING COIL 12  34  L6537,3 JOJJC0000011 CHIP INDUCTOR 1  L6542 G0ZZ00002183 PEAKING COIL 12  34  L6541 JOJJC0000011 CHIP INDUCTOR 1  L6542 G0ZZ00002183 PEAKING COIL 3  44  L8096 JOJHC0000045 CHIP INDUCTOR 1  L8206 ELJNA47NMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNA47NMB INDUCTION COIL 1  L8209 JOJHC0000045 CHIP INDUCTOR 1  L8209 ELJNA47NMB INDUCTION COIL 1  L8209 ELJNA47NMB INDUCTION COIL 1  L8209 JOJHC0000045 CHIP INDUCTOR 1  L8201 ELJNAAFSFM INDUCTION COIL 1  L8202 ELJNAAFSFM INDUCTION COIL 1  L8203 INDUCTION COIL 1  L8204 ELJNARSFF INDUCTION COIL 1  L8205 ELJNAAFSFF INDUCTION COIL 1  L8217 ELJNARSFF INDUCTION COIL 1  L8218 JOJHC0000045 CHIP INDUCTOR 1  L8219 ELJNARSFF INDUCTION COIL 1  L8211 ELJNARSFF INDUCTION COIL 1  L8212 ELJNARSFF INDUCTION COIL 1  L8213 L8214 ELJNARSFF INDUCTION COIL 1  L8215 ELJNARSFF INDUCTION COIL 1  L8216 LBJARSFF INDUCTION COIL 1  L8217 ELJNARSFF INDUCTION COIL 1  L8218 JOJHC0000045 CHIP INDUCTOR 5  L8211 ELJNARSFF INDUCTION COIL 1  L8212 ELJNARSFF INDUCTION COIL 1  L8213 JOJHC0000045 CHIP INDUCTOR 5  L8214 JOJHC0000045 CHIP INDUCTOR 5				_	
23   L6026- GOZZO0002183   PEAKING COIL   10   35   10   10   35   10   10   35   10   10   35   10   10   35   10   10   35   10   10   35   10   10   35   10   10   35   10   10   35   10   10   10   10   10   10   10   1				<del>                                     </del>	
L6026- GOZZOO002183 PEAKING COIL 10 35 36 36 37 38 38 39 40028 4002000021 CHIP INDUCTOR 1 40091,9 JOJJC0000021 CHIP INDUCTOR 2 406502- GOZZOO002183 PEAKING COIL 2 405502- GOZZOO002183 PEAKING COIL 3 40 40 40 40 40 40 40 40 40 40 40 40 40		G02200002183	LEWYING COIP		
35		G07700000100	DEAKING COTT	10	
L6052,5 G0ZZ00002183 PEAKING COIL 2		G02200002183	LEWYING COIP	1 10	
3		G07700000100	DEAKING COTT	-	
L6058 J0JJC0000021 CHIP INDUCTOR 1 L6061,6 J0JJC0000011 CHIP INDUCTOR 2 2 L6069,7 G0ZZ00002183 PEAKING COIL 2 L6091,9 J0JJC0000021 CHIP INDUCTOR 2 2 L6500,0 J0JJC0000021 CHIP INDUCTOR 2 1 L65502 G0ZZ00002183 PEAKING COIL 3 04 L65505 J0JJC0000021 CHIP INDUCTOR 1 L65508,0 GOAR60MA0003 CHOKE COIL 2 9 L6512,1 G0A1R4MA0003 CHOKE COIL 2 3 L6515- G0ZZ00002183 PEAKING COIL 6 20 L6515- G0ZZ00002183 PEAKING COIL 12 20 L6537,3 J0JJC0000011 CHIP INDUCTOR 1 L6541 J0JJC0000011 CHIP INDUCTOR 2 8 L6541 J0JJC0000011 CHIP INDUCTOR 1 L6542- G0ZZ00002183 PEAKING COIL 12 44 L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 43 L8200 ELJPA270KB INDUCTION COIL 1 L8200- ELJPA270KB INDUCTION COIL 1 L8200- ELJNA47NMB INDUCTION COIL 1 L8201- ELJNA1ROMF INDUCTION COIL 1 L8202- ELJNA1ROMF INDUCTION COIL 1 L8203- J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1RSJF INDUCTION COIL 1 L8212 ELJNA1ROMF INDUCTION COIL 1 L8213 ELJNA1ROMF INDUCTION COIL 1 L8214 ELJNA1RSJF INDUCTION COIL 1 L8215 ELJNA1ROMF INDUCTION COIL 1 L8216 ELJNA1ROMF INDUCTION COIL 1 L8217 ELJNA1RSJF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8217 ELJNA1RSJF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219 ELJNA1ROMF INDUCTION COIL 1 L8210 ELJNA1ROMF INDUCTION COIL 1 L8211 ELJNA1RSJF INDUCTION COIL 1 L8212 ELJNA1ROMF INDUCTION COIL 1 L8213 J0JHC0000045 CHIP INDUCTOR 1 L8214 ELJNA1RSJF INDUCTION COIL 1 L8215 ELJNA1ROMB INDUCTION COIL 1 L8216 ELJNA1ROMB INDUCTION COIL 1 L8217 ELJNA1ROMB INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 5 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000035 CHIP INDUCTOR 5	_	G0ZZ00002183	PEAKING COIL	4	
L6061,6 J0JJC0000011 CHIP INDUCTOR 2 L6069,7 G0ZZ00002183 PEAKING COIL 2 L6091,9 J0JJC0000021 CHIP INDUCTOR 2 L6500,0 J0JJC0000021 CHIP INDUCTOR 2 L6500,0 G0ZZ00002183 PEAKING COIL 3 L6505 J0JJC0000021 CHIP INDUCTOR 1 L6506 G0ZZ00002183 PEAKING COIL 1 L6508,0 G0AR60MA0003 CHOKE COIL 2 G0ZZ00002183 PEAKING COIL 3 L6515- G0ZZ00002183 PEAKING COIL 12 L6537,3 J0JJC0000011 CHIP INDUCTOR 2 B CL6541 J0JJC0000011 CHIP INDUCTOR 2 B CL6542 G0ZZ00002183 PEAKING COIL 3 L6541 J0JJC0000021 CHIP INDUCTOR 1 L8141- ERJ3GEY0RO0 MOOHM, 1/16W 3 L8141- ERJ3GEY0RO0 MOOHM, 1/16W 3 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1ROJF INDUCTION COIL 1 L8212 ELJNA1ROJF INDUCTION COIL 1 L8213 LBJPA1ROMB INDUCTION COIL 1 L8214 ELJNA1ROJF INDUCTION COIL 1 L8215 ELJNA1ROJF INDUCTION COIL 1 L8216 ELJNA1ROJF INDUCTION COIL 1 L8217 ELJNA756KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8217 ELJNA756KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 5 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 5		T0.T.T00000001	CUID INDUCTOR	1	
2					
L6069,7 G0ZZ00002183 PEAKING COIL 2 2 L6500,0 J0JJC0000021 CHIP INDUCTOR 2 1 L6500,0 J0JJC0000021 CHIP INDUCTOR 2 1 L6500,0 G0ZZ00002183 PEAKING COIL 3 04 L6505 J0JJC0000021 CHIP INDUCTOR 1 L6506 G0ZZ00002183 PEAKING COIL 1 L6508,0 G0AR60MA0003 CHOKE COIL 2 9 L6512,1 G0A1R4MA0003 CHOKE COIL 2 3 L6515- G0ZZ00002183 PEAKING COIL 6 2 2 L6537,3 J0JJC0000011 CHIP INDUCTOR 2 8 L6537,3 J0JJC0000011 CHIP INDUCTOR 2 8 L6541 J0JJC0000011 CHIP INDUCTOR 1 L6542- G0ZZ00002183 PEAKING COIL 3 4 L8206 LJ0JHC0000045 CHIP INDUCTOR 1 L8204 ELJNA270KB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA47NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8209 J0JHC0000045 CHIP INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1ROJF INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1ROJF INDUCTION COIL 1 L8213 I ELJPA1ROMB INDUCTION COIL 1 L8217 ELJNA786KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219 ELJPA1ROMB INDUCTION COIL 1 L8211 ELJPA1ROMB INDUCTION COIL 1 L8212 ELJNA1ROJF INDUCTION COIL 1 L8213 J0JHC0000045 CHIP INDUCTOR 5 L8211 J0JHC0000045 CHIP INDUCTOR 5 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 5		J0JJC0000011	CHIP INDUCTOR	2	
0   Ch091,9   J0JJC0000021   CHIP INDUCTOR   2   2   2   2   2   2   2   2   2				l .	
CHIP INDUCTOR   2		G0ZZ00002183	PEAKING COIL	2	
2 L6500, 0 J0JJC0000021 CHIP INDUCTOR 2				L .	
Chip   Inductor   Chip   Chip   Chip   Chip   Inductor   Chip   Ch		J0JJC0000021	CHIP INDUCTOR	2	
1					
Color		J0JJC0000021	CHIP INDUCTOR	2	
04 L6505 J0JJC0000021 CHIP INDUCTOR 1 L6506 G0ZZ00002183 PEAKING COIL 1 L6508,0 G0AR60MA0003 CHOKE COIL 2 9 L6512,1 G0A1R4MA0003 CHOKE COIL 2 3 L6515- G0ZZ00002183 PEAKING COIL 6 20 L6523- G0ZZ00002183 PEAKING COIL 12 34 L6537,3 J0JJC0000011 CHIP INDUCTOR 2 8 L6541 J0JJC0000021 CHIP INDUCTOR 1 L6542- G0ZZ00002183 PEAKING COIL 3 44 L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 43 L8200- ELJPA270KB INDUCTION COIL 4 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA47NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R0MF INDUCTION COIL 1 L8212 ELJNA1R0MF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8214 ELJNA1R0JF INDUCTION COIL 1 L8215 ELJNA1R0JF INDUCTION COIL 1 L8216 ELJNA1R0JF INDUCTION COIL 1 L8217 ELJNAT5KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 2 0 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 2					
L6505 J0JJC0000021 CHIP INDUCTOR 1 L6506 G0ZZ00002183 PEAKING COIL 1 L6508,0 G0AR60MA0003 CHOKE COIL 2 L6512,1 G0AIR4MA0003 CHOKE COIL 2 L6515- G0ZZ00002183 PEAKING COIL 6 L6523- G0ZZ00002183 PEAKING COIL 12 34 L6537,3 J0JJC0000011 CHIP INDUCTOR 2 8 L6541 J0JJC0000021 CHIP INDUCTOR 1 L6542- G0ZZ00002183 PEAKING COIL 3 44 L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 43 L8200- ELJPA270KB INDUCTION COIL 4 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA47NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8209 J0JHC0000045 CHIP INDUCTOR COIL 1 L8201 ELJNA47NMB INDUCTION COIL 1 L8202 ELJNA47NMB INDUCTION COIL 1 L8203 ELJNA47NMB INDUCTION COIL 1 L8204 ELJNA47NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1ESJF INDUCTION COIL 1 L8212 ELJNA1ROMF INDUCTION COIL 1 L8213,1 ELJPA1ROMB INDUCTION COIL 1 L8214 ELJNA1ESJF INDUCTION COIL 1 L8215 J0JHC0000045 CHIP INDUCTOR 5 L8217 ELJNA56KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 5 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 2		G0ZZ00002183	PEAKING COIL	3	
L6506 G0ZZ00002183 PEAKING COIL 1  L6508,0 G0AR60MA0003 CHOKE COIL 2  L6512,1 G0A1R4MA0003 CHOKE COIL 2  L6515- G0ZZ00002183 PEAKING COIL 6  L6523- G0ZZ00002183 PEAKING COIL 12  AL6537,3 J0JJC0000011 CHIP INDUCTOR 2  B  L6541 J0JJC0000021 CHIP INDUCTOR 1  L6542- G0ZZ00002183 PEAKING COIL 3  44 L6541 FEAKING COIL 3  L68096 J0JHC0000045 CHIP INDUCTOR 1  L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3  L8200- ELJPA270KB INDUCTION COIL 4  B2004 ELJNA82NMB INDUCTION COIL 1  L8205 ELJNA47NMB INDUCTION COIL 1  L8206 ELJNA56MMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNA47NMB INDUCTION COIL 1  L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1ROJF INDUCTION COIL 1  L8213,1 ELJPA1ROMB INDUCTION COIL 1  L8214 ELJNAS6KF INDUCTION COIL 1  L8215 ELJNATOMB INDUCTION COIL 1  L8217 ELJNAF56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1ROMB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000045 CHIP INDUCTOR 5	04				
CHOKE COIL   2	L6505	J0JJC0000021	CHIP INDUCTOR	1	
9   CHORE COIL   2   2   3   3   3   3   3   3   3   3	L6506	G0ZZ00002183	PEAKING COIL	1	
CHOKE COIL   2   3   3   3   3   3   3   3   3   3	L6508,0	GOAR60MA0003	CHOKE COIL	2	
3 L6515- G0ZZ00002183 PEAKING COIL 6 L6523- G0ZZ00002183 PEAKING COIL 12 34 L6537,3 J0JJC0000011 CHIP INDUCTOR 2 8 L6541 J0JJC0000021 CHIP INDUCTOR 1 L6542- G0ZZ00002183 PEAKING COIL 3 44 L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 43 L8200- ELJPA270KB INDUCTION COIL 4 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8214 ELJNA1856KF INDUCTION COIL 1 L8215 ELJNA180JF INDUCTION COIL 1 L8216 J0JHC0000045 CHIP INDUCTOR 1 L8217 ELJNAR56KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 5 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8221- J0JHC00000045 CHIP INDUCTOR 5 L8221- J0JHC00000045 CHIP INDUCTOR 5	9				
Columb   C	L6512,1	G0A1R4MA0003	CHOKE COIL	2	
20 L6523- G0ZZ00002183 PEAKING COIL 12 34 L6537,3 J0JJC0000011 CHIP INDUCTOR 8 L6541 J0JJC0000021 CHIP INDUCTOR 1 L6542- G0ZZ00002183 PEAKING COIL 3 44 L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 L8200- ELJPA270KB INDUCTION COIL 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA10MF INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8217 ELJNAF56KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 0 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC00000045 CHIP INDUCTOR 5 L8231,3 J0JHC00000045 CHIP INDUCTOR 5	3				
L6523- 34  L6537,3 J0JJC0000011 CHIP INDUCTOR 2  L6541 J0JJC0000021 CHIP INDUCTOR 1 L6542- G0ZZ00002183 PEAKING COIL 3  44  L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3  L8200- ELJPA270KB INDUCTION COIL 3  L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 L8213,1 L8217 ELJNAR56KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 L8211 L8211 CLJNAR56KF INDUCTION COIL 1 L8212 L8213,1 L8214 L8215 L8215 L8215 L8217 CHIP INDUCTOR 5 L8211 L8216 CHIP INDUCTOR 5 L8211 L8217 L8218 J0JHC0000045 CHIP INDUCTOR 5 L8211 L8211 J0JHC0000045 CHIP INDUCTOR 5 L8211 L8211 J0JHC0000045 CHIP INDUCTOR 5 L8211 J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC00000035 CHIP INDUCTOR 2	L6515-	G0ZZ00002183	PEAKING COIL	6	
34 L6537,3 J0JJC0000011 CHIP INDUCTOR 2 8 L6541 J0JJC0000021 CHIP INDUCTOR 1 L6542- G0ZZ00002183 PEAKING COIL 3 44 L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 43 L8200- ELJPA270KB INDUCTION COIL 4 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8214 ELJNAR56KF INDUCTION COIL 1 L8215 ELJNAR56KF INDUCTION COIL 1 L8216 J0JHC0000045 CHIP INDUCTOR 1 L8217 ELJNAR56KF INDUCTION COIL 2 0 L8221- J0JHC0000045 CHIP INDUCTOR 5 25 L8231,3 J0JHC0000045 CHIP INDUCTOR 5	20				
CHIP INDUCTOR   2	L6523-	G0ZZ00002183	PEAKING COIL	12	
8 L6541 J0JJC0000021 CHIP INDUCTOR 1 L6542- G0ZZ00002183 PEAKING COIL 3 44 L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEYOROO M 0 OHM, 1/16W 3 43 L8200- ELJPA270KB INDUCTION COIL 4 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNAH0MF INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1ROJF INDUCTION COIL 1 L8213,1 ELJPA1ROMB INDUCTION COIL 1 L8213,1 ELJPA1ROMB INDUCTION COIL 1 L8214 ELJNAS6KF INDUCTION COIL 1 L8215 ELJNAF56KF INDUCTION COIL 1 L8216 J0JHC0000045 CHIP INDUCTOR 1 L8217 ELJNAR56KF INDUCTION COIL 2 4 L8217 ELJNAR56KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 5 L821- J0JHC0000045 CHIP INDUCTOR 5 L8221- J0JHC0000045 CHIP INDUCTOR 5	34				
8 L6541 J0JJC0000021 CHIP INDUCTOR 1 L6542- G0ZZ00002183 PEAKING COIL 3 44 L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEYOROO M 0 OHM, 1/16W 3 43 L8200- ELJPA270KB INDUCTION COIL 4 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNAH0MF INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1ROJF INDUCTION COIL 1 L8213,1 ELJPA1ROMB INDUCTION COIL 1 L8213,1 ELJPA1ROMB INDUCTION COIL 1 L8214 ELJNAS6KF INDUCTION COIL 1 L8215 ELJNAF56KF INDUCTION COIL 1 L8216 J0JHC0000045 CHIP INDUCTOR 1 L8217 ELJNAR56KF INDUCTION COIL 2 4 L8217 ELJNAR56KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 5 L821- J0JHC0000045 CHIP INDUCTOR 5 L8221- J0JHC0000045 CHIP INDUCTOR 5	L6537,3	J0JJC0000011	CHIP INDUCTOR	2	
L6542- 44  L8096 J0JHC0000045 CHIP INDUCTOR 1  L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3  L8200- ELJPA270KB INDUCTION COIL 4  L8204 ELJNA82NMB INDUCTION COIL 1  L8205 ELJNA47NMB INDUCTION COIL 1  L8206 ELJNA56NMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNA47NMB INDUCTION COIL 1  L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 1  L8217 ELJNAF56KF INDUCTION COIL 2  4  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000045 CHIP INDUCTOR 5	8				
L6542- 44  L8096 J0JHC0000045 CHIP INDUCTOR 1  L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3  L8200- ELJPA270KB INDUCTION COIL 4  L8204 ELJNA82NMB INDUCTION COIL 1  L8205 ELJNA47NMB INDUCTION COIL 1  L8206 ELJNA56NMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNA47NMB INDUCTION COIL 1  L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 1  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  CREAT OF THE STANDARD S	L6541	J0JJC0000021	CHIP INDUCTOR	1	
44 L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 L8200- ELJPA270KB INDUCTION COIL 4 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA47NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA7NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8217 ELJNAR56KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 2 0 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC00000045 CHIP INDUCTOR 5		<b> </b>	PEAKING COIL	3	
L8096 J0JHC0000045 CHIP INDUCTOR 1  L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3  L8200- ELJPA270KB INDUCTION COIL 4  03  L8204 ELJNA82NMB INDUCTION COIL 1  L8205 ELJNA47NMB INDUCTION COIL 1  L8206 ELJNA47NMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNA47NMB INDUCTION COIL 1  L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 2  4  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000045 CHIP INDUCTOR 5					
L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 L8200- ELJPA270KB INDUCTION COIL 4  L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNAR10MF INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 2 L8217 ELJNAR56KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 2 0 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 5		.TO.THC0000045	CHIP INDUCTOR	<del>  .  </del>	
43 L8200- ELJPA270KB INDUCTION COIL 4 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNAR10MF INDUCTION COIL 1 L8209 JOJHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 2 4 L8217 ELJNAR56KF INDUCTION COIL 1 L8218 JOJHC0000045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 2 0 L8221- J0JHC0000045 CHIP INDUCTOR 5 25 L8231,3 J0JHC0000035 CHIP INDUCTOR 2	L8096			1 1	
L8200- ELJPA270KB INDUCTION COIL 4 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNAR10MF INDUCTION COIL 1 L8209 JOJHCO000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 2 4 L8217 ELJNAR56KF INDUCTION COIL 1 L8218 JOJHCO000045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 2 0 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 2					
03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNAR10MF INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 2 4 L8217 ELJNAR56KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 2 0 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000035 CHIP INDUCTOR 2	L8141-				
L8204 ELJNA82NMB INDUCTION COIL 1  L8205 ELJNA47NMB INDUCTION COIL 1  L8206 ELJNA56NMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNAR10MF INDUCTION COIL 1  L8209 JOJHCO000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 2  4  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 JOJHCO000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  CREAT STANDARD	L8141- 43	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
L8205 ELJNA47NMB INDUCTION COIL 1  L8206 ELJNA56NMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNAR10MF INDUCTION COIL 1  L8209 JOJHCO000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 2  4  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 JOJHCO000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000035 CHIP INDUCTOR 2	L8141- 43 L8200-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
L8206         ELJNA56NMB         INDUCTION COIL         1           L8207         ELJNA47NMB         INDUCTION COIL         1           L8208         ELJNAR10MF         INDUCTION COIL         1           L8209         J0JHC0000045         CHIP INDUCTOR         1           L8211         ELJNA1R5JF         INDUCTION COIL         1           L8212         ELJNA1R0JF         INDUCTION COIL         1           L8213,1         ELJPA1R0MB         INDUCTION COIL         2           L8217         ELJNAR56KF         INDUCTION COIL         1           L8218         J0JHC00000045         CHIP INDUCTOR         1           L8221-         J0JHC00000045         CHIP INDUCTOR         5           L8231,3         J0JHC00000035         CHIP INDUCTOR         2	L8141- 43 L8200- 03	ERJ3GEY0R00 ELJPA270KB	M 0 OHM, 1/16W INDUCTION COIL	3 4	
L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNAR10MF INDUCTION COIL 1  L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNALR5JF INDUCTION COIL 1  L8212 ELJNALR0JF INDUCTION COIL 1  L8213,1 ELJPALR0MB INDUCTION COIL 2  4  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPALR0MB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000035 CHIP INDUCTOR 2  2	L8141- 43 L8200- 03 L8204	ERJ3GEY0R00 ELJPA270KB ELJNA82NMB	M 0 OHM, 1/16W INDUCTION COIL INDUCTION COIL	3 4 1	
L8208 ELJNAR10MF INDUCTION COIL 1  L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNALR5JF INDUCTION COIL 1  L8212 ELJNALR0JF INDUCTION COIL 1  L8213,1 ELJPALR0MB INDUCTION COIL 2  4  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPALR0MB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000035 CHIP INDUCTOR 2  2	L8141- 43 L8200- 03 L8204 L8205	ELJPA270KB ELJNA82NMB ELJNA47NMB	M 0 OHM, 1/16W  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL	3 4 1 1	
L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 2  4  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000035 CHIP INDUCTOR 2  2	L8141- 43 L8200- 03 L8204 L8205 L8206	ERJ3GEY0R00 ELJPA270KB ELJNA82NMB ELJNA47NMB ELJNA56NMB	M 0 OHM, 1/16W  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL	3 4 1 1	
L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 2  4  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  25  L8231,3 J0JHC0000035 CHIP INDUCTOR 2  2	L8141- 43 L8200- 03 L8204 L8205 L8206	ERJ3GEY0R00 ELJPA270KB ELJNA82NMB ELJNA47NMB ELJNA56NMB	M 0 OHM, 1/16W  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL	3 4 1 1	
L8212 ELJNA1ROJF INDUCTION COIL 1  L8213,1 ELJPA1ROMB INDUCTION COIL 2  4  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 JOJHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1ROMB INDUCTION COIL 2  0  L8221- JOJHC0000045 CHIP INDUCTOR 5  25  L8231,3 JOJHC0000035 CHIP INDUCTOR 2  2	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207	ELJPA270KB ELJPA270KB ELJNA82NMB ELJNA47NMB ELJNA56NMB ELJNA47NMB	M 0 OHM, 1/16W  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL	3 4 1 1 1	
L8212 ELJNA1ROJF INDUCTION COIL 1  L8213,1 ELJPA1ROMB INDUCTION COIL 2  4  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 JOJHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1ROMB INDUCTION COIL 2  0  L8221- JOJHC0000045 CHIP INDUCTOR 5  25  L8231,3 JOJHC0000035 CHIP INDUCTOR 2  2	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208	ELJPA270KB  ELJPA270KB  ELJNA82NMB  ELJNA47NMB  ELJNA56NMB  ELJNA47NMB  ELJNA47NMB	M 0 OHM, 1/16W  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL	3 4 1 1 1 1	
L8213,1 ELJPA1ROMB INDUCTION COIL 2  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 JOJHCO000045 CHIP INDUCTOR 1  L8219,2 ELJPA1ROMB INDUCTION COIL 2  0  L8221- JOJHCO000045 CHIP INDUCTOR 5  L8231,3 JOJHCO000035 CHIP INDUCTOR 2	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209	ERJ3GEY0R00 ELJPA270KB ELJNA82NMB ELJNA47NMB ELJNA56NMB ELJNA47NMB ELJNA47NMB ELJNAR10MF JOJHC00000045	M 0 OHM, 1/16W  INDUCTION COIL  CHIP INDUCTOR	3 4 1 1 1 1 1	
4	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209 L8211	ERJ3GEY0R00  ELJPA270KB  ELJNA82NMB  ELJNA47NMB  ELJNA56NMB  ELJNA47NMB  ELJNAR10MF  JOJHC0000045  ELJNA1R5JF	M 0 OHM, 1/16W  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL	3 4 1 1 1 1 1 1	
L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000035 CHIP INDUCTOR 2  2	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209 L8211 L8212	ERJ3GEY0R00  ELJPA270KB  ELJNA82NMB  ELJNA47NMB  ELJNA56NMB  ELJNA47NMB  ELJNAR10MF  JOJHC0000045  ELJNA1R5JF  ELJNA1R0JF	M 0 OHM, 1/16W  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL	3 4 1 1 1 1 1 1	
L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1ROMB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000035 CHIP INDUCTOR 2  2	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209 L8211 L8212 L8213,1	ERJ3GEY0R00  ELJPA270KB  ELJNA82NMB  ELJNA47NMB  ELJNA56NMB  ELJNA47NMB  ELJNAR10MF  JOJHC0000045  ELJNA1R5JF  ELJNA1R0JF	M 0 OHM, 1/16W  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL	3 4 1 1 1 1 1 1	
L8219,2 ELJPA1ROMB INDUCTION COIL 2 0 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000035 CHIP INDUCTOR 2 2	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209 L8211 L8212 L8213,1	ERJ3GEY0R00 ELJPA270KB  ELJNA82NMB ELJNA47NMB ELJNA56NMB ELJNA47NMB ELJNA47NMB TOJHC0000045 ELJNA1R5JF ELJNA1R0JF ELJPA1R0MB	M 0 OHM, 1/16W  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL  INDUCTION COIL	3 4 1 1 1 1 1 1 1 2	
0	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209 L8211 L8212 L8213,1 4 L8217	ERJ3GEY0R00 ELJPA270KB  ELJNA82NMB ELJNA47NMB ELJNA56NMB ELJNA47NMB ELJNAR10MF J0JHC0000045 ELJNA1R5JF ELJNA1R0JF ELJNA1R0JF ELJPA1R0MB	M 0 OHM, 1/16W  INDUCTION COIL	3 4 1 1 1 1 1 1 1 2	
L8221- J0JHC0000045 CHIP INDUCTOR 5 25 L8231,3 J0JHC0000035 CHIP INDUCTOR 2 2	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209 L8211 L8212 L8213,1 4 L8217 L8218	ERJ3GEY0R00 ELJPA270KB  ELJNA82NMB ELJNA47NMB ELJNA47NMB ELJNA47NMB ELJNA10MF J0JHC0000045 ELJNA1R5JF ELJNA1R0JF ELJPA1R0MB ELJNAR56KF J0JHC0000045	M 0 OHM, 1/16W  INDUCTION COIL  CHIP INDUCTOR	3 4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
25 L8231,3 J0JHC0000035 CHIP INDUCTOR 2 2	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209 L8211 L8212 L8213,1 4 L8217 L8218 L8219,2	ERJ3GEY0R00 ELJPA270KB  ELJNA82NMB ELJNA47NMB ELJNA47NMB ELJNA47NMB ELJNA10MF J0JHC0000045 ELJNA1R5JF ELJNA1R0JF ELJPA1R0MB ELJNAR56KF J0JHC0000045	M 0 OHM, 1/16W  INDUCTION COIL  CHIP INDUCTOR	3 4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
L8231,3 J0JHC0000035 CHIP INDUCTOR 2	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209 L8211 L8212 L8213,1 4 L8217 L8218 L8219,2	ERJ3GEY0R00  ELJPA270KB  ELJNA82NMB  ELJNA47NMB  ELJNA47NMB  ELJNA10MB  ELJNAR10MF  J0JHC0000045  ELJNA1R0JF  ELJPA1R0MB  ELJNAR56KF  J0JHC0000045  ELJPA1R0MB	M 0 OHM, 1/16W  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL	3 4 1 1 1 1 1 1 1 1 1 1 2	
2	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209 L8211 L8212 L8213,1 4 L8217 L8218 L8219,2 0 L8221-	ERJ3GEY0R00  ELJPA270KB  ELJNA82NMB  ELJNA47NMB  ELJNA47NMB  ELJNA10MB  ELJNAR10MF  J0JHC0000045  ELJNA1R0JF  ELJPA1R0MB  ELJNAR56KF  J0JHC0000045  ELJPA1R0MB	M 0 OHM, 1/16W  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL	3 4 1 1 1 1 1 1 1 1 1 1 2	
	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209 L8211 L8212 L8213,1 4 L8217 L8218 L8219,2 0 L8221- 25	ERJ3GEY0R00  ELJPA270KB  ELJNA82NMB  ELJNA47NMB  ELJNA56NMB  ELJNAR10MF  JOJHC0000045  ELJNA1R0JF  ELJNA1R0JF  ELJNAR56KF  JOJHC0000045  ELJPA1R0MB  JUJHC0000045	M 0 OHM, 1/16W  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL  CHIP INDUCTOR	3 4 1 1 1 1 1 1 1 1 1 2 5	
L8235 JUJHCUUUUU45   CHIP INDUCTOR   1	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209 L8211 L8212 L8213,1 4 L8217 L8218 L8219,2 0 L8221- 25 L8231,3	ERJ3GEY0R00  ELJPA270KB  ELJNA82NMB  ELJNA47NMB  ELJNA56NMB  ELJNAR10MF  JOJHC0000045  ELJNA1R0JF  ELJNA1R0JF  ELJNAR56KF  JOJHC0000045  ELJPA1R0MB  JUJHC0000045	M 0 OHM, 1/16W  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL  CHIP INDUCTOR	3 4 1 1 1 1 1 1 1 1 1 2 5	
	L8141- 43 L8200- 03 L8204 L8205 L8206 L8207 L8208 L8209 L8211 L8212 L8213,1 4 L8217 L8218 L8219,2 0 L8221- 25 L8231,3 2	ERJ3GEY0R00 ELJPA270KB  ELJNA82NMB ELJNA47NMB ELJNA56NMB ELJNA47NMB ELJNAR10MF J0JHC0000045 ELJNA1R5JF ELJNA1R0JF ELJNA1R0JF ELJPA1R0MB ELJNAR56KF J0JHC0000045 ELJPA1R0MB J0JHC0000045	M 0 OHM, 1/16W  INDUCTION COIL  CHIP INDUCTOR  INDUCTION COIL  CHIP INDUCTOR  CHIP INDUCTOR  CHIP INDUCTOR	3 4 1 1 1 1 1 1 1 1 2 1 1 2 5	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L8236,3 7	J0JHC0000035	CHIP INDUCTOR	2	
L8239	J0JCC0000241	CHIP INDUCTOR	1	
L8240	J0JHC0000045	CHIP INDUCTOR	1	
L8242	J0JCC0000078	CHIP INDUCTOR	1	
L8243,4 4	J0JHC0000045	CHIP INDUCTOR	2	
L8252	ELJPA1R0MB	INDUCTION COIL	1	
L8253- 56	EXC3BB221H	BEAD CHOKE	4	
L8258	J0JHC0000045	CHIP INDUCTOR	1	
L8264-	J0JHC0000045	CHIP INDUCTOR	5	
68	T0 T00000000	CUITD TANDUICMOD	1	
L8269	J0JGC0000036	CHIP INDUCTOR INDUCTION COIL		
L8270 L8271	G1C100MA0078 G1C6R8MA0078	INDUCTION COIL	1	
L8271	G1C100MA0077	INDUCTION COIL	1	
L8274	ELJNA2R7JB		1	
L8274	J0JBC0000080	CHIP INDUCTOR	1	
L8277	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L9200	G1C150KA0038	INDUCTION COIL	1	
L9500,0	J0JHC0000078	CHIP INDUCTOR	2	
1 L9700	G1C4R3M00003	CHIP INDUCTOR	1	
L9701	G1C6R8M00009		1	
PA7	K1KA08AA0192	8P CONNECTOR	1	
PA10	K1KA06A00452		1	
PA10 PA20	K1MN30A00068	30P CONNECTOR	1	
PA30	K1MN30A00068	30P CONNECTOR	1	
PA5601, 02	K5H4022A0023	FUSE	2	
PB5	K1KA11AA0194	11P CONNECTOR	1	
PB7				
PB30	K1KA08AA0192	8P CONNECTOR	1	
PB31-34	K1KA05AA0150 K1KA03AA0192	3P CONNECTOR	4	
PC6501	B3PBA0000223	IC	1	
PC6507- 09	B3PBA0000223	ic	3	
PC6512, 13	B3PBA0000223	IC	2	
PC6516, 17	B3PBA0000234	IC	2	
PC6518	B3PBA0000233	IC	1	
PC6520	B3PBA0000233	IC	1	
PC6522	B3PBA0000233	IC	1	
00200	2005045025	MD ANGTONOS	+	
Q2300	2SC584500L	TRANSISTOR	1	
Q2301	2SD601A	TRANSISTOR	1	
Q2302 O2314-	2SC584500L	TRANSISTOR	1 1	
17	2SC584500L	TRANSISTOR	4	
Q2323	2SA207700L	TRANSISTOR	1	
Q2510,1 1	2SD601A	TRANSISTOR	2	
Q2519	2SB709A	TRANSISTOR	1	
Q2609	2SD601A	TRANSISTOR	1	
Q2611	2SD601A	TRANSISTOR	1	
Q2612	2SB709A	TRANSISTOR	1	
Q2618,1 9	2SD601A	TRANSISTOR	2	
Q4001	2SA207700L	TRANSISTOR	1	
Q4004	2SD601A	TRANSISTOR	1	
Q4006- 09	2SD601A	TRANSISTOR	4	
Q4012	2SD601A	TRANSISTOR	1	
Q4015-	2SD601A	TRANSISTOR	3	
17	2SD601A	TRANSISTOR	3	
Q4019-				
Q4019- 21	2SC584500L	TRANSISTOR	1	
Q4019- 21 Q4022		TRANSISTOR TRANSISTOR	1	
17 Q4019- 21 Q4022 Q4024 Q4026	2SC584500L		<del></del>	

No.   Part No.   Part Name & Pes   Remarks   No.   Q4043, 4   28D0601A   TRANSISTOR   1   Q4045   28A207700L   TRANSISTOR   1   Q4051   28D601A   TRANSISTOR   1   Q4055   28A207700L   TRANSISTOR   1   Q4055   28A207700L   TRANSISTOR   1   Q4055   28A207700L   TRANSISTOR   1   Q4056   28D601A   TRANSISTOR   1   Q4056   28D601A   TRANSISTOR   1   Q4056   28E2731T146   TRANSISTOR   1   Q4066   28E2731T146   TRANSISTOR   1   Q4066   28E2601A   TRANSISTOR   1   Q5601   BIDHDC000028   TRANSISTOR   1   Q5602   28C584500L   TRANSISTOR   1   Q5604   28C584500L   TRANSISTOR   1   Q5604   Q5606   BIDHDC00028   TRANSISTOR   1   Q5604   Q5606   Q56				1_ 1	
Q4043	Ref.	Part No.	Part Name &	Pcs	Remarks
Q4045   28A207700L		2SD0601A		2	
Q4091   Z80207700L					
Q4051-   SD601A	Q4045	2SA207700L	TRANSISTOR	1	
54         Q40555         25A207700L         TRANSISTOR         1           Q40565-         25D601A         TRANSISTOR         4           59         25D601A         TRANSISTOR         1           Q40668         25B601A         TRANSISTOR         1           Q40688         25B601A         TRANSISTOR         1           Q5601         B1DHDC0000028         TRANSISTOR         1           Q5602         25S64500L         TRANSISTOR         1           Q5604         Q5S64500L         TRANSISTOR         1           Q5604         Q5S64500L         TRANSISTOR         1           Q5607         Q5S64500L         TRANSISTOR         1           Q5601         Q5S64500L         TRANSISTOR         1           Q5610         Q5S64500L         TRANSISTOR         1           Q5611         Q5S64500L         TRANSISTOR         1           Q5614         Q5S64500L         TRANSISTOR         1           Q5614         Q5S64500L         TRANSISTOR         1           Q6011         PARAMISTOR         1           Q6012         PARAMISTOR         1           Q6013         PARAMISTOR         1           <	Q4049	2SA207700L	TRANSISTOR	1	
Q4055		2SD601A	TRANSISTOR	4	
Q4056- 2SD601A TRANSISTOR 4   90062   2SD601A TRANSISTOR 1   1   1   1   1   1   1   1   1   1		2532077001.	TDANGIGTOD	1	
59         Q4062         2SD601A         TRANSISTOR         1           Q40666,6         28K2731T146         TRANSISTOR         2           7         24068         28K2731T146         TRANSISTOR         1           Q5601         B1DHC000028         TRANSISTOR         1           Q5602         2BDBDC000028         TRANSISTOR         1           Q5604         D1DHDC000028         TRANSISTOR         1           Q5607         2BDBDC000028         TRANSISTOR         1           Q5606         B1DHDC000028         TRANSISTOR         1           Q5607         2BCS84500L         TRANSISTOR         1           Q5610         2SCS84500L         TRANSISTOR         1           Q5613         2SCS84500L         TRANSISTOR         1           Q5614         2SCS84500L         TRANSISTOR         1           Q5613         2SCS84500L         TRANSISTOR         1           Q5614         2SCS84500L         TRANSISTOR         1           Q5611         2SCS84500L         TRANSISTOR         1           Q6001         2SC399900VH         FET         1           Q6010         BLJADN00000         TRANSISTOR         1					
Q4066.6 2 SK2731T146 TRANSISTOR 2  Q4068					
7	Q4062	2SD601A	TRANSISTOR	1	
Q4068         2SD601A         TRANSISTOR         1           Q5601         BIDDEDCO00028         TRANSISTOR         1           Q5603         BIDDEDCO00028         TRANSISTOR         1           Q5604         Q5603         BIDDEDCO00028         TRANSISTOR         1           Q5604         Q5606         BIDDEDCO00028         TRANSISTOR         1           Q5606         BIDDEDCO00028         TRANSISTOR         1           Q5607         Z5C584500L         TRANSISTOR         1           Q5610         Z5C584500L         TRANSISTOR         1           Q5614         Z5C584500L         TRANSISTOR         1           Q5614         Z5C584500L         TRANSISTOR         1           Q5614         Z5C584500L         TRANSISTOR         1           Q5614         Z5C584500L         TRANSISTOR         1           Q6011-         Z5C384500L         TRANSISTOR         1           Q6001         Z5C384500L         TRANSISTOR         1           Q6001-         Z5C384500L         TRANSISTOR         1           Q6001-         Z5C3999000VH         FET         1           Q6010-         Z5C3999000VH         FET         1	12	2SK2731T146	TRANSISTOR	2	
Q5601 B1DHDC000028 TRANSISTOR 1 Q5602 ZSCS84500L TRANSISTOR 1 Q5604,0 ZSCS84500L TRANSISTOR 1 Q5604,0 ZSCS84500L TRANSISTOR 1 Q5606 B1DHDC000028 TRANSISTOR 1 Q5607 ZSCS84500L TRANSISTOR 1 Q5607 ZSCS84500L TRANSISTOR 1 Q5601 ZSCS84500L TRANSISTOR 1 Q5610 ZSCS84500L TRANSISTOR 1 Q5611 ZSCS84500L TRANSISTOR 1 Q5612 ZSCS84500L TRANSISTOR 1 Q5613 ZSCS84500L TRANSISTOR 1 Q5614 ZSCS84500L TRANSISTOR 1 Q5614 ZSCS84500L TRANSISTOR 1 Q5614 ZSCS84500L TRANSISTOR 1 Q5615 ZSCS84500L TRANSISTOR 1 Q5616 ZSCS84500L TRANSISTOR 1 Q5617 ZSCS84500L TRANSISTOR 1 Q5618 ZSCS84500L TRANSISTOR 1 Q5619 ZSCS84500L TRANSISTOR 1 Q6005 ZSCS899900VH FET 1 Q6010 B1JADN000002 TRANSISTOR 3 Q6011 ZSCS84500L TRANSISTOR 3 Q6027,2 B1DFKM000002 TRANSISTOR 3 Q6031 ZSCS84500L TRANSISTOR 1 Q6032 B1ADNF000006 TRANSISTOR 1 Q6033 B1ADNF000006 TRANSISTOR 1 Q6034 B1ADNF000006 TRANSISTOR 1 Q6035 B1ADNF000006 TRANSISTOR 1 Q6036 ZSCS8450 FET 4 Q6010 B1ADNF000006 TRANSISTOR 1 Q6011 B1ABNF000006 TRANSISTOR 1 Q6012 B1ADNF000006 TRANSISTOR 1 Q6012 B1ADNF000006 TRANSISTOR 1 Q6041 ZSCS8450 FET 4 Q6510 B1ADNF000006 TRANSISTOR 1 Q6510 B1ADNF000006 TRANSISTOR 1 Q6510 B1ADNF000006 TRANSISTOR 1 Q6510 B1ADNF000006 TRANSISTOR 1 Q6522 ZSCS00 FET 4 Q6522 ZSCS0 FET 4 Q6521 B1DFES0000006 TRANSISTOR 1 Q6522 ZSCS000002 TRANSISTOR 1 Q6522 ZSCS00 FET 1 Q6523 B1ADNF000006 TRANSISTOR 1 Q6524 ZSCS000002 TRANSISTOR 1 Q6525 B1DDFS0000006 TRANSISTOR 1 Q6526 B1DDFS0000006 TRANSISTOR 1 Q6527 ZSD601A TRANSISTOR 1 Q6528 B1DDFS0000006 TRANSISTOR 1 Q6529 ZSCS001A TRANSISTOR 1 Q6520 ZSCS001A TRANSISTOR 1 Q6521 B1DFS0000006 TRANSISTOR 1 Q6522 ZSCS001A TRANSISTOR 1 Q6523 B1DDFS0000006 TRANSISTOR 1 Q6524 ZSCS001A TRANSISTOR 1 Q6525 ZSCS001A TRANSISTOR 1 Q6526 B1DDFN0000001 TRANSISTOR 1 Q6527 ZSD601A TRANSISTOR 1 Q6528 B1DDFN0000001 TRANSISTOR 1 Q6529 ZSCS001A TRANSISTOR 1 Q6520 ZSCS001A TRANSISTOR 1 Q6521 ZSCS001A TRANSISTOR 1 Q6522 ZSCS001A TRANSISTOR 1 Q6523 B1DDFN0000000 TRANSISTOR 1 Q6524 ZSCS001A TRANSISTOR 1 Q6525 ZSCS001A TRANSISTOR 1 Q6526 B1DDFN000000 TRANSISTOR 1 Q6527 ZSCS001A TRANSIST	-	0.60013	mnavaramon	+ , +	
Q5602 28C584500L TRANSISTOR 1 Q5603 BIDHDCC000028 TRANSISTOR 2 S50404.0 28C584500L TRANSISTOR 2 S50606 BIDHDCC000028 TRANSISTOR 1 Q5606 BIDHDCC000028 TRANSISTOR 1 Q5610 28C584500L TRANSISTOR 1 Q5611 28C584500L TRANSISTOR 1 Q5613 28C584500L TRANSISTOR 1 Q5614 28C3065T100 FET 1 Q5614 28C3065T100 FET 1 Q5641- 28A207700L TRANSISTOR 1 Q5641- 28A207700L TRANSISTOR 1 Q6601 28K3997000VH TRANSISTOR 1 Q6005 28K3997000VH FET 1 Q6001 BIJADN000002 TRANSISTOR 3 Q6015- BIJADN000002 TRANSISTOR 3 Q6015- BIJADN000002 TRANSISTOR 3 Q6031 28D1263A TRANSISTOR 1 Q6032 BIABNF000006 TRANSISTOR 1 Q6033 BIADNF000006 TRANSISTOR 1 Q6033 BIADNF000006 TRANSISTOR 1 Q6034 BIABNF000006 TRANSISTOR 1 Q6035 BIADNF000006 TRANSISTOR 1 Q6036 BIADNF000006 TRANSISTOR 1 Q6037 Q6038 28C1473A TRANSISTOR 1 Q6031 BIADNF000006 TRANSISTOR 1 Q6033 BIADNF000006 TRANSISTOR 1 Q6030 BIADNF000006 TRANSISTOR 1 Q6031 BIADNF000006 TRANSISTOR 1 Q6010 BIADNF000006 TRANSISTOR 1 Q6102 BIADNF000006 TRANSISTOR 1 Q6104 BIADNF000006 TRANSISTOR 1 Q6104 BIADNF000006 TRANSISTOR 1 Q6104 BIADNF000006 TRANSISTOR 1 Q6104 BIADNF000006 TRANSISTOR 1 Q6501- 28K620 FET 1 Q65501- 28K620 FET 1 Q6551- BIDFFM000006 TRANSISTOR 1 Q6551- BIDFFM000006 TRANSISTOR 1 Q6552 28B620 FET 1 Q6552 28B620 FET 1 Q65530- BIDFFM000006 TRANSISTOR 1 Q6551- BIDFFM000006 TRANSISTOR 1 Q6551- BIDFFM000006 TRANSISTOR 1 Q6551- BIDFFM000006 TRANSISTOR 1 Q6552 BIDBFFM000006 TRANSISTOR 1 Q6551 BIDFFM000006 TRANSISTOR 1 Q6551 BIDFFM000006 TRANSISTOR 1 Q6551 BIDFFM000006 TRANSISTOR 1 Q6560 BIDDFM000006 TRANSISTOR 1 Q6600 BIDDFM000000 TRANSISTOR 1 Q6600 BIDDFM000000 TRANSISTOR 1 Q6600 BIDDFM000000 TRANSISTOR 1	-	t		+	
Q5603         B1DHDC000028         TRANSISTOR         1           Q5604, 0         2SC584500L         TRANSISTOR         2           Q5606         B1DHDC000028         TRANSISTOR         1           Q5607         2SC584500L         TRANSISTOR         1           Q5610         2SC584500L         TRANSISTOR         1           Q5614         2SC364500L         TRANSISTOR         1           Q5614         2SA207700L         TRANSISTOR         1           Q5644         2SC584500L         TRANSISTOR         1           Q6001         2SA399700VP         TRANSISTOR         1           Q6001         2SA399700VP         FET         1           Q6005         2SK399900VP         FET         1           Q6015-         BLJADN000002         TRANSISTOR         3           12         Q6015-         BLJADN000002         TRANSISTOR         1           Q6031         2SD1263A         TRANSISTOR         1           Q6031         2SD4060A         TRANSISTOR         1           Q6032         BLABMF000006         TRANSISTOR         1           Q6035         BLADMF000006         TRANSISTOR         1           Q6036		t	<del> </del>	+	
Q\$604,0   SC584500L   TRANSISTOR   2   2   5   5   5   5   5   5   5   5		+		+	
Q5606         B1DHDC000028         TRANSISTOR         1           Q5607         QSC584500L         TRANSISTOR         1           Q5610         QSC584500L         TRANSISTOR         1           Q5613         QSC584500L         TRANSISTOR         1           Q5614         QSC584500L         TRANSISTOR         1           Q5641-         QSA207700L         TRANSISTOR         1           Q6001         QSK33997000VE         TRANSISTOR         1           Q6001-         BLJADN000002         TRANSISTOR         1           Q6010-         BLJADN000002         TRANSISTOR         3           12         BLJADN000002         TRANSISTOR         3           12         BLJADN000002         TRANSISTOR         2           26015-         BLJADN000002         TRANSISTOR         1           Q6031-         BLJADNF000006         TRANSISTOR         1           Q6032         BLADNF000006         TRANSISTOR         1           Q6033         BLADNF000006         TRANSISTOR         1           Q6034         BLADNF000006         TRANSISTOR         1           Q6102         BLADNF000006         TRANSISTOR         1           Q6103 <td></td> <td>2SC584500L</td> <td>TRANSISTOR</td> <td>2</td> <td></td>		2SC584500L	TRANSISTOR	2	
Q5607         28C584500L         TRANSISTOR         1           Q5610         28C584500L         TRANSISTOR         1           Q5613         28C584500L         TRANSISTOR         1           Q5614         28X30657100         FET         1           Q5614         28X397700L         TRANSISTOR         1           Q5604         28X3997000VE         TRANSISTOR         1           Q6001         28X3997000VE         PET         1           Q6005         28X399900VH         PET         1           Q6015-         BLJADN000002         TRANSISTOR         3           12         Q6015-         BLJADN000002         TRANSISTOR         3           16         Q6015-         BLJADN000002         TRANSISTOR         1           Q6031         28D1263A         TRANSISTOR         1           Q6032         BLABHF000006         TRANSISTOR         1           Q6033         BLADNF00006         TRANSISTOR         1           Q6034         BLABHF000006         TRANSISTOR         1           Q6034         BLABHF000006         TRANSISTOR         1           Q6031         SLABHF000006         TRANSISTOR         1	5				
Q5610	-	•		+	
Q5613         28C584500L         TRANSISTOR         1           Q5614         28S30657100         FET         1           Q5641-         28A207700L         TRANSISTOR         3           43         3         3           Q5644         28C584500L         TRANSISTOR         1           Q6001         28K3997000VH         FET         1           Q6010-         BIJADN000002         TRANSISTOR         3           12         BOOK         TRANSISTOR         3           17         BIJADN000002         TRANSISTOR         3           17         BOOK         TRANSISTOR         1           Q6031         28D1263A         TRANSISTOR         1           Q6031         28D1263A         TRANSISTOR         1           Q6033         BIADNF000006         TRANSISTOR         1           Q6033         BIADNF000006         TRANSISTOR         1           Q6034         BIADNF000006         TRANSISTOR         1           Q6031         Z9C1473A         TRANSISTOR         1           Q6101         BIADNF000006         TRANSISTOR         1           Q6102         BIADNF000006         TRANSISTOR         1		<del> </del>		+ . +	
Q5614 2SK3065T100 FET 1 1		+		+	
Q5641- 2SA207700L TRANSISTOR 3 43 Q5644 2SC584500L TRANSISTOR 1 Q6001 2SK3997000VE TRANSISTOR 1 Q6005 2SK3999000VH FET 1 Q6010- BIJADN000002 TRANSISTOR 3 12 Q6015- BIJADN000002 TRANSISTOR 3 Q6027,2 BIDFKM000002 TRANSISTOR 1 Q6031 2SD1263A TRANSISTOR 1 Q6033 BIADNF000006 TRANSISTOR 1 Q6033 BIADNF000006 TRANSISTOR 1 Q6034 BIADNF000006 TRANSISTOR 1 Q6038 BIADNF000006 TRANSISTOR 1 Q6038 BIADNF000006 TRANSISTOR 1 Q6039 BIADNF000006 TRANSISTOR 1 Q6031 DIADNF000006 TRANSISTOR 1 Q6031 DIADNF000006 TRANSISTOR 1 Q6032 DIADNF000006 TRANSISTOR 1 Q6033 BIADNF000006 TRANSISTOR 1 Q6034 DIADNF000006 TRANSISTOR 1 Q6035 DIADNF000006 TRANSISTOR 1 Q6038 DIADNF000006 TRANSISTOR 1 Q6038 DIADNF000006 TRANSISTOR 1 Q6041 SDANF000006 TRANSISTOR 1 Q6101 BIADNF000006 TRANSISTOR 1 Q6102 BIADNF000006 TRANSISTOR 1 Q6501 BIADNF000006 TRANSISTOR 1 Q6501 BIADNF000006 TRANSISTOR 1 Q6501 DIDFFM000003 TRANSISTOR 1 Q6521 BIDFFM000003 TRANSISTOR 2 Q6522 DSC01A TRANSISTOR 1 Q6521 BIDFFM000001 TRANSISTOR 1 Q6524 DSC000000 TRANSISTOR 1 Q6525 BIDFFM000001 TRANSISTOR 1 Q6526 DSC00000 TRANSISTOR 1 Q6527 DSC00000 TRANSISTOR 1 Q6528 BIADNF000006 TRANSISTOR 1 Q6529 DSC001A TRANSISTOR 1 Q6520 DSC00000 TRANSISTOR 1 Q6521 DSC001A TRANSISTOR 1 Q6520 DSC001A TRANSISTOR 1 Q6521 DSC001A TRANSISTOR			<u> </u>		
Q3644   2SC584500L	-	<del> </del>			
Q6001         2SK3997000VE         TRANSISTOR         1           Q6005         2SK3999900VH         FET         1           Q6010-         BIJADN000002         TRANSISTOR         3           12         Q6015-         BIJADN000002         TRANSISTOR         3           17         Q6027,2         BIDFKM000002         TRANSISTOR         2           26031         2SD1263A         TRANSISTOR         1           Q6032         BIADNF000006         TRANSISTOR         1           Q6033         BIADNF000006         TRANSISTOR         1           Q6034         BIADNF000006         TRANSISTOR         1           Q6038         2SC1473A         TRANSISTOR         1           Q6041         2SD601A         TRANSISTOR         1           Q6102         BIADNF000006         TRANSISTOR         1           Q6103         BIADNF000006         TRANSISTOR         1           Q6104         BIADNF000006         TRANSISTOR         1           Q6101         BIADNF000006         TRANSISTOR         1           Q6501-         2SK620         FET         4           Q6521         BIDFEN000003         TRANSISTOR         1					
Q6005	Q5644	2SC584500L	TRANSISTOR	1	
Q6010-         BlJADN000002         TRANSISTOR         3           12         BlJADN000002         TRANSISTOR         3           Q6015-         BlJADN000002         TRANSISTOR         2           8         2         8           Q6031         2SD1263A         TRANSISTOR         1           Q6032         BlABNF000006         TRANSISTOR         1           Q6034         BlADNF000006         TRANSISTOR         1           Q6035         BLADNF000006         TRANSISTOR         1           Q6038         2SC1473A         TRANSISTOR         1           Q6038         2SC1473A         TRANSISTOR         1           Q6101         BLABNF000006         TRANSISTOR         1           Q6102         BLABNF000006         TRANSISTOR         1           Q6103         BLABNF000006         TRANSISTOR         1           Q6104         BLADNF000006         TRANSISTOR         1           Q6102         BLADNF000006         TRANSISTOR         1           Q6521-         2SC620         FET         4           Q6522         2SK620         FET         1           Q6522         2SK620         FET         1 </td <td>Q6001</td> <td>2SK3997000VE</td> <td>TRANSISTOR</td> <td>1</td> <td></td>	Q6001	2SK3997000VE	TRANSISTOR	1	
12   Region   Region	Q6005	2SK3999000VH	FET	1	
Q6015- B1JADN000002 TRANSISTOR 3 17 26027,2 B1DFKM000002 TRANSISTOR 2 8 Q6031 2SD1263A TRANSISTOR 1 Q6032 B1ABNF000006 TRANSISTOR 1 Q6033 B1ADNF000006 TRANSISTOR 1 Q6034 B1ABNF000006 TRANSISTOR 1 Q6035 B1ADNF000006 TRANSISTOR 1 Q6035 B1ADNF000006 TRANSISTOR 1 Q6036 B1ADNF000006 TRANSISTOR 1 Q6041 2SD601A TRANSISTOR 1 Q6101 B1ABNF000006 TRANSISTOR 1 Q6102 B1ADNF000006 TRANSISTOR 1 Q6103 B1ABNF000006 TRANSISTOR 1 Q6104 B1ADNF000006 TRANSISTOR 1 Q6501- ZSK620 FET 4 Q6511, 1 B1DFFM000003 TRANSISTOR 2 Q6521 B1DFS000002 1 Q6522 2SK620 FET 1 Q6522 B1ADNF000006 TRANSISTOR 1 Q6524 B1ADNF000006 TRANSISTOR 1 Q6525 B1ADNF000006 TRANSISTOR 2 Q6526 B1ADNF000006 TRANSISTOR 1 Q6527 ZSD601A TRANSISTOR 1 Q6528 B1ADNF000006 TRANSISTOR 1 Q6529 B1ADNF000006 TRANSISTOR 1 Q6520 B1ADNF000006 TRANSISTOR 1 Q6521 B1DFEN000001 TRANSISTOR 1 Q6522 ZSK620 FET 1 Q6523 B1ADNF000006 TRANSISTOR 1 Q6524 B1ADNF000006 TRANSISTOR 1 Q6525 B1ADNF000006 TRANSISTOR 1 Q6526 B1ADNF000006 TRANSISTOR 1 Q6527 ZSD601A TRANSISTOR 1 Q6528 B1ADNF000006 TRANSISTOR 1 Q6529 B1ADNF000006 TRANSISTOR 1 Q6530- B1DFHN000001 TRANSISTOR 1 Q6530- B1DFHN000001 TRANSISTOR 1 Q6551 B1DFHN000001 TRANSISTOR 1 Q6560- ZSK39980L FET 7 G660 B1ADNF000006 TRANSISTOR 1 Q6560- ZSK39980L FET 7 G660 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000002 TRANSISTOR 1 Q6608 B1ADNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1		B1JADN000002	TRANSISTOR	3	
17		B1.TADN000002	TRANSISTOR	3	
8         Q6031         2SD1263A         TRANSISTOR         1           Q6032         B1ABNF000006         TRANSISTOR         1           Q6033         B1ADNF000006         TRANSISTOR         1           Q6034         B1ADNF000006         TRANSISTOR         1           Q6035         B1ADNF000006         TRANSISTOR         1           Q6041         2SD601A         TRANSISTOR         1           Q6101         B1ADNF000006         TRANSISTOR         1           Q6102         B1ADNF000006         TRANSISTOR         1           Q6103         B1ADNF000006         TRANSISTOR         1           Q6104         B1ADNF000006         TRANSISTOR         1           Q6103         B1ADNF000006         TRANSISTOR         1           Q6501-         2SK620         FET         4           Q6520         2SK620         FET         4           Q6521         B1DFES000002         1         1           Q6522         2SK620         FET         1           Q6523         B1ADNF000006         TRANSISTOR         1           Q6524, 2         B1ADNF000006         TRANSISTOR         1           Q6530-         B1DFH00000		BIOADNOOOOZ	IRANDIDIOR		
Q6031         2SD1263A         TRANSISTOR         1           Q6032         B1ABNF000006         TRANSISTOR         1           Q6033         B1ADNF000006         TRANSISTOR         1           Q6034         B1ABNF000006         TRANSISTOR         1           Q6038         2SC1473A         TRANSISTOR         1           Q6041         2SD601A         TRANSISTOR         1           Q6101         B1ABNF000006         TRANSISTOR         1           Q6102         B1ADNF000006         TRANSISTOR         1           Q6103         B1ABNF000006         TRANSISTOR         1           Q6104         B1ADNF000006         TRANSISTOR         1           Q6104         B1ADNF000006         TRANSISTOR         1           Q6501-         Q85620         FET         4           Q6521         B1DFEM000002         1         1           Q6521         B1DFES000002         1         1           Q6522         Z8K620         FET         1           Q6524         B1ADNF000006         TRANSISTOR         1           Q6524         B1ADNF000006         TRANSISTOR         1           Q6526         B1ADNF000006         TRA	Q6027,2	B1DFKM000002	TRANSISTOR	2	
Q6032         B1ABNF000006         TRANSISTOR         1           Q6033         B1ADNF000006         TRANSISTOR         1           Q6034         B1ABNF000006         TRANSISTOR         1           Q6035         B1ADNF000006         TRANSISTOR         1           Q6038         2SC1473A         TRANSISTOR         1           Q6041         2SD601A         TRANSISTOR         1           Q6101         B1ABNF000006         TRANSISTOR         1           Q6102         B1ADNF000006         TRANSISTOR         1           Q6103         B1ABNF000006         TRANSISTOR         1           Q6104         B1ADNF000006         TRANSISTOR         1           Q6501-         2SK620         FET         4           Q6520         2SD601A         TRANSISTOR         1           Q6521         B1DFES000002         PRINT         1           Q6522         2SK620         FET         1           Q6523         B1ADNF000006         TRANSISTOR         1           Q6524, 2         B1ABNF000006         TRANSISTOR         1           Q6527         2SD601A         TRANSISTOR         1           Q6530-         B1DEET000002	8			$\perp$	
Q6033         Bladnf000006         TRANSISTOR         1           Q6034         Blabnf000006         TRANSISTOR         1           Q6035         Bladnf000006         TRANSISTOR         1           Q6038         2SC1473A         TRANSISTOR         1           Q6041         2SD601A         TRANSISTOR         1           Q6101         Blabnf000006         TRANSISTOR         1           Q6102         Bladnf000006         TRANSISTOR         1           Q6103         Blabnf000006         TRANSISTOR         1           Q6104         Bladnf000006         TRANSISTOR         1           Q6501-         2SK620         FET         4           Q4         Q6511,1         Bldffm000003         TRANSISTOR         1           Q6520         2SD601A         TRANSISTOR         1           Q6521         Bldfm000006         TRANSISTOR         1           Q6522         2SK620         FET         1           Q6523         Bladnf000006         TRANSISTOR         1           Q6524,2         Bladnf000006         TRANSISTOR         1           Q6526         Bladnf000001         TRANSISTOR         1           Q6530-		1			
Q6034         Blabnf000006         TRANSISTOR         1           Q6035         BlaDnf000006         TRANSISTOR         1           Q6038         2SC1473A         TRANSISTOR         1           Q6041         2SD601A         TRANSISTOR         1           Q6101         Blabnf000006         TRANSISTOR         1           Q6102         BlaDnf000006         TRANSISTOR         1           Q6103         Blabnf000006         TRANSISTOR         1           Q6104         BlaDnf000006         TRANSISTOR         1           Q6501-         2SK620         FET         4           Q6511,1         BlDFFM000003         TRANSISTOR         2           Q6520         2SD601A         TRANSISTOR         1           Q6521         BlDFFS0000002         1         1           Q6522         2SK620         FET         1           Q6523         BlADNF000006         TRANSISTOR         2           Q6524,2         BlABNF000006         TRANSISTOR         1           Q6526         BlADNF000006         TRANSISTOR         1           Q6527         2SD601A         TRANSISTOR         1           Q6552         BlDEET000002				+ +	
Q6035         Bladnf000006         TRANSISTOR         1           Q6038         2SC1473A         TRANSISTOR         1           Q6041         2SD601A         TRANSISTOR         1           Q6101         Bladnf000006         TRANSISTOR         1           Q6102         Bladnf000006         TRANSISTOR         1           Q6103         Bladnf000006         TRANSISTOR         1           Q6104         Bladnf000006         TRANSISTOR         1           Q6501-         2SK620         FET         4           Q6520         2SD601A         TRANSISTOR         2           Q6521         BlDFFS000002         1         1           Q6522         2SK620         FET         1           Q6521         BlDFFS0000002         1         1           Q6522         2SK620         FET         1           Q6523         BlADNF000006         TRANSISTOR         1           Q6524         BlADNF000006         TRANSISTOR         1           Q6527         2SD601A         TRANSISTOR         1           Q6552         2SD601A         TRANSISTOR         1           Q6552         BlDEFLO00002         TRANSISTOR <t< td=""><td>-</td><td>t</td><td></td><td>+</td><td></td></t<>	-	t		+	
Q6038         2SC1473A         TRANSISTOR         1           Q6041         2SD601A         TRANSISTOR         1           Q6101         B1ABNF000006         TRANSISTOR         1           Q6102         B1ADNF000006         TRANSISTOR         1           Q6103         B1ABNF000006         TRANSISTOR         1           Q6104         B1ADNF000006         TRANSISTOR         1           Q6501-         2SK620         FET         4           Q6521,1         B1DFFM000003         TRANSISTOR         2           Q6522         2SD601A         TRANSISTOR         1           Q6521         B1DFES000002         1         Q6522           Q6522         2SK620         FET         1           Q6522         2SK620         FET         1           Q6522         2SK620         FET         1           Q6523         B1ADNF000006         TRANSISTOR         1           Q6524,2         B1ABNF000006         TRANSISTOR         1           Q6527         2SD601A         TRANSISTOR         1           Q6530-         B1DFHN000001         TRANSISTOR         1           Q6552         B1DEET000001         TRANSISTOR		•		+ . +	
Q6041         2SD601A         TRANSISTOR         1           Q6101         BlABNF000006         TRANSISTOR         1           Q6102         BlADNF000006         TRANSISTOR         1           Q6103         BLABNF000006         TRANSISTOR         1           Q6501-         2SK620         FET         4           Q6501-         2SK620         FET         4           Q6511,1         BlDFFM000003         TRANSISTOR         2           Q6520         2SD601A         TRANSISTOR         1           Q6521         BlDFESOURCE         1           Q6522         2SK620         FET         1           Q6523         BLADNFOROUGH         TRANSISTOR         1           Q6524,2         BLABNFOROUGH         TRANSISTOR         1           Q6524,2         BLABNFOROUGH         TRANSISTOR         1           Q6527         2BD601A         TRANSISTOR         1           Q6551         2BD601A         TRANSISTOR         1           Q6552         BLDETOROUGH         TRANSISTOR         1           Q6582,8         BLDFETOROUGH         TRANSISTOR         1           Q6582,8         BLDFETOROUGH         TRANSISTOR				+ +	
Q6102 Bladnf00006 TRANSISTOR 1 Q6103 Blabnf00006 TRANSISTOR 1 Q6104 Bladnf00006 TRANSISTOR 1 Q6501- 2SK620 FET 4 Q6511,1 Bldffm000003 TRANSISTOR 2 Q6520 2SD601A TRANSISTOR 1 Q6521 Bldfes000002 1 Q6522 2SK620 FET 1 Q6523 Bladnf000006 TRANSISTOR 2 Q6524,2 Blabnf000006 TRANSISTOR 1 Q6524,2 Blabnf000006 TRANSISTOR 1 Q6527 2SD601A TRANSISTOR 1 Q6527 2SD601A TRANSISTOR 1 Q6528 Bladnf000006 TRANSISTOR 1 Q65510 Bldfhn000001 TRANSISTOR 1 Q6551 Bldfes000001 TRANSISTOR 1 Q6551 2SD601A TRANSISTOR 1 Q6552 Bldeet000002 TRANSISTOR 1 Q6551 2SD601A TRANSISTOR 1 Q6552 Bldeet000002 TRANSISTOR 1 Q6552 Bldeet000002 TRANSISTOR 1 Q6582,8 Bldfet000001 TRANSISTOR 1 Q6582,8 Bldfet000001 TRANSISTOR 1 Q6601- BlJADN000006 TRANSISTOR 1				1	
Q6103       B1ABNF000006       TRANSISTOR       1         Q6104       B1ADNF000006       TRANSISTOR       1         Q6501-       2SK620       FET       4         Q6511,1       B1DFFM000003       TRANSISTOR       2         Q6520       2SD601A       TRANSISTOR       1         Q6521       B1DFES000002       1       1         Q6522       2SK620       FET       1         Q6523       B1ADNF000006       TRANSISTOR       1         Q6524,2       B1ABNF000006       TRANSISTOR       1         Q6526       B1ADNF000006       TRANSISTOR       1         Q6527       2SD601A       TRANSISTOR       1         Q6551       2SD601A       TRANSISTOR       1         Q6552       B1DET000002       TRANSISTOR       1         Q6550-       2SK399800L       FET       7         66       2SK399800L       FET       7         66       2G581       2SD601A       TRANSISTOR       1         Q6582,8       B1DFET000001       TRANSISTOR       1         Q6586       B1ADNF000006       TRANSISTOR       1         Q6609       B1ADNF000006       TRANSISTOR	Q6101	B1ABNF000006	TRANSISTOR	1	
Q6104       B1ADNF000006       TRANSISTOR       1         Q6501-       2SK620       FET       4         Q6511,1       B1DFFM000003       TRANSISTOR       2         Q6520       2SD601A       TRANSISTOR       1         Q6521       B1DFES000002       1       1         Q6522       2SK620       FET       1         Q6523       B1ADNF000006       TRANSISTOR       1         Q6524,2       B1ABNF000006       TRANSISTOR       2         S       2G6526       B1ADNF000006       TRANSISTOR       1         Q6527       2SD601A       TRANSISTOR       1         Q6530-       B1DFHN000001       TRANSISTOR       1         Q6551       2SD601A       TRANSISTOR       1         Q6552       B1DEET000002       TRANSISTOR       1         Q6550-       2SK399800L       FET       7         66       7       7       66         Q6581       2SD601A       TRANSISTOR       1         Q6582,8       B1DFET000001       TRANSISTOR       1         Q6586       B1ADNF000006       TRANSISTOR       1         Q6609       B1ADNF000006       TRANSISTOR       1	Q6102	B1ADNF000006	TRANSISTOR	1	
Q6501- Q8K620 FET 4 Q6511,1 B1DFFM000003 TRANSISTOR 2 Q6520 2SD601A TRANSISTOR 1 Q6521 B1DFES000002 1 Q6522 2SK620 FET 1 Q6523 B1ADNF000006 TRANSISTOR 2 Q6524,2 B1ABNF000006 TRANSISTOR 1 Q6524,2 B1ADNF000006 TRANSISTOR 1 Q6527 2SD601A TRANSISTOR 1 Q6530- B1DFHN000001 TRANSISTOR 1 Q6530- B1DFHN000001 TRANSISTOR 1 Q6552 B1DEET000002 TRANSISTOR 1 Q6552 B1DEET000002 TRANSISTOR 1 Q6560- 2SK399800L FET 7 G6 Q6581 2SD601A TRANSISTOR 1 Q6582,8 B1DFFT000001 TRANSISTOR 1 Q6586 B1ADNF000006 TRANSISTOR 1 Q6586 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000002 TRANSISTOR 1 Q6600 B1JADN000002 TRANSISTOR 1 Q6601- B1JADN000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6611- B1JADN000002 TRANSISTOR 1 Q6611- B1JADN000006 TRANSISTOR 1	Q6103	B1ABNF000006	TRANSISTOR	1	
04       Q6511,1       B1DFFM000003       TRANSISTOR       2         Q6520       2SD601A       TRANSISTOR       1         Q6521       B1DFES000002       1         Q6522       2SK620       FET       1         Q6523       B1ADNF000006       TRANSISTOR       1         Q6524,2       B1ABNF000006       TRANSISTOR       2         S       S       S         Q6526       B1ADNF000006       TRANSISTOR       1         Q6527       2SD601A       TRANSISTOR       1         Q6530-       B1DFHN000001       TRANSISTOR       1         Q6551       2SD601A       TRANSISTOR       1         Q6552       B1DEET000002       TRANSISTOR       1         Q6560-       2SK399800L       FET       7         66       2SD601A       TRANSISTOR       1         Q6581       2SD601A       TRANSISTOR       1         Q6586       B1ADNF000006       TRANSISTOR       1         Q6586       B1ADNF000006       TRANSISTOR       1         Q6609       B1ADNF000006       TRANSISTOR       1         Q6611-       B1JADN000002       TRANSISTOR       1 <t< td=""><td></td><td></td><td></td><td>+ . +</td><td></td></t<>				+ . +	
Q6511,1 B1DFFM000003 TRANSISTOR 2 Q6520 2SD601A TRANSISTOR 1 Q6521 B1DFES000002 1 Q6522 2SK620 FET 1 Q6523 B1ADNF000006 TRANSISTOR 2 S6524,2 B1ADNF000006 TRANSISTOR 1 Q6524,2 B1ADNF000006 TRANSISTOR 1 Q6527 2SD601A TRANSISTOR 1 Q6530- B1DFHN000001 TRANSISTOR 1 Q6531 2SD601A TRANSISTOR 1 Q6552 B1DEET000002 TRANSISTOR 1 Q6552 B1DEET000002 TRANSISTOR 1 Q6580- SK399800L FET 7 G66 2SK399800L FET 7 G66 B1ADNF000006 TRANSISTOR 1 Q6582,8 B1DFET000001 TRANSISTOR 1 Q6601- B1JADN000006 TRANSISTOR 1 Q6601- B1JADN000006 TRANSISTOR 1 Q6601- B1JADN000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000006 TRANSISTOR 1 Q6601- B1JADN000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000006 TRANSISTOR 1 Q6601- B1JADN000006 TRANSISTOR 1 Q6601- B1JADN000006 TRANSISTOR 1		2SK620	FET	4	
2   Q6520   2SD601A   TRANSISTOR   1   Q6521   B1DFES000002   1   Q6522   2SK620   FET   1   Q6523   B1ADNF000006   TRANSISTOR   1   Q6524,2   B1ABNF000006   TRANSISTOR   2   C   C   C   C   C   C   C   C   C		B1DFFM000003	TRANSISTOR	2	
Q6521 B1DFES000002 1 Q6522 2SK620 FET 1 Q6523 B1ADNF000006 TRANSISTOR 1 Q6524,2 B1ABNF000006 TRANSISTOR 2 S Q6526 B1ADNF000006 TRANSISTOR 1 Q6527 2SD601A TRANSISTOR 1 Q6530- B1DFHN000001 TRANSISTOR 1 Q6551 2SD601A TRANSISTOR 1 Q6552 B1DEET000002 TRANSISTOR 1 Q6552 B1DEET000002 TRANSISTOR 1 Q6560- 2SK399800L FET 7 G66 Q6581 2SD601A TRANSISTOR 1 Q6582,8 B1DFET000001 TRANSISTOR 2 3 Q6586 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000002 TRANSISTOR 1 Q6601- B1JADN000006 TRANSISTOR 1					
Q6522         2SK620         FET         1           Q6523         B1ADNF000006         TRANSISTOR         1           Q6524,2         B1ABNF000006         TRANSISTOR         2           S         COMMANDIAN         1           Q6526         B1ADNF000006         TRANSISTOR         1           Q6527         2SD601A         TRANSISTOR         1           Q6530-         B1DFHN000001         TRANSISTOR         1           Q6551         2SD601A         TRANSISTOR         1           Q6552         B1DEET000002         TRANSISTOR         1           Q6560-         2SK399800L         FET         7           66         2SB399800L         FET         7           66         2SD601A         TRANSISTOR         1           Q6582,8         B1DFET000001         TRANSISTOR         2           3         3         3           Q6601-         B1JADN000002         TRANSISTOR         1           Q6608         B1ADNF000006         TRANSISTOR         1           Q6609         B1ADNF000006         TRANSISTOR         1           Q6611-         B1JADN000002         TRANSISTOR         1           Q6	Q6520	2SD601A	TRANSISTOR	1	
Q6523 B1ADNF000006 TRANSISTOR 1 Q6524,2 B1ABNF000006 TRANSISTOR 2 SQ6526 B1ADNF000006 TRANSISTOR 1 Q6527 ZSD601A TRANSISTOR 1 Q6530 B1DFHN000001 TRANSISTOR 1 Q6551 ZSD601A TRANSISTOR 1 Q6551 ZSD601A TRANSISTOR 1 Q6552 B1DEET000002 TRANSISTOR 1 Q6550 ZSK399800L FET 7 G66 Q6581 ZSD601A TRANSISTOR 1 Q6582,8 B1DFET000001 TRANSISTOR 2 3 Q6586 B1ADNF000006 TRANSISTOR 1 Q6601 B1JADN000002 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6601 B1JADN000002 TRANSISTOR 1 Q6601 B1JADN000006 TRANSISTOR 1 Q6601 B1JADN000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6611 B1JADN000002 TRANSISTOR 1 Q6619 B1ADNF000006 TRANSISTOR 1	Q6521	B1DFES000002		1	
Q6524,2       B1ABNF000006       TRANSISTOR       2         Q6526       B1ADNF000006       TRANSISTOR       1         Q6527       2SD601A       TRANSISTOR       1         Q6530-       B1DFHN000001       TRANSISTOR       10         39       Q6551       2SD601A       TRANSISTOR       1         Q6552       B1DEET000002       TRANSISTOR       1         Q6560-       2SK399800L       FET       7         66       7       7         66       7       7         66       7       7         66       7       7         66       7       7         66       7       7         66       7       7         66       7       7         66       7       7         66       7       7         66       7       1         Q6581       2SD601A       TRANSISTOR       1         Q6582,8       B1DFFT000006       TRANSISTOR       1         Q6601-       B1JADN000002       TRANSISTOR       1         Q6609       B1ADNF000006       TRANSISTOR       1         Q6611-					
5   Q6526   B1ADNF000006   TRANSISTOR   1   Q6527   2SD601A   TRANSISTOR   1   Q6530-   B1DFHN000001   TRANSISTOR   1   Q6551   2SD601A   TRANSISTOR   1   Q6552   B1DEET000002   TRANSISTOR   1   Q6560-   2SK399800L   FET   7   66		1		+	
Q6526         B1ADNF000006         TRANSISTOR         1           Q6527         2SD601A         TRANSISTOR         1           Q6530-         B1DFHN000001         TRANSISTOR         10           39         Q6551         2SD601A         TRANSISTOR         1           Q6552         B1DEET000002         TRANSISTOR         1           Q6560-         2SK399800L         FET         7           66         7         7           Q6581         2SD601A         TRANSISTOR         1           Q6582,8         B1DFET000001         TRANSISTOR         2           3         2         3           Q6586         B1ADNF000006         TRANSISTOR         1           Q6601-         B1JADN000002         TRANSISTOR         1           Q6608         B1ADNF000006         TRANSISTOR         1           Q6611-         B1JADN000002         TRANSISTOR         1           Q6611-         B1JADN000002         TRANSISTOR         1           Q6619         B1ABNF000006         TRANSISTOR         1           Q6620         B1ADNF000006         TRANSISTOR         1		B1ABNF000006	TRANSISTOR	2	
Q6527       2SD601A       TRANSISTOR       1         Q6530-       B1DFHN000001       TRANSISTOR       10         39       Q6551       2SD601A       TRANSISTOR       1         Q6552       B1DEET000002       TRANSISTOR       1         Q6560-       2SK399800L       FET       7         66       7       7       7         Q6581       2SD601A       TRANSISTOR       1         Q6582,8       B1DFET000001       TRANSISTOR       2         3       3       3         Q6586       B1ADNF000006       TRANSISTOR       1         Q6601-       B1JADN000002       TRANSISTOR       1         Q6608       B1ADNF000006       TRANSISTOR       1         Q6609       B1ADNF000006       TRANSISTOR       1         Q6611-       B1JADN000002       TRANSISTOR       3         13       Q6619       B1ABNF000006       TRANSISTOR       1         Q6620       B1ADNF000006       TRANSISTOR       1		B1ADNF000006	TRANSISTOR	1	
39 Q6551 2SD601A TRANSISTOR 1 Q6552 B1DEET000002 TRANSISTOR 1 Q6560- 2SK399800L FET 7 G6 7 Q6581 2SD601A TRANSISTOR 1 Q6582,8 B1DFET000001 TRANSISTOR 2 3 Q6586 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000002 TRANSISTOR 3 Q6608 B1ABNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000002 TRANSISTOR 1 Q6611- B1JADN000006 TRANSISTOR 1 Q6611- B1JADN000006 TRANSISTOR 1 Q6619 B1ABNF000006 TRANSISTOR 1 Q6620 B1ADNF000006 TRANSISTOR 1				1	
Q6551       2SD601A       TRANSISTOR       1         Q6552       B1DEET000002       TRANSISTOR       1         Q6560-       2SK399800L       FET       7         66       2SD601A       TRANSISTOR       1         Q6582,8       B1DFET000001       TRANSISTOR       2         3       3         Q6586       B1ADNF000006       TRANSISTOR       1         Q6601-       B1JADN000002       TRANSISTOR       3         Q6608       B1ADNF000006       TRANSISTOR       1         Q6609       B1ADNF000006       TRANSISTOR       1         Q6611-       B1JADN000002       TRANSISTOR       3         13       Q6619       B1ABNF000006       TRANSISTOR       1         Q6620       B1ADNF000006       TRANSISTOR       1	Q6530-	B1DFHN000001	TRANSISTOR	10	
Q6552 B1DEET000002 TRANSISTOR 1 Q6560- 2SK399800L FET 7 G6 Q6581 2SD601A TRANSISTOR 1 Q6582,8 B1DFET000001 TRANSISTOR 2 3 Q6586 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000002 TRANSISTOR 3 Q6608 B1ABNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000002 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6611- B1JADN000002 TRANSISTOR 1 Q6619 B1ABNF000006 TRANSISTOR 1 Q6620 B1ADNF000006 TRANSISTOR 1	39			$\perp$	
Q6560-       2SK399800L       FET       7         66       2G581       2SD601A       TRANSISTOR       1         Q6582,8       B1DFET000001       TRANSISTOR       2         3       2G586       B1ADNF000006       TRANSISTOR       1         Q6601-       B1JADN000002       TRANSISTOR       3         Q6608       B1ABNF000006       TRANSISTOR       1         Q6609       B1ADNF000006       TRANSISTOR       1         Q6611-       B1JADN000002       TRANSISTOR       3         13       Q6619       B1ABNF000006       TRANSISTOR       1         Q6620       B1ADNF000006       TRANSISTOR       1				+	
66 Q6581 2SD601A TRANSISTOR 1 Q6582,8 B1DFET000001 TRANSISTOR 2 3 Q6586 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000002 TRANSISTOR 3 Q6608 B1ABNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6611- B1JADN000002 TRANSISTOR 3 13 Q6619 B1ABNF000006 TRANSISTOR 1 Q6620 B1ADNF000006 TRANSISTOR 1				+	
Q6581 2SD601A TRANSISTOR 1 Q6582,8 B1DFET000001 TRANSISTOR 2 3 Q6586 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000002 TRANSISTOR 3 Q6608 B1ABNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6611- B1JADN000002 TRANSISTOR 3 13 Q6619 B1ABNF000006 TRANSISTOR 3 13 Q6620 B1ADNF000006 TRANSISTOR 1		2SK399800L	FET	'	
Q6582,8 B1DFET000001 TRANSISTOR 2  Q6586 B1ADNF000006 TRANSISTOR 1  Q6601- B1JADN000002 TRANSISTOR 3  Q6608 B1ABNF000006 TRANSISTOR 1  Q6609 B1ADNF000006 TRANSISTOR 1  Q6611- B1JADN000002 TRANSISTOR 3  13  Q6619 B1ABNF000006 TRANSISTOR 1  Q6620 B1ADNF000006 TRANSISTOR 1		2SD601A	TRANSISTOR	1	
3 Q6586 B1ADNF000006 TRANSISTOR 1 Q6601- B1JADN000002 TRANSISTOR 3 Q6608 B1ABNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6611- B1JADN000002 TRANSISTOR 3 13 Q6619 B1ABNF000006 TRANSISTOR 1 Q6620 B1ADNF000006 TRANSISTOR 1		1	+		
Q6601-       B1JADN000002       TRANSISTOR       3         03       Q6608       B1ABNF000006       TRANSISTOR       1         Q6609       B1ADNF000006       TRANSISTOR       1         Q6611-       B1JADN000002       TRANSISTOR       3         13       TRANSISTOR       1         Q6619       B1ABNF000006       TRANSISTOR       1         Q6620       B1ADNF000006       TRANSISTOR       1	3			$\perp$	
03 Q6608 B1ABNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6611- B1JADN000002 TRANSISTOR 3 13 Q6619 B1ABNF000006 TRANSISTOR 1 Q6620 B1ADNF000006 TRANSISTOR 1					
Q6608 B1ABNF000006 TRANSISTOR 1 Q6609 B1ADNF000006 TRANSISTOR 1 Q6611- B1JADN000002 TRANSISTOR 3 13 Q6619 B1ABNF000006 TRANSISTOR 1 Q6620 B1ADNF000006 TRANSISTOR 1		B1JADN000002	TRANSISTOR	3	
Q6609 B1ADNF000006 TRANSISTOR 1 Q6611- B1JADN000002 TRANSISTOR 3 13 Q6619 B1ABNF000006 TRANSISTOR 1 Q6620 B1ADNF000006 TRANSISTOR 1		B1ABNF00006	TRANSTSTOR	1 1	
Q6611- B1JADN000002 TRANSISTOR 3 13 Q6619 B1ABNF000006 TRANSISTOR 1 Q6620 B1ADNF000006 TRANSISTOR 1		†		+	
13 Q6619 B1ABNF000006 TRANSISTOR 1 Q6620 B1ADNF000006 TRANSISTOR 1		1		+ . +	
Q6620 B1ADNF000006 TRANSISTOR 1				$\perp$	
				+	
Q6627  B1ABNF000006  TRANSISTOR   1		†		+ +	
	Q6627	B1ABNF000006	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6628	B1ADNF000006	TRANSISTOR	1	
Q6629	B1ABNF000006	TRANSISTOR	1	
Q6630	B1ADNF000006	TRANSISTOR	1	
Q6635	2SK3997000VE	TRANSISTOR	1	
Q6639,4	2SK620	FET	2	
0				
Q6649	2SK3999000VH	FET	1	
Q6761	B1BBCJ000004	TRANSISTOR	1	
Q6762	2SD1263A	TRANSISTOR	1	
Q6764	2SD814A	TRANSISTOR	1	
Q6765	2SD601A	TRANSISTOR	1	
Q6768	2SB0709A	TRANSISTOR	1	
Q6771	B1BAEJ000014	TRANSISTOR	1	
Q6772	2SB0709A	TRANSISTOR	1	
Q6774	2SD814A	TRANSISTOR	1	
Q6775- 77	2SD601A	TRANSISTOR	3	
Q6791	2SD1263A	TRANSISTOR	1	
Q6792	2SC1473A	TRANSISTOR	1	
Q8200	B1BBAB000039	TRANSISTOR	1	
Q8201	2SD601A	TRANSISTOR	1	
Q8203	B1BBAB000039	TRANSISTOR	1	
Q8209	2SA207700L	TRANSISTOR	1	
Q8216	2SC584500L	TRANSISTOR	1	
08217-	2SD601A	TRANSISTOR	4	
20		TRANSISTOR	2	
Q8221,2 2	B1MBDDA00003			
Q9000,0 1	2SD601A	TRANSISTOR	2	
Q9003	B1DHCC000034	TRANSISTOR	1	
Q9004	2SB709A	TRANSISTOR	1	
Q9008,0 9	2SK2731T146	TRANSISTOR	2	
Q9010,1 1	2SD601A	TRANSISTOR	2	
Q9012,1 3	2SK2731T146	TRANSISTOR	2	
Q9020- 23	2SD601A	TRANSISTOR	4	
Q9500	2SK2731T146	TRANSISTOR	1	
Q9700	2SD601A	TRANSISTOR	1	
Q9701,0 2	B1MBCDA00002	TRANSISTOR	2	
Q9703,0 4	2SD601A	TRANSISTOR	2	
Q9800,0 1	2SD601A	TRANSISTOR	2	
Q9900,0 1	2SD601A	TRANSISTOR	2	
				·
R2302	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2303	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R2304	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2305	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2306	ERJ6GEYJ821	M 820 OHM,J,1/10W	1	
R2307	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2308,0 9	ERJ3GEYJ392	м 3.9конм, ј, 1/16W	2	
R2310	ERJ3GEYJ184	M 180KOHM,J,1/16W	1	
R2311	ERJ12YJ821	M 820 OHM,J, 1/2W	1	
R2312,1	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2316- 19	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R2320	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
			1	
DOZOO	ERJ3GEYJ103	M 10KOHM, J, 1/16W		
	ERJ3GEYJ562	M 5.6KOHM,J,1/16W M 470 OHM,J,1/10W	1	
R2322 R2324	ED TO CHILL TART		1 1	
R2324 R2331	ERJ6GEYJ471		-	
R2324 R2331 R2338	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2324 R2331 R2338 R2342,4			1 2	
R2324 R2331 R2338 R2342,4	ERJ3GEY0R00	M 0 OHM, 1/16W	<del>                                     </del>	
R2324 R2331 R2338 R2342,4	ERJ3GEY0R00 ERJ6GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/10W	2	

Ref.	Part No.	Part Name &	Pcs	Remarks
No. R2352,5	ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
3 R2357	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R2358,5	ERJ3GEYJ683	M 68KOHM,J,1/16W	2	
9	TD 73 GDW 7450	W 4 EVOTO T 1/16W		
R2360 R2363	ERJ3GEYJ472 ERJ3GEYJ472	M 4.7KOHM,J,1/16W M 4.7KOHM,J,1/16W	1	
R2364	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R2365,6	ERJ3GEYJ683	M 68KOHM,J,1/16W	2	
R2367	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2368	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R2369,7	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R2388,8	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R2390	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	
R2391	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2392	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R2393	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2394 R2395,9	ERJ3GEYJ203 ERJ3GEYJ103	M 20KOHM,J,1/16W M 10KOHM,J,1/16W	2	
6		·		
R2397,9 8	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R2436	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2437,3	ERDS2TJ103	C 10KOHM, J,1/4W	2	
R2444,4 5	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R2448,4 9	ERJ6GEYJ510	M 51 OHM,J,1/10W	2	
R2450	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2451,5 2	ERJ6GEYJ510	M 51 OHM,J,1/10W	2	
R2453	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2460	ERJ6ENF1373	M 137KOHM, 1/10W	1	
R2461	ERJ6ENF1103	M 110KOHM, 1/10W	1	
R2464,6 5	ERJ6GEYJ120	M 12 OHM,J,1/10W	2	
R2468,6 9	ERJ6GEYJ331	M 330 OHM,J,1/10W	2	
R2488,8 9	ERJ6GEYJ120	M 12 OHM,J,1/10W	2	
R2499	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2501	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2516	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2517	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R2520	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R2524	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2525 R2526	ERJ6ENF1002 ERJ6GEYJ562	M 10KOHM, 1/10W M 5.6KOHM, J, 1/10W	1	
R2542	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2545	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2550	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2553	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2557	ERJ6ENF8200	M 820 OHM, 1/10W	1	
R2607	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2640,4 1	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R2645	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R2646	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2647	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2648	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2649	ERJ6GEYJ183	M 18KOHM, J, 1/10W	1	
R2650 R2651	ERJ6GEYJ223 ERJ3GEYJ471	M 22KOHM, J, 1/10W	1	
R2652	ERJ6GEYJ102	M 470 OHM,J,1/16W M 1KOHM,J,1/10W	1	
R2655	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R2659,6	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R2673	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2680,8	ERJ3GEYJ184	M 180KOHM, J, 1/16W	2	
R2682	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2686	ERJ6ENF75R0	M 75 OHM, 1/10W	1	

Ref. Part No. Part Name & Pec Remarks No. No. Past Name & Pec Remarks No. No. East T ATAAAHOLOLY M 100 OHM, J, 1/16W 1	(50U / TH-42I	PX50U / TH-50PX50L	J		
R2630 RAJARHOLOLJY M 100 CHM, J, J/16W 1 R2690 RAJGEYJ182 M 1.8KOHM, J, J/16W 1 R2693 TAJAAHOLOLJY M 100 CHM, J, J/16W 1 R2695 RAJGEYJ182 M 1.00 CHM, J, J/16W 1 R2696 RAJGEYJ182 M 1.00 CHM, J, J/16W 1 R2696 RAJGEYJ182 M 1.00 CHM, J, J/16W 1 R2699 RAJGEYJ182 M 1.00 CHM, J, J/16W 1 R2699 RAJGEYJ182 M 1.00 CHM, J, J/16W 1 R2700 RAJGEYJ192 M 1.00 CHM, J, J/16W 1 R2702 RAJGEYJ194 M 270 KOHM, J, J/16W 1 R2703 RAJGEYJ194 M 100 KOHM, J, J/16W 1 R2723, Z RAJGEYJ104 M 100 KOHM, J, J/16W 1 R2725 RAJGEYJ102 M 1KOHM, J, J/16W 1 R2726, Z RAJGEYJ102 M 1KOHM, J, J/16W 1 R2727, Z RAJGEYJ102 M 1KOHM, J, J/16W 1 R2727, Z RAJGEYJ102 M 1KOHM, J, J/16W 1 R2731 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2732 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2733 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2734 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2735 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2736 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2736 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2737 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2746 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2746 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2747 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2746 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2755 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2756 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2755 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2755 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2756 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2757 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2758 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2759 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2751 RRJGEYJ221 M 220 CHM, J, J/16W 1 R2801, RRJGEYJ221 M 220 CHM, J, J/16W 1 R2801, RRJGEYJ221 M 220 CHM, J, J/16W 1 R2803, RRJGEYJ221 M 220 CHM, J, J/16W 1 R2803, RRJGEYJ221 M 220 CHM, J, J/16W 1 R2803 RRJGEYJ221 M 220 CHM, J, J/16W		Part No.		Pcs	Remarks
RESSIDENTISED   M. 1.8 KOINH, J, J/16W   1   1   1   1   1   1   1   1   1		TAJAAH0101JV	<u> </u>	1	
R2693				1	
R2695				1	
R2696 RNJ3GEYJ105 M 1MOHM,J,1/16W 1 R2698 RNJ3GEYORDO M 0 ORM, J,1/16W 1 R2700 RNJ3GEYDATO M 1 ORM,J,1/16W 1 R2701 RNJ3GEYJATO M 1 ORM,J,1/16W 1 R2702 RNJ3GEYJATO M 4 TKOHM,J,1/16W 1 R2723, RNJ3GEYJATO M 1 TKOHM,J,1/16W 1 R2726, RNJ3GEYJATO M 1 TKOHM,J,1/16W 1 R2726, RNJ3GEYJATO M 1 TKOHM,J,1/16W 1 R2727, RNJ3GEYJATO M 1 TKOHM,J,1/16W 1 R2727, RNJ3GEYJATO M 1 TKOHM,J,1/16W 1 R2721 RNJ3GEYJATO M 1 TKOHM,J,1/16W 1 R2724 RNJ3GEYJATO M 1 TKOHM,J,1/16W 1 R2725 RNJ3GEYJATO M 220 OHM,J,1/16W 1 R2726 RNJ3GEYJATO M 220 OHM,J,1/16W 1 R2727 RNJ3GEYJATO M 220 OHM,J,1/16W 1 R2727 RNJ3GEYJATO M 220 OHM,J,1/16W 1 R2729 RNJ3GEYJATO M 220 OHM,J,1/16W 1 R2801, RNJ3GEYJATO M 220 OHM,J,1/16W 1 R2801 RNJ3GEYJATO M 220 OHM,J,1/16W 1 R2801 RNJ3GEYJATO M 220 OHM,J,1/16W 1 R2803 RNJ3GEYJATO M 220 OHM,J,1/16W 1 R2803 RNJ3GEYJATO M 220 OHM,J,1/16W 1 R2803 RNJ3GEYJATO M 220 O				1	
R2698   RRJ3GEY102   M 1.8KOHM, J, J/16W				_	
R2699 RNJ3GEYOROO M 0 OHM, 1/16W 1 1 R2700 RNJ3GEY07374 M 270XOHM, J,1/16W 1 1 R2702 RNJ3GEY1473 M 47KOHM, J,1/16W 1 1 R2703 RNJ3GEY1473 M 100KOHM, J,1/16W 1 1 R2703 RNJ3GEY10102 M 1KOHM, J,1/16W 1 1 R2723,2 RNJ3GEY1012 M 1KOHM, J,1/16W 1 2 R2723,2 RNJ3GEY1012 M 1KOHM, J,1/16W 1 2 R2726,2 RNJ3GEY121 M 220 OHM, J,1/16W 3 3 R2739 RNJ3GEY121 M 220 OHM, J,1/16W 1 1 R2733- BRJ3GEY121 M 220 OHM, J,1/16W 1 1 R2733- BRJ3GEY121 M 220 OHM, J,1/16W 1 1 R2739 RNJ3GEY121 M 220 OHM, J,1/16W 1 1 R2739 RNJ3GEY121 M 220 OHM, J,1/16W 1 1 R2741 RNJ3GEY121 M 220 OHM, J,1/16W 1 1 R2741 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2741 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2744 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2745 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2746 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2751 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2752 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2753 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2754 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2755 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2756 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2757 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2758 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2759 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2759 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2751 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2752 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2753 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2754 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2755 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2756 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2757 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2758 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2777 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2779 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2801,0 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2801,1 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2821 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2821 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2822 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2833 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2836 RNJ3GEY1221 M 220 OHM, J,1/16W 1 1 R2837 RNJ3GEY1221 M 220 OHM, J,1/16				<b>-</b>	
R2700 ERJ3GEYJ274 M 270KOHM, J, 1/16W 1 R2702 ERJ3GEYJ103 M 47KOHM, J, 1/16W 1 R2723, 2 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R2723, 2 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R2725, 2 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2726, 2 ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2727, 2 ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2737 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2733- BRJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2733 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2734 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2741 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2741 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2741 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2745 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2746 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2747 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2748 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2749 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2755 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2756 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2757 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2758 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2759 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2761- ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2860 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2871 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2883 ERJ3GEYJ321 M 220 OHM, J, 1/16W 1 R2883 ERJ3GEYJ321 M 220 OHM, J, 1/16W 1 R2883 ERJ3GEYJ321 M 220 OHM,				<b>†</b>	
R2702 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R2708 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R2726,2 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 R2726,2 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R2726,2 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2726,2 ERJ3GEYJ221 M 220 OHM,J,1/16W 3 R2733- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2737 RRJ3GEYJ102 M 1KOHM,J,1/16W 1 R2739 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R2739 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2739 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2739 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2734 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2741 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2744 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2745 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2746 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2751 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2752 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2753 ERJ3GEYJ220 M 220 OHM,J,1/16W 1 R2755 ERJ3GEYJ220 M 220 OHM,J,1/16W 1 R2756 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2757 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2758 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2759 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2777- ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2801,0 TAJAAHO101JV M 100 OHM,J,1/16W 2 R2801,0 TAJAAHO101JV M 100 OHM,J,1/16W 1 R2811,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2823 ERJ3GEYJ321					
R2708				<b>—</b>	
R2723,2 ERJ3GEYJ104 M 100KOHM,J,1/16W 2 R2726,2 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R2726,2 ERJ3GEYJ221 M 220 OHM,J,1/16W 3 R2729- ERJ3GEYJ221 M 220 OHM,J,1/16W 3 R2733- ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2733- ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2738 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2739 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2739 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2744 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2745 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2746 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2747 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2748 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2751 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2751 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2753 ERJ3GEYD220 M 22 OHM,J,1/16W 1 R2755 ERJ3GEYD220 M 22 OHM,J,1/16W 1 R2756 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2757 ERJ3GEYD220 M 22 OHM,J,1/16W 1 R2758 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2759 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2757 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2757 ERJ3GEYD221 M 220 OHM,J,1/16W 2 R2758 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2777 ERJ3GEYD221 M 220 OHM,J,1/16W 2 R2778 ERJ3GEYD221 M 220 OHM,J,1/16W 2 R2779 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2801,0 TAJAAHO101JV M 100 OHM,J,1/16W 2 R2801,0 TAJAAHO101JV M 100 OHM,J,1/16W 2 R2801,0 TAJAAHO101JV M 100 OHM,J,1/16W 2 R2801,0 TAJAAHO101JV M 100 OHM,J,1/16W 1 R2804 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2804 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2804 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2803 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2804 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2803 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2804 ERJ3GEYD221 M 220 OHM,J,1/16W 1 R2805 ERJ3GEYD321 M 220 OHM,J,1/16W 1 R2806 ERJ3GEYD393 M 82KOHM,J,1/16W 1 R2808 ERJ3GEYD393 M 98KOHM,J,1/10W 1 R28086 ERJ3GEYD393 M 39KOHM,J,1/10W 1 R28086 ERJ5ENF75R0 M 75 OHM, 1/10W 1				1	
### R2725				1	
R2725		ERUSGEIUIU4	M 100KOHM, 0, 1/16W		
R2726.2 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2729- R2733- RRJ3GEYJ221 M 220 OHM,J,1/16W 4 R2737- RRJ3GEYJ221 M 220 OHM,J,1/16W 1 R2737- RRJ3GEYJ221 M 220 OHM,J,1/16W 1 R2738- ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2739- ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2741 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2744 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2745 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2746 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2747 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2748 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2749 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2751 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2753 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2754 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2755 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2756 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2757 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2768 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2801.0 TAJAAHO101JV M 100 OHM,J,1/16W 2 R2801.0 TAJAAHO101JV M 100 OHM,J,1/16W 2 R2801.1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2801.2 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2801.1 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2801.2 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2802- ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2803 ERJ3GEYJ221 M 220 OHM,J,1/16W 1		ER.T3GEY.T102	м 1конм.д.1/16w	1	
7				t	
31   R2733- RJ3GEYJ221   M 220 OHM, J, 1/16W   1   1   1   1   1   1   1   1   1				-	
R2733-	R2729-	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
36         R2737         ERJ3GEYJ102         M 1KOHM, J, 1/16W         1           R2738         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1           R2741         ERJ3GEYJ102         M 1KOHM, J, 1/16W         1           R2741         ERJ3GEYJ102         M 1KOHM, J, 1/16W         1           R2744         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1           R2747         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1           R2747         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1           R2751         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1           R2751         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1           R2753         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1           R2754         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1           R2755         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1           R2756         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1           R2757         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1           R2769,7         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1           R2772         ERJ3GEYJ221         M 220 OHM, J, 1/16W         1 </td <td>31</td> <td></td> <td></td> <td></td> <td></td>	31				
R2737 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R2738 ERJ3GEYJ212 M 220 OHM, J, 1/16W 1 R2741 ERJ3GEYJ212 M 220 OHM, J, 1/16W 1 R2741 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2744 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2744 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2746 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2747 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2751 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2753 ERJ3GEYJ220 M 220 OHM, J, 1/16W 1 R2755 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2759 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2759 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2759 ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 64 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2768 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2769 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2769 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2801	R2733-	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2738	36				
R2739		ERJ3GEYJ102		1	
R2741 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2744 ERJ3GEYJ022 M 1KORM, J, 1/16W 1 R2747 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2747 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2751 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2753 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2755 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2756 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2757 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2758 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2759 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2761 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2762 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2769, 7 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2777 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2777 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2777 ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2779 ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2793 ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2801, 0 TAJAAHO101JV M 100 OHM, J, 1/16W 4 R2801, 0 TAJAAHO101JV M 220 OHM, J, 1/16W 2 R2801, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2801, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2801, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2801, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2808, ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2809, ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2809, ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2809, ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2809, ERJ3GEYJ220 M 22 OHM,	R2738	ERJ3GEYJ221		1	
R2744 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R2746 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2751 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2753 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2754 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2755 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2756 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2757 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2758 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2759 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2759 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2759 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2750 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2777 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2777 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2777 ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2777 ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2777 ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2777 ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 R2769 ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 R2760 ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2805 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2806 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2807 P ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2810, 1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2810, 1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2810, 1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2820 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2822 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2830 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2831 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2832 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2836 ERJ6GEYJ393 M 39KOHM, J, 1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ393 M 39KOHM, J, 1/10W 1 R2839 ERJ3GEYJ393 M 39KOHM, J, 1/10W 1	R2739	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2746 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2747 ERJ3GEYOROD M 0 OHM, J/16W 1 R2751 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2753 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2754 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2755 ERJ5ENF75RO M 75 OHM, J/10W 1 R2755 ERJ5ENF75RO M 75 OHM, J/16W 1 R2756 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2757 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2758 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2759 ERJ6ENF75RO M 75 OHM, J/16W 1 R2761 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2762 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2768 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2769 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2769 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2760 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2761 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2762 ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2772 ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2779 ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 R2793 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2805 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2806 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2811,1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2821 ERJ6GEYJ183 M 18KOHM, J, 1/16W 1 R28221 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2836 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2837 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2836 ERJ3GEYJ393 M 39KOHM, J, 1/10W 1 R2858 ERJ3GEYJ393 M 39KOHM, J, 1/10W 1 R2858 ERJ3GENF75RO M 75 OHM, 1/10W 1 R2859 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R2863 ERJ6ENF75RO M 75 OHM, 1/10W 1	R2741	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2747 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R2751 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2754 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2755 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2756 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2756 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2756 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2757 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2759 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2759 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2761 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2769,7 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2775 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2777 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2778 ERJ3GEYJ221 M 220 OHM,J,1/16W 3 P3 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2779 ERJ3GEYJ221 M 220 OHM,J,1/16W 3 P3 ERJ3GEYJ221 M 220 OHM,J,1/16W 3 P3 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2801,0 TAJAAH0101JV M 100 OHM,J,1/16W 2 R2801,0 TAJAAH0101JV M 100 OHM,J,1/16W 2 R2807,0 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,2 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2822 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2837 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2839 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2836 ERJ3GEYJ393 M 39KOHM,J,1/10W 1 R2858 ERJ3GEYJ393 M 39KOHM,J,1/10W 1 R2859 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2859 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2859 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R28663 ERJ6ENF75R0 M 75 OHM, 1/10W 1	R2744	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R2751	R2746	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2753 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2754 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R2755 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2758 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2759 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2761- ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2769,7 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 0 R2771 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2775 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2777- ERJ6ENF75R0 M 75 OHM, 1/10W 3 PR2777- ERJ3GEYJ221 M 220 OHM,J,1/16W 3 PR2779- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R27891- OHM, 1/10W 1 D D OHM,J,1/16W 1 R2801,0 TAJAAHO101JV M 100 OHM,J,1/16W 2 R2801 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2811 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2822 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ303 M 39KOHM,J,1/10W 4 S2838 ERJ3GEYJ303 M 39KOHM,J,1/10W 1 R2838 ERJ3GEYJ303 M 39KOHM,J,1/10W 1 R2838 ERJ3GEYJ303 M 39KOHM,J,1/10W 1 R2836 ERJ3GEYJ303 M 39KOHM,J,1/10W 1 R2837 ERJ3GEYJ303 M 39KOHM,J,1/10W 1 R2838 ERJ3GEYJ303 M 39KOHM,J,1/10W 1 R2838 ERJ3GEYJ303 M 39KOHM,J,1/10W 1 R2838 ERJ3GEYJ303 M 39KOHM,J,1/10W 1	R2747	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2754 ERJ3GEYOROO M 0 OHM, 1/16W 1 R2755 ERJ6ENF75RO M 75 OHM, 1/10W 1 R2756 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2759 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2761- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 64 R2767 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2769,7 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2772 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2775 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2776 ERJ3GEYJ221 M 220 OHM,J,1/16W 3 R2777- ERJ6ENF75RO M 75 OHM, 1/10W 3 R2793- ERJ3GEYJ221 M 220 OHM,J,1/16W 3 P35 R2797- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2801,0 TAJAAHO101JV M 100 OHM,J,1/16W 2 R2801,0 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2801,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2801,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2801 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2801 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2801 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2802 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2803 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2803 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2803 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2803 ERJ3GEYJ303 M 39KOHM,J,1/10W 1 R2805 ERJ6GEYJ393 M 39KOHM,J,1/10W 1	R2751	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2755 ERJ3GENF75RO M 75 OHM, 1/10W 1 R2756 ERJ3GEYJ221 M 22 OHM,J,1/16W 1 R2758 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2758 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2761- ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2769,7 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2772 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2777- ERJ6ENF75RO M 75 OHM, 1/10W 1 R2777- ERJ6ENF75RO M 75 OHM, 1/10W 3 P5 R2779- ERJ3GEYJ221 M 220 OHM,J,1/16W 3 P5 R2797- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2804 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2807,0 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2801,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2830 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2830 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2822 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2834 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2835 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2836 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2837 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2858 ERJGENF75RO M 75 OHM, 1/10W 1 R2858 ERJGENF75RO M 75 OHM, 1/10W 1 R28589 ERJGENF75RO M 75 OHM, 1/10W 1 R28589 ERJGENF75RO M 75 OHM, 1/10W 1	R2753	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2756 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2758 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2759 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2761- ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767, ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2777 ERJ6ENF75R0 M 75 OHM, 1/10W 3 R2777- ERJ6ENF75R0 M 75 OHM, 1/10W 3 R2793- ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2797- ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2810, 1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2811, 1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2821 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2820 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2822- ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2832 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2835 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2836 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ2393 M 39KOHM, J, 1/10W 4 S2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R28589 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R28589 ERJ6ENF75R0 M 75 OHM, 1/10W 1	R2754	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2756 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2758 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2759 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2761- ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767, ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2777 ERJ6ENF75R0 M 75 OHM, 1/10W 3 R2777- ERJ6ENF75R0 M 75 OHM, 1/10W 3 R2793- ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 R2797- ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2810, 1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2811, 1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2821 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2820 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2822- ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2832 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2835 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2836 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ2393 M 39KOHM, J, 1/10W 4 S2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R28589 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R28589 ERJ6ENF75R0 M 75 OHM, 1/10W 1	R2755	ERJ6ENF75R0		1	
R2759 ERJ6ENF75RO M 75 OHM, 1/10W 1 R2761- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2767 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2769,7 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2772 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2777 ERJ6ENF75RO M 75 OHM, 1/10W 1 R2777- ERJ6ENF75RO M 75 OHM, 1/10W 3 PS ERJ3GEYJ221 M 220 OHM,J,1/16W 3 PS ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2777- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2797- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2801,0 TAJAAHO101JV M 100 OHM,J,1/16W 1 R2807,0 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2811 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2814,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2822 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2822 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2834 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2835 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2836 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ393 M 39KOHM,J,1/10W 4 S1 R2854 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2855 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2856 ERJ6ENF75RO M 75 OHM, 1/10W 1 R2856 ERJ6ENF75RO M 75 OHM, 1/10W 1	R2756	ERJ3GEYJ220		1	
R2759 ERJ6ENF75RO M 75 OHM, 1/10W 1 R2761- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2767 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2769,7 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2772 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2777 ERJ6ENF75RO M 75 OHM, 1/10W 1 R2777- ERJ6ENF75RO M 75 OHM, 1/10W 3 PS ERJ3GEYJ221 M 220 OHM,J,1/16W 3 PS ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2777- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2797- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2801,0 TAJAAHO101JV M 100 OHM,J,1/16W 1 R2807,0 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2811 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2814,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2822 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2822 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2834 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2835 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2836 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ393 M 39KOHM,J,1/10W 4 S1 R2854 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2855 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2856 ERJ6ENF75RO M 75 OHM, 1/10W 1 R2856 ERJ6ENF75RO M 75 OHM, 1/10W 1	R2758	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2761- 64  R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2769,7 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2  R2772 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2775 ERJ6ENF75R0 M 75 OHM, 1/10W 1  R2777- ERJ6ENF75R0 M 75 OHM, 1/10W 3  R2777- ERJ3GEYJ221 M 220 OHM, J, 1/16W 3  R2777- ERJ3GEYJ221 M 220 OHM, J, 1/16W 3  R2793- ERJ3GEYJ221 M 220 OHM, J, 1/16W 4  R2801,0 TAJAAH0101JV M 100 OHM, J, 1/16W 2  R2801,0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2807,0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2  R2801,1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2  R2811,1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2  R2814,1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2  R2817,1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2  R2820 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2821 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2822- ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2823 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2830 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2831 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2832 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2833 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2834 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2835 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2836 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1  R2837 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1  R2838 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1  R2838 ERJ3GEYJ393 M 39KOHM, J, 1/10W 4  S1  R2854,5 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1  R28558 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1  R28559 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1  R28560 ERJ6ENF75R0 M 75 OHM, 1/10W 1  R28563 ERJ6ENF75R0 M 75 OHM, 1/10W 1  R28563 ERJ6ENF75R0 M 75 OHM, 1/10W 1	R2759	ERJ6ENF75R0		1	
R2767 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2769,7 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2772 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2775 ERJ6ENF75RO M 75 OHM, 1/10W 1 R2777- ERJ6ENF75RO M 75 OHM, 1/10W 3 R2793- ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 R2797- ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 R2801, 0 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R2801, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2810, 1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2814, 1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2821 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2822 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2824 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2825 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2826 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2827 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2828 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2837 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2839 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ393 M 39KOHM, J, 1/10W 1 R2854 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R2855 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R2856 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R2858 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R2859 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1		ERJ3GEYJ221		4	
R2769,7 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2777 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2777- ERJ6ENF75R0 M 75 OHM, 1/10W 3 R2777- ERJ6ENF75R0 M 75 OHM, 1/10W 3 R2793- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2797- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2801,0 TAJAAH0101JV M 100 OHM,J,1/16W 1 R2807,0 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2801,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2814,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2817,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2820 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2820 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2822- ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2822- ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2830 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2831 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2832 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2833 ERJ3GEYJ220 M 220 OHM,J,1/16W 1 R2834 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2835 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4 S1 R2854,5 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2855 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3 ER2859 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 1	64		·		
0 R2772 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2775 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2777- ERJ6ENF75R0 M 75 OHM, 1/10W 3 P2793- ERJ3GEYJ221 M 220 OHM, J, 1/16W 3 P2797- ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 P2801, 0 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2807, 0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2814, 1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2814, 1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2814, 1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2820 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2820 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2821 ERJ6GEYJ183 M 18KOHM, J, 1/16W 1 R2822- ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 P2832, 3 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2832, 3 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2833 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2835 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ393 M 39KOHM, J, 1/10W 4 S1 R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM, J, 1/10W 3 61 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1	R2767	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2772 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2775 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2777- ERJ6ENF75R0 M 75 OHM, 1/10W 3 R2777- ERJ6ENF75R0 M 75 OHM, 1/10W 3 R2793- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2797- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2801,0 TAJAAH0101JV M 100 OHM,J,1/16W 1 R2807,0 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2814,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2814,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2814,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2820 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2822- ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2823 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2834 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2835 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ20 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ20 M 22 OHM,J,1/16W 1 R2839 ERJ3GEYJ20 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ393 M 39KOHM,J,1/10W 4 S1 R2854,5 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2855 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859 ERJ6GEYJ393 M 39KOHM,J,1/10W 3 61 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1	R2769,7	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2775 ERJ6ENF75RO M 75 OHM, 1/10W 1 R2777- ERJ6ENF75RO M 75 OHM, 1/10W 3 R2793- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 SERJ3GEYJ221 M 220 OHM,J,1/16W 4 R2801,0 TAJAAH0101JV M 100 OHM,J,1/16W 1 R2807,0 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2801,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2801,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2817,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2817,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2820 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ6GEYJ183 M 18KOHM,J,1/16W 1 R2822- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 SERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2830 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2830 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2831 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2832 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2833 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2834 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2835 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ393 M 39KOHM,J,1/10W 4 S1 R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 1	0				
R2777-	R2772	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
79 R2793- BRJ3GEYJ221 M 220 OHM, J, 1/16W 3 95 R2797- BRJ3GEYJ221 M 220 OHM, J, 1/16W 4  R2801,0 TAJAAH0101JV M 100 OHM, J, 1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2807,0 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 8 R2810,1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2814,1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2814,1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2817,1 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 R2820 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2821 ERJ6GEYJ183 M 18KOHM, J, 1/10W 1 R2822- ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 S R2830 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2837 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM, J, 1/10W 4 S1 R2856 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R2858 ERJ6GEYJ393 M 39KOHM, J, 1/10W 3 G1 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R2858 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R2858 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1	R2775	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2793-		ERJ6ENF75R0	M 75 OHM, 1/10W	3	
95 R2797- ERJ3GEYJ221 M 220 OHM,J,1/16W 4  R2801,0 TAJAAH0101JV M 100 OHM,J,1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2807,0 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2811,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2817,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2820 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ6GEYJ183 M 18KOHM,J,1/16W 1 R2822- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 ERZ830 ERJ3GEYJ221 M 220 OHM,J,1/16W 4 ERZ830 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2831 ERJ6GEYJ183 M 18KOHM,J,1/16W 1 R2832 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2833 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2835 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ393 M 39KOHM,J,1/10W 4 S1 R2854- ERJ6GEYJ393 M 39KOHM,J,1/10W 2 S2 R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2857 ERJ6GEYJ393 M 39KOHM,J,1/10W 3 G1 R2859 ERJ6ENF75R0 M 75 OHM, 1/10W 1				_	
R2797-       ERJ3GEYJ221       M 220 OHM,J,1/16W       4         00       R2801,0       TAJAAH0101JV       M 100 OHM,J,1/16W       2         R2804       ERJ3GEYJ221       M 220 OHM,J,1/16W       1         R2807,0       ERJ3GEYJ221       M 220 OHM,J,1/16W       2         R2810,1       ERJ3GEYJ221       M 220 OHM,J,1/16W       2         R2814,1       ERJ3GEYJ221       M 220 OHM,J,1/16W       2         R2817,1       ERJ3GEYJ221       M 220 OHM,J,1/16W       1         R28220       ERJ3GEYJ221       M 220 OHM,J,1/16W       1         R28221-       ERJ3GEYJ221       M 220 OHM,J,1/16W       1         R28222-       ERJ3GEYJ221       M 220 OHM,J,1/16W       1         R2830-       ERJ3GEYJ221       M 220 OHM,J,1/16W       1         R2832,3       ERJ3GEYJ221       M 220 OHM,J,1/16W       1         R2835-       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R2836-       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R2838-       ERJ3GEYJ393       M 39KOHM,J,1/10W       4         51       ERJ6GEYJ393       M 39KOHM,J,1/10W       1         R2856-       ERJ6ENF75R0       M 75 OHM, 1/10W       1		ERJ3GEYJ221	M 220 OHM, J, 1/16W	3	
00 R2801,0 TAJAAH0101JV M 100 OHM,J,1/16W 2 R2804 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2807,0 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2814,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2817,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2820 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ6GEYJ183 M 18KOHM,J,1/10W 1 R2822- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 25 R2830 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2830 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2832,3 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2832,3 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2835 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 3 R2836 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ20 M 22 OHM,J,1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4 51 R2856 ERJ6GEYJ393 M 39KOHM,J,1/10W 2 R2857 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3 61 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1		ER.T3GEY.T221	M 220 OHM.J.1/16W	4	
2			220 0111,0,2,2011	-	
R2804 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2807,0 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2814,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2817,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2820 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2821 ERJ6GEYJ183 M 18KOHM,J,1/10W 1 R2822- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 25 R2830 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2832,3 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2832,3 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2835 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4 S1 R2854-5 ERJ6GEYJ393 M 39KOHM,J,1/10W 2 S2 R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3 ERJ6ENF75R0 M 75 OHM, 1/10W 1	R2801,0	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2807,0       ERJ3GEYJ221       M 220 OHM,J,1/16W       2         R2810,1       ERJ3GEYJ221       M 220 OHM,J,1/16W       2         R2814,1       ERJ3GEYJ221       M 220 OHM,J,1/16W       2         R2817,1       ERJ3GEYJ221       M 220 OHM,J,1/16W       2         R2820       ERJ3GEYJ221       M 220 OHM,J,1/16W       1         R2821       ERJ6GEYJ183       M 18KOHM,J,1/10W       1         R2822-       ERJ3GEYJ221       M 220 OHM,J,1/16W       4         25       ERJ3GEYJ221       M 220 OHM,J,1/16W       1         R2832,3       ERJ3GEYJ221       M 220 OHM,J,1/16W       1         R2835       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R2837       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R2848-       ERJ6GEYJ393       M 39KOHM,J,1/10W       4         51       R2848-       ERJ6GEYJ393       M 39KOHM,J,1/10W       2         5       ERJ6GEYJ393       M 75 OHM, 1/10W       1         R2856       ERJ6ENF75R0       M 75 OHM, 1/10W       1         R2859-       ERJ6GEYJ393       M 39KOHM,J,1/10W       3         61       ERJ6ENF75R0       M 75 OHM, 1/10W       1	2				
8	R2804	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2810,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2		ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
1 R2814,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 S S S S S S S S S S S S S S S S S S				ļ	
R2814,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2  R2817,1 ERJ3GEYJ221 M 220 OHM,J,1/16W 2  R2820 ERJ3GEYJ221 M 220 OHM,J,1/16W 1  R2821 ERJ6GEYJ183 M 18KOHM,J,1/10W 1  R2822- ERJ3GEYJ221 M 220 OHM,J,1/16W 4  25  R2830 ERJ3GEYJ221 M 220 OHM,J,1/16W 1  R2832,3 ERJ3GEYJ221 M 220 OHM,J,1/16W 2  3  R2835 ERJ3GEYJ221 M 220 OHM,J,1/16W 1  R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1  R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1  R2838 ERJ3GEYJ230 M 10KOHM,J,1/16W 1  R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4  51  R2856 ERJ6GEYJ393 M 39KOHM,J,1/10W 1  R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1  R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3  61  R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1		ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
5       R2817,1       ERJ3GEYJ221       M 220 OHM,J,1/16W       2         8       R2820       ERJ3GEYJ221       M 220 OHM,J,1/16W       1         R2821       ERJ6GEYJ183       M 18KOHM,J,1/10W       1         R2822-       ERJ3GEYJ221       M 220 OHM,J,1/16W       4         25       R2830       ERJ3GEYJ823       M 82KOHM,J,1/16W       1         R2832,3       ERJ3GEYJ221       M 220 OHM,J,1/16W       2         3       R2835       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R2837       ERJ3GEYJ220       M 22 OHM,J,1/16W       1         R2838       ERJ3GEYJ103       M 10KOHM,J,1/16W       1         R2848-       ERJ6GEYJ393       M 39KOHM,J,1/10W       4         51       ERJ6GEYJ393       M 39KOHM,J,1/10W       2         R2856       ERJ6ENF75R0       M 75 OHM, 1/10W       1         R2858       ERJ6GEYJ393       M 39KOHM,J,1/10W       1         R2859-       ERJ6GEYJ393       M 39KOHM,J,1/10W       3         61       ERJ6GEYJ393       M 75 OHM, 1/10W       1         R2863       ERJ6ENF75R0       M 75 OHM, 1/10W       1		EB.T3GEV.T221	м 220 онм .т 1/16ы	2	
8 R2820 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2821 ERJ6GEYJ183 M 18KOHM, J, 1/10W 1 R2822- ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 ERJ3GEYJ823 M 82KOHM, J, 1/16W 1 R2832, 3 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 3 R2835 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM, J, 1/10W 4 S1 R2854, 5 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM, J, 1/10W 3 G1 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1				~	
8 R2820 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R2821 ERJ6GEYJ183 M 18KOHM, J, 1/10W 1 R2822- ERJ3GEYJ221 M 220 OHM, J, 1/16W 4 ERJ3GEYJ823 M 82KOHM, J, 1/16W 1 R2832, 3 ERJ3GEYJ221 M 220 OHM, J, 1/16W 2 3 R2835 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R2838 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM, J, 1/10W 4 S1 R2854, 5 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM, J, 1/10W 3 G1 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1	R2817,1	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2821 ERJ6GEYJ183 M 18KOHM,J,1/10W 1 R2822- ERJ3GEYJ221 M 220 OHM,J,1/16W 4 25 R2830 ERJ3GEYJ823 M 82KOHM,J,1/16W 1 R2832,3 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 3 R2835 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4 51 R2854,5 ERJ6GEYJ393 M 39KOHM,J,1/10W 2 5 R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2858 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 1	8				
R2822-     ERJ3GEYJ221     M 220 OHM, J, 1/16W     4       25     R2830     ERJ3GEYJ823     M 82KOHM, J, 1/16W     1       R2832,3     ERJ3GEYJ221     M 220 OHM, J, 1/16W     2       R2835     ERJ3GEYJ220     M 22 OHM, J, 1/16W     1       R2837     ERJ3GEYJ220     M 22 OHM, J, 1/16W     1       R2838     ERJ3GEYJ103     M 10KOHM, J, 1/16W     1       R2848-     ERJ6GEYJ393     M 39KOHM, J, 1/10W     4       51     R2854,5     ERJ6GEYJ393     M 39KOHM, J, 1/10W     2       5     R2856     ERJ6ENF75R0     M 75 OHM, 1/10W     1       R2858     ERJ6GEYJ393     M 39KOHM, J, 1/10W     1       R2859-     ERJ6GEYJ393     M 39KOHM, J, 1/10W     3       61     R2863     ERJ6ENF75R0     M 75 OHM, 1/10W     1	R2820	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
25 R2830 ERJ3GEYJ823 M 82KOHM,J,1/16W 1 R2832,3 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2835 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4 S1 R2854,5 ERJ6GEYJ393 M 39KOHM,J,1/10W 2 S R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2858 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1	R2821	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R2830 ERJ3GEYJ823 M 82KOHM,J,1/16W 1 R2832,3 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2835 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4 S1 R2845- ERJ6GEYJ393 M 39KOHM,J,1/10W 2 R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2858 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R2859 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1		ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2832,3 ERJ3GEYJ221 M 220 OHM,J,1/16W 2 R2835 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4 S1 R2854,5 ERJ6GEYJ393 M 39KOHM,J,1/10W 2 R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3 61 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1				<u> </u>	
3 R2835 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4 S1 R2845,5 ERJ6GEYJ393 M 39KOHM,J,1/10W 2 S R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3 61 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1				1	
R2835 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4 51 R2854,5 ERJ6GEYJ393 M 39KOHM,J,1/10W 2 S R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3 61 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1		ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2837 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R2838 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4 51 R2854,5 ERJ6GEYJ393 M 39KOHM,J,1/10W 2 5 R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3 61 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1		ED.T3GEV.T220	м 22 Орм т 1/1сы	1	
R2838 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4 51 R2854,5 ERJ6GEYJ393 M 39KOHM,J,1/10W 2 5 R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3 61 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1				-	
R2848- ERJ6GEYJ393 M 39KOHM,J,1/10W 4  R2854,5 ERJ6GEYJ393 M 39KOHM,J,1/10W 2  R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1  R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1  R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3  61  R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1				<b>-</b>	
51 R2854,5 ERJ6GEYJ393 M 39KOHM,J,1/10W 2 S R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3 61 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1				-	
R2854,5 ERJ6GEYJ393 M 39KOHM,J,1/10W 2  R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1  R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1  R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3  61  R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1		EKUOGE1U393	M DEVIN,U,I/IUW	4	
5 R2856 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3 61 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1		ERJ6GEYJ393	M 39KOHM,J,1/10W	2	
R2858 ERJ6ENF75R0 M 75 OHM, 1/10W 1 R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3 61 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1	_				
R2859- ERJ6GEYJ393 M 39KOHM,J,1/10W 3 61	R2856	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
61 R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1	R2858	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2863 ERJ6ENF75R0 M 75 OHM, 1/10W 1		ERJ6GEYJ393	M 39KOHM,J,1/10W	3	
			W EE 07-2 1 /2 2-2	-	
KZ00%   EKU0GE1U393   M 39KUHM,U,1/1UW   1				<b>†</b>	
	K2864	EKOOGEYU393	m JOKOHM,U,1/10W	Г т	

			_	
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2866	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
		M 75 OHM, 1/10W	2	
9	ERJ6ENF75R0	M /5 OHM, 1/10W	^	
R2881	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2883	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2887	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2891-	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
94	ERUSGEIURUU	M 0 OHM, 1/16W	*	
R2896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2899	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3751	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
R3753	ERJ6ENF3161		1	
	ERJ6ENF3101	M3.16KOHM, 1/10W M2.32KOHM, 1/10W		
R3755		· .	1	
R3756	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R3758	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
R4001,0	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
	ED TOGEW TI OO	M 17077 T 1/16W	1	
R4003	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4004	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4005	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4006	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4007	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4008	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4010	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4015	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4016	ERJ3GEYJ273	M 27KOHM,J,1/16W	1	
R4017	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4018	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R4020	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4021	ERJ3GEYJ273	M 27KOHM, J, 1/16W	1	
R4022	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R4023	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R4024,2	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
5		·		
R4026	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4028,2	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
9				
R4035	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4039	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R4040	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4045	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4047	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R4048	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4050	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4052	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4053	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4055	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4056	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4059	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4063	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4064-	TAJAAH0101JV	M 100 OHM,J,1/16W	3	
66				
R4068,6	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
9				
R4070	ERJ3GEYJ154	M 150KOHM,J,1/16W	1	
R4071-	TAJAAH0101JV	M 100 OHM, J, 1/16W	6	
76				
R4077	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4078,7	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
9	ma Taarro101	M 100 OTT T 1/1/2	-	
R4082	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4083	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4086	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4088- 90	TAJAAH0101JV	M 100 OHM,J,1/16W	3	
R4091	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
			1	
R4092	TAJAAH0101JV	M 100 OHM, J, 1/16W		
R4094	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4095	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4098,9	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R4101	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4101	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4104	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	

	T		_	
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4105	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4106	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4108	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4109	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4110,1	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
1				
R4114	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4118	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4119	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4121 R4122	TAJAAH0101JV ERJ3GEYJ103	M 100 OHM, J, 1/16W	1	
R4123	TAJAAH0101JV	M 10KOHM,J,1/16W M 100 OHM,J,1/16W	1	
R4124	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4125	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4126	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4128	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4129	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R4130	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4134	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4135	ERJ3EKF1801	M 1.8KOHM, 1/16W	1	
R4138	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R4139	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R4141,4	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
2 P4144	FD.T3CFV.T222	м закорм т 1/1сы	1	
R4144 R4145	ERJ3GEYJ333 ERJ3GEY0R00	M 33KOHM,J,1/16W	1	
R4146	ERJ3GEYJ681	M 0 OHM, 1/16W M 680 OHM,J,1/16W	1	
R4148,4	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
9			_	
R4151- 53	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	
R4155	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4158	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4162	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R4169	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4171- 73	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4174	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4175	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4176	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4177	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4179	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4181 R4182,8	TAJAAH0101JV	M 100 OHM,J,1/16W M 22 OHM,J,1/16W	2	
R4184	20030210220		1	
R4184 R4185	ERJ3GEYJ332 ERJ3GEYJ472	M 3.3KOHM,J,1/16W M 4.7KOHM,J,1/16W	1	
R4188	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4192	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4193	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4197	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4199,0	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4201	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4202	ERJ3EKF7151	M7.15KOHM, 1/16W	1	
R4203	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4205	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4208	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4214	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4218	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R4219	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4223	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4224	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4225	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4226 R4230,3	ERJ3GEY0R00 ERJ3GEYJ220	M 0 OHM, 1/16W	2	
1		M 22 OHM, J, 1/16W	1	
R4237 R4238	ERJ3GEYJ102 ERJ3GEYJ472	M 1KOHM, J, 1/16W	1	
R4252,5	ERJ3GEYJ472 ERJ3GEYJ823	M 4.7KOHM,J,1/16W M 82KOHM,J,1/16W	2	
3 R4254	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4255	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	TD 72 GTV 71 0.4	Description		
R4256,5	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R4259	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R4260,6	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	2	
1				
R4262,6	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4264	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4266	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4267,6	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
8				
R4269	ERJ3GEYJ153	M 15KOHM, J, 1/16W	1	
R4281	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4282	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R4284 R4286	ERJ3GEYJ102 ERJ3GEYJ221	M 1KOHM, J, 1/16W	1	
R4289	ERJ3GEYJ241	M 220 OHM,J,1/16W M 240 OHM,J,1/16W	1	
R4291	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R4292	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4298	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4327,2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
8				
R4329	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R4339	ERJ3GEYJ391 ERJ3EKF1301	M 390 OHM, J, 1/16W	2	
R4344,4 5	EKUSEKF13U1	M 1.3KOHM, 1/16W	2	
R4346	ERJ3EKF1001	M 1KOHM, 1/16W	1	
R4347	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4349,5	ERJ3EKF1801	M 1.8KOHM, 1/16W	2	
0				
R4351	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	
R4356,5	ERJ6GEYJ471	M 470 OHM,J,1/10W	2	
R4358	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R4359	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4361	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R4365	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4367	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4370	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4371	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R4375	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4379,8	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	2	
R4382	ERJ3EKF1600	M 160 OHM, 1/16W	1	
R4383	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4388,8	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
9				
R4391	ERJ3EKF1371	M 13.7 OHM, 1/16W	1	
R4392	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4408 R4409	ERJ3EKF1741 ERJ3GEYJ220	M 17.4 OHM, 1/16W M 22 OHM, J, 1/16W	1	
R4411	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4414	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4416	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4421	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4423	EXB38V220J	RESISTOR ARRAY	1	
R4426	EXB38V220J	RESISTOR ARRAY	1	
R4427	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4428	EXB38V220J	RESISTOR ARRAY	1	
R4433,3 4	EXB38V220J	RESISTOR ARRAY	2	
R4435- 37	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
	D1HG5608A002	NETWORK RESISTER	2	
R4443	EXB38V560J	RESISTOR ARRAY	1	
R4444	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4445- 47	ERJ3GEYJ560	M 56 OHM,J,1/16W	3	
R4448,4 9	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4450- 54	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4456,5	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
	1	<del></del>		

(50U / TH-42I	PX50U / TH-50PX50U			
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4458,5	ERJ3EKF3302	м 33конм, 1/16W	2	
R4460	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4461,6	ERJ3EKF2202	M 22KOHM, 1/16W	2	
R4463	ERJ3EKF6192	M61.9KOHM, 1/16W	1	
R4464	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4465	ERJ3EKF6192	M61.9KOHM, 1/16W	1	
R4466	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4469	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4471	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4472 R4473	ERJ3GEYJ330 ERJ3GEY0R00	M 33 OHM,J,1/16W M 0 OHM, 1/16W	1	
R4474	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4480	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4481	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4482,8	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4484	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R4485,8	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4487	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R4488,8 9	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R4490,9 1	ERJ3EKF1800	M 180 OHM, 1/16W	2	
R4492,9 3	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R4494	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4495,9 6	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4497,9 8	ERJ3GEYJ471	M 470 OHM,J,1/16W	2	
R4516	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4522	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4524 R4527	ERJ3GEY0R00 ERJ3EKF1202	M 0 OHM, 1/16W M 12KOHM, 1/16W	1	
R4527	ERJ3EKF1202	M 180 OHM, 1/16W	1	
R4529	ERJ3EKF2001	M 2KOHM, 1/16W	1	
R4530	ERJ3EKF4302	M 43KOHM, 1/16W	1	
R4531,3 2	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4533- 37	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4540,4 1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4543,4 4	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4545,4 6	ERJ3GEYJ330	M 33 OHM,J,1/16W	2	
R4547-	EXB2HV680J	RESISTOR ARRAY	4	
R4551,5 2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4557	ERJ3GEYJ750	M 75 OHM, J, 1/16W	1	
R4558	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4559 R4560,6 1	ERJ3GEYJ203 TAJAAH0101JV	M 20KOHM,J,1/16W M 100 OHM,J,1/16W	2	
R4562	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R4564- 66		M 68 OHM,J,1/16W	3	
R4569	EXB38V680J	RESISTOR ARRAY	1	
R4570	EXB2HV680J	RESISTOR ARRAY	1	
R4571	EXB38V680J	RESISTOR ARRAY	1	
R4572,7 3	ERJ3EKF3002	M 30KOHM, 1/16W	2	
R4575- 77	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4578,7 9	ERJ3EKF1741	M 17.4 OHM, 1/16W	2	
R4581- 85		M 0 OHM, 1/16W	5	
R4590		M 100 OHM, J, 1/16W	1	
R4592	ERJ3GEYJ820	M 82 OHM, J, 1/16W	1	
R4593 R4594	TAJAAH0101JV ERJ3GEYJ103	M 100 OHM,J,1/16W M 10KOHM,J,1/16W	1	
	-1023210103	10101111,0,1/10W		

No.   Description   R4596	Ref.	Down No.	Part Name &	Pcs	Remarks
RA556	l	Fait No.		FCS	Kemaiks
### ### ### ### ### ### ### ### ### ##		ERJ3GEYJ330		1	
R4600		ERJ3GEYJ103		1	
### ### ### ### ### ### ### ### ### ##	R4600	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
22	R4602	ERJ3GEY0R00		1	
R4623 ERJ3GEYJ151 M 150 OHM, J,1/16W 1 R624- EXB38V820J RESISTOR ARRAY 3 R6267 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4630 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4630, R630 ERJ3GEYJ223 M 22KOHM, J,1/16W 1 R4636 ERJ3GEYJ223 M 22KOHM, J,1/16W 1 R4638 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4639, R636 ERJ3GEYJ023 M 22KOHM, J,1/16W 1 R4638 ERJ3GEYJ023 M 22KOHM, J,1/16W 1 R4639, R639, R639, R6315TOR ARRAY 2 R4639, R639, R6315TOR ARRAY 2 R4639, R639, R6315TOR ARRAY 2 R4639, R639, R6315TOR ARRAY 2 R4630 ERJ3GEYU600 M 0 OHM, 1/16W 1 R4651 ERJ3GEY0720 M 22 OHM, J,1/16W 1 R4652 ERJ3GEY0720 M 20 OHM, 1/16W 1 R4653 ERJ3GEYJ031 M 800 OHM, 1/16W 1 R4654 ERJ3GEYJ04 M 100 OHM, 1/16W 1 R4656 ERJ3GEYJ104 M 100 KOHM, J,1/16W 1 R4666, R6313GEYJ103 M 10KOHM, J,1/16W 1 R4666, R6313GEYJ103 M 10KOHM, J,1/16W 2 R4667, ERJ3GEYJ103 M 10KOHM, J,1/16W 2 R4668 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 R4669 R6313GEYJ103 M 10KOHM, J,1/16W 2 R4669 R6313GEYJ103 M 10KOHM, J,1/16W 1 R4660 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4660 ERJ3GEYD103 M 10KOHM, J,1/16W 1 R4703 ERJ3GEYD103 M 10KOHM, J,1/16W 1 R4703 ERJ3GEYD103 M 10KOHM, J,1/16W 1 R4704 ERJ3GEYD103 M 10KOHM, J,1/16W 1 R4705 ERJ3GEYD103 M 10KOHM, J,1/16W 1 R4706 ERJ3GEYD103 M 10KOHM, J,1/16W 1 R4707 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4708 ERJ3GEYD103 M 10KOHM, J,1/16W 1 R4709 ERJ3	ı	ERJ3GEYJ820	M 82 OHM,J,1/16W	20	
R4624- EXB38V820J RESISTOR ARRAY 2 26 R4627 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4630 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4630 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4636 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4637 AN 10KOHM,J,1/16W 1 R4638 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4639,4 EXB2HV680J RESISTOR ARRAY 2 R4630 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4631 ERJ3GEY0700 M 0 OHM, 1/16W 1 R4650 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4651 ERJ3GEY0800 M 0 OHM, 1/16W 3 R4652 ERJ3GEYN010 M 0 OHM, 1/16W 1 R4653 ERJ3GEYN010 M 0 OHM, 1/16W 3 R4655 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R4656 ERJ3GEYD104 M 100KOHM,J,1/16W 1 R4657 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4667,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4668 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4668 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4668 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4669 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4669 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4669 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4704 ERJ6GEYORO M 0 0 OHM, 1/16W 1 R4705 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4710 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4751 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4752 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4755 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4756 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4757 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4758 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4759 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4759 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4751 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4751 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4767 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4768 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4769 ERJ3GEYJ0					
26					
R4627 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4630 RBJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4631 ERJ3GEYJ233 M 22KOHM, J, 1/16W 1 R4636 ERJ3GEYJ233 M 22KOHM, J, 1/16W 1 R4637 RBJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4639, 4 EKZ2HV680J RESISTOR ARRAY 2 0 R4643, 4 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4651 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4652 ERJ3GEYJ220 M 20 OHM, J, 1/16W 1 R4653 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R4653 ERJ3GEYDR00 M 0 OHM, 1/16W 3 S5 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4667 ERJ3GEYJ222 M 22 ZKOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4667 ERJ3GEYJ222 M 22 ZKOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4669 ERJ3GEYJ02 M 22 OHM, J, 1/16W 1 R4669 ERJ3GEYJ02 M 10 OHM, 1/16W 1 R4669 ERJ3GEYJ02 M 10 OHM, 1/16W 1 R4669 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4706 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4707 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4708 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4708 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4709 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4709 ERJ3EKF800 M 0 OHM, 1/16W 1 R4751 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4752 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4753 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4754 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4755 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4756 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4758 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4759 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4752 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4756 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYD103 M 10KOHM, J, 1/1	ı	EXB38V820J	RESISTOR ARRAY	3	
R4630 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4632, 2 BRJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4638 ERJ3GEYJ233 M 22KOHM, J, 1/16W 1 R4638 ERJ3GEYJ233 M 22KOHM, J, 1/16W 1 R4639, 4 ERJ3GEYOROO M 10KOHM, J, 1/16W 1 R4639, 4 ERJ3GEYDROO M 0 OHM, 1/16W 1 R4643, 4 ERJ3GEYDROO M 0 OHM, 1/16W 1 R4651 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4652 ERJ3GEYJ21 M 820 OHM, J, 1/16W 1 R4653 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R4654 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4656 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4667, 7 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4678 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4678 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4698 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4699 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4696 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4696 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4697 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4698 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4709 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4709 ERJ3GEYDR00 M 0 0HM, 1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYDR00 M 0 0HM, 1/16W 1 R4752 ERJ3GEYDR00 M 0 0HM, 1/16W 1 R4753 ERJ3GEYDR00 M 0 0HM, 1/16W 1 R4754 ERJ3GEYDR00 M 0 0HM, 1/16W 1 R4755 ERJ3GEYDR00 M 0 0HM, 1/16W 1 R4766 ERJ3GEYDR00 M 0 0HM, 1/16W 1 R4756 ERJ3GEYDR00 M 0 0HM, 1/16W 1 R4757 ERJ3GEYDR00 M 0 0		ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4632,3 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4636 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4638 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4639,4 EXB2HV680J RESISTOR ARRAY 2 0 R4643,4 ERJ3GEY0700 M 0 OHM, 1/16W 1 R4652 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4652 ERJ3GEYU820 M 22 OHM,J,1/16W 1 R4652 ERJ3GEYU821 M 820 OHM,J,1/16W 1 R4653 ERJ3GEYU821 M 820 OHM,J,1/16W 1 R4653 ERJ3GEYU800 M 0 OHM, 1/16W 3 S55 R4657 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4667 REJ3GEYJ103 M 10KOHM,J,1/16W 1 R4667 REJ3GEYJ103 M 10KOHM,J,1/16W 2 1 R4667 REJ3GEYJ103 M 10KOHM,J,1/16W 1 R4678 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 8 R4674 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4678 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4678 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4678 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4708 ERJ3GEYD102 M 10KOHM,J,1/16W 1 R4708 ERJ3GEYD103 M 10KOHM,J,1/16W 1 R4718 ERJ3GEYD103 M 10KOHM,J,1/16W 1 R4718 ERJ3GEYD103 M 10KOHM,J,1/16W 1 R4719 ERJ3EKF8200 M 0 OHM, 1/16W 1 R4719 ERJ3EKF9200 M 0 OHM, 1/16W 1 R4751 ERJ3EKF9200 M 0 OHM, 1/16W 1 R4751 ERJ3EKF9200 M 0 OHM,J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4760 ERJ3GEYJ239 M 3.9KOHM,J,1/16W 1 R4760	R4630			1	
R4636 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4638 RBJ3GEYJ103 M 10KOHM,J,1/16W 1 R4639,4 EXB2HV680J RESISTOR ARRAY 2 0 R4643,4 ERJ3GEY0200 M 0 OHM, 1/16W 1 R4651 ERJ3GEY0210 M 22 OHM,J,1/16W 1 R4652 ERJ3GEY021 M 22 OHM,J,1/16W 1 R4653 ERJ3GEY021 M 0 OHM, 1/16W 1 R4653 ERJ3GEY0800 M 0 OHM, 1/16W 3 S5 R4657 ERJ3GEY0800 M 0 OHM, 1/16W 3 S5 R4657 ERJ3GEY103 M 10KOHM,J,1/16W 1 R4658 ERJ3GEY1103 M 10KOHM,J,1/16W 1 R4658 ERJ3GEY1103 M 10KOHM,J,1/16W 1 R4666 ERJ3GEY1103 M 10KOHM,J,1/16W 1 R4667 A ERJ3GEY1103 M 10KOHM,J,1/16W 1 R4668 ERJ3GEY1474 M 470KOHM,J,1/16W 2 8 R4674 ERJ3GEYJ474 M 470KOHM,J,1/16W 1 R4682 BEJ3GEY1474 M 10KOHM,J,1/16W 1 R4682 BEJ3GEY1474 M 10KOHM,J,1/16W 1 R4686 ERJ3GEY103 M 10KOHM,J,1/16W 1 R4686 ERJ3GEY103 M 10KOHM,J,1/16W 1 R4681 BEJ3GEY147 M 17.4 OHM, 1/16W 1 R4682 BEJ3GEY103 M 10KOHM,J,1/16W 1 R4684 BRJ3GEY103 M 10KOHM,J,1/16W 1 R4686 ERJ3GEY103 M 10KOHM,J,1/16W 1 R4708 ERJ3GEY000 M 0 OHM, 1/16W 1 R4708 ERJ3GEY000 M 0 OHM, 1/16W 1 R4750 ERJ3GEY000 M 0 OHM, 1/16W 1 R4751 ERJ3GEY000 M 0 OHM, 1/16W 1 R4752 ERJ3GEY000 M 0 OHM, 1/16W 1 R4753 ERJ3GEY000 M 0 OHM, 1/16W 1 R4754 ERJ3EKF4702 M 43KOHM, 1/16W 1 R4755 ERJ3GEY000 M 0 OHM, 1/16W 1 R4757 ERJ3GEY000 M 0 OHM, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4757 ERJ3GEY013 M 10KOHM,J,1/16W 1 R4751 ERJ5GEY0722 M 22KOHM,J,1/10W 1 R47600 ERJ3GEY0760 M 0 OHM,J/10W 1 R4751 ERJ5GEY0722 M 22KOHM,J,1/10W 1 R5601 ERJ5GEY0722 M 22KOHM,J,1/10W 1				2	
R4638 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4639, 4 EXE2HV680J RESISTOR ARRAY 2 0 R4643, 4 ERJ3GEY0R00 M 0 OHM, 1/16W 2 R4650 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4651 ERJ3GEYJ221 M 820 OHM, J/16W 1 R4651 ERJ3GEYJ21 M 820 OHM, J/16W 1 R4652 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4653 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4656 ERJ3GEYJ222 M 2.2KOHM, J, 1/16W 1 R4657 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4659 RRJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4670, ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4678 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4688 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4688 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4688 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4689 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4687 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4709 ERJ3EKF2302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF2801 M 6.8KOHM, 1/16W 1 R4751 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4752 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4753 ERJ3EKF1800 M 180 OHM, J, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4769 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4761, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4767 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4768 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4769 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4761 ERJ3GEYJ103 M 10KO	3				
R4639,4 EXB2HV680J RESISTOR ARRAY 2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	R4636	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
0         R4643,4         ERJ3GEY0R00         M 0 OHM, 1/16W         2           44         4         4         4         4           R4650         ERJ3GEY1020         M 22 OHM, J, 1/16W         1           R4651         ERJ3GEY0R00         M 0 OHM, 1/16W         1           R4653-         ERJ3GEY104         M 100KOHM, J, 1/16W         1           R4657-         ERJ3GEYJ104         M 100KOHM, J, 1/16W         1           R4658-         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4660,6         ERJ3GEYJ222         M 2.2KOHM, J, 1/16W         1           R4667,6         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4667,6         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4667,7         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4676,7         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4678         ERJ3GEYJ104         M 470KOHM, J, 1/16W         1           R4682         ERJ3GEYJ220         M 22 OHM, J, 1/16W         1           R4683         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4685         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1					
R4643,4	l _	EXB2HV680J	RESISTOR ARRAY	2	
### R4650		ED T3 CEVODOO	м о очм 1/16м	2	
R4651 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4652 ERJ3GEYJB21 M 820 OHM, 7,1/16W 1 R4653 ERJ3GEYJB21 M 820 OHM, 1/16W 3 S5 R4657 ERJ3GEYJ104 M 100KOHM, J,1/16W 1 R4660,6 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4666,6 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 1 R4666 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 R4666 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 R4667,6 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 R4667,7 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 R4668 ERJ3GEYJ220 M 2.2KOHM, J,1/16W 1 R4668,8 ERJ3GEYJ203 M 10KOHM, J,1/16W 2 R4668 ERJ3GEYJ2103 M 10KOHM, J,1/16W 1 R4684 ERJ3GEYJ203 M 10KOHM, J,1/16W 1 R4685 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4687 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4708 ERJ3GEYOROO M 0 0 OHM, 1/16W 1 R4708 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4709 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4750 ERJ3EKF800 M 10KOHM, J,1/16W 1 R4750 ERJ3EKF800 M 10KOHM, J,1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4758 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4759,6 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4759,6 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4750 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4750 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4750 ERJ3GEYJ103 M 10KOHM, J,1/10W 1 R5603 ERJ6GEYJ222 M 2.2KOHM, J/10W 1 R5605 ERJ6GEYJ222 M 2.2KOHM, J/10W 1 R5606 ERJ6GEYJ223 M 2.2KOHM, J/10W 1 R5615, ERJ6GEYJ223 M 2.2	4	BROSGETOROO	0 Olin, 1/10W		
R4652 ERJ3GEYJ821 M 820 OHM, J, 1/16W 1 R4653 ERJ3GEYJ000 M 0 OHM, 1/16W 3 S5 R4657 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4660, 6 ERJ3GEYJ202 M 2.2KOHM, J, 1/16W 1 R4667, 6 ERJ3GEYJ222 M 2.2KOHM, J, 1/16W 1 R4667, 7 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4667, 7 ERJ3GEYJ474 M 470KOHM, J, 1/16W 1 R4668 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4668 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4668 ERJ3GEYJ203 M 10KOHM, J, 1/16W 1 R4680 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4681 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4680 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4706 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4706 ERJ3GEYD00 M 0 0 OHM, 1/16W 1 R4708 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4708 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4748 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4748 ERJ3GEYB00 M 0 OHM, 1/16W 1 R4749 ERJ3GEYB00 M 0 OHM, 1/16W 1 R4750 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4751 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4752 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4753 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4754 ERJ3GEYD00 M 180 OHM, 1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, 1/16W 1 R4759 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4752 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4750 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4750 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4750 ERJ3GEYJ222 M 2.2KOHM, 1/10W 1 R5603 ERJ6GEFYJ222 M 2.2KOHM, 1/10W 1 R5605 ERJ6GEYJ222 M 2.2KOHM, 1/10W 1 R5606 ERJ6GEYJ223 M 2.2KOHM, 1/10W 1 R5610 ERJ6GEYJ223 M 2.2KOHM, 1/10W 1	R4650	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4653- ERJ3GEYJROO M 0 OHM, 1/16W 1 R4658 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4658 ERJ3GEYJROO M 0 OHM, 1/16W 2 1 R4666 ERJ3GEYJ222 M 2.2KOHM, J, 1/16W 1 R4667, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4667, 7 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4667, 7 ERJ3GEYJ20 M 22 OHM, J, 1/16W 2 R4668 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R4668 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4682, 8 ERJ3GEYJ203 M 10KOHM, J, 1/16W 1 R4685 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4680 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4704 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4705 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4706 ERJ3GEYOROO M 0 OHM, 1/10W 40 47 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/16W 1 R4751, 5 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4751, 5 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4751 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAHO101JV M 100 OHM, 1/16W 1 R4759 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4750 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4751 ERJ3GEYJ473 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4751 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4751 ERJ3GEYJ473 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4751 ERJ3GEYJ473 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4751 ERJ3GEYJ473 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R5601 ERJ6ENF4532 M 4.53KOHM, 1/10W 1 R5603 ERJ6ENF1502 M 1.5KOHM, 1/10W 1 R5604 ERJ6ENF1502 M 1.5KOHM, 1/10W 1 R5605 ERJ6ENF1502 M 1.5KOHM, 1/10W 1 R5606 ERJ6ENF1502 M 1.5KOHM, 1/10W 1 R5607 ERJ6ENF1502 M 1.5KOHM, 1/10W 1 R5608 ERJ6ENF1502 M 1.5KOHM, 1/10W 1 R5609 ERJ6ENF1502 M 1.5KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 8.2KOHM, 1/10W 1 R56151 ERJ6GEYJ223 M 2.2KOHM, 1/10W 1	R4651	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
55         R4657         ERJ3GEYJ104         M 100K0HM,J,1/16W         1           R4658         ERJ3GEYJ103         M 10K0HM,J,1/16W         1           R4660,6         ERJ3GEYJ2000         M 0 0HM, 1/16W         2           1         R4660,6         ERJ3GEYJ222         M 2.2K0HM,J,1/16W         1           R4666         ERJ3GEYJ103         M 10K0HM,J,1/16W         1           R4667         ERJ3GEYJ103         M 10K0HM,J,1/16W         1           R4674         ERJ3GEYJ474         M 470K0HM,J,1/16W         1           R4678         ERJ3GEYJ220         M 22 OHM,J,1/16W         1           R4684         ERJ3GEYJ103         M 10K0HM,J,1/16W         1           R4684         ERJ3GEYJ103         M 10K0HM,J,1/16W         1           R4685         ERJ3GEYJ103         M 10K0HM,J,1/16W         1           R4686         ERJ3GEYJ103         M 10K0HM,J,1/16W         1           R4703         ERJ3GEYJ103         M 10K0HM,J,1/16W         1           R4708         ERJ3GEYJ103         M 10K0HM,J,1/16W         1           R4708         ERJ3GEYJ103         M 10K0HM,J,1/16W         1           R4748         ERJ3GEYJ103         M 10K0HM,J,1/16W         1	R4652	ERJ3GEYJ821	M 820 OHM,J,1/16W	1	
R4657 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4660,6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4666,6 ERJ3GEYJ222 M 2.2KOHM, J, 1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667,6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667,7 ERJ3GEYJ474 M 470KOHM, J, 1/16W 1 R4678 ERJ3GEYJ474 M 470KOHM, J, 1/16W 1 R4678 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4684 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R4686 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R4703 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4704 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4708 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4709 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYOR00 M 0 0HM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAHO101JV M 100 OHM, 1/16W 1 R4759 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4750 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4760 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4760 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R5601 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5601 ERJ6GEYJ223 M 2.2KOHM, J, 1/10W 1 R5601 ERJ6GEYJ223 M 2.2KOHM, J, 1/10W 1 R5601 ERJ6GEYJ223 M 2.2KOHM, J, 1/10W 1 R5615, 1 ERJ6GEYJ223 M 2.2KOHM, J, 1/10W 1		ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4666, 6 ERJ3GEYJ222 M 2.2KOHM, J, 1/16W 2 R4667, 6 ERJ3GEYJ222 M 2.2KOHM, J, 1/16W 1 R4667, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4667, 7 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4676, 7 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R4682, 8 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4682, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4684 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4685 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4704 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4705 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 40 47 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4752 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4754 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4755 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4759, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4759, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4759 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4759 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4750 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4760 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5601 ERJ6ENF4532 M4.5SKOHM, 1/10W 1 R5601 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5601 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5601 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5601 ERJ6ENF1822 M 8.2KOHM, 1/10W 1 R5601 ERJ6ENF1822 M 8.2KOHM, 1/10W 1 R5611 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1					
R4660,6 ERJ3GEY0R00 M 0 OHM, 1/16W 2 1 R4666 ERJ3GEYJ222 M 2.2KOHM,J,1/16W 1 R4667,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 8 R4674 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4676,7 ERJ3GEYJ474 M 470KOHM,J,1/16W 2 7 R4678 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4682 BEJ3GEYJ103 M 10KOHM,J,1/16W 1 R4684 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4685 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4708 ERJ3GEYJ000 M 0 OHM, 1/16W 1 R4708 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708 ERJ3GEYOR00 M 0 OHM, 1/10W 40 R4708 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708 ERJ3EKF84302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF8801 M 6.8KOHM, 1/16W 1 R4750 ERJ3EKF8800 M 180 OHM, 1/16W 1 R4750 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4750 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4757 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4758 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4759 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4759 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4750 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4751 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4750 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4757 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4758 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4759 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4759 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4750 ERJ3EYJ033 M 10KOHM,J,1/16W 1 R4751 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4751 ERJ3EYJ033 M 10KOHM,J,1/16W 1 R4751 ERJ3EYJ033 M 10KOHM,J,1/16W 1 R4760 ERJ3GEYJ033 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ033 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ033 M 10KOHM,J,1/16W 1 R4760 ERJ3GEYJ033 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ033 M 10KOHM,J,1/16W 1 R4760 ERJ3GEYJ033 M 10KOHM,J,1/16W 1 R4760 ERJ3GEYJ030 M 10KOHM,J,1/16W 1 R5603 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5603 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5600 ERJ6GEYJ023 M 15KOHM, 1/10W 1 R5601 ERJ6GEYJ103 M 10KOHM,J,1/10W 1		<del> </del>	:		
1 R4666 ERJ3GEYJ222 M 2.2KOHM,J,1/16W 1 R4667,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4676,7 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4676,7 ERJ3GEYJ474 M 470KOHM,J,1/16W 1 R4678 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2 R4684 ERJ3GEYJ2103 M 10KOHM,J,1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4708 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4708 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4708 ERJ3GEYSH101 M 0 OHM, 1/16W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4751 ERJ3EKF4302 M 6.8KOHM, 1/16W 1 R4751 ERJ3EKF4702V M77.0KOHM, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4759 (ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R5601 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5600 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5601 ERJ6ENF1502 M 15KOHM,J,1/10W 1 R5601 ERJ6ENF1502 M 15KOHM,J,1/10W 1 R5601 ERJ6ENF1502 M 15KOHM,J,1/10W 1 R5601 ERJ6ENF1652 M 15KOHM,J,1/10W 1 R5601 ERJ6ENF1652 M 15KOHM,J,1/10W 1 R5601 ERJ6ENF1652 M 16KOHM,J,1/10W 1 R5611 ERJ6ENF1652					
R4666 ERJ3GEYJ222 M 2.2KOHM,J,1/16W 1 R4667,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4676,7 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4676,7 ERJ3GEYJ474 M 470KOHM,J,1/16W 2 R4678 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2 3 R4684 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4708 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4759 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4759 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4751 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4751 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4752 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4753 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4754 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4755 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4759 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4760 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM,J,1/10W 1 R5601 ERJ6GEYJ202 M 2.2KOHM,J,1/10W 1 R5601 ERJ6GEYJ172 M 4.7KOHM,J,1/10W 1 R5601 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5601 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5601 ERJ6ENF1602 M 15KOHM, 1/10W 1 R5601 ERJ6ENF1602 M 6.5KOHM, 1/10W 1 R5601 ERJ6ENF1602 M 6.5KOHM, 1/10W 1 R5601 ERJ6ENF1602 M 6.5KOHM, 1/10W 1 R5601 ERJ6GEYJ203 M 22KOHM,J,1/10W 1	l_ '	ERJ3GEYOROO	M 0 OHM, 1/16W	2	
R4667,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 8 8 84674 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4676,7 ERJ3GEYJ474 M 470KOHM,J,1/16W 2 7 R4678 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2 3 8 84684 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4704 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/16W 1 R4749 ERJ5EKF4302 M 43KOHM, 1/16W 1 R4751,5 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4751,5 ERJ3EKF4302 M 180 OHM, 1/16W 1 R4751 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4756 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4757 ERJ3GEYJ403 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4759 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4751 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4752 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4753 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4754 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4755 ERJ3GEYJ403 M 10KOHM,J,1/16W 1 R4756 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4757 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4750 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4750 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4750 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R5601 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5600 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5601 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5601 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5601 ERJ6ENF1652 M 4.7KOHM, 1/10W 1 R5601 ERJ6ENF1801 M 1.8KOHM, 1/10W 1 R5601 ERJ6ENF1801 M 1.8KOHM, 1/10W 1 R5601 ERJ6ENF1801 M 1.8KOHM, 1/10W 1 R5601 ERJ6ENF1802 M 4.5KOHM, 1/10W 1	_	ERJ3GEYJ222	M 2.2KOHM.J.1/16W	1	
8					
R4676,7 ERJ3GEYJ474 M 470KOHM,J,1/16W 2 R4678 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4682,8 ERJ3GEYJ103 M 17.4 OHM, 1/16W 2 R4684 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4680 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4706 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ6GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ6GEYOR00 M 0 OHM, 1/16W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF4800 M 180 OHM, 1/16W 1 R4751 ERJ3EKF4800 M 180 OHM, 1/16W 1 R4750 ERJ3EKF4900 M 180 OHM, 1/16W 1 R4750 ERJ3EKF4900 M 180 OHM, 1/16W 1 R4750 ERJ3EKF4900 M 180 OHM, 1/16W 1 R4750 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4751 ERJ3EKF1800 M 10KOHM,J,1/16W 1 R4756 ERJ3GEYJ073 M 10KOHM,J,1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4771 TAJAAHO101JV M 100 OHM,J,1/16W 1 R4771 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4770 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4771 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4770 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4770 ERJ6EYD220 M 4.7KOHM,J,1/10W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5600 ERJ6ENF1502 M 15KOHM,J,1/10W 1 R5601 ERJ6ENF1502 M 15KOHM,J,1/10W 1 R5601 ERJ6ENF1502 M 15KOHM,J,1/10W 1 R5601 ERJ6ENF1652 M 15KOHM, 1/10W 1 R5601 ERJ6ENF1652 M 16.5KOHM, 1/10W 1 R5601 ERJ6ENF1652 M 16.5KOHM, 1/10W 1 R5601 ERJ6EYJ223 M 22KOHM,J,1/10W 1 R5601 ERJ6EYJ23 M 22KOHM,J,1/10W 1 R5601 ERJ6EYJ23 M 22KOHM,J,1/10W 1	8		·		
7 R4678 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4682, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4684 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4680 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4690 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4706 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/16W 1 R4748 ERJ6ENF7151 M 7.15KOHM, 1/16W 1 R4750 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4751, 5 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4759, 6 ERJ3GEYJ103 M 47KOHM, J, 1/16W 1 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4776 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4777 ERJ6EYJ103 M 10KOHM, J, 1/16W 1 R47780- ERJ6GEYJ103 M 10KOHM, J, 1/16W 1 R47780- ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5601 ERJ6ENF1550 M 255 OHM, 1/10W 1 R5606 ERJ6EYJ472 M 4.7KOHM, J, 1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5608 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5601 ERJ6ENF1652 M 15KOHM, 1/10W 1 R5611 ERJ6ENF1652 M 16.5KOHM, 1/10W 1 R5611 ERJ6ENF1652 M 16.5KOHM, 1/10W 1 R5611 ERJ6EYJ203 M 22KOHM, J, 1/10W 1	R4674	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4678 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2 R4684 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4686 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJ3GEYJ472 M 10KOHM,J,1/16W 1 R4686 ERJ3GEYJ472 M 10KOHM,J,1/16W 1 R4690 ERJ3GEYJ102 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4706 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ6GEYOR00 M 0 OHM, 1/10W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4761,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ222 M 3.9KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ222 M 2.2KOHM,J,1/10W 1 R5601 ERJ6ENF1852 M 4.53KOHM, 1/10W 1 R5605 ERJ6EFY550 M 255 OHM, 1/10W 1 R5606 ERJ6EFY103 M 10KOHM,J,1/10W 1 R5607 ERJ6EFF1802 M 15KOHM, J/1/10W 1 R5609 ERJ6EFF1802 M 15KOHM, J/1/10W 1 R5601 ERJ6EFF1802 M 15KOHM, J/1/10W 1 R5611 ERJ6EFF1802 M 15KOHM, J/1/10W 1 R5611 ERJ6EFF1802 M 16.5KOHM, J/1/10W 1 R5612 ERJ6EFF1802 M 16.5KOHM, J/1/10W 1	I_	ERJ3GEYJ474	M 470KOHM, J, 1/16W	2	
R4682,8	-		N 00 0774 T 1/1677	-	
3					
R4685 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4706 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4708- ERJ6GEYOROO M 0 OHM, 1/16W 1 R4708- ERJ6GEYOROO M 0 OHM, 1/10W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4756 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4765 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4771 TAJAAH0101JV M 100 OHM, 1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4766 ERJ6EYROO M 0 OHM, 1/16W 1 R4771 TAJAAH0101JV M 100 OHM, 1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4770 ERJ6EYR00 M 0 OHM, 1/10W 1 R4770 ERJ6EYJ103 M 10KOHM,J,1/16W 1 R4771 TAJAAH0101JV M 100 OHM, 1/10W 1 R5601 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5601 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5606 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5607 ERJ6ENF1871 M 4.7KOHM,J,1/10W 1 R5608 ERJ6ENF1871 M 1.87KOHM, 1/10W 1 R5609 ERJ6ENF1871 M 1.87KOHM, 1/10W 1 R5610 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF1652 M 16.5KOHM, 1/10W 1 R5612 ERJ6ENF1652 M 16.5KOHM, 1/10W 1		ERUSERFI/41	M 17.4 OHM, 1/16W		
R4686 ERJ3GEYOROO M O OHM, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4706 ERJ3GEYOROO M O OHM, 1/16W 1 R4708- ERJ6GEYOROO M O OHM, 1/10W 40 47 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF4800 M 180 OHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4755 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYOROO M O OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAHO101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4771 TAJAAHO101JV M 100 OHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4771 TAJAAHO10JJV M 100 OHM, 1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4771 TAJAAHO10JJV M 100 OHM, 1/10W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4760 ERJ6GEYJ202 M 2.2KOHM,J,1/10W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5605 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5606 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5601 ERJ6ENF1502 M 25KOHM, 1/10W 1 R5601 ERJ6ENF1502 M 25KOHM, 1/10W 1 R5601 ERJ6ENF1652 M 15KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 22KOHM, 1/10W 1 R5612 ERJ6ENF1652 M 16.5KOHM, 1/10W 1	R4684	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4706 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ6GEYOR00 M 0 OHM, 1/10W 40 47 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF4800 M 180 OHM, 1/16W 2 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4756 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAHO101JV M 100 OHM,J,1/16W 1 R4758 ERJ3GEYJ103 M 47KOHM,J,1/16W 2 R4761,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4760 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4770 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4771 TAJAAH0101JV M 100 OHM, 1/10W 1 R5601 ERJ6EY9R00 M 0 OHM, 1/10W 1 R5603 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5604 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5607 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5609 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5601 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5601 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5601 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5601 ERJ6ENF1802 M 82KOHM, 1/10W 1 R5601 ERJ6ENF1652 M 16.5KOHM, 1/10W 1 R5601 ERJ6ENF1652 M 16.5KOHM, 1/10W 1	R4685	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4703 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4706 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ6GEYOR00 M 0 OHM, 1/10W 40 47 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4755 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4759, 6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4767 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4769 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4760 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4761 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4771 TAJAAH0101JV M 100 OHM, 1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4780- ERJ6GEYOR00 M 0 OHM, 1/10W 8 R7 R5601 ERJ6GEYJ202 M 2.5KOHM, 1/10W 1 R5603 ERJ6ENF1502 M 4.5KOHM, 1/10W 1 R5606 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5609 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6ENF1802 M 82KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5613 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5614 ERJ6ENF1652 M16.5KOHM, 1/10W 1	R4686	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4706 ERJ3GEYOROO M O OHM, 1/16W 1 R4708- R4748 ERJ6GEYOROO M O OHM, 1/10W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYOROO M O OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAHO101JV M 100 OHM, J, 1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4765 ERJ3GEYJ473 M 10KOHM, J, 1/16W 1 R4767 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4767 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4767 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4767 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4771 TAJAAHO101JV M 100 OHM, J, 1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4780- ERJ6GEYDR00 M 0 OHM, 1/10W 1 R5601 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5607 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1	R4690	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4708- ERJ6GEY0R00 M 0 OHM, 1/10W 40 47 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYJ000 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 2 0 R4761,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 2 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4777 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4767 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4761 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4780- ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5605 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5611 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1	R4703	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
47 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYJ000 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4758 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 2 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 2 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4771 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4771 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4776 ERJ6EYDR00 M 0 OHM, 1/16W 1 R4760 ERJ6EYJ103 M 10KOHM, J, 1/16W 1 R4760 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5605 ERJ6EYJ222 M 2.2KOHM, J, 1/10W 1 R5606 ERJ6EYJ222 M 2.2KOHM, J, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1		ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4751,5 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4758 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4761,6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4767 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4767 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4771 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4776 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4776 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4760 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5601 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5606 ERJ6ENF1550 M 255 OHM, 1/10W 1 R5607 ERJ6ENF1502 M 4.7KOHM, J, 1/10W 1 R5609 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5610 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1	ı	ERJ6GEY0R00	M 0 OHM, 1/10W	40	
R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4751,5 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4761,6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4767 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4767 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4767 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4771 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4760 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5606 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1		FP.T6FNF7151	M7 15KOHM 1/10W	1	
R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4767 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4771 TAJAAH0101JV M 100 OHM, J,1/16W 1 R4771 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4760 ERJ6EYJ103 M 10KOHM,J,1/16W 1 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5606 ERJ6EYJ472 M 4.7KOHM,J,1/10W 1 R5607 ERJ6EYJ472 M 4.7KOHM,J,1/10W 1 R5609 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5601 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6EYJ223 M 22KOHM,J,1/10W 1		1			
R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2  R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1  R4756 ERJ3GEYOR00 M 0 OHM, 1/16W 1  R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1  R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2  R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  R4767 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1  R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  R4760 ERJ6GEY0R00 M 0 OHM, 1/10W 1  R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1  R5605 ERJ6ENF2550 M 255 OHM, 1/10W 1  R5606 ERJ6EYJ472 M 4.7KOHM,J,1/10W 1  R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1  R5609 ERJ6ENF1502 M 15KOHM, 1/10W 1  R5610 ERJ6EYJ103 M 10KOHM,J,1/10W 1  R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1  R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1  R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1					
2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM, J,1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 2 R4765 ERJ3GEYJ392 M 3.9KOHM, J,1/16W 1 R4767 ERJ3GEYJ392 M 3.9KOHM, J,1/16W 1 R4771 TAJAAH0101JV M 100 OHM, J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4780- ERJ6GEYOR00 M 0 OHM, 1/10W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R5606 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5610 ERJ6EYJ103 M 10KOHM, J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1					
R4756 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 0 R4761,6 ERJ3GEYJ473 M 10KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4771 TAJAH0101JV M 100 OHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4778 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4778 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF4550 M 255 OHM, 1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ23 M 22KOHM,J,1/10W 1	2		·		
R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4759, 6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 0 R4761, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 2 R4765 ERJ3GEYJ392 M 3.9KOHM, J, 1/16W 1 R4767 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4771 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4780- ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF4550 M 255 OHM, 1/10W 1 R5606 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5607 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5609 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615, 1 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1	R4754	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4780- ERJ6GEYOR00 M 0 OHM, 1/10W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF4550 M 255 OHM, 1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5611 ERJ6ENF1652 M16.5KOHM, 1/10W 1	R4756	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4780- ERJ6GEYOROO M 0 OHM, 1/10W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ23 M 22KOHM,J,1/10W 1	R4757				
0 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4780- ERJ6GEYOR00 M 0 OHM, 1/10W 1 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5613 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5614 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ23 M 22KOHM,J,1/10W 2					
R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2  R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1  R4767 ERJ3GEYOR00 M 0 OHM, 1/16W 1  R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1  R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  R4780- ERJ6GEYOR00 M 0 OHM, 1/10W 1  R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1  R5603 ERJ6ENF2550 M 255 OHM, 1/10W 1  R5605 ERJ6EYJ472 M 4.7KOHM,J,1/10W 1  R5606 ERJ6EYJ472 M 4.7KOHM,J,1/10W 1  R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1  R5609 ERJ6ENF1502 M 15KOHM, 1/10W 1  R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1  R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1  R5613 ERJ6ENF1652 M16.5KOHM, 1/10W 1  R5614 ERJ6ENF1652 M16.5KOHM, 1/10W 1  R5615,1 ERJ6GEYJ223 M 22KOHM,J,1/10W 2	1 -	EKU3GEYJ473	M 4/KOHM,J,1/16W	2	
2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4780- ERJ6GEY0R00 M 0 OHM, 1/10W 8 87 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5605 ERJ6EYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6EYJ472 M 4.7KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5613 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5614 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ233 M 22KOHM,J,1/10W 2		ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4767 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4780- ERJ6GEY0R00 M 0 OHM, 1/10W 8 87 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ23 M 22KOHM,J,1/10W 2	2				
R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4775 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4780- ERJ6GEY0R00 M 0 OHM, 1/10W 8 87 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ23 M 22KOHM,J,1/10W 2	R4765	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	1	
R4775 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4780- ERJ6GEY0R00 M 0 OHM, 1/10W 8 87 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ233 M 22KOHM, J,1/10W 2	R4767	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4780- ERJ6GEY0R00 M 0 OHM, 1/10W 8 87 R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ233 M 22KOHM,J,1/10W 2	R4771	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
87  R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1  R5603 ERJ6ENF2550 M 255 OHM, 1/10W 1  R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1  R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1  R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1  R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1  R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1  R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1  R5615,1 ERJ6GEYJ233 M 22KOHM,J,1/10W 2					
R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ233 M 22KOHM,J,1/10W 2		ERJ6GEY0R00	M 0 OHM, 1/10W	8	
R5603 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ223 M 22KOHM,J,1/10W 2		ERJ6ENE4532	M4.53KOHM 1/10W	1	
R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ223 M 22KOHM,J,1/10W 2					
R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ223 M 22KOHM,J,1/10W 2					
R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ223 M 22KOHM, J,1/10W 2					
R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ223 M 22KOHM,J,1/10W 2	R5607				
R5610 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ223 M 22KOHM, J, 1/10W 2	R5609			1	
R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ223 M 22KOHM,J,1/10W 2	R5610	ERJ6GEYJ103		1	
R5615,1 ERJ6GEYJ223 M 22KOHM,J,1/10W 2	R5611	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R5612	ERJ6ENF1652	M16.5KOHM, 1/10W	1	
0	R5615,1	ERJ6GEYJ223	M 22KOHM,J,1/10W	2	
	l <sub>o</sub>	I	1		

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R5617,1 8	ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
R5619	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R5620	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R5621	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5623,2	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
4 R5625-	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	3	
27	EROUGEIO472	M 4.7KOIM, 0, 1, 10W	,	
R5630	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5632	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5633	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R5634	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R5635 R5637,3	ERJ6GEYJ221 ERJ6GEYJ103	M 220 OHM,J,1/10W M 10KOHM,J,1/10W	2	
8		1010111707171011	_	
R5639	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5640	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R5641	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5642	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R5643 R5644	ERJ6GEYJ681	M 680 OHM, J, 1/10W	1	
R5645,4	ERJ6GEYJ222 ERJ6ENF2201	M 2.2KOHM, J,1/10W M 2.2KOHM, 1/10W	2	
6	LNO CHIEF ZZUI			
R5647	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R5648	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R5649	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R5650	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R5651	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
R5653- 56	ERJ6GEYJ103	M 10KOHM,J,1/10W	*	
R5657,5	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
8	ED 76 ENTE 4 E 0.0	N 450 OTT 1/10T	-	
R5659	ERJ6ENF4700	M 470 OHM, 1/10W M 0 OHM, 1/10W	1	
R5660 R5662	ERJ6GEY0R00 ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5670	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5672	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5675	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5676	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5679	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5680	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5692	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R5693 R5694,9	ERJ6GEYJ333 ERJ6GEYJ103	M 33KOHM,J,1/10W M 10KOHM,J,1/10W	2	
5	ERS GODIO 103	1 10K01117071710W	_	
R5696	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R5801	ERJ6ENF9100	M 910 OHM, 1/10W	1	
R5802	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R5803	ERJ6ENF2741	M2.74KOHM, 1/10W	1	
R5804 R5805-	ERJ6GEY0R00 ERJ6GEYJ222	M 0 OHM, 1/10W	1 4	
08	ERUUGEIU222	M 2.2KOHM, J, 1/10W	*	
R5809	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R5812	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R5815	ERJ6ENF3900	M 390 OHM, 1/10W	1	
R5819	ERJ6ENF2941	M2.94KOHM, 1/10W	1	
R5820	ERX3FJSR22D	M 2.2 OHM, J, 3W	1	
R5822- 24	ERJ6GEYJ101	M 100 OHM,J,1/10W	3	
R5826	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6005	ERJ14YJ5R6U	M 6.20HM, 1/4W	1	
R6016-	ERJ14YJ100	M 10 OHM, J,1/4W	6	
21 R6022	ERJ14YJ5R6U	M 6.20HM, 1/4W	1	
R6023-	ERJ14YJ100	M 10 OHM, J,1/4W	3	
25				
R6029,3	ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
R6031	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6032-	ERJ14YJ100	M 10 OHM, J,1/4W	3	
34				
R6036	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6037	ERJ6GEYJ103 ERJ6GEYJ100	M 10KOHM,J,1/10W M 10 OHM,J,1/10W	1	
		IN TO CHIM, U, T/ TUW		
R6038 R6039	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	ERJ6GEYJ101	Description M 100 OHM,J,1/10W	5	
R6040- 44	ERUOGEYUTUT	M 100 OHM, J, 1/10W	5	
R6047	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6050	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6052	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6053	ERG1FJS472D	M 4.7KOHM, J, 1W	1	
R6054	ERG2FJS123D	M 12KOHM, J, 2W	1	
R6058	ERJ6GEYJ203	M 20KOHM, J, 1/10W	1	
R6059	ERJ6GEYJ243	M 24KOHM, J, 1/10W	1	
R6060 R6062	ERJ6GEYJ222 ERJ6GEY0R00	M 2.2KOHM,J,1/10W M 0 OHM, 1/10W	1	
R6064	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6067	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6068	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6069,7	ERJ6ENF3902	M 39KOHM, 1/10W	2	
0				
R6071	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R6072,7	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	2	
R6074	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6075	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6076	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6077	EXB38V470J	RESISTOR ARRAY	1	
R6078	EXB38V472J	RESISTOR ARRAY	1	
R6079	EXB38V470J	RESISTOR ARRAY	1	
R6080	EXB38V472J	RESISTOR ARRAY	1	
R6081,8	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6083,8	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
	ERX2FJSR22D	M0.22 OHM, J, 2W	2	
R6090	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6092-	ERX2FJSR22D	M0.22 OHM, J, 2W	3	
94 P6095	ED.T6CEV.T102	M 10КОБМ Т 1/10м	1	
R6095	ERJ6GEYJ103 ERJ6GEYJ100	M 10KOHM,J,1/10W M 10 OHM,J,1/10W	2	
7	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
9 R6101-	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
04		. ,		
R6105	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6106- 08	ERJ6GEYJ101	M 100 OHM, J, 1/10W	3	
R6110	ERJ6GEYJ243	M 24KOHM,J,1/10W	1	
R6111-	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
_	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6117,1	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
8 R6121-	ERJ6ENF8202	M 82KOHM, 1/10W	3	
R6130-	ERJ6GEYJ104	M 100KOHM,J,1/10W	3	
32 R6502,0 3	ERJ12YJ1R0	M 1 OHM, J,1/2W	2	
R6504	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6505	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6506	ERDS1FJ221	C 220 OHM, J,1/2W	1	
R6507	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6508	ERJ6ENF1543	M 154KOHM, 1/10W	1	
R6510	ERJ6ENF2202	M 2.2KOHM, 1/10W	1 2	
R6511- 13	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	3	
R6514 R6515	ERJ6ENF9531 ERJ6ENF2491	M9.53KOHM, 1/10W M2.49KOHM, 1/10W	1	
R6516	ERJ6ENF6202	M 62KOHM, 1/10W	1	
R6517	ERJ12YJ153U	M 15KOHM, 1/2W	1	
R6518	ERJ14YJ433U	M 43KOHM, 1/2W	1	
R6519	ERX3FJS8R2D	M 8.2 OHM, J, 3W	1	
R6520	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1	
R6521	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6522 R6523	ERJ14YJ333U ERJ14YJ203U	M 33KOHM, 1/2W M 20KOHM, 1/2W	1	
L-10323		20X01H1, 1/2W		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6525	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6526		M 22KOHM,J,1/10W	1	
R6527	ERG1FJS680D	M 68 OHM, J, 1W	1	
R6528	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R6529	ERJ6ENF2403	M 240KOHM, 1/10W	1	
R6530	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R6531	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6532	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6534	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6536	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6537,3	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6539	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6540	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6541	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6542	ERX1FJSR27D	M0.27 OHM, J, 1W	1	
R6543	ERJ12YJ104U	M 100KOHM, 1/2W	1	
R6544	ERJ6ENF2703	M 270KOHM, 1/10W	1	
R6545	ERJ6ENF2203	M 220KOHM, 1/10W	1	
R6546	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R6547	ERJ6ENF5231	M5.23KOHM, 1/10W	1	
R6548	ERX1FJSR33D	MO.33 OHM, J, 1W	1	
R6549	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6550,5	ERX1FJS8R2D	M 8.2 OHM, J, 1W	2	
1 R6552	ERJ6GEYJ122	M 1.2KOHM, J, 1/10W	1	
R6553- 61	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	9	
R6562	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
	ERX3FJS2R2D	M 2.2 OHM, J, 3W	2	
R6565	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6566	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6567	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6568	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6569	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6570	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6571	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6572	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6573	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6575	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R6576	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6577	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6578		·	1	
	ERJ14YJ102	M 47 OHM, J, 1/10W	<b>—</b> —	
R6579	ERJ1413102 ERJ6GEYJ102	M 1KOHM, J,1/4W	1	
R6580		M 1KOHM, J, 1/10W	<del>                                     </del>	
R6581 R6582-	ERJ6GEYJ100 ERJ6GEYJ470	M 10 OHM,J,1/10W M 47 OHM,J,1/10W	10	
91		-:, 0, 1, 10,		
R6593	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6594,9 5	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6596	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6597,9 8	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	2	
R6599,0 0	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6601	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6602	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6603	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6604,0	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R6606	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R6607	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6608	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
R6609	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6610	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
R6611	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6612- 18	ERJ6GEYJ100	M 10 OHM,J,1/10W	7	
R6619	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
	ERG1FJS101D	M 100 OHM, J, 1W	1	
R6620	EKGIFODIOID		_	
R6620 R6621	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	

	1	T		
Ref.	Part No.	Part Name &	Pcs	Remarks
No. R6623-	ERJ6GEYJ471	Description M 470 OHM,J,1/10W	8	
30	EKOOGE104/1	M 470 OHM, 0, 1, 10W		
R6631	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6632	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6633	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6634,3	ERJ6ENF3902	M 39KOHM, 1/10W	2	
5				
R6636	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R6637,3	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	2	
R6639	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6640	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6641	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6642,4	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
3				
R6644,4	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
5				
R6646	ERJ12YJ104U	M 100KOHM, 1/2W	1	
R6647,4	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R6649	ERJ6GEYJ563	M 56KOHM, J, 1/10W	1	
R6650	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6651	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6652	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6653	ERG1FJS471D	M 470 OHM, J, 1W	1	
R6654	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6655	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6656-	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
58				
R6659	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6660,6	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
1 R6662-	ERJ14YJ100	M 10 OHM, J,1/4W	6	
67 R6673-	ERJ14YJ100	M 10 OHM, J,1/4W	6	
78 R6682,8	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
3	20000210172	11710111707171011	-	
R6684	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6685	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6686	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6687,8	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
8				
R6689	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6690	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6691,9	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6693- 95	ERJ6GEYJ102	M 1KOHM,J,1/10W	3	
R6698	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6700-	ERJ6GEYJ102	M 1KOHM,J,1/10W	3	
02		* 10morns 7 1 /10m	1	
R6703 R6704	ERJ6GEYJ103 ERG2FJS221D	M 10KOHM, J, 1/10W	1	
R6705	ERJ6GEYJ513	M 220 OHM, J, 2W M 51KOHM,J,1/10W	1	
R6706,0	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
7	LIGOGETOTOS	1000111707171011	-	
R6708	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R6709	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6710	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R6713	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6714	EXB38V470J	RESISTOR ARRAY	1	
R6715	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6716	EXB38V472J	RESISTOR ARRAY	1	
R6717	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6718	EXB38V470J	RESISTOR ARRAY	1	
R6719	ERJ14YJ224	M 220KOHM, J,1/4W	1	
R6720	EXB38V472J	RESISTOR ARRAY	1	
R6722	EXB38V470J	RESISTOR ARRAY	1	
R6723	ERJ14YJ224	M 220KOHM, J,1/4W	1	
R6724	EXB38V472J	RESISTOR ARRAY	1	
R6726	EXB38V470J	RESISTOR ARRAY	1	
R6727 R6728	EXB38V472J EXB38V680J	RESISTOR ARRAY	1	
R6732	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6733	EXB38V680J	RESISTOR ARRAY	1	
12.07.00	1	1		

R6761 REJ14YJSR6U M 6.20HM, 1/4W 1 R6763 REJ14YJSR6U M 6.20HM, 1/4W 1 R67771 REJ6GEYJ103 M 10KOHM, J, 1/10W 1 R67777 REJ6GEYJ151 M 150 OHM, J, 1/10W 1 R67777 REJ6GEYJ151 M 150 OHM, J, 1/10W 1 R67780 REJ6GEYJ151 M 150 OHM, J, 1/10W 1 R6781, 8 ERJ6GEYGROO M 6 OHM, J, 1/10W 2 R6783, 8 ERJ6GEYGROO M 0 OHM, 1/10W 2 R6783, 8 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R6783, 8 ERJ6GEYJ151 M 150 OHM, J, 1/10W 3 R6786 REJ6GEYJ151 M 150 OHM, J, 1/10W 3 R6787 REJ6GEYJ151 M 150 OHM, J, 1/10W 1 R6788 REJ6GEYJ151 M 150 OHM, J, 1/10W 3 R6789 REJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6791 ERJ6GEYJ21 M 220 OHM, J, 1/10W 5 R6901 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6902 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6902 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6916 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6916 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6926 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6931 ERJ6GEYJ224 M 220KOHM, J, 1/10W 5 R6932 ERJ6GEYJ224 M 220KOHM, J, 1/10W 5 R6932 ERJ6GEYJ224 M 220KOHM, J, 1/10W 5 R6932 ERJ6GEYJ224 M 220KOHM, J, 1/10W 5 R7103 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R7103 ERJ6GEYJ020 M 22 OHM, J, 1/2W 3 R7108 ERJ6GEYD00 M 0 OHM, 1/10W 1 R71101 ERJ6GEYD00 M 0 OHM, 1/10W 1 R7111 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7112 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7113 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7114 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7115 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7115 ERJ3GEYJ104 M 22 OHM, J, 1/2W 3 R7142 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7155 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7156, 5 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7157 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7158 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7159 ERJ3GEYJ104 M 22 OHM, J, 1/2W 1 R7159 ERJ3GEYJ104 M 22 OHM, J, 1/2W 1 R7159 ERJ3GEYJ104 M 20 OHM, 1/10W 1 R7159 ER					
R6734 REJ6GEYJ224 M 220KCHM, J, 1/10W 1 R6738 RAJ3GEYOROO M 0 0 MM, 1/16W 1 R6740 REJ6GEYJ513 M 51KCHM, J, 1/10W 1 R6749 REJ14YJ5RGU M 6.20HM, 1/4W 1 R6761 REJ14YJ5RGU M 6.20HM, 1/4W 1 R6761 REJ14YJ5RGU M 6.20HM, 1/4W 1 R6763 REJ14YJ5RGU M 6.20HM, 1/4W 1 R6763 REJ14YJ5RGU M 6.20HM, 1/10W 1 R6761 REJ14YJ5RGU M 6.20HM, 1/10W 1 R67677 REJ6GEYJ151 M 10KCHM, J, 1/10W 1 R6777 REJ6GEYJ151 M 10KCHM, J, 1/10W 1 R6788 REJ6GEYJ151 M 150 OHM, J, 1/10W 1 R6788 REJ6GEYJ151 M 150 OHM, J, 1/10W 2 R6781,8 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R6781,8 ERJ6GEYJ151 M 150 OHM, J, 1/10W 3 R6785,8 ERJ6GEYS101 M 150 OHM, J, 1/10W 3 R6786,8 ERJ6GEYS101 M 52 OHM, J, 1/10W 3 R67879- REJ6GEYS101 M 52 OHM, J, 1/10W 3 R6788 REJ6GEYS101 M 52 OHM, J, 1/10W 1 R6789 REJ6GEYS101 M 220 OHM, J, 1/10W 1 R6789 REJ6GEYS101 M 220 OHM, J, 1/10W 1 R68902 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6901 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6991 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6992 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6992 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6993 REJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6993 REJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6993 REJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6993 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6993 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6993 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6993 REJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6993 REJ6GEYJ224 M 220KOHM, J, 1/10W 1 R7103 RRJ6GEYJ224 M 220KOHM, J, 1/2W 3 R7101 RJAAHO470JV M 47 OHM, J, 1/16W 1 R7112 ERJ3GEYDROO M 0 OHM, 1/10W 1 R7112 ERJ3GEYDROO M 0 OHM, 1/10W 1 R7112 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7112 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7131 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7145 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7131 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7131 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7149 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7151 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7181 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7188 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7189 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7189 ERJ		Part No.		Pcs	Remarks
RE738 REJJGEVOROO M 0 CHM, 1/16W 1 RE740 ERJGEVIJS13 M 51KOHM, J, 1/10W 1 RE751 ERJ14YJSRGU M 6.20HM, 1/4W 1 RE763 ERJ14YJSRGU M 6.20HM, 1/4W 1 RE777 ERJGGEVIJO3 M 10KOHM, J, 1/10W 1 RE777 ERJGGEVIJO3 M 150 CHM, J, 1/10W 1 RE779 ERJGGEVIJT0 M 150 CHM, J, 1/10W 1 RE788 ERJGGEVIJT1 M 150 CHM, J, 1/10W 1 RE788 ERJGGEVIJT1 M 150 CHM, J, 1/10W 2 4 RE7881,8 ERJGGEVIJT1 M 150 CHM, J, 1/10W 2 6 RE7881,8 ERJGGEVIJT1 M 150 CHM, J, 1/10W 3 93 RE7891 ERJGGEVIJT1 M 150 CHM, J, 1/10W 3 93 RE791 ERJGGEVIJT1 M 20 CHM, J, 1/10W 1 RE791 ERJGGEVIJT1 M 20 CHM, J, 1/10W 1 RE792 ERJGGEVIJT1 M 20 CHM, J, 1/10W 1 RE991 ERJGGEVIJT1 M 20 CHM, J, 1/2W 3 RE7105 ERJ1ZYJZ20 M 22 CHM, J, 1/2W 3 RE711T1 TAJAAHO470JV M 47 CHM, J, 1/10W 1 RT109 ERJ1ZYJZ20 M 22 CHM, J, 1/2W 3 RT112 TAJAAHO470JV M 47 CHM, J, 1/10W 1 RT112 TAJAAHO470JV M 47 CHM, J, 1/10W 1 RT112 ERJGEVOROO M 0 CHM, J, 1/2W 3 RT112 TAJAAHO470JV M 47 CHM, J, 1/10W 1 RT113 ERJGGEVOROO M 0 CHM, J, 1/2W 1 RT114 ERJGGEVOROO M 0 CHM, J, 1/2W 1 RT115 TAJAAHO470JV M 47 CHM, J		ED TOGEW TOO 4		1	
R6740 RRJ6GEYJ513 M 51KOHM, J, 1/10W 1 R6749 RRJ14YJSRGU M 6.20HM, 1/4W 1 R6761 ERJ14YJSRGU M 6.20HM, 1/4W 1 R6761 ERJ14YJSRGU M 6.20HM, 1/4W 1 R6761 ERJ14YJSRGU M 6.20HM, 1/4W 1 R6771 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6777 ERJ6GEYJ101 M 150 OHM, J, 1/10W 1 R6777 ERJ6GEYJ151 M 150 OHM, J, 1/10W 1 R6780 REJGEYJ151 M 150 OHM, J, 1/10W 1 R6780 REJGERYJ151 M 150 OHM, J, 1/10W 2 R6781,8 ERJ6GEYJ101 M 150 OHM, J, 1/10W 2 R6788,8 ERJ6GEYJ101 M 50 OHM, J, 1/10W 3 R6797 ERJ6GEYJ101 M 50 OHM, J, 1/10W 3 R6798 REJ6GEYJ101 M 50 OHM, J, 1/10W 3 R6798 REJ6GEYJ101 M 50 OHM, J, 1/10W 1 R6780 REJ6ENF5202 M 62KOHM, 1/10W 3 R6791 ERJ6GEYJ21 M 220 OHM, J, 1/10W 1 R6791 ERJ6GEYJ224 M 220 OHM, J, 1/10W 5 R6902 ERJ6GEYJ224 M 220 OHM, J, 1/10W 5 R6901 ERJ6GEYJ224 M 220 OHM, J, 1/10W 1 R6911 ERJ6GEYJ224 M 220 OHM, J, 1/10W 1 R6926 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6927 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6928 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6929 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6921 ERJ6GEYJ224 M 220 OHM, J, 1/10W 1 R6922 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6923 EXB38V103J RESISTOR ARRAY 1 R6936 AND ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6926 ERJ6GEYJ220 M 22 OHM, J, 1/2W 3 R7105 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7105 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7112 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7112 ERJ3GEYOROO M 0 OHM, 1/16W 1 R7112 ERJ3GEYOROO M 0 OHM, 1/16W 1 R7125 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7126 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7127 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7128 ERJ6GEYOROO M 0 OHM, 1/16W 1 R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7138 A BRJ6GEYOROO M 0 OHM, 1/16W 1 R7145 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7125 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7136 ERJ6GEYOROO M 0 OHM, 1/16W 1 R7127 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7128 ERJ6GEYOROO M 0 OHM, 1/16W 1 R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7136 ERJ6GEYOROO M 0 OHM, 1/16W 1 R7148 ERJ6GEYOROO M 0 OHM, 1/16W 1 R7158 ERJ6GEYOROO M 0 OHM, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7160 ERJ6GEYOROO M 0 OHM, 1/16W 1 R7161 ERJ6GEYOROO M 0 OHM, 1/16W 1 R7162 TAJAAHO470JV M 47 OHM, J, 1/16W				-	
R6749 ERJ14YJSR6U M 6.20HM, 1/4W 1 R6751 ERJ14YJSR6U M 6.20HM, 1/4W 1 R6761 ERJ14YJSR6U M 6.20HM, 1/4W 1 R6763 ERJ14YJSR6U M 6.20HM, 1/4W 1 R6763 ERJ14YJSR6U M 6.20HM, 1/4W 1 R67677 ERJ6GEYJ103 M 105.0 HM, J, 1/10W 1 R67779 ERJ6GEYJ151 M 150.0 HM, J, 1/10W 1 R6779 ERJ6GEYJ151 M 150.0 HM, J, 1/10W 1 R6780 ERJ6GEYJ151 M 150.0 HM, J, 1/10W 1 R6781,8 ERJ6GEYJ151 M 150.0 HM, J, 1/10W 2 2 R6783,8 ERJ6GEYJ151 M 150.0 HM, J, 1/10W 2 4 R6788,8 ERJ6GEYJ151 M 150.0 HM, J, 1/10W 2 6 R6789 ERJ6GEYJ151 M 150.0 HM, J, 1/10W 3 86789 ERJ6GEYJ121 M 220.0 HM, J, 1/10W 1 R67910 ERJ6GEYJ121 M 220.0 HM, J, 1/10W 5 86 R6901 ERJ6GEYJ1221 M 220.0 HM, J, 1/10W 1 R6901 ERJ6GEYJ1221 M 220.0 HM, J, 1/10W 1 R6911 ERJ6GEYJ1224 M 220.0 HM, J, 1/10W 1 R6912 ERJ6GEYJ1221 M 220.0 HM, J, 1/10W 1 R6913 ERJ6GEYJ1221 M 220.0 HM, J, 1/10W 1 R6914 ERJ6GEYJ1221 M 220.0 HM, J, 1/10W 1 R6915 ERJ6GEYJ1221 M 220.0 HM, J, 1/10W 1 R6916 ERJ6GEYJ1221 M 220.0 HM, J, 1/10W 1 R6916 ERJ6GEYJ1221 M 220.0 HM, J, 1/10W 1 R6936 ERJ6GEYJ1221 M 220.0 HM, J, 1/10W 1 R6936 ERJ6GEYJ122 M 220.0 HM, J, 1/10W 1 R7103 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R7103 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R7105 ERJ12YJ220 M 22.0 HM, J, 1/2W 1 R7111 TAJAAH0470JV M 47.0 HM, J, 1/16W 1 R7112 ERJ3GEYD100 M 0.0 HM, 1/10W 1 R7112 ERJ3GEYD100 M 0.0 HM, 1/10W 1 R7113 TAJAAH0470JV M 47.0 HM, J, 1/16W 1 R7114 ERJ12YJ220 M 22.0 HM, J, 1/2W 3 R7128 ERJ6GEYOR00 M 0.0 HM, 1/10W 1 R7138,3 ERJGEYD100 M 0.0 HM, 1/10W 1 R7138,3 ERJGEYD100 M 0.0 HM, 1/10W 1 R7149 ERJ12YJ220 M 22.0 HM, J, 1/2W 3 R7128 ERJ6GEYOR00 M 0.0 HM, 1/10W 1 R7138,3 ERJGEYD100 M 0.0 HM, 1/10W 1 R7149 ERJ12YJ220 M 22.0 HM, J, 1/2W 3 R7159 ERJ3GEYJ104 M 0.0 HM, 1/10W 1 R7159 ERJ6GEYOR00 M 0.0 HM, 1/10W 1 R7169 ERJ12YJ220 M 22.0 HM, J, 1/2W 3					
R6751 RRJ14YJSR6U M 6.20HM, 1/4W 1 R6761 RRJ14YJSR6U M 6.20HM, 1/4W 1 R6761 RRJ14YJSR6U M 6.20HM, 1/4W 1 R6777 RRJ6GRYJ103 M 10.00HM, J,1/10W 1 R6779 RRJ6GRYJ110 M 150 OHM, J,1/10W 1 R6779 RRJ6GRYJ151 M 150 OHM, J,1/10W 1 R6780 RRJ6GRYJ151 M 150 OHM, J,1/10W 2 R6781,8 RRJ6GRYJ151 M 150 OHM, J,1/10W 2 R6783,8 RRJ6GRYJ151 M 150 OHM, J,1/10W 2 R6783,8 RRJ6GRYJ151 M 150 OHM, J,1/10W 2 R6785,8 RRJ6GRYJ151 M 150 OHM, J,1/10W 3 R6788 RRJ6GRYJ151 M 150 OHM, J,1/10W 3 R6788 RRJ6GRYJ151 M 150 OHM, J,1/10W 3 R6788 RRJ6GRYJ151 M 150 OHM, J,1/10W 3 R6789.1 RRJ6GRYJ151 M 220 OHM, J,1/10W 1 R6901 RRJ6GRYJ101 M 100 OHM, J,1/10W 1 R6902- BRJ6GRYJ101 M 220 OHM, J,1/10W 1 R6901 ERJ6GRYJ224 M 220 OHM, J,1/10W 1 R6902- BRJ6GRYJ224 M 220 OHM, J,1/10W 1 R6916 RRJ6GRYJ224 M 220 OHM, J,1/10W 1 R6926 RRJ6GRYJ221 M 220 OHM, J,1/10W 1 R6936 RRJ6GRYJ10J M 100 OHM, J,1/10W 1 R6936 RRJ6GRYJ221 M 220 OHM, J,1/10W 1 R6936 RRJ6GRYJ220 M 22 OHM, J, 1/2W 3 R7103 RRJ6GRYJ220 M 22 OHM, J, 1/2W 3 R7103 RRJ6GRYJ102 M 100 OHM, 1/10W 1 R71105 RRJ12YJ220 M 22 OHM, J, 1/2W 1 R7111 TRJAAHO470JV M 47 OHM, J,1/16W 1 R71122 TAJAAHO470JV M 47 OHM, J,1/16W 1 R71124 RRJGGRYDROO M 0 OHM, 1/10W 1 R71125 RRJ12YJ220 M 22 OHM, J, 1/2W 1 R71126 RRJGGRYDROO M 0 OHM, 1/10W 1 R71127 RRJAHO470JV M 47 OHM, J,1/16W 1 R71131 TAJAAHO470JV M 47 OHM, J,1/16W 1 R71142 RRJGGRYDROO M 0 OHM, 1/10W 1 R71143 RRJGGRYDROO M 0 OHM, 1/10W 1 R71145 RRJ12YJ220 M 22 OHM, J, 1/2W 1 R71151 TAJAAHO470JV M 47 OHM, J,1/16W 1 R71152 RRJGGRYDROO M 0 OHM, 1/10W 1 R71153 RRJGGRYDROO M 0 OHM, 1/10W 1 R71154 RRJGGRYDROO M 0 OHM, 1/10W 1 R71155 RRJ12YJ220 M 22 OHM, J, 1/2W 1 R71158 RRJGGRYDROO M 0 OHM, 1/10W 1 R71159 RRJ3GRYDROO M 0 OHM, 1/10W 1 R71159 RRJ3GRYDROO M 0 OHM, 1/10W 1 R71159 RRJGGRYDROO M 0 OHM, 1/10W 1 R71159 RRJGGRYDROO M 0 OHM, 1/10W 1 R71159 RRJGGRYDROO M		<del> </del>	<u> </u>		
R6761 REJ14YJSR6U M 6.20HM, 1/4W 1 R6763 REJ14YJSR6U M 6.20HM, 1/4W 1 R67771 REJ6GEYJ103 M 10KOHM, J, 1/10W 1 R67777 REJ6GEYJ151 M 150 OHM, J, 1/10W 1 R67777 REJ6GEYJ151 M 150 OHM, J, 1/10W 1 R67780 REJ6GEYJ151 M 150 OHM, J, 1/10W 1 R6781, 8 ERJ6GEYGROO M 6 OHM, J, 1/10W 2 R6783, 8 ERJ6GEYGROO M 0 OHM, 1/10W 2 R6783, 8 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 R6783, 8 ERJ6GEYJ151 M 150 OHM, J, 1/10W 3 R6786 REJ6GEYJ151 M 150 OHM, J, 1/10W 3 R6787 REJ6GEYJ151 M 150 OHM, J, 1/10W 1 R6788 REJ6GEYJ151 M 150 OHM, J, 1/10W 3 R6789 REJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6791 ERJ6GEYJ21 M 220 OHM, J, 1/10W 5 R6901 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6902 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6902 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6916 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6916 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6926 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6931 ERJ6GEYJ224 M 220KOHM, J, 1/10W 5 R6932 ERJ6GEYJ224 M 220KOHM, J, 1/10W 5 R6932 ERJ6GEYJ224 M 220KOHM, J, 1/10W 5 R6932 ERJ6GEYJ224 M 220KOHM, J, 1/10W 5 R7103 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R7103 ERJ6GEYJ020 M 22 OHM, J, 1/2W 3 R7108 ERJ6GEYD00 M 0 OHM, 1/10W 1 R71101 ERJ6GEYD00 M 0 OHM, 1/10W 1 R7111 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7112 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7113 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7114 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7115 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7115 ERJ3GEYJ104 M 22 OHM, J, 1/2W 3 R7142 TAJAAHO470JV M 47 OHM, J, 1/16W 1 R7155 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7156, 5 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7157 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7158 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7159 ERJ3GEYJ104 M 22 OHM, J, 1/2W 1 R7159 ERJ3GEYJ104 M 22 OHM, J, 1/2W 1 R7159 ERJ3GEYJ104 M 20 OHM, 1/10W 1 R7159 ER	R6751	+	1		
REFORD REJIGUENTS OF M 6.20HM, J, J/10W 1 REFORD REJIGUENTS OF M 10ROHN, J, J/10W 1 REFORD REJIGUENTS OF M 10ROHN, J, J/10W 1 REFORD REJIGUENTS OF M 150 OHM, J, J/10W 1 REFORD REJIGUENTS OF M 150 OHM, J, J/10W 1 REFORD REJIGUENTS OF M 150 OHM, J, J/10W 2 REFORD REJIGUENTS OF M 150 OHM, J, J/10W 2 REFORD REJIGUENTS OF M 150 OHM, J, J/10W 2 REFORD REJIGUENTS OF M 150 OHM, J, J/10W 3 REFORD REJIGUENTS OF M 150 OHM, J, J/10W 1 REFORD REJIGUENTS OF M 150 O	R6761	<u> </u>	<u> </u>	1	
R8777	R6763	ERJ14YJ5R6U		1	
R6779 ERJ6GEYJ470 M 47 OHM, J, 1/10W 1 R6780 ERJ6GEY6202 M 62KOHM, 1/10W 1 R6781,8 ERJ6GEY151 M 150 OHM, J, 1/10W 2 4 R6781,8 ERJ6GEY0151 M 150 OHM, J, 1/10W 2 4 R6785,8 ERJ6GEY9151 M 150 OHM, J, 1/10W 2 6 R6788, ERJ6GEY9151 M 150 OHM, J, 1/10W 1 R6791- ERJ6ENF8020 M 82KOHM, 1/10W 3 93 R6901 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6902- BRJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6902- BRJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6911 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6911 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6932 ERJ6GEYJ221 M 100 OHM, J, 1/10W 1 R6932 ERJ6GEYJ221 M 220 COHM, J, 1/10W 1 R6936, 3 ERJ6GEYJ221 M 220 COHM, J, 1/10W 2 7 R7102 TAJAAH0470JV M 47 OHM, J, 1/10W 1 R7103 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R7103 ERJ6GEYJ02 M 120 OHM, J, 1/10W 1 R7105 ERJ1 EYJ6GEYJ22 M 220KOHM, J, 1/10W 1 R7107 ERJ6GEY M 20 OHM, J, 1/10W 2 7 R7108 ERJ6GEYJ224 M 20KOHM, J, 1/10W 1 R7109 ERJ12YJ220 M 22 OHM, J, 1/10W 1 R71101 ERJ6GEYJ02 M 1 ROHM, J, 1/10W 1 R7111 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7112 ERJ3GEYOR00 M 0 OHM, 1/10W 1 R7112 ERJ3GEYOR00 M 0 OHM, 1/10W 1 R7112 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7112 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7112 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7113 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7114 ERJ6GEYDROO M 0 OHM, 1/10W 1 R7115 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7115 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7116 ERJ6GEYDROO M 0 OHM, 1/10W 1 R7117 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7118 ERJ6GEYDROO M 0 OHM, 1/10W 1 R7119 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7111 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7115 ERJ6GEYJ224 M 220KOHM, J, 1/12W 1 R7115 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7116 ERJ6GEYJ224 M 220KOHM, J, 1/12W 1 R7117 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7118 ERJ6GEYDROO M 0	R6771	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6780 ERJ6ENF6202 M 62KOHM, 1/10W 1 R6781, 8 ENJ6GEYJ151 M 150 OHM, J,1/10W 2 R6783, 8 ENJ6GEYJ151 M 150 OHM, J,1/10W 2 R6785, 8 ERJ6GEYJ151 M 150 OHM, J,1/10W 2 R6785, 8 ERJ6GEYJ151 M 150 OHM, J,1/10W 3 R6781 ERJ6ENF9101 M 9.1KOHM, 1/10W 1 R6791- ERJ6ENF8202 M 82KOHM, 1/10W 3 R6901 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6902- ERJ6GEYJ21 M 220 OHM, J,1/10W 5 R6901 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R6902- ERJ6GEYJ224 M 220KOHM, J,1/10W 1 R6916 ERJ6GEYJ224 M 220KOHM, J,1/10W 1 R6916 ERJ6GEYJ224 M 220KOHM, J,1/10W 1 R6921- ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R6926 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R6927- ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R6932 EXB38V103J RESISTOR ARRAY 1 R6932- ERJ6GEYJ221 M 220 OHM, J,1/10W 2 R7103 ERJ6GEYJ224 M 220KOHM, J,1/10W 2 R7103 ERJ6GEYJ224 M 220KOHM, J,1/10W 2 R7103 ERJ6GEYJ224 M 220KOHM, J,1/10W 1 R7103 ERJ6GEYJ220 M 22 OHM, J, 1/2W 3 R7105- ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7107 R7108 ERJ6GEYJ220 M 22 OHM, J, 1/2W 1 R7111 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7112- ERJ3GEYONOO M 0 OHM, 1/16W 6 R7122 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7112- ERJ3GEYD20 M 22 OHM, J, 1/2W 3 R7122 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7121 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7122 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7123 ERJ6GEYD200 M 0 OHM, 1/10W 1 R7124 ERJ6GEYD200 M 0 OHM, 1/10W 1 R7125 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7131- TAJAAH0470JV M 47 OHM, J, 1/16W 7 R7125 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7145 ERJ6GEYD200 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7152 ERJ6GEYD200 M 0 OHM, 1/10W 1 R7153 ERJ6GEYD200 M 0 OHM, 1/10W 1 R7164 ERJ6GEYD200 M 0 OHM, 1/10W 1 R7155 ERJ6GEYD200 M 0 OHM, 1/10W 1 R7156 ERJ6GEYD200 M 0 OHM, 1/10W 1 R7157 ERJ6GEYD200 M 0 OHM, 1/10W 1 R7158 ERJ6GEYD200 M 0 OHM, 1/10W 1 R7159 ERJ3GEYD100 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7171 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7169 ERJ6GEYD200 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM, J,	R6777	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6781,8 ERJ6GEYJ151 M 150 OHM, J,1/10W 2 4 6 76783,8 ERJ6GEY0R00 M 0 OHM, J,1/10W 2 6 76788 ERJ6GEYJ151 M 150 OHM,J,1/10W 1 76781 ERJ5ENF8202 M 82KOHM, 1/10W 3 93 73 85901 ERJ6GEYJ211 M 100 OHM,J,1/10W 1 76901 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 76902 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 76911 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 76911 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 76911 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 76912 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 76913 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 76914 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 76925 ERJ6GEYJ21 M 100 OHM,J,1/10W 1 76926 ERJ6GEYJ21 M 200 OHM,J,1/10W 1 76932 EXB38V103J RESISTOR ARRAY 1 76932 EXB38V103J RESISTOR ARRAY 1 76933, 3 ERJ6GEYJ224 M 220KOHM,J,1/10W 2 7 7 77102 TAJAAH0470JV M 47 OHM,J,1/16W 1 77103 ERJ6GEYJ220 M 220 OHM,J 1/2W 3 7 77107 ERJ12YJ220 M 220 OHM,J 1/2W 3 7 77108 ERJ6GEY000 M 0 OHM, 1/10W 1 77112 ERJ3GEY0R00 M 0 OHM, 1/16W 6 77 77122 TAJAAH0470JV M 47 OHM,J,1/16W 1 77112 ERJ3GEY0R00 M 0 OHM, 1/16W 6 77 77128 ERJ12YJ220 M 22 OHM,J, 1/2W 3 7 77138 RRJ6GEYJ210 M 22 OHM,J, 1/2W 3 7 77131 TAJAAH0470JV M 47 OHM,J,1/16W 1 77112 ERJ3GEYOR00 M 0 OHM, 1/10W 1 77129 ERJ12YJ220 M 22 OHM,J, 1/2W 3 7 77138 RRJ6GEY0R00 M 0 OHM, 1/10W 1 77129 ERJ12YJ220 M 22 OHM,J, 1/2W 3 7 77138 RRJ6GEY0R00 M 0 OHM, 1/10W 1 77129 ERJ12YJ220 M 22 OHM,J, 1/2W 3 7 77138 RRJ6GEY0R00 M 0 OHM, 1/10W 1 77129 ERJ12YJ220 M 22 OHM,J, 1/2W 1 77131 TAJAAH0470JV M 47 OHM,J,1/16W 1 77145 ERJ12YJ220 M 22 OHM,J, 1/2W 1 77151 TAJAAH0470JV M 47 OHM,J,1/16W 1 77159 ERJ3GEYJ04 M 100KOHM,J,1/16W 1 77165 ERJ6GEY0R00 M 0 OHM, 1/10W 1 77165 ERJ6GEY0R00 M 0 OHM, 1/10W 1 77165 ERJ12YJ220 M 22 OHM,J, 1/2W 3 7 7 77186 ERJ6GEY0R00 M 0 OHM, 1/10W 1 77167 ERJ6GEY0R00 M 0 OHM, 1/10W 1 77169 ERJ3GEYJ04 M 100KOHM,J,1/16W 1 77165 ERJ6GEY0R00 M 0 OHM, 1/10W 1 77165 ERJ12YJ220 M 22 OHM,J, 1/2W 3 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	R6779	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
2	R6780	ERJ6ENF6202	M 62KOHM, 1/10W	1	
### R6785.8 ERJ6GEYJ151 M 150 OHM, J, 1/10W 2 C C C C C C C C C C C C C C C C C C	R6781,8 2	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
6 R6788 ERJ6ENF9101 M 9.1KOHM, 1/10W 1 R6791- 8RJ6ENF8202 M 220 OHM,J,1/10W 1 R6902- 8RJ6GEYJ101 M 100 OHM,J,1/10W 5	R6783,8 4	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6791- R791- R796NF8202 M 82KOHM, 1/10W 3 R6901 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6902- RRJ6GEYJ221 M 220 OHM, J,1/10W 5 R6907 EXB38V103J RESISTOR ARRAY 1 R6911 ERJ6GEYJ224 M 220KOHM, J,1/10W 1 R6910 ERJ6GEYJ224 M 220KOHM, J,1/10W 1 R6911 ERJ6GEYJ224 M 220KOHM, J,1/10W 1 R6911 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R6927- RRJ6GEYJ221 M 220 OHM, J,1/10W 5 31 R6932 EXB38V103J RESISTOR ARRAY 1 R6936,3 ERJ6GEYJ224 M 220KOHM, J,1/10W 2 7 R7102 TAJAAH0470JV M 47 OHM, J,1/16W 1 R7103 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R7105- RRJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7108 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R7109 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7111 TAJAAH0470JV M 47 OHM, J,1/16W 6 17 R7122 ERJ3GEYOR00 M 0 OHM, 1/10W 1 R7125- ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7138,3 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7129 ERJ12YJ20 M 22 OHM, J, 1/2W 1 R7131- TAJAAH0470JV M 47 OHM, J,1/16W 7 37 R7138,3 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7129 ERJ12YJ20 M 22 OHM, J, 1/2W 1 R7131- TAJAAH0470JV M 47 OHM, J,1/16W 7 37 R7138,3 ERJ3GEYOR00 M 0 OHM, 1/10W 1 R7142 TAJAAH0470JV M 47 OHM, J,1/16W 1 R7145- ERJ12YJ20 M 22 OHM, J, 1/2W 1 R7131- TAJAAH0470JV M 47 OHM, J,1/16W 1 R7148 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ20 M 22 OHM, J, 1/2W 1 R7155- ERJ12YJ20 M 22 OHM, J, 1/2W 1 R7155- ERJ12YJ20 M 22 OHM, J, 1/2W 1 R7156- ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7148 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7158 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7159 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7155 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7156 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7157 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R7158 ERJ3GEYJ104 M 200KOHM, J, 1/16W 1 R7159 ERJ3GEYJ223 M 22KOHM, J, 1/10W 1 R7159 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 R7156 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 R7157 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 R7158 ERJ3GEYOR00 M 0 OHM, 1/10W 1 R7159 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 R7156 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 R7157 ERJ6GEYDR00 M 0 OHM, 1/10W 1 R7168 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7183 ERJ3GEYOR00 M 0 OHM, 1/10W 1 R7183 ERJ3GEYOR00 M 0 OHM, 1/10W 1	l _ ·	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
93 R6901 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6902- 06 R6907 EXB38V103J RESISTOR ARRAY 1 R6911 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6916 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6916 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6927 BRJ6GEYJ221 M 220 OHM, J, 1/10W 1 R6932 EXB38V103J RESISTOR ARRAY 1 R6932 EXB38V103J RESISTOR ARRAY 1 R6936, 3 ERJ6GEYJ224 M 220KOHM, J, 1/10W 2 R7102 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7103 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R7105 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7108 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7109 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7111 TAJAAH0470JV M 47 OHM, J, 1/16W 6 17 R7122 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7125 ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7128 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7128 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7131- TAJAAH0470JV M 47 OHM, J, 1/16W 7 37 R7128 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7131- TAJAAH0470JV M 47 OHM, J, 1/16W 7 37 R7128 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7131- TAJAAH0470JV M 47 OHM, J, 1/2W 3 47 R7145 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7148 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7148 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7158 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7158 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7152 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7153 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7160 ERJ3GEYJ224 M 220KOHM, J, 1/16W 1 R7161 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7162 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7163 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7163 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7159 ERJ3GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7169 ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7160 ERJ6GEYOR00 M 0 OHM, 1/16W 1 R7163 ERJ6GEYOR00 M 0 OHM, 1/16W 1 R7163 ERJ6GEYOR00 M 0 OHM, 1/16W 1 R7163 ERJ6G	R6788	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R6902- ERJ6GEYJ221 M 220 OHM,J,1/10W 5    R6907 EXB38V103J RESISTOR ARRAY 1   R6911 ERJ6GEYJ224 M 220KOHM,J,1/10W 1   R6916 ERJ6GEYJ224 M 220KOHM,J,1/10W 1   R6926 ERJ6GEYJ221 M 220 OHM,J,1/10W 1   R6927- STAN STAN STAN STAN STAN STAN STAN STAN		ERJ6ENF8202	M 82KOHM, 1/10W	3	
06   R6907   EXB38V103J   RESISTOR ARRAY   1   1   1   1   1   1   1   1   1	R6901	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6907 EXB38V103J RESISTOR ARRAY R6911 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6926 ERJ6GEYJ221 M 220KOHM, J, 1/10W 1 R6927 ERJ6GEYJ221 M 220 OHM, J, 1/10W 5 31 R6932 EXB38V103J RESISTOR ARRAY 1 R6936, 3 ERJ6GEYJ224 M 220KOHM, J, 1/10W 2 7 R7102 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7103 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R7105 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7108 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R71109 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7111 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7112 ERJ3GEYOR00 M 0 OHM, 1/16W 6 17 R7122 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7131 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7128 ERJ6GEYOR00 M 0 OHM, 1/16W 6 17 R7121 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7125 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7128 ERJ6GEYOR00 M 0 OHM, 1/16W 6 17 R7127 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7128 ERJ6GEYOR00 M 0 OHM, 1/16W 1 R7138, 3 ERJ3GEYOR00 M 0 OHM, 1/16W 7 07 R7138 ERJ6GEYOR00 M 0 OHM, 1/16W 7 07 R7148 ERJ6GEYOR00 M 0 OHM, 1/16W 7 07 R7148 ERJ6GEYOR00 M 0 OHM, 1/16W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7131- TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7145- ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7148 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7155, 5 ERJ6GEYJ224 M 220KOHM, J, 1/2W 1 R7156, 5 ERJ6GEYJ224 M 220KOHM, J, 1/16W 1 R7159 ERJ3GEYJ20 M 22 OHM, J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7152 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7153 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 07 R7168 ERJ6GEYJ224 M 220KOHM, J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7189- ERJ3GEYJ220 M 22 OHM, J, 1/2W 1 R7169 ERJ3GEYJ220 M 22 OHM, J, 1/2W 1 R7169 ERJ3GEYJ20 M 22 OHM, J, 1/2W 1 R7189- ERJ8GEYOR00 M 0 OHM, 1/16W 1 R7203, 0 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R7203, 0 ERJ3GEYOR00 M 0 OHM, 1/16W 1	R6902-	ERJ6GEYJ221	†	5	
R6911 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6916 ERJ6GEYJ221 M 220KOHM, J, 1/10W 1 R6926 ERJ6GEYJ221 M 100 OHM, J, 1/10W 1 R6932 EXB38V103J RESISTOR ARRAY 1 R6932 EXB38V103J RESISTOR ARRAY 1 R6933 ERJ6GEYJ224 M 220KOHM, J, 1/10W 2 R7102 TAJAAH0470JV M 47 OHM, J, 1/10W 1 R7105 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7108 ERJ6GEYJ000 M 0 OHM, 1/10W 1 R7111 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7112 ERJ3GEYOR00 M 0 OHM, 1/16W 6 R7112 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R7112 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R7112 ERJ3GEYOR00 M 0 OHM, 1/16W 6 R7112 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R7112 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R7112 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R7112 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7131 TAJAAH0470JV M 47 OHM, J, 1/16W 7 R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7131 TAJAAH0470JV M 47 OHM, J, 1/16W 7 R7145 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7147 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7148 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7141 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7145 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7148 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7148 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7159 ERJ6GEYJ224 M 22 OHM, J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7159 ERJ3GEYJ04 M 100KOHM, J, 1/16W 1 R7159 ERJ3GEYJ04 M 100KOHM, J, 1/16W 1 R7165 ERJ3GEYJ020 M 22 OHM, J, 1/2W 3 R7166 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7167 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 R7168 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ3GEYJ04 M 22 OHM, J, 1/2W 3 R7169 ERJ3GEYJ04 M 22 OHM, J, 1/2W 1 R7169 ERJ3GEYJ04 M 0 OHM, 1/10W 1 R7169 ERJ3GEYJ070 M 0 OHM, 1/10W 1 R7169 ERJ3GEY0R00 M 0 OHM, 1/10W 1 R7189 ERJ3GEY0R00 M 0 OHM, 1/16W 4 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/10W 1	06				
R6916 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R6927 - ERJ6GEYJ221 M 100 OHM, J, 1/10W 1 R6927 - ERJ6GEYJ221 M 220 OHM, J, 1/10W 5 31 R6932 EXB38V103J RESISTOR ARRAY 1 R6936, 3 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R7102 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7103 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R7105 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7108 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7111 TAJAAH0470JV M 47 OHM, J, 1/16W 6 17 R7112 ERJ3GEYOROO M 0 OHM, J, 1/16W 1 R7112 ERJ3GEYOROO M 0 OHM, J, 1/2W 3 27 R7128 ERJ6GEYOROO M 0 OHM, J, 1/2W 3 27 R7128 ERJ6GEYOROO M 0 OHM, J, 1/2W 3 27 R7138, 3 ERJ3GEYOROO M 0 OHM, J, 1/16W 7 R7131 TAJAAH0470JV M 47 OHM, J, 1/16W 7 R7138, 3 ERJ3GEYOROO M 0 OHM, J, 1/16W 7 R7142 TAJAAH0470JV M 47 OHM, J, 1/16W 7 R7143 ERJ6GEYOROO M 0 OHM, J, 1/2W 1 R7131 TAJAAH0470JV M 47 OHM, J, 1/16W 7 R7148 ERJ6GEYOROO M 0 OHM, J, 1/2W 1 R7145 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7146 ERJ6GEYOROO M 0 OHM, J, 1/16W 7 R7147 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7148 ERJ6GEYOROO M 0 OHM, J, 1/16W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7141 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7145 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7146 ERJ6GEYOROO M 0 OHM, J, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7159 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7159 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R7159 ERJ3GEYJ224 M 220KOHM, J, 1/16W 1 R7150 ERJ3GEYJ224 M 220KOHM, J, 1/16W 1 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7152 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 R7153 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 R7154 ERJ6GEY0ROO M 0 OHM, J, 1/16W 1 R7155 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7157 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7159 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 R7159 ERJ3GEYJ000 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7165 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7166 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7169 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7169 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7169 ERJ3GEYOROO M 0 OHM, 1/16W 4 R7189 ERJ3GEYOROO M 0 OHM, 1/16W 4 R7203, 0 ERJ3GEYOROO M 0 OHM, 1/16W 4 R7203, 0 ERJ3GEYOROO M 0 OHM, 1/10W 1					
R6926 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6927 ERJ6GEYJ221 M 220 OHM, J, 1/10W 5 31 R6932 EXB38V103J RESISTOR ARRAY 1 R6936, 3 ERJ6GEYJ224 M 220KOHM, J, 1/10W 2 7 R7102 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7103 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R7105- ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7108 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7109 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7111 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7112- ERJ3GEYOR00 M 0 OHM, 1/16W 6 17 R7122 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7123 ERJ6GEYOR00 M 0 OHM, 1/16W 1 R7124 ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7128 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7131- TAJAAH0470JV M 47 OHM, J, 1/16W 7 37 R7138, 3 ERJ3GEYOR00 M 0 OHM, 1/16W 7 R7142 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7145- ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7146- ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7147 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7148 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7148 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7152 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7153 ERJ3GEYJ224 M 22 OHM, J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7160 ERJ3GEYJ224 M 22 OHM, J, 1/16W 1 R7160 ERJ3GEYJ224 M 22 OHM, J, 1/16W 1 R7165 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7165 ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7167 ERJ3GEYJ224 M 22 OHM, J, 1/16W 1 R7168 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7161 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7163 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7164 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7165 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7167 ERJ3GEYJ224 M 22 OHM, J, 1/2W 3 R7168 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7160 ERJ3GEYJ224 M 22 OHM, J, 1/2W 3 R7160 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 R7160 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7160 ERJ6GEYOR00 M 0 OHM, 1/10W 1	R6911			H	
R6927- BRJ6GEYJ221 M 220 OHM, J, 1/10W 5 31 R6932 EXB38V103J RESISTOR ARRAY 1 R6936,3 ERJ6GEYJ224 M 220KOHM, J, 1/10W 2 7 R7102 TAJAAH0470JV M 47 OHM, J, 1/10W 1 R7105- BRJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7108 ERJ6GEYJR00 M 0 OHM, 1/10W 1 R7109 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7111 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7112- BRJ3GEYOR00 M 0 OHM, 1/16W 6 17 R7112- TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7112- ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7128 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7131- TAJAAH0470JV M 47 OHM, J, 1/16W 7 37 R7138, 3 ERJ3GEYOR00 M 0 OHM, 1/16W 7 37 R7142 TAJAAH0470JV M 47 OHM, J, 1/16W 7 37 R7145- ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7146 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7147 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7148 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7148 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7155 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7156,5 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7157 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7156,5 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7156 ERJ6GEYJ224 M 22OKOHM, J, 1/16W 1 R7157 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7161 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R7162 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7163 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7164 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7168 ERJ6GEYJ224 M 22OKOHM, J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7161 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7162 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7163 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7164 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7165 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7167 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7168 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7160 ERJ3GEYJ223 M 22KOHM, J, 1/2W 1 R7161 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7162 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7163 ERJ6GEYOR00 M 0 OHM, 1/16W 4 R7160 ERJ3GEYJ220 M 22 OHM, J, 1/2W 1 R7161 ERJ12YJ	R6916	<b>+</b>	<u> </u>		
31 R6932 EXB38V103J RESISTOR ARRAY 1	R6926	<b>†</b>			
R6936,3 ERJ6GEYJ224 M 220KOHM,J,1/10W 2		ERJ6GEYJ221	M 220 OHM,J,1/10W	5	
7 R7102 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7105 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R7107 ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7108 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7111 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7112 ERJ3GEY0R00 M 0 OHM, 1/16W 6 17 R7112 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R7112 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R7112 ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7128 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7129 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7131 TAJAAH0470JV M 47 OHM,J,1/16W 7 37 R7138,3 ERJ3GEY0R00 M 0 OHM, 1/16W 7 37 R7138,3 ERJ3GEY0R00 M 0 OHM, 1/16W 2 9 R7142 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7145- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7148 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7148 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7148 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7159 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7159 ERJ6GEY0R00 M 0 OHM, 1/10W 2 7 R7158 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7159 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7160 ERJ3GEYJ224 M 220KOHM,J,1/16W 1 R7161 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7163 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7164 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7183- ERJ3GEY0R00 M 0 OHM, 1/10W 1 R7183- ERJ3GEY0R00 M 0 OHM, 1/16W 1 R7183- ERJ3GEY0R00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 0 0 OHM, 1/16W 1 R7205- ERJ12YJ220 M 0 0 OHM, 1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 0 0 OHM, 1/16W 3					
R7103		ERJ6GEYJ224	·	2	
R7105- CRJ12YJ220 M 22 OHM,J, 1/2W 3 R7108 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7109 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7111 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7112- ERJ3GEYOROO M 0 OHM, 1/16W 6 R7122- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7122 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7125- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7128 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7129 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7131- TAJAAH0470JV M 47 OHM,J,1/16W 7 R7138,3 ERJ3GEYOROO M 0 OHM, 1/16W 2 R7145- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7145- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7147 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7148 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7156,5 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7156,5 ERJ6GEYOROO M 0 OHM,J,1/16W 1 R7158 ERJ6GEYJ224 M 22OKOHM,J,1/16W 1 R7160 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7163 ERJ6GEYJ223 M 22KOHM,J,1/16W 1 R7164 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7165 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7169 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7161 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7163 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7164 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7165 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7165 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7167 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7168 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7169 ERJ12YJ220 M 20 OHM,J,1/16W 1	R7102	TAJAAH0470JV		1	
07 R7108 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7109 ERJ12YJ220 M 22 OHM,J,1/16W 1 R7111 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7112- ERJ3GEY0R00 M 0 OHM, 1/16W 6 R7112- ERJ3GEY0R00 M 0 OHM, 1/16W 1 R7125- ERJ12YJ220 M 22 OHM,J, 1/2W 3 Z7 R7128 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7129 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7131- TAJAAH0470JV M 47 OHM,J,1/16W 7 37 R7138,3 ERJ3GEY0R00 M 0 OHM, 1/16W 2 9 R7142 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7145- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7148 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7156,5 ERJ6GEY0R00 M 0 OHM, 1/10W 2 R7156 ERJ6GEY0R00 M 0 OHM, 1/10W 2 R7156 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7160 ERJ3GEYJ224 M 220KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7165 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J,1/16W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7168 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7169 ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7169 ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7189- ERJ8GEYOR00 M 0 OHM, 1/8W 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7205- ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7205- ERJ12YJ220 M 0 0 OHM, 1/16W 2 R7205- ERJ12YJ220 M 0 0 OHM, 1/16W 2 R7205- ERJ12YJ220 M 0 0 OHM, 1/16W 2	R7103		i e	-	
R7109 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7111 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7112- ERJ3GEYOROO M 0 OHM, 1/16W 6 17 R7122 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7125- ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7128 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7131- TAJAAH0470JV M 47 OHM, J, 1/16W 7 37 R7138, 3 ERJ3GEYOROO M 0 OHM, 1/16W 2 9 R7142 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7145- ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7148 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7155, 5 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7158 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7159 ERJ3GEYJ24 M 22 OHM, J, 1/16W 1 R7160 ERJ3GEYJ224 M 220KOHM, J, 1/16W 1 R7161 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7162 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7163 ERJ6GEYJ224 M 20KOHM, J, 1/16W 1 R7165 ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7169 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 88 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7171 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7183 EXB3 RV470J RESISTOR ARRAY 6 88 R7189 ERJ3GEYOROO M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7205 ERJ12YJ220 M 22 OHM, J, 1/2W 3 87205 ERJ12YJ220 M 0 0 OHM, 1/16W 1 R7205 ERJ12YJ220 M 0 0 OHM, 1/16W 1	l	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7111 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7112- ERJ3GEYOROO M 0 OHM, 1/16W 6 R7112- TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7122 TAJAAH0470JV M 47 OHM, J, 1/2W 3 27 R7128 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7131- TAJAAH0470JV M 47 OHM, J, 1/16W 7 37 R7138, 3 ERJ3GEYOROO M 0 OHM, 1/16W 2 9 R7142 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7145- ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7148 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7155, 5 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7158 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7159 ERJ3GEYJ24 M 22 OHM, J, 1/10W 1 R7159 ERJ3GEYJ24 M 220KOHM, J, 1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7161 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7162 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7163 ERJ6GEYJ224 M 20KOHM, J, 1/16W 1 R7164 ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7165 ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7169 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7111 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7171 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7183 EXBSSV470J RESISTOR ARRAY 6 R8 R7189 ERJ3GEYOROO M 0 OHM, 1/16W 1 R7203, 0 ERJ3GEYOROO M 0 OHM, 1/16W 2 R7200 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7205 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7205 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7205 ERJ12YJ220 M 22 OHM, J, 1/2W 3	R7108	+	† · · · · · · · · · · · · · · · · · · ·		
R7112-	R7109	-			
17 R7122 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7125- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7128 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7129 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7131- TAJAAH0470JV M 47 OHM,J,1/16W 7 37 R7138,3 ERJ3GEY0R00 M 0 OHM, 1/16W 2 9 R7142 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7145- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7148 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7156,5 ERJ6GEY0R00 M 0 OHM, 1/10W 2 R7158 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7159 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7161 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7163 ERJ6GEYJ220 M 22 OHM,J, 1/2W 3 67 R7164 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7165 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7167 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7183- EXB38V470J RESISTOR ARRAY 6 88 R7189- ERJ8GEYOR00 M 0 OHM, 1/16W 1 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEYOR00 M 0 OHM, 1/16W 2 R7200 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07	<b>-</b>			-	
R7125- ERJ12YJ220 M 22 OHM, J, 1/2W 3  R7128 ERJ6GEYOROO M 0 OHM, 1/10W 1  R7129 ERJ12YJ220 M 22 OHM, J, 1/2W 1  R7131- TAJAAH0470JV M 47 OHM, J, 1/16W 7  R7138, 3 ERJ3GEYOROO M 0 OHM, 1/16W 2  R7142 TAJAAH0470JV M 47 OHM, J, 1/16W 1  R7145- ERJ12YJ220 M 22 OHM, J, 1/2W 3  47  R7148 ERJ6GEYOROO M 0 OHM, 1/10W 1  R7149 ERJ12YJ220 M 22 OHM, J, 1/2W 1  R7151 TAJAAH0470JV M 47 OHM, J, 1/16W 1  R7156, 5 ERJ6GEYOROO M 0 OHM, 1/10W 2  R7158 ERJ6GEYOROO M 0 OHM, 1/10W 2  R7159 ERJ3GEYJ224 M 220KOHM, J, 1/10W 1  R7160 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1  R7161 TAJAAH0470JV M 47 OHM, J, 1/16W 1  R7162 TAJAAH0470JV M 47 OHM, J, 1/16W 1  R7163 ERJ6GEYOROO M 0 OHM, 1/10W 1  R7164 ERJ6GEYJ220 M 22 OHM, J, 1/2W 3  R7167 ERJ12YJ220 M 22 OHM, J, 1/2W 3  R7168 ERJ6GEYOROO M 0 OHM, 1/10W 1  R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 3  R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 1  R7183- EXB38V470J RESISTOR ARRAY 6  R7205- ERJ3GEYOROO M 0 OHM, 1/16W 1  R7205- ERJ3GEYOROO M 0 OHM, 1/16W 2  R7205- ERJ12YJ220 M 22 OHM, J, 1/2W 3	17	ERJ3GEY0R00	M 0 OHM, 1/16W		
27 R7128 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7129 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7131- TAJAAH0470JV M 47 OHM,J,1/16W 7 37 R7138,3 ERJ3GEY0R00 M 0 OHM, 1/16W 2 9 R7142 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7145- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7148 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7155,5 ERJ6GEY0R00 M 0 OHM, 1/10W 2 R7158 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7159 ERJ3GEYJ224 M 220KOHM,J,1/16W 1 R7160 ERJ3GEYJ224 M 220KOHM,J,1/16W 1 R7161 TAJAH0470JV M 47 OHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7163 ERJ6GEYJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7183- EXB38V470J RESISTOR ARRAY 6 88 R7189- ERJ8GEY0R00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEYOR00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07		+			
R7129 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7131- TAJAAH0470JV M 47 OHM,J,1/16W 7 R7138,3 ERJ3GEY0R00 M 0 OHM, 1/16W 2 R7142 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7145- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7148 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7156,5 ERJ6GEY0R00 M 0 OHM, 1/10W 2 R7158 ERJ6GEYJ224 M 220KOHM,J,1/16W 1 R7159 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7161- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7168 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7183- EXB38V470J RESISTOR ARRAY 6 R7183- EXB38V470J RESISTOR ARRAY 6 R7189- ERJ8GEYOR00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEYOR00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07		ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7131- TAJAAH0470JV M 47 OHM,J,1/16W 7 R7138,3 ERJ3GEY0R00 M 0 OHM, 1/16W 2 9 R7142 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7145- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7148 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7156,5 ERJ6GEY0R00 M 0 OHM, 1/10W 2 7 R7158 ERJ6GEYJ224 M 220KOHM,J,1/16W 1 R7159 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7183- EXB38V470J RESISTOR ARRAY 6 R7183- EXB38V470J RESISTOR ARRAY 6 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3	R7128	ERJ6GEY0R00		1	
37 R7138,3 ERJ3GEYOROO M 0 OHM, 1/16W 2 9 R7142 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7145- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7148 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7151 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7156,5 ERJ6GEYOROO M 0 OHM, 1/10W 2 7 R7158 ERJ6GEYJ224 M 220KOHM,J,1/16W 1 R7159 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7162 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7183- EXB38V470J RESISTOR ARRAY 6 R7183- ERJ8GEYOROO M 0 OHM, 1/16W 1 R7203,0 ERJ3GEYOROO M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07	R7129				
9 R7142 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7145- R7148 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7158 ERJ6GEYOROO M 0 OHM, 1/10W 2 R7159 ERJ3GEYJ224 M 220KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7168 ERJ6GEYJ224 M 100KOHM,J,1/16W 1 R7169 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7183- EXB38V470J RESISTOR ARRAY 6 R7189- ERJ8GEYOROO M 0 OHM, 1/10W 1 R7189- ERJ8GEYOROO M 0 OHM, 1/16W 2 R7203,0 ERJ3GEYOROO M 0 OHM, 1/16W 2 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3	R7131- 37	TAJAAH0470JV	M 47 OHM,J,1/16W	7	
R7145-		ERJ3GEY0R00	M 0 OHM, 1/16W	2	
47 R7148 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7149 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7156,5 ERJ6GEY0R00 M 0 OHM, 1/10W 2 R7158 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7159 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7171 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7183- EXB38V470J RESISTOR ARRAY 6 R7189- PRJ8GEY0R00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3	R7142			1	
R7149 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7151 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7156,5 ERJ6GEYDR00 M 0 OHM, 1/10W 2 R7158 ERJ6GEYJ224 M 220KOHM,J,1/16W 1 R7159 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7171 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7183- EXB38V470J RESISTOR ARRAY 6 R7189- ERJ8GEYOR00 M 0 OHM, 1/8W 4 92 R7203,0 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R7203,0 ERJ3GEYOR00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3	R7145- 47	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7151 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7156,5 ERJ6GEY0R00 M 0 OHM, 1/10W 2 R7158 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7159 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7171 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7183- EXB38V470J RESISTOR ARRAY 6 R7189- ERJ8GEY0R00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3	R7148	•	<del> </del>	1	
R7156,5 ERJ6GEY0R00 M 0 OHM, 1/10W 2 R7158 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7159 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7171 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7183- EXB38V470J RESISTOR ARRAY 6 R7189- ERJ8GEY0R00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3	R7149	ERJ12YJ220	† · · · · · · · · · · · · · · · · · · ·	1	
R7158 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7159 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7171 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7183- EXB38V470J RESISTOR ARRAY 6 88 R7189- ERJ8GEY0R00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3	R7151 R7156,5	1			
R7159 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7171 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7183- EXB38V470J RESISTOR ARRAY 6 88 R7189- ERJ8GEY0R00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3					
R7160 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7171 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7183- EXB38V470J RESISTOR ARRAY 6 88 R7189- ERJ8GEY0R00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3	R7158	+			
R7162 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7165- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7168 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7171 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7183- EXB38V470J RESISTOR ARRAY 6 88 R7189- ERJ8GEY0R00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3	R7159	+		_	
R7165- ERJ12YJ220 M 22 OHM, J, 1/2W 3  R7168 ERJ6GEYOROO M 0 OHM, 1/10W 1  R7169 ERJ12YJ220 M 22 OHM, J, 1/2W 1  R7171 TAJAAH0470JV M 47 OHM, J, 1/16W 1  R7183- EXB38V470J RESISTOR ARRAY 6  88  R7189- ERJ8GEYOROO M 0 OHM, 1/8W 4  92  R7202 TAJAAH0470JV M 47 OHM, J, 1/16W 1  R7203,0 ERJ3GEYOROO M 0 OHM, 1/16W 2  4  R7205- ERJ12YJ220 M 22 OHM, J, 1/2W 3					
67 R7168 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7171 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7183- EXB38V470J RESISTOR ARRAY 6 88 R7189- ERJ8GEY0R00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3					
R7169 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7171 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7183- EXB38V470J RESISTOR ARRAY 6 R7189- ERJ8GEYOR00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEYOR00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3	67		·		
R7171 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7183- EXB38V470J RESISTOR ARRAY 6 88 R7189- ERJ8GEY0R00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07		+	†		
R7183- EXB38V470J RESISTOR ARRAY 6 88 6 6 7 7 8 8 8 8 8 8 8 8 8 8 8 8 9 8 9 9 9 9					
R7189- ERJ8GEY0R00 M 0 OHM, 1/8W 4 92 R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07	R7183-				
R7202 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07	R7189-	ERJ8GEY0R00	M 0 OHM, 1/8W	4	
R7203,0 ERJ3GEY0R00 M 0 OHM, 1/16W 2 4 R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07		ma Ta 2 ** 0 4 = 0 = -	M 47 OTT 7 7 / 7 7 7	-	
R7205- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07	R7203,0				
<del>-                                      </del>	R7205-	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
	07 R7208	ERJ6GEY0R00	M 0 OHM, 1/10W	1	

		111-57	FAJUU	/ IN-42FX300 / IN-
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R7209		M 22 OHM, J, 1/2W	1	
R7211		M 47 OHM,J,1/16W	1	
R7212- 17	EXB38V470J	RESISTOR ARRAY	6	
R7222	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7225-	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
27	LNOILIOLLO	22 0111/0/ 1/211		
R7228	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7229	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7231		M 47 OHM,J,1/16W	1	
R7232-		M 0 OHM, 1/8W	4	
35		, ,		
R7236- 39	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7242	TA.TAAH0470.TV	M 47 OHM,J,1/16W	1	
R7245-		M 22 OHM, J, 1/2W	3	
47				
R7248	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7249	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7251	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7252,5	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
3				
R7254- 59	TAJAAH0470JV	M 47 OHM,J,1/16W	6	
R7262	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7265-		M 22 OHM, J, 1/2W	3	
67				
R7268	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7269		M 22 OHM,J, 1/2W	1	
R7271		M 47 OHM,J,1/16W	1	
R7274	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7277		M 22KOHM,J,1/16W	1	
R7278	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R7279	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7285,8	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
6 R7301,0	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
2				
R7303		M 47 OHM, J, 1/16W	1	
R7305- 07	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7308	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7309	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7310	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7312	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7314- 19	EXB38V470J	RESISTOR ARRAY	6	
R7323	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7325-	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
27				
R7328	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7329	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7332	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7334- 37	ERJ8GEY0R00	M 0 OHM, 1/8W	4	
R7343				
12/12/	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7345-	TAJAAH0470JV ERJ12YJ220	M 47 OHM,J,1/16W M 22 OHM,J, 1/2W	3	
R7345- 47	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7345- 47 R7348	ERJ12YJ220 ERJ6GEY0R00	M 22 OHM, J, 1/2W M 0 OHM, 1/10W	3	
R7345- 47 R7348 R7349	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220	M 22 OHM, J, 1/2W  M 0 OHM, 1/10W  M 22 OHM, J, 1/2W	3 1 1	
R7345- 47 R7348 R7349 R7352 R7354,5	ERJ12YJ220 ERJ6GEY0R00	M 22 OHM, J, 1/2W M 0 OHM, 1/10W	3	
R7345- 47 R7348 R7349 R7352	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ3GEY0R00	M 22 OHM, J, 1/2W  M 0 OHM, 1/10W  M 22 OHM, J, 1/2W  M 47 OHM, J, 1/16W	3 1 1	
R7345- 47 R7348 R7349 R7352 R7354,5 5 R7356- 61	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ3GEY0R00 TAJAAH0470JV	M 22 OHM, J, 1/2W  M 0 OHM, 1/10W  M 22 OHM, J, 1/2W  M 47 OHM, J, 1/16W  M 0 OHM, 1/16W  M 47 OHM, J, 1/16W	3 1 1 2	
R7345- 47 R7348 R7349 R7352 R7354,5 5 R7356- 61 R7363	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ3GEY0R00 TAJAAH0470JV	M 22 OHM, J, 1/2W  M 0 OHM, 1/10W  M 22 OHM, J, 1/2W  M 47 OHM, J, 1/16W  M 0 OHM, 1/16W  M 47 OHM, J, 1/16W  M 47 OHM, J, 1/16W	3 1 1 2 6	
R7345- 47 R7348 R7349 R7352 R7354,5 5 R7356- 61 R7363 R7365-	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ3GEY0R00 TAJAAH0470JV	M 22 OHM, J, 1/2W  M 0 OHM, 1/10W  M 22 OHM, J, 1/2W  M 47 OHM, J, 1/16W  M 0 OHM, 1/16W  M 47 OHM, J, 1/16W	3 1 1 2	
R7345- 47 R7348 R7349 R7352 R7354,5 5 R7356- 61 R7363 R7365- 67	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ3GEY0R00 TAJAAH0470JV ERJ12YJ220	M 22 OHM, J, 1/2W M 0 OHM, 1/10W M 22 OHM, J, 1/2W M 47 OHM, J, 1/16W M 0 OHM, 1/16W M 47 OHM, J, 1/16W M 47 OHM, J, 1/16W M 47 OHM, J, 1/16W M 22 OHM, J, 1/2W	3 1 1 2 6 1 3	
R7345- 47 R7348 R7349 R7352 R7354,5 5 R7356- 61 R7363 R7365- 67 R7368	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ3GEY0R00  TAJAAH0470JV ERJ12YJ220 ERJ12YJ220 ERJ6GEY0R00	M 22 OHM, J, 1/2W M 0 OHM, 1/10W M 22 OHM, J, 1/2W M 47 OHM, J, 1/16W M 0 OHM, 1/16W M 47 OHM, J, 1/16W M 47 OHM, J, 1/16W M 47 OHM, J, 1/2W M 22 OHM, J, 1/2W M 0 OHM, J 1/10W	3 1 1 2 6 1 3	
R7345- 47 R7348 R7349 R7352 R7354,5 5 R7356- 61 R7363 R7365- 67 R7368 R7369	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ3GEY0R00  TAJAAH0470JV ERJ12YJ220 ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220	M 22 OHM, J, 1/2W  M 0 OHM, 1/10W  M 22 OHM, J, 1/2W  M 47 OHM, J, 1/16W  M 22 OHM, J, 1/2W  M 0 OHM, 1/10W  M 22 OHM, J, 1/2W	3 1 1 2 6 1 3	
R7345- 47 R7348 R7349 R7352 R7354,5 5 R7356- 61 R7363 R7365- 67 R7368 R7369 R7372	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ3GEY0R00  TAJAAH0470JV ERJ12YJ220 ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV	M 22 OHM, J, 1/2W M 0 OHM, 1/10W M 22 OHM, J, 1/2W M 47 OHM, J, 1/16W M 0 OHM, J, 1/16W M 47 OHM, J, 1/16W M 47 OHM, J, 1/16W M 22 OHM, J, 1/2W M 0 OHM, J, 1/2W M 0 OHM, J, 1/2W M 47 OHM, J, 1/2W M 47 OHM, J, 1/2W M 47 OHM, J, 1/16W	3 1 1 2 6 1 3	
R7345- 47 R7348 R7349 R7352 R7354,5 5 R7356- 61 R7363 R7365- 67 R7368 R7369 R7372 R7374	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ3GEY0R00  TAJAAH0470JV ERJ12YJ220 ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ12YJ220 TAJAAH0470JV ERJ16GEYJ102	M 22 OHM, J, 1/2W M 0 OHM, 1/10W M 22 OHM, J, 1/2W M 47 OHM, J, 1/16W M 0 OHM, J, 1/16W M 47 OHM, J, 1/16W M 47 OHM, J, 1/16W M 22 OHM, J, 1/2W M 0 OHM, 1/10W M 22 OHM, J, 1/2W M 47 OHM, J, 1/16W M 47 OHM, J, 1/16W M 1KOHM, J, 1/16W	3 1 1 2 6 1 3 1 1	
R7345- 47 R7348 R7349 R7352 R7354,5 5 R7356- 61 R7363 R7365- 67 R7368 R7369 R7372 R7374 R7375- 78	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ3GEY0R00  TAJAAH0470JV ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ12YJ220 ERJ6GEYJ102 ERJ3GEY0R00	M 22 OHM, J, 1/2W M 0 OHM, 1/10W M 22 OHM, J, 1/2W M 47 OHM, J, 1/16W M 0 OHM, J, 1/16W M 47 OHM, J, 1/16W M 47 OHM, J, 1/16W M 47 OHM, J, 1/16W M 22 OHM, J, 1/2W M 0 OHM, 1/10W M 22 OHM, J, 1/2W M 47 OHM, J, 1/16W M 1KOHM, J, 1/16W M 1KOHM, J, 1/10W M 0 OHM, 1/110W	3 1 1 2 6 1 3 1 1 1 1 4	
R7345- 47 R7348 R7349 R7352 R7354,5 5 R7356- 61 R7363 R7365- 67 R7368 R7369 R7372 R7374 R7375- 78	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ3GEY0R00  TAJAAH0470JV ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ12YJ220 ERJ6GEYJ020 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ224	M 22 OHM, J, 1/2W  M 0 OHM, 1/10W  M 22 OHM, J, 1/2W  M 47 OHM, J, 1/16W  M 0 OHM, J, 1/16W  M 47 OHM, J, 1/16W  M 47 OHM, J, 1/16W  M 47 OHM, J, 1/16W  M 22 OHM, J, 1/2W  M 0 OHM, 1/10W  M 22 OHM, J, 1/2W  M 47 OHM, J, 1/16W  M 1KOHM, J, 1/16W  M 1KOHM, J, 1/10W  M 0 OHM, 1/16W  M 1KOHM, J, 1/10W  M 0 OHM, 1/16W	3 1 1 2 6 1 3 1 1 1 1 4	
R7345- 47 R7348 R7349 R7352 R7354,5 5 R7356- 61 R7363 R7365- 67 R7368 R7369 R7372 R7374 R7375- 78	ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ3GEY0R00  TAJAAH0470JV ERJ12YJ220 ERJ6GEY0R00 ERJ12YJ220 TAJAAH0470JV ERJ12YJ220 ERJ6GEYJ102 ERJ3GEY0R00	M 22 OHM, J, 1/2W M 0 OHM, 1/10W M 22 OHM, J, 1/2W M 47 OHM, J, 1/16W M 0 OHM, J, 1/16W M 47 OHM, J, 1/16W M 47 OHM, J, 1/16W M 47 OHM, J, 1/16W M 22 OHM, J, 1/2W M 0 OHM, 1/10W M 22 OHM, J, 1/2W M 47 OHM, J, 1/16W M 1KOHM, J, 1/16W M 1KOHM, J, 1/10W M 0 OHM, 1/110W	3 1 1 2 6 1 3 1 1 1 1	

(50U / TH-42F	PX50U / TH-50PX50U	J		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7387	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R7388	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R7403	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7405- 07	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7408	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7409	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7410,1 1	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7412	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7416- 21	EXB38V470J	RESISTOR ARRAY	6	
R7422	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R7423	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7425- 27	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7428	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7429	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7430	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R7431	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R7432	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7434- 37	ERJ8GEY0R00	M 0 OHM, 1/8W	4	
R7438- 41	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7443	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7445- 47	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7448	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7449		M 22 OHM,J, 1/2W	1	
R7452	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7454	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7455- 60	TAJAAH0470JV	M 47 OHM,J,1/16W	6	
R7461,6 2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7463	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7465- 67	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7468	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7469	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7470,7 1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7472	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R8137	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
R8140,4 1	ERJ3EKF1001	M 1KOHM, 1/16W	2	
R8144- 47	D1HG5608A002	NETWORK RESISTER	4	
R8148,4 9	D1HG3908A002	NETWORK RESISTER	2	
R8150- 62	ERJ2GEJ390	м 39 ОНМ, J,0.063W	13	
R8163- 66	ERJ2GEJ560	м 56 ОНМ, J,0.063W	4	
R8200- 03	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8206	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8207	ERJ2GEJ561	M 60 OHM, J,0.063W	1	
R8208	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8209	ERJ2GEJ273	M 27KOHM ,J,0.063W	1	
R8210	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8211	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8215	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8216	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8217	ERJ2GEJ561	M 60 OHM, J,0.063W	1	
R8218	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8219	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
R8220	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8221	ERJ3GEYJ391	M 390 OHM, J, 1/16W	1	
R8222	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8223	ERJ2GEJ102	M 1KOHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8224	ERJ2GEJ101	м 100 ОНМ,	1	
R8228	ERJ2GE0R00	J,0.063W М 0.0 ОНМ,	1	
R8229	ERJ2GEJ222	J,0.063W M 2.2KOHM,	1	
	DRO E GEO E E E	J,0.063W	_	
R8230 R8231	ERJ2GEJ102 ERJ2GE0R00	M 1KOHM, J,0.063W M 0.0 OHM,	1	
		J,0.063W	_	
R8232	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8233	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R8234 R8237	ERJ2GEJ102 ERJ3GEYJ150	M 1KOHM, J,0.063W M 15 OHM,J,1/16W	1	
R8240	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8241	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8242	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R8243	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R8244	ERJ3GEYJ150	M 15 OHM,J,1/16W	1	
R8245,4	ERJ2GEJ392	м 3.9КОНМ,	2	
6 R8248	ERJ2GEJ272	J,0.063W M 2.7KOHM,	1	
R8250	ERJ2GEJ222	J,0.063W M 2.2KOHM,	1	
R8251	ERJ2GEJ122	J,0.063W M 1.2KOHM,	1	
		J,0.063W		
R8258	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	1	
R8262- 65	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8266,6	ERJ2GEJ821	M 820 OHM, J,0.063W	2	
R8268,6	ERJ3GEYJ471	M 470 OHM, J, 1/16W	2	
R8270	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
R8272	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8273,7	ERJ3GEYJ560	M 56 OHM,J,1/16W	2	
R8275	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R8276	ERJ2GEJ183	M 18KOHM ,J,0.063W	1	
R8277	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R8278	ERJ3EKF1201	M 1.2KOHM, 1/16W	1	
R8279,8 0	ERJ2GEJ102	M 1KOHM, J,0.063W	2	
R8281	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8282- 84	ERJ2GEJ102	M 1KOHM, J,0.063W	3	
R8285	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8286	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8287	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8288	ERJ2GE0R00	м 0.0 ОНМ,	1	
R8289,9	ERJ2GEJ103	J,0.063W М 10КОНМ, J,0.063W	2	
0 R8291	ERJ2GE0R00	M 0.0 OHM,	1	
R8292	ERJ2GEJ102	J,0.063W M 1KOHM, J,0.063W	1	
R8293	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8297	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8300	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8301	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8303	ERJ2GEJ272	м 2.7КОНМ, J,0.063W	1	
R8304,0	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8306	EXB38V472J	RESISTOR ARRAY	1	
R8307	ERJ2GEJ472	м 4.7KOHM, J,0.063W	1	
R8313	ERJ2GE0R00	м 0.0 ОНМ,	1	
L	1	J,0.063W	l	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ERJ2GEJ472	M 4.7KOHM,	2	
5		J,0.063W		
R8316- 18	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
R8322- 36	ERJ2GEJ101	M 100 OHM, J,0.063W	15	
R8339	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8341	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8343	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8345	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8347	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
R8349	ERJ2GEJ104	M 100КОНМ, J,0.063W	1	
R8351	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8354	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8355	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8356,5	ERJ2GEJ390	M 39 OHM, J,0.063W	2	
R8358	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8370	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8372	ERJ2GE0R00	м 0.0 онм,	1	
R8373-	ERJ2GEJ560	J,0.063W М 56 ОНМ, J,0.063W	7	
79 R8381,8	ERJ2GE0R00	м 0.0 ОНМ,	2	
2	DAMES COOFFEE	J,0.063W	_	
R8383	D1HG5608A002	NETWORK RESISTER	1	
R8384	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8385	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8386	D1HG5608A002	NETWORK RESISTER	1	
R8387	EXB38V560J	RESISTOR ARRAY	1	
R8388	D1HG5608A002	NETWORK RESISTER	1	
R8390 R8391	ERJ2GEJ560 ERJ2GEJ472	M 56 OHM, J,0.063W M 4.7KOHM,	1	
R8392	ERJ2GEJ223	J,0.063W M 22KOHM, J,0.063W	1	
R8393,9	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
4		, , , , , , , , , , , , , , , , , , , ,		
R8395	EXB38V560J	RESISTOR ARRAY	1	
R8396- 98	ERJ2GEJ560	M 56 OHM, J,0.063W	3	
R8399	EXB2HV223JV	NETWORK RESISTER	1	
	t	M 56 OHM, J,0.063W	2	
IKO#U/.U	ERJ2GEJ560			
8	ERJ2GEJ560	DECICTOD ADDAV	2	
8 R8409,1 0	EXB38V560J	RESISTOR ARRAY	2	
8 R8409,1 0 R8411,1	EXB38V560J ERJ2GEJ392	M 3.9KOHM, J,0.063W	2	
8 R8409,1 0 R8411,1 2 R8414	EXB38V560J ERJ2GEJ392 ERJ2GEJ560	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W	2	
8 R8409,1 0 R8411,1 2 R8414 R8415	EXB38V560J ERJ2GEJ392 ERJ2GEJ560 EXB38V560J	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY	1 1	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416	EXB38V560J ERJ2GEJ392 ERJ2GEJ560 EXB38V560J ERJ2GE0R00	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W	2 1 1	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GE0R00  ERJ2GEJ472	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W	1 1 1	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416 R8419	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GEOR00  ERJ2GEJ472  ERJ2GEJ272	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 2.7KOHM, J,0.063W	2 1 1 1 1	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GE0R00  ERJ2GEJ472	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 2.7KOHM,	1 1 1	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416 R8419	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GEOR00  ERJ2GEJ472  ERJ2GEJ272	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 2.7KOHM,	2 1 1 1 1	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416 R8419 R8420 R8421 R8422,2 3 R8435	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GE0R00  ERJ2GEJ472  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ270	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 2.2KOHM, J,0.063W M 4.7KOHM, J,0.063W	2 1 1 1 1 1 2	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416 R8419 R8420 R8421 R8422,2 3 R8435 R8436	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GE0R00  ERJ2GEJ472  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ479	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 2.2KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.9KOHM, J/16W M 49.9KOHM, 1/16W	2 1 1 1 1 1 2	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416 R8419 R8420 R8421 R8422,2 3 R8435 R8436 R8436	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GEJ472  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ470	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 2.2KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.9KOHM, J,0.063W	2 1 1 1 1 2 1 1	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416 R8419 R8420 R8421 R8422,2 3 R8435 R8436	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GE0R00  ERJ2GEJ472  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ479	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 2.2KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.9KOHM, J,0.063W	2 1 1 1 1 1 2	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416 R8419 R8420 R8421 R8422,2 3 R8435 R8436 R8460	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GEJ472  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ470	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 2.2KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.9KOHM, J,0.063W	2 1 1 1 1 2 1 1	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416 R8419 R8420 R8421 R8422,2 3 R8435 R8436 R8460 R8464,6	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ272  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W	2 1 1 1 1 1 2 2 1 1 1 1 2	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416 R8419 R8420 R8421 R8422,2 3 R8435 R8436 R8460 R8464,6 5 R8467	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ3GEY0R00  ERJ3EKF4992  ERJ2GE0R00  EXB2HV104JV  D1HG1008A002	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 2.2KOHM, J,0.063W M 4.7KOHM, J,0.063W M 0.063W M 0.0HM, 1/16W M 49.9KOHM, 1/16W M 1.0063W M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W	2 1 1 1 1 1 2 1 1 1 1 2 2 1 1 1 1 1 1 1	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416 R8419 R8420 R8421 R8422,2 3 R8435 R8436 R8460 R8464,6 5 R8467 R8468 R8470 R8471,7	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GE0R00  ERJ2GEJ472  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ472  ERJ2GEJ472  ERJ3GEY0R00  ERJ3EKF4992  ERJ2GEOR00  EXB2HV104JV  D1HG1008A002  ERJ2GEOR00	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 2.2KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 0.0HM, 1/16W M 49.9KOHM, 1/16W M 0.0 OHM, J,0.063W RESISTOR ARRAY NETWORK RESISTER M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W	2 1 1 1 1 2 1 1 1 2 1 1 1 1 1 1 1 1 1 1	
8 R8409,1 0 R8411,1 2 R8414 R8415 R8416 R8419 R8420 R8421 R8422,2 3 R8435 R8436 R8460 R8464,6 5 R8467 R8468 R8470	EXB38V560J  ERJ2GEJ392  ERJ2GEJ560  EXB38V560J  ERJ2GE0R00  ERJ2GEJ472  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ272  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ472  ERJ2GEJ470  ERJ2GEOR00  EXB2HV104JV  D1HG1008A002  ERJ2GE0R00  ERJ2GE0R00	M 3.9KOHM, J,0.063W M 56 OHM, J,0.063W RESISTOR ARRAY M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 2.2KOHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 0.0HM, 1/16W M 49.9KOHM, 1/16W M 0.0 OHM, J,0.063W RESISTOR ARRAY NETWORK RESISTER M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W	2 1 1 1 1 1 2 1 1 1 1 1 1	

		111-37	1 7300	/ In-42F X300 / In-
Ref.	Part No.	Part Name &	Pcs	Remarks
No. R8475	ERJ2GE0R00	Description M 0.0 OHM,	1	
		J,0.063W		
R8476	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8477	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8478 R8479,8	ERJ3EKF5601 ERJ2GEJ560	M 5.6KOHM, 1/16W M 56 OHM, J,0.063W	2	
0	ERU ZGEU 300	M 30 OHM, 0,0.003W		
R8481	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8483- 87	ERJ2GEJ560	M 56 OHM, J,0.063W	5	
R8488	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8489	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8491- 94	ERJ2GEJ101	M 100 ОНМ, J,0.063W	4	
R8495	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8497,9 8	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8500	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	1	
R8501	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8503	ERJ2GEJ562	M 5.6KOHM, J, 0.063W	1	
R8504,0 5	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8507	ERJ2GEJ562	M 5.6KOHM, J, 0.063W	1	
R8508,0	ERJ2GEJ203	м 20конм, ј, 0.063w	2	
R8510	ERJ2GE0R00	M 0.0 OHM,	1	
R8511	ERJ2GEJ473	J,0.063W M 47KOHM,J,0.063W	1	
R8512-	ERJ2GEJ103	M 10KOHM, J,0.063W	7	
18 R8519	ERJ2GEJ392	м 3.9КОНМ,	1	
R8524	ERJ2GEJ222	J,0.063W M 2.2KOHM,	1	
R8525,2	ERJ2GEJ103	J,0.063W M 10КОНМ, J,0.063W	2	
6 R8527	ERJ2GEJ392	м 3.9КОНМ,	1	
R8528-	ERJ2GEJ103	J,0.063W М 10КОНМ, J,0.063W	3	
30 R8531	EXB38V560J	RESISTOR ARRAY	1	
R8532-	ERJ2GEJ560	M 56 OHM, J,0.063W	4	
35				
R8536	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8537	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8538	ERJ2GEJ101	м 100 ОНМ, J,0.063W	1	
R8539	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8540	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8541-	ERJ2GEJ560	M 56 OHM, J,0.063W	7	
47 R8548	ERJ2GE0R00	M 0.0 OHM,	1	
R8551	ERJ2GEJ103	J,0.063W M 10KOHM, J,0.063W	1	
R8551	ERJ2GEJ103 ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8554 - 56	ERJ2GEJ560	M 56 OHM, J,0.063W	3	
R8557	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8558	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8559	EXB38V560J	RESISTOR ARRAY	1	
R8560,6 1	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8562	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
R8564	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8565	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8566,6 7	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8568,6	ERJ2GEJ103	м 10конм, J,0.063W	2	
R8570- 73	ERJ2GEJ560	м 56 ОНМ, Ј,0.063W	4	
R8574	ERJ2GEJ103	м 10конм, ј,0.063w	1	

Ref.	PX50U / TH-50PX50U	Part Name &	Pcs	Remarks
No.		Description		
R8575 02	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R8575	ERJ3GEYJ181	M 180 OHM,J,1/16W	1	
R8576- 80	ERJ2GEJ330	M 33 OHM, J,0.063W	5	
R8582- 95	ERJ2GEJ330	M 33 OHM, J,0.063W	14	
R8596,9	D1HG33080001	NETWORK RESISTER	2	
R8598-	D1HG5608A002	NETWORK RESISTER	3	
R8601	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8602	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8605-	ERJ2GEJ103	M 10KOHM, J,0.063W	11	
R8617	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8629	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8630,3	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
1 R8632-	ERJ2GEJ560	M 56 OHM, J,0.063W	6	
37 R8640	ERJ2GE0R00	M 0.0 OHM,	1	
-06:5		J,0.063W	_	
R8641	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
4	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8645,4 6	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8647	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8648,4 9	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8650	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8651	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8652	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
R8653	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8654,5 5	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8656	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8657	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R8658	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8659	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8661	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	1	
R8665	D1HG1218A002	NETWORK RESISTER	1	
R8666	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8668	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8670	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8673	D1HG1218A002	NETWORK RESISTER	1	
R8674	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8678	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R8682	ERJ3EKF1303	M 130KOHM, 1/16W	1	
R8686,8 7	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8688,8 9	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8690	ERJ2GEJ333	м 33КОНМ, J,0.063W	1	
R8691	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8692	ERJ3EKF5102	M51.0KOHM, 1/16W	1	
R8693	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
R8694 R8695	ERJ2GEJ473 ERJ2GEJ223	M 47KOHM, J, 0.063W	1	
R8696	ERJ2GEJ223 ERJ3EKF5102	M 22KOHM, J,0.063W M51.0KOHM, 1/16W	1	
R8697	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8698	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8700	ERJ2GEJ472	м 4.7КОНМ,	1	
R8702	ERJ2GEJ101	J,0.063W M 100 OHM,	1	
R8703	ERJ2GEJ472	J,0.063W M 4.7KOHM,	1	
		J,0.063W		

		David Warra	<b>.</b>	B
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8704	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8705	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8706	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8707	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8708	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8709	ERJ3EKF8872	M88.7KOHM, 1/16W	1	
R8710	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8711	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8712	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8713,1 4	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8715	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8716	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8719,2	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8722- 25	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8727	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8731	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8733 R8734	ERJ3EKF1501 ERJ2GE0R00	M 1.5KOHM, 1/16W M 0.0 OHM,	1	
R8735	ERJ2GEJ103	J,0.063W M 10KOHM, J,0.063W	1	
R8736	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R8737	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8738	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R8741	ERJ3EKF8872	M88.7KOHM, 1/16W	1	
R8748	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8749	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8751- 53	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
R8755- 58	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	4	
R8765 R8770	ERJ3GEY0R00 ERJ2GE0R00	M 0 OHM, 1/16W M 0.0 OHM,	1	
R8774	ERJ2GE0R00	J,0.063W M 0.0 OHM,	1	
R8776	ERJ2GE0R00	J,0.063W M 0.0 OHM,	1	
R8777	ERJ3GEY0R00	J,0.063W M 0 OHM, 1/16W	1	
R8778,7	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8780,8	ERJ2GEJ103	м 10КОНМ, J,0.063W	2	
R8782- 87	EXB38VR000	RESISTOR ARRAY	6	
R8788	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8790	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R8791	ERJ2GEJ152	M 1.5KOHM, J,0.063W	1	
R8792,9	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8795- 98	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8799- 02	ERJ2GEJ103	м 10конм, J,0.063W	4	
R8817,1	ERJ2GEJ473	м 47конм, ј, 0.063W	2	
R9000	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9003,0	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9006	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9007	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9009	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9010	EXB2HV272JV	RESISTOR ARRAY	1	
R9012	EXB2HV272JV	RESISTOR ARRAY	1	
R9013	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9015- 18	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	ED TO COMO	Description		
R9019	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9020,2 1	ERJ3GEYJ102	M 1KOHM, J, 1/16W	4	
R9022	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9023	ERJ6ENF1601	M 1.6KOHM, 1/10W	1	
R9024	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9026	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9028	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9029,3	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
0 R9031,3	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
2 R9033,3 4	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R9039	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9040	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9041	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9042	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9043,4	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R9045	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9046	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R9047- 50	TAJAAH0101JV	M 100 OHM, J, 1/16W	4	
R9052	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9053	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9054,5	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
5				
R9056,5 7	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9058,5 9	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9060- 67	TAJAAH0101JV	M 100 OHM,J,1/16W	8	
R9068- 72	ERJ3GEYJ103	M 10KOHM,J,1/16W	5	
R9073	EXB2HV470JV	RESISTOR ARRAY	1	
R9074	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
	EXB2HV470JV	RESISTOR ARRAY	1	
R9076	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9076 R9077- 79	TAJAAH0101JV ERJ3GEY0R00	M 100 OHM, J, 1/16W M 0 OHM, 1/16W	3	
R9080	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223	M 100 OHM,J,1/16W M 0 OHM, 1/16W M 22KOHM,J,1/16W	1	
R9076 R9077- 79 R9080 R9081	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103	M 100 OHM, J, 1/16W M 0 OHM, 1/16W M 22KOHM, J, 1/16W M 10KOHM, J, 1/16W	1 3 1 1	
R9076 R9077- 79 R9080 R9081 R9082- 89	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV	M 100 OHM,J,1/16W M 0 OHM, 1/16W M 22KOHM,J,1/16W	1 3	
R9076 R9077- 79 R9080 R9081 R9082- 89	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562	M 100 OHM, J, 1/16W M 0 OHM, 1/16W M 22KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W	1 3 1 1	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV	M 100 OHM, J, 1/16W M 0 OHM, 1/16W M 22KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W	1 3 1 1 8	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562	M 100 OHM, J, 1/16W M 0 OHM, 1/16W M 22KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W	1 3 1 1 8	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103	M 100 OHM, J, 1/16W M 0 OHM, 1/16W M 22KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/10W	1 3 1 1 8	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103 ERJ3GEYJ473	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 22KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ473 ERJ6GEY0R00 ERJ3GEYJ103 TAJAAH0101JV	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 22KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04 R9105	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ473 ERJ6GEY0R00 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ103	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 22KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ473 ERJ6GEY0R00 ERJ3GEYJ103 TAJAAH0101JV	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 22KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04 R9105 R9107- 09	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ473 ERJ6GEY0R00 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ103	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 22KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4 3	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04 R9105 R9107- 09 R9110 R9111,1	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103 ERJ3GEYJ473 ERJ6GEY0R00 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 22KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 39KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4 3	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04 R9105 R9110 R9111,1	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103 ERJ3GEYJ473 ERJ6GEY0R00 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4 3 1 3	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04 R9107- 09 R9110 R9111,1 2 R9113	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103 ERJ3GEYJ473 ERJ6GEY0R00 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4 3 1 3	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04 R9110 R9111,1 2 R9113 R9114- 16	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4 3 1 3 1 2	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04 R9105 R9107- 09 R9111,1 2 R9113 R9114- 16 R9117,1 8	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4 3 1 3 1 3 1 2	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04 R9105 R9107- 09 R9111,1 2 R9113 R9114- 16 R9117,1 8 R9119	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4 3 1 3 1 2	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04 R9105 R9107- 09 R9111,1 2 R9113 R9114- 16 R9117,1	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4 3 1 3 1 2 1 3 2	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04 R9110 R9111,1 2 R9113 R9114- 16 R9117,1 8 R9117,1 8 R9119 R9120,2 1 R9122- 24	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103 ERJ3GEYJ473 ERJ6GEY0R00 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYOR00 ERJ3GEYOR00 ERJ3GEYOR00 ERJ3GEYOR00 ERJ3GEYOR00 TAJAAH0101JV	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 0 OHM, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4 3 1 3 1 2 1 3 2 1 2	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04 R9110 R9111,1 2 R9113 R9114- 16 R9117,1 8 R9117,1 8 R9119 R9120,2 1 R9122-	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103 ERJ3GEYJ473 ERJ6GEY0R00 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYJ103 ERJ3GEYOR00 ERJ3GEYOR00 ERJ3GEYOR00 ERJ3GEYOR00 ERJ3GEYOR00 TAJAAH0101JV	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10 OHM, J, 1/16W M 100 OHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4 3 1 3 1 2 1 3 2 1 2	
R9076 R9077- 79 R9080 R9081 R9082- 89 R9090 R9091,9 2 R9093 R9094 R9095- 98 R9102- 04 R9110 R9111,1 2 R9113 R9114- 16 R9117,1 8 R9117,1 8 R9119 R9120,2 1 R9122- 24 R9125,2	TAJAAH0101JV ERJ3GEY0R00 ERJ3GEYJ223 ERJ3GEYJ103 TAJAAH0101JV ERJ3GEYJ562 ERJ3GEYJ103	M 100 OHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 10KOHM, J, 1/16W M 100 OHM, J, 1/16W M 5.6KOHM, J, 1/16W M 10KOHM, J, 1/16W M 47KOHM, J, 1/16W M 0 OHM, J, 1/16W M 10KOHM, J, 1/16W M 0 OHM, 1/16W M 10KOHM, J, 1/16W	1 3 1 1 8 1 2 1 1 4 3 1 2 1 3 1 2 1 2 1 2 1 3 2 1 2 1 3 2 1 3 1 2 1 3 1 2 1 3 1 2 1 3 1 2 1 3 1 2 1 3 1 2 1 3 1 2 1 3 1 3	

		111-97	. 2000	/ IN-42F X300 / IN-
Ref.	Part No.	Part Name &	Pcs	Remarks
No. R9131-	ERJ3GEYJ472	Description M 4.7KOHM,J,1/16W	3	
33 R9134-	TAJAAHO101JTV	M 100 OHM,J,1/16W	3	
36	1110111111010101	11 100 Olm/0/1/10N		
R9137	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9140-	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
42 R9145- 47	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9160,6	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9162,6	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R9200-	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
R9204	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R9206,0	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9210	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
<b>—</b>				
R9212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9300- 04	D1HG33080001	NETWORK RESISTER	5	
R9305	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9306,0	D1HG33080001	NETWORK RESISTER	2	
R9308	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9309	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9313-	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
16				
9	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9321	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9323	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9324- 28	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9329	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9330- 33	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9335,3	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9337	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
R9338	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
R9339-	ERJ6ENF1001	M 1KOHM, 1/10W	4	
42 R9500-	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
03 R9505-	TAJAAH0101JV	M 100 OHM,J,1/16W	6	
10 R9511	EABORIS 20 111	DECICATOD YDDAA	1	
	EXB2HV272JV	RESISTOR ARRAY		
R9512	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9513	EXB2HV272JV	RESISTOR ARRAY	1	
R9515	EXB2HV272JV	RESISTOR ARRAY	1	
R9516,1	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9518	EXB2HV470JV	RESISTOR ARRAY	1	
R9519- 21	EXB38V470J	RESISTOR ARRAY	3	
R9522,2	EXB2HV470JV	RESISTOR ARRAY	2	
R9524- 26	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
R9527	EXB38V470J	RESISTOR ARRAY	1	
R9528,2 9	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R9530	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9533,3	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9536	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R9537,3	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9540	ERJ3GEYJ304V	M 300KOHM,J,1/16W	1	
R9543	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9547	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9700	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
22,00	LENUJGETURUU	2 0 OHM, 1/10W		

50U / TH-42I	PX50U / TH-50PX50L			
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9702- 04	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
	ERJ6ENF1001	M 1KOHM, 1/10W	2	
7 R9708	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
		·		
R9709	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9714	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9716,1 7	ERJL14KJ33M	M 33 OHM, J,1/4W	2	
R9718	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9719	ERJ6ENF1742	M17.4KOHM, 1/10W	1	
R9720	ERJ6ENF6342	M6.34KOHM, 1/10W	1	
R9721	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9722,2	ERJ3GEYJ100	M 10 OHM,J,1/16W	2	
R9724	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9725	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9726,2	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
7		·		
R9728,2 9	ERJ6ENF2002	M 20KOHM, 1/10W	2	
R9738,3 9	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9740- 42	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R9800	EXB38V470J	RESISTOR ARRAY	1	
R9802- 04	EXB2HV470JV	RESISTOR ARRAY	3	
R9806,0	EXB38V470J	RESISTOR ARRAY	2	
R9808,0	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9810	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9811	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9812	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9813	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9814	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9815	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9816,1 7	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9819	EXB2HV470JV	RESISTOR ARRAY	1	
R9820,2 1	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9822,2 3	EXB2HV470JV	RESISTOR ARRAY	2	
R9824	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9830	EXB2HV470JV	RESISTOR ARRAY	1	
R9900	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9901	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9902		•	1	
	ERJ3GEYJ104	M 100KOHM, J, 1/16W		
R9903	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9904	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9905	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9906	EXB2HV470JV	RESISTOR ARRAY	1	
R9907	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9908,0 9	EXB38V470J	RESISTOR ARRAY	2	
R9910,1 1	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9912	EXB2HV470JV	RESISTOR ARRAY	1	
R9913	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9914	EXB38V470J	RESISTOR ARRAY	1	
R9915,1	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9917- 19	EXB2HV470JV	RESISTOR ARRAY	3	
R9922	EXB2HV470JV	RESISTOR ARRAY	1	
R9923	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
		, , , , , , , , , , , , , , , , , , , ,		
RM2510	PNA4601M05TV	REMOCO RECEIVER	1	
RTL	TNGA162	CIRCUIT BOARD DT	1	PAVCA A
RTL	TNPA3598AC	CIRCUIT BOARD H	1	$\triangle$
RTL	TNPA3620	CIRCUIT BOARD PA	1	$\triangle$
RTL	TNPA3621AB	CIRCUIT BOARD Z	1	$\triangle$
RTL	TNPA3625AE	CIRCUIT BOARD DG	1	$\triangle$

	1	1		T
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
RTL	TNPA3626	CIRCUIT BOARD DV	1	∆
RTL	TNPA3547	CIRCUIT BOARD C1	1	$ $ $\triangle$
RTL	TNPA3548	CIRCUIT BOARD C2	1	Δ
			<b>-</b>	Δ
RTL	TNPA3549	CIRCUIT BOARD C3	1	
RTL	TNPA3550	CIRCUIT BOARD C4	1	$\triangle$
RTL	TZTNP010YES	CIRCUIT BOARD D	1	$\triangle$
RTL	TNPA3570AB	CIRCUIT BOARD P	1	$\triangle$
RTL	TNPA3643AC	CIRCUIT BOARD PB	1	Δ
RTL	TNPA3573	CIRCUIT BOARD SC	1	Δ
	<del> </del>			
RTL	TNPA3552	CIRCUIT BOARD SD	1	Δ
RTL	TNPA3574	CIRCUIT BOARD SS	1	$\triangle$
RTL	TNPA3551	CIRCUIT BOARD SU	1	$\triangle$
RTL	TNPA3603	CIRCUIT BOARD K	1	Δ
RTL	TNPA3604	CIRCUIT BOARD S	1	<u> </u>
KIL .	111111111111111111111111111111111111111	CIRCOII BOIND D	-	
S1	K1KA03AA0193	3P CONNECTOR	1	
S2	K1KA02AA0193	2P CONNECTOR	1	
SC2	K1KA06AA0192	6P CONNECTOR	1	
SC20	K1KA20AA0008	20P CONNECTOR	1	
SC23		3P CONNECTOR	1	
SC41,42	K1ML80B00001	80P CONNECTOR	2	
SC45,46	K1KA09A00210	9P CONNECTOR	2	
SC90	K1KA06AA0192	6P CONNECTOR	1	
			<del>-</del> -	
		<u> </u>	-	
SD1-D3	K1MNC0B00001	CONNECTOR	3	
SD46	K1KB09A00045	9P CONNECTOR	1	
SS11	K1KA07AA0192	7P CONNECTOR	1	
SS12		5P CONNECTOR	1	
SS24	K1KA04AA0193	4P CONNECTOR	1	
SS32	K1KA12AA0194	12P CONNECTOR	1	
SS34	K1KA03AA0193	3P CONNECTOR	1	
SS51-54	K1MN13B00020	13P CONNECTOR	4	
arra rra	***************************************	GOVERNOR		
SU1-U3	K1MNC0B00001	CONNECTOR	3	
SU45	K1KB09A00045	9P CONNECTOR	1	
SW2500	K0F122A00172	SWITCREMOTE	1	
		CONTROLH		
SW3751-	EVQ11G05R	SWITCH	5	
55	_ ~			
mc F O O	EEG12ED1203D	SWITCHING TRANS	-	
			1	
T6501	ETS22AE2F9AC	SWITCHING TRANS	1	
TU8200	ENGD6302DF	TUNER	1	$\triangle$
VR6045	EVMEASA00B14	CONTROL 10KOHMB	1	
V K O U 4 5	LVMEASAUUB14	0.3W		
TVD CE AA	DIRET GROSSIS		-	
VR6503	EVMEASA00B13	CONTROL 1KOHMB	1	
		0.3W	_	
VR6504,	EVMEASA00B53	CONTROL 5KOHMB	2	
05		0.3W		
X4001	TSSA101	CRYSTAL	1	
X4002	ној400400017	CRYSTAL	1	
X4004	ној270500087	CRYSTAL	1	
X8005	H0J270500067	CRYSTAL	1	
X8200	ној250500050	CRYSTAL	1	
X9000	H2D2705A0004	CRYSTAL	1	
X9200	ној200500038	CRYSTAL	1	
XF8200	J0C4405B0004	LC FILTER	1	
	<u> </u>	<del> </del>	<del>                                     </del>	
XF8201	J0C4405B0006	LC FILTER	1	
XF8202	J0C4405B0005	LC FILTER	1	
Z2	K1KA05AA0192	5P CONNECTOR	1	
Z50	K1MN35A00013	35P CONNECTOR	1	
	1			
735601	F07700000101	CONNECTOR	4	
ZA5601-	K9ZZ00000424	CONNECTOR	4	
04			<u> </u>	
ZA5801-	K9ZZ00000424	CONNECTOR	4	
04				

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	K4CD01000013	_	4	
	K4CD01000013	TERMINAL	3	
<b>-</b>	K4CD01000013	TERMINAL	3	
	K4CD01000013	TERMINAL	2	
ZA7204	K4CD01000013	TERMINAL	1	
ZA7301- 04	K4CD01000013	TERMINAL	4	
ZA7401- 03	K4CD01000013	TERMINAL	3	
	K4CD01000013	TERMINAL	1	
06	K4ZZ01000179	TERMINAL	5	
ZMM1	TMM25401	CLAMPER	1	
C402	EC.T2 YC1 H1 01.T	C 100PF, J, 50V	1	
C402	ECKCNA222MEB		1	Δ
C404	F0CAF105A021	C 1UF, 250V	1	Δ
C405		C 0.01UF, K, 50V	1	
C407	ECA2WHG220	E 22UF, 450V	1	
C409	F0CAF105A021	C 1UF, 250V	1	<u> </u>
C410 C411-14	ECJ3YB1E105K ECJ2XB1H103K	C 1UF, K, 25V C 0.01UF, K, 50V	4	
	F1A3A102A040	C 1000PF, J, 1KV	2	
C417		C 0.01UF, K, 50V	1	
C418	F1J1C1050011	C 1UF, Z, 50V	1	
C419	F1A3A102A040	C 1000PF, J, 1KV	1	
	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C423	ECJ2XB1H472K	C 1000PF, K, 50V	1	
C424 C425	F1A3A102A040 ECJ2XB1H103K	C 1000PF, J, 1KV C 0.01UF, K, 50V	1	
C426	ECJ2XC1H471J	C 470PF, J, 50V	1	
C427	F1J1C1050011	C 1UF, Z, 50V	1	
C428	ECJ2XC1H221J	C 220PF, J, 50V	1	
C429,30	F1K2J1530002	C 0.15PF, J,630V	2	
		C 1000PF, K, 50V	1	
C432-34 C436	F1J1C1050011 F1J1C1050011	C 1UF, Z, 50V C 1UF, Z, 50V	3 1	
	ECA1HM100	E 10UF, 50V	1	
	F1A3A102A040	C 1000PF, J, 1KV	2	
C445	F1J1C1050011	C 1UF, Z, 50V	1	
C446	F2B2W3910005	C 390UF, 450V	1	
C451	F1A3A101A040	C 100PF, J, 1KV	1	
C457 C459	ECWH12333RHV F1K2J1530002	P 0.013UF,J,1.2KV C 0.15PF, J,630V	1	
	F1A3A331A039	E 330UF, 1KV	2	
C462	ECJ3YB1E105K	C 1UF, K, 25V	1	
C463	ECJ2XC1H220J	C 22UF, J, 50V	1	
C465	ECKCNA221KB7	C 220PF, M,	1	<u>^</u>
C467	ECKCNA221KB7	C 220PF, M,	1	$\triangle$
C468 C470	ECJ2XB1H103K F0CAF105A021	C 0.01UF, K, 50V C 1UF, 250V	1	Δ
C471	F1J1C1050011	C 1UF, Z, 50V	1	
C473	ECKCNA221KB7	C 220PF, M,	1	Δ
C476	ECKCNA221KB7	C 220PF, M,	1	Δ
C482	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C490	ECJ2XC1H331J	C 330PF, J, 50V	1	
C491 C492	ECJ2XB1E104K ECJ2XC1H271J	C 0.1UF, K, 25V C 270PF, J, 50V	1	
C493	ECA1EM101	E 100UF, 25V	1	
	ECJ2XC1H101J	C 100PF, J, 50V	2	
C496	F1J1C1050011	C 1UF, Z, 50V	1	
C497	ECA1EM221	E 220UF, 25V	1	
C498	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C501-03 C504	ECJ2XB1H103K F1J1C1050011	C 0.01UF, K, 50V	3 1	
C504 C505	ECJ2XB1H102K	C 1UF, Z, 50V C 1000PF, K, 50V	1	
C506-08	ECJ2XB1H103K	C 0.01UF, K, 50V	3	
		1	1	
C509	ECA1EM101	E 100UF, 25V		

Ref.	Part No.	Part Name & Description	Pcs	Remarks
	ECA1EM331	E 330UF, 25V	1	
C512-14		C 470PF, J, 50V	3	
C515	ECA1CM222	E 2200UF, 16V	1	
C516	ECJ2XB1C474K	C 0.47UF, K, 16V	1	
C517	F2D1E1010001	E 10UF, 25V	1	
C518,19	F1J1C1050011	C 1UF, Z, 50V	2	
C523	ECJ3YB1E105K	C 1UF, K, 25V	1	
C525	F2A1E8210012	E 820UF, 25V	1	
C526	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C527	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C528,29	F1J1C1050011	C 1UF, Z, 50V	2	
C530	ECJ2VB1H333K	C 0.033UF, K, 50V	1	
C533	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C534		C 470PF, J, 50V	1	
	ECJ2VB1H333K	C 0.033UF, K, 50V	2	
C548	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C551-53		C 0.1UF, K, 50V	3	
C554		C 1UF, Z, 50V	1	
C555 C556	F2A1C1520009	E 100UF, 100V	1	
C557		E 1500UF, 16V E 1500UF, 25V	1	
C562	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C572	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C574	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C577		E 33UF, 100V	1	
C581		C 0.022UF, K, 50V	1	
C583	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C584	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C587	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C591,92	F1K2J1530002	C 0.15PF, J,630V	2	
C601	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C603	ECA1HM470	E 47UF, 50V	1	
C604,05	F2A2C1510004	E 150UF, 160V	2	
C606,07	F1J1C1050011	C 1UF, Z, 50V	2	
C608,09	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C610	F1J1C1050011	C 1UF, Z, 50V	1	
C611		E 142UF, 220V	1	
C612	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C615	F2B2T1420001	E 142UF, 220V	1	
C616		C 1000PF, J, 1KV	1	
C619	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C620 C623	ECJ2XB1H103K ECA1HM100	C 0.01UF, K, 50V E 10UF, 50V	1	
C624		C 1UF, K, 25V	1	
C626	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C629	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C631	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C633	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C634	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C635	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C636	F1J1C1050011	C 1UF, Z, 50V	1	
C637	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C638,39	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C640	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C641	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C643	ECA1HM470	E 47UF, 50V	1	
C646,47	ECJ2XC1H331J	C 330PF, J, 50V	2	
D401	B0FBAT000006	DIODE	1	
D402	MA4240MTA	ZENER DIODE	1	
D403	MA4051NM	ZENER DIODE	1	
D404	B0EBKT000007	DIODE	1	
D406	MA4200M	ZENER DIODE	1	
D407	MA188	DIODE	1	
D410	MA111	DIODE	1	
D411	B0BB17000010	DIODE	1	
D412-14 D415	B0JAME000081	DIODE	3 1	
D415 D417	RU30A	DIODE	1	
	MA4082M	ZENER DIODE	1	
	RU30A	DIODE	2	
D413,20	MA188	DIODE	1	
D425	MA188	DIODE	1	

No.	Part No.	Part Name & Description	Pcs	Remarks
D427-29	ERA15-10	DIODE	3	
D431	B0JCDD000002	DIODE	1	
D433	MA4150M	ZENER DIODE	1	
D434	MA4082M	ZENER DIODE	1	
D435	ERA15-10	DIODE	1	
D436	MA188	DIODE	1	
D437	MA4082M	ZENER DIODE	1	
D438	MA4150M	ZENER DIODE	1	
D439	MA4130HTA	ZENER DIODE	1	
D440	MA4300M	ZENER DIODE	1	
D441	B0HAMM000122	DIODE	1	
D442	MA4075M	ZENER DIODE	1	
D443	MA4240MTA	ZENER DIODE	1	
D444	B0HAMM000122	DIODE	1	
D445	MA165	DIODE	1	
D459	MA188	DIODE	1	
D461	MA4082M	ZENER DIODE	1	
D462	MA142WKTX	ZENER DIODE	1	
D463-67	ERA15-10	DIODE	5	
D501	BOHANROOOO16	DIODE	1	
D501	MA165	DIODE	2	
D505,04	B0JAME000081	DIODE	1	
D505	MA4051NM	ZENER DIODE	1	
	MA4150M	ZENER DIODE	2	
D507,08	BOHANMOOOO28	DIODE	2	
D509,10 D511	BOHBSM000043	DIODE	1	
D511 D514	MA4062M	ZENER DIODE	1	
D514 D521	B0HAMP000067	DIODE	1	
D521 D528,29	MA153	DIODE	2	
D530 D531,32	MA4100M B0HAPR000012	ZENER DIODE DIODE	2	
		<del> </del>	-	
D534	B0JBSG000026	DIODE	1	
D535	MA188	DIODE		
D536	B0JBSL000013	DIODE	1	
D538	MA3051M	ZENER DIODE	1	
D539	B0HBRP000007	DIODE	1	
D542	MA4180HTA	ZENER DIODE	1	
D543	MA4150M	ZENER DIODE	1	
D544,45	MA4180HTA	ZENER DIODE	2	
D549	MA4075M	ZENER DIODE	1	
D551	MA4130M	ZENER DIODE	1	
D552	MA4082M	ZENER DIODE	1	
D555		ZENER DIODE	1	
	MA4075M			
D559	MA4075M	ZENER DIODE	1	
D559 D563	MA4075M MA4062M	ZENER DIODE	1	
D559 D563 D564	MA4075M MA4062M MAZ72000AF	ZENER DIODE	1	
D559 D563 D564 D565	MA4075M MA4062M MAZ72000AF MA4160M	ZENER DIODE ZENER DIODE ZENER DIODE	1 1 1	
D559 D563 D564 D565 D566	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122	ZENER DIODE ZENER DIODE ZENER DIODE DIODE	1 1 1	
D559 D563 D564 D565 D566	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L	ZENER DIODE ZENER DIODE ZENER DIODE DIODE DIODE	1 1 1 1 1	
D559 D563 D564 D565 D566 D568	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M	ZENER DIODE  ZENER DIODE  ZENER DIODE  DIODE  DIODE  ZENER DIODE	1 1 1 1 1 3	
D559 D563 D564 D565 D566 D568 D569-71 D572	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188	ZENER DIODE ZENER DIODE ZENER DIODE DIODE DIODE ZENER DIODE DIODE DIODE	1 1 1 1 1 1 3	
D559 D563 D564 D565 D566 D568 D569-71 D572 D574	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111	ZENER DIODE ZENER DIODE ZENER DIODE DIODE DIODE ZENER DIODE DIODE DIODE DIODE	1 1 1 1 1 1 3 1	
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188	ZENER DIODE ZENER DIODE ZENER DIODE DIODE DIODE ZENER DIODE DIODE DIODE DIODE DIODE	1 1 1 1 1 3 1 1	
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111	ZENER DIODE ZENER DIODE ZENER DIODE DIODE DIODE ZENER DIODE DIODE DIODE DIODE DIODE DIODE DIODE	1 1 1 1 1 1 3 1 1 1	
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F	ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE	1 1 1 1 1 3 1 1 1 1	
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M	ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE	1 1 1 1 1 3 1 1 1 1 1	
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584 D586	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067	ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  DIODE  DIODE	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M	ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE	1 1 1 1 1 3 1 1 1 1 1	
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584 D586 D587	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188	ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE DIODE DIODE DIODE DIODE	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584 D586 D587	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188 CNC1S171R	ZENER DIODE ZENER DIODE ZENER DIODE DIODE DIODE ZENER DIODE DIODE DIODE DIODE DIODE DIODE DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE DIODE DIODE DIODE DIODE	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Δ
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584 D586 D587  IC401 IC402	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188 CNC1S171R COBBAA000038	ZENER DIODE  ZENER DIODE  ZENER DIODE  DIODE  DIODE  ZENER DIODE  ZENER DIODE  ZENER DIODE  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D559 D563 D564 D565 D566 D568 D572 D574 D575 D579 D582 D584 D586 D587 IC401 IC402 IC403,0	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188 CNC1S171R	ZENER DIODE ZENER DIODE ZENER DIODE DIODE DIODE ZENER DIODE DIODE DIODE DIODE DIODE DIODE DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE DIODE DIODE DIODE DIODE	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Δ Δ
D559 D563 D564 D565 D566 D568 D572 D574 D575 D579 D582 D584 D586 D587 IC401 IC402 IC403,04	MA4075M MA4062M MA272000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188 CNC1S171R COBBAA000038	ZENER DIODE ZENER DIODE ZENER DIODE DIODE DIODE ZENER DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE ZENER DIODE ZENER DIODE ZENER DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D559 D563 D564 D565 D566 D568 D572 D574 D575 D579 D582 D584 D586 D587 IC401 IC402 IC403,0 4 IC406	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188 CNC1S171R COBBAA000038 CNC1S171R	ZENER DIODE  ZENER DIODE  ZENER DIODE  IC  IC  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D559 D563 D564 D565 D566 D568 D572 D574 D575 D579 D582 D584 D586 D587 IC401 IC402 IC403,0 4 IC406 IC407	MA4075M MA4062M MA272000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188 CNC1S171R C0BBAA000038 CNC1S171R CODBAZZ00021 CODBAZZ00111	ZENER DIODE  ZENER DIODE  ZENER DIODE  LENER DIODE  DIODE  DIODE  LENER DIODE  DIODE  DIODE  LENER DIODE  LOC  LC  LC  LC  LC  LC  LC  LC  LC  L	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Δ
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584 D586 D587 IC401 IC402 IC403,0 4 IC406 IC407 IC408,0	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188 CNC1S171R COBBAA000038 CNC1S171R	ZENER DIODE  ZENER DIODE  ZENER DIODE  IC  IC  IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584 D586 D587 IC401 IC402 IC403,0 4 IC406 IC407 IC408,0 9	MA4075M MA4062M MA272000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188 CNC1S171R C0BBAA000038 CNC1S171R CODAZZZ00021 CNC1S171R	ZENER DIODE  ZENER DIODE  ZENER DIODE  LENER DIODE  DIODE  DIODE  LENER DIODE  DIODE  DIODE  LENER DIODE  LOC  LC  LC  LC  LC  LC  LC  LC  LC  L	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Δ
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584 D586 D587 IC401 IC402 IC403,04 IC406 IC407 IC408,09 IC411	MA4075M MA4062M MA272000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188  CNC1S171R C0BBAA000038 CNC1S171R CODAZZZ00021 CNC1S171R CNC1S171R	ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE IC IC IC IC IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Δ
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584 D586 D587 IC401 IC402 IC403,04 IC406 IC407 IC408,09 IC411 IC412	MA4075M MA4062M MAZ72000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188  CNC1S171R C0DBAZZ00021 C0DBAZZ00111 CNC1S171R C0BBAA000038 CNC1S171R	ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE IC IC IC IC IC IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Δ
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584 D586 D587 IC401 IC402 IC403,04 IC406 IC407 IC408,09 IC411 IC412 IC501	MA4075M MA4062M MA272000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188  CNC1S171R C0DBAZZ00021 C0DBAZZ00111 CNC1S171R C0BBAA000038 CNC1S171R C0DBAZZ00111 CNC1S171R	ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE IC IC IC IC IC IC IC IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2	Δ.
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584 D586 D587 IC401 IC402 IC403,04 IC406 IC407 IC408,09 IC411 IC412 IC501 IC502	MA4075M MA4062M MA272000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188  CNC1S171R CODBAZZ00021 CODBAZZ00111 CNC1S171R CODBAZZ00111 CNC1S171R COBBAA000038 CNC1S171R COBBAA0000064 COEBH00000190	ZENER DIODE  ZENER DIODE  ZENER DIODE  IC  IC  IC  IC  IC  IC  IC  IC  IC  I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2 1 1 1 2 1	Δ.
D559 D563 D564 D565 D566 D568 D569-71 D572 D574 D575 D579 D582 D584 D586 D587 IC401 IC402 IC403,04 IC406 IC407 IC408,09 IC411 IC412 IC501	MA4075M MA4062M MA272000AF MA4160M B0HAMM000122 MA3J142D0L MA4300M MA188 MA111 MA188 MA111 MA2705600F MA4075M B0HAMP000067 MA188  CNC1S171R C0DBAZZ00021 C0DBAZZ00111 CNC1S171R C0BBAA000038 CNC1S171R C0DBAZZ00111 CNC1S171R	ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE IC IC IC IC IC IC IC IC	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 2	Δ.

Ref.   Part No.   Description   1   1   1   1   1   1   1   1   1				-	
COS   COERDEOUGUST   C	Ref.	Part No.	Part Name &	Pcs	Remarks
ICS07   COCBABE00023   CC		C07P70000979		1	
CONTRIBUTION   CC				<del>                                     </del>	
CS12   CODAEMBO00045   CC				<del>                                     </del>	
ICS20			-	<del>                                     </del>	
L402   EXCELSA24   BEAD CHOKE			<del> </del>	<del>                                     </del>	
L404.05 G0B123K00003 INDUCTION COIL 2  L501 EXCELSA35 BRAD CHOKE 1  L502 TALLOSHIO2JA INDUCTION COIL 1  L506 EXCELDR25C BRAD CHOKE 1  L509 J0JRC0000032 CHIP INDUCTOR 1  L510 EXCELDR25C BRAD CHOKE 1  P2 K1KA06AA0479 6P CONNECTOR 1  P5 K1KA1AA0183 11P CONNECTOR 1  P9 K1KA03A0037 3P CONNECTOR 1  P9 K1KA03A0037 3P CONNECTOR 1  P11 K1KA07AA0192 7P CONNECTOR 1  P12 K1KA05AA0192 5P CONNECTOR 1  P12 K1KA05AA0192 5P CONNECTOR 1  P13 K1KA05AA0192 5P CONNECTOR 1  P14 K1KA05AA0192 5P CONNECTOR 1  P15 K1KA1AA0183 11P CONNECTOR 1  P16 K1KA05AA0192 5P CONNECTOR 1  P17 K1KA05AA0192 5P CONNECTOR 1  P18 K1KA05AA0192 5P CONNECTOR 1  P19 K1KA05AA0192 5P CONNECTOR 1  P10 K1KA05AA0192 5P CONNECTOR 1  P11 K1KA05AA0192 5P CONNECTOR 1  P12 K1KA05AA0192 5P CONNECTOR 1  P13 K1KA05AA0192 5P CONNECTOR 1  P14 K1KA05AA0192 5P CONNECTOR 1  P15 K1KA05AA0192 5P CONNECTOR 1  P16 K55502B0001 FUSE 1  PK601 K55502B0001 FUSE 1  PK601 K56312B00012 FUSE 1  Q401 B1CHND000004 TRANSISTOR 1  Q403 B1CBGD000007 TRANSISTOR 1  Q404 B1DECF000022 TRANSISTOR 1  Q404 B1DEGCD0002 TRANSISTOR 1  Q404 B1DEGD000007 TRANSISTOR 1  Q404 B1DEGD000007 TRANSISTOR 1  Q404 B1DEGD000007 TRANSISTOR 1  Q405 P18	10320	C92B00000496	10	<del>                                     </del>	
L404.05 G0B123K00003 INDUCTION COIL 2  L501 EXCELSA35 BRAD CHOKE 1  L502 TALLOSHIO2JA INDUCTION COIL 1  L506 EXCELDR25C BRAD CHOKE 1  L509 J0JRC0000032 CHIP INDUCTOR 1  L510 EXCELDR25C BRAD CHOKE 1  P2 K1KA06AA0479 6P CONNECTOR 1  P5 K1KA1AA0183 11P CONNECTOR 1  P9 K1KA03A0037 3P CONNECTOR 1  P9 K1KA03A0037 3P CONNECTOR 1  P11 K1KA07AA0192 7P CONNECTOR 1  P12 K1KA05AA0192 5P CONNECTOR 1  P12 K1KA05AA0192 5P CONNECTOR 1  P13 K1KA05AA0192 5P CONNECTOR 1  P14 K1KA05AA0192 5P CONNECTOR 1  P15 K1KA1AA0183 11P CONNECTOR 1  P16 K1KA05AA0192 5P CONNECTOR 1  P17 K1KA05AA0192 5P CONNECTOR 1  P18 K1KA05AA0192 5P CONNECTOR 1  P19 K1KA05AA0192 5P CONNECTOR 1  P10 K1KA05AA0192 5P CONNECTOR 1  P11 K1KA05AA0192 5P CONNECTOR 1  P12 K1KA05AA0192 5P CONNECTOR 1  P13 K1KA05AA0192 5P CONNECTOR 1  P14 K1KA05AA0192 5P CONNECTOR 1  P15 K1KA05AA0192 5P CONNECTOR 1  P16 K55502B0001 FUSE 1  PK601 K55502B0001 FUSE 1  PK601 K56312B00012 FUSE 1  Q401 B1CHND000004 TRANSISTOR 1  Q403 B1CBGD000007 TRANSISTOR 1  Q404 B1DECF000022 TRANSISTOR 1  Q404 B1DEGCD0002 TRANSISTOR 1  Q404 B1DEGD000007 TRANSISTOR 1  Q404 B1DEGD000007 TRANSISTOR 1  Q404 B1DEGD000007 TRANSISTOR 1  Q405 P18	T 400	BYCET CADA	DEAD GUOVE	-	
L404,05   G0B123K00003   INDUCTION COIL   2				<del>                                     </del>	
L502   TALLOSNIOLOJA   BEAD CHOKE   1				<del>                                     </del>	Α
L502				<del>                                     </del>	<u> </u>
L506 EXCELDR25C BEAD CHOKE 1 L509 J0JRC0000032 CHIP INDUCTOR 1 L510 EXCELDR25C BEAD CHOKE 1  P2 KIKA06A00479 6P CONNECTOR 1 P5 KIKA11A00183 1JP CONNECTOR 1 P6 KIKA03A00537 3P CONNECTOR 1 P7 KIKA03A00537 3P CONNECTOR 1 P8 KIKA03A00537 3P CONNECTOR 1 P10 KIKA06AA0182 6P CONNECTOR 1 P11 KIKA07A0192 7P CONNECTOR 1 P12 KIKA05A00192 7P CONNECTOR 1 P12 KIKA05A00192 5P CONNECTOR 1 P23 KIKA03A0182 3P CONNECTOR 1 P25 KIKA03A0182 5P CONNECTOR 1 P25 KIKA05A0019 5P CONNECTOR 1 P30 KIKA05A0182 5P CONNECTOR 1 PR401 KSY502B0001 FUSE 1 PR501 KSH502200003 FUSE 1 PR503 KSH502200003 FUSE 1 PR503 KSH502200003 FUSE 1 PR503 KSH502200003 FUSE 1 PR601 KSG312B00012 FUSE 1 PR601 KSG312B00012 FUSE 1 P4040 B1CHND000004 TRANSISTOR 1 Q403 B1CBGD000001 TRANSISTOR 1 Q404 B1CHD000004 TRANSISTOR 1 Q406 B1DEHQ000007 TRANSISTOR 1 Q407 XW4601 TRANSISTOR 1 Q408,09 B1CRDD000004 TRANSISTOR 1 Q408,09 B1CRDD000004 TRANSISTOR 1 Q407 XW4601 TRANSISTOR 1 Q408,09 B1CRDD000004 TRANSISTOR 1 Q401 B1CHD000004 TRANSISTOR 1 Q401 B1CRDD000004 TRANSISTOR 1 Q402-22 ES1819A TRANSISTOR 1 Q411 B1CRD000004 TRANSISTOR 1 Q412-32 B1CEDQ000001 TRANSISTOR 1 Q414 B1CRD000004 TRANSISTOR 1 Q415 SES1819A TRANSISTOR 1 Q416 B1CRDQ000007 TRANSISTOR 1 Q417 B1CHND000004 TRANSISTOR 1 Q418 B1CRD000001 TRANSISTOR 1 Q419 B1CRDQ000001 TRANSISTOR 1 Q419 B1CRDQ000001 TRANSISTOR 1 Q419 B1CRDQ000001 TRANSISTOR 1 Q410 B1CRDQ000002 TRANSISTOR 1 Q411 B1CRD000004 TRANSISTOR 1 Q412-12 B1CRDQ000002 TRANSISTOR 1 Q432 B1CRDQ000001 TRANSISTOR 1 Q433 B1CRDD000001 TRANSISTOR 1 Q434 B1CRDQ000001 TRANSISTOR 1 Q435 B1CRDQ000001 TRANSISTOR 1 Q436 B1CRDQ000001 TRANSISTOR 1 Q437 B1CRDQ000001 TRANSISTOR 1 Q439 B1CRDQ000001 TRANSISTOR 1 Q430 B1CRDQ000001 TRANSISTOR 1 Q431 B1DRG0000001 TRANSISTOR 1 Q432 B1CRDQ000001 TRANSISTOR 1 Q433 B1CRDQ000001 TRANSISTOR 1 Q434 B1CRDQ000001 TRANSISTOR 1 Q435 B1CRDQ000001 TRANSISTOR 1 Q436 B1CRDQ000001 TRANSISTOR 1 Q437 B1CRDQ000001 TRANSISTOR 1 Q439 B1CRDQ000001 TRANSISTOR 1 Q430 B1CRDQ000001 TRANSISTOR 1 Q501 B1DRDQ000001 TRANSISTOR 1 Q501 B1DRDQ000001 TRANSISTOR 1 Q502 B1DR				<del></del>	
L509	-			<del>                                     </del>	
EXCELDR25C	<b>-</b>			<del>                                     </del>	
P2				<del>                                     </del>	
P5	L510	EXCELDR25C	BEAD CHOKE	1	
P5			<u> </u>	_	
P9		<b>+</b>		<del>                                     </del>	
P10			+	<del>                                     </del>	
P11				<del>                                     </del>	
P12				<del>                                     </del>	
P23	P11	K1KA07AA0192	7P CONNECTOR	1	
P25				<del>                                     </del>	
P30	P23	K1KA03AA0182	3P CONNECTOR	1	
PR401	P25	K1KA20AA0178		1	
PR402	P30	K1KA05AA0182	5P CONNECTOR	1	
PR402					
PR501	PR401	K5Y502BA0001	FUSE	1	
PR503	PR402	K5G202B00015	FUSE	1	
PR509	PR501	K5H502Z00003	FUSE	1	
PR601   K5G312B00012   FUSE	PR503	K5H502Z00003	FUSE	1	
Q401         B1CHND000004         TRANSISTOR         1           Q403         B1CBGD000001         TRANSISTOR         1           Q404         B1BCCF000002         TRANSISTOR         1           Q406         B1DBEQ000007         TRANSISTOR         1           Q407         XN4601         TRANSISTOR         2           Q412,13         B1DAGQ000013         TRANSISTOR         2           Q414         B1ABCF000134         TRANSISTOR         1           Q415         2SB1218ARL         TRANSISTOR         1           Q417         B1CHND000004         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q420-22         2SD1819A         TRANSISTOR         1           Q420,22         2SD1819A         TRANSISTOR         1           Q423,24         B1CBGD000001         TRANSISTOR         1           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1DEGS000001         TRANSISTOR         1           Q432         B1CBGD000001         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q435         B1C	PR509	K5H501Z00005	FUSE	1	
Q403         B1CBGD000001         TRANSISTOR         1           Q404         B1BCCF000022         TRANSISTOR         1           Q406         B1DEHQ000007         TRANSISTOR         1           Q407         XN4601         TRANSISTOR         1           Q408,09         B1CHND000004         TRANSISTOR         2           Q412,13         B1DAGQ000013         TRANSISTOR         1           Q415         2SB1218AL         TRANSISTOR         1           Q417         B1CRND000004         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q420-22         2SD1819A         TRANSISTOR         1           Q423,24         B1CBGD000001         TRANSISTOR         1           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1CBGD000001         TRANSISTOR         1           Q432         B1CBGD000001         TRANSISTOR         1           Q434         B1CEGD000001         TRANSISTOR         1           Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CE	PR601	K5G312B00012	FUSE	1	
Q403         B1CBGD000001         TRANSISTOR         1           Q404         B1BCCF000022         TRANSISTOR         1           Q406         B1DEHQ000007         TRANSISTOR         1           Q407         XN4601         TRANSISTOR         1           Q408,09         B1CHND000004         TRANSISTOR         2           Q412,13         B1DAGQ000013         TRANSISTOR         1           Q415         2SB1218AL         TRANSISTOR         1           Q417         B1CRND000004         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q420-22         2SD1819A         TRANSISTOR         1           Q423,24         B1CBGD000001         TRANSISTOR         1           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1CBGD000001         TRANSISTOR         1           Q432         B1CBGD000001         TRANSISTOR         1           Q434         B1CEGD000001         TRANSISTOR         1           Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CE					
Q404         B1BCCF000022         TRANSISTOR         1           Q406         B1DEHQ000007         TRANSISTOR         1           Q407         XN4601         TRANSISTOR         1           Q408,09         B1CHND000004         TRANSISTOR         2           Q412,13         B1DAGQ000013         TRANSISTOR         1           Q414         B1ABCF000134         TRANSISTOR         1           Q415         2SB1218AL         TRANSISTOR         1           Q417         B1CHND000004         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q420-22         2SD1819A         TRANSISTOR         1           Q423,24         B1CBGD000001         TRANSISTOR         2           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1DEGS000001         TRANSISTOR         1           Q432         B1CEJQ000002         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438	Q401	B1CHND000004	TRANSISTOR	1	
Q404         B1BCCF000022         TRANSISTOR         1           Q406         B1DEHQ000007         TRANSISTOR         1           Q407         XN4601         TRANSISTOR         1           Q408,09         B1CHND000004         TRANSISTOR         2           Q412,13         B1DAGQ000013         TRANSISTOR         1           Q414         B1ABCF000134         TRANSISTOR         1           Q415         2SB1218AL         TRANSISTOR         1           Q417         B1CHND000004         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q420-22         2SD1819A         TRANSISTOR         1           Q423,24         B1CBGD000001         TRANSISTOR         2           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1DEGS000001         TRANSISTOR         1           Q432         B1CEJQ000002         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438	Q403	B1CBGD000001	TRANSISTOR	1	
Q406         B1DEHQ000007         TRANSISTOR         1           Q407         XN4601         TRANSISTOR         1           Q408,09         B1CHND000004         TRANSISTOR         2           Q412,13         B1DAGQ000013         TRANSISTOR         2           Q414         B1ABCF000134         TRANSISTOR         1           Q415         2SB1218ARL         TRANSISTOR         1           Q417         B1CHD0000004         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q420-22         2SD1819A         TRANSISTOR         2           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1CEGQ000002         TRANSISTOR         1           Q431         B1CEGQ000002         TRANSISTOR         1           Q432         B1CEJQ000002         TRANSISTOR         1           Q433         B1CEGD000001         TRANSISTOR         1           Q434         B1CEGD000001         TRANSISTOR         1           Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q439         B1		B1BCCF000022	TRANSISTOR	1	
Q407         XN4601         TRANSISTOR         1           Q408,09         B1CHND000004         TRANSISTOR         2           Q412,13         B1DAGQ000013         TRANSISTOR         2           Q414         B1ABCF000134         TRANSISTOR         1           Q415         2SB1218ARL         TRANSISTOR         1           Q417         B1CHND000004         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q420-22         2SD1819A         TRANSISTOR         2           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1DEGS000001         TRANSISTOR         1           Q432         B1CEJQ000002         TRANSISTOR         1           Q433         B1CEGD000001         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBGD000001         TRANSISTOR         1           Q439         B1CHND000004         TRANSISTOR         1           Q501         XN				1	
Q408,09         B1CHND000004         TRANSISTOR         2           Q412,13         B1DAGQ000013         TRANSISTOR         2           Q414         B1ABCF000134         TRANSISTOR         1           Q415         28B1218ARL         TRANSISTOR         1           Q417         B1CHND000004         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q420-22         2SD1819A         TRANSISTOR         3           Q423,24         B1CBGD000001         TRANSISTOR         2           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1DEGS000001         TRANSISTOR         1           Q432         B1CEJQ000002         TRANSISTOR         1           Q433         B1CBGD000001         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q435         B1CBJQ000002         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBJQ000001         TRANSISTOR         1           Q439         B1CHND000004         TRANSISTOR         1           Q501,02				1	
Q412,13         BlDAGQ000013         TRANSISTOR         2           Q414         BlABCF000134         TRANSISTOR         1           Q415         2SB1218ARL         TRANSISTOR         1           Q417         BlCHND000004         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q420-22         2D81819A         TRANSISTOR         2           Q430         BlCEGD000001         TRANSISTOR         2           Q431         BlDEGS000001         TRANSISTOR         1           Q432         BlCEJQ000002         TRANSISTOR         1           Q433         BlCEGD000001         TRANSISTOR         1           Q434         BlCEJQ000002         TRANSISTOR         1           Q434         BlCEJQ000002         TRANSISTOR         1           Q435         BlCEGD000001         TRANSISTOR         1           Q436         BlCEJQ000002         TRANSISTOR         1           Q438         BlCEGD000001         TRANSISTOR         1           Q439         BlCHND00004         TRANSISTOR         1           Q439         BlCHND000004         TRANSISTOR         2           Q501,02         <				2	
Q414         Blabcf000134         TRANSISTOR         1           Q415         2SB1218ARL         TRANSISTOR         1           Q417         BlCHND000004         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q420-22         2SD1819A         TRANSISTOR         2           Q430         BlCEGD000001         TRANSISTOR         2           Q431         BlDEGS000001         TRANSISTOR         1           Q432         BlCEJQ000002         TRANSISTOR         1           Q433         BlCEGD000001         TRANSISTOR         1           Q434         BlCEJQ000002         TRANSISTOR         1           Q434         BlCEJQ000002         TRANSISTOR         1           Q436         BlCEJQ000002         TRANSISTOR         1           Q438         BlCEGD000001         TRANSISTOR         1           Q439         BlCHND00004         TRANSISTOR         1           Q440,41         2SD1819A         TRANSISTOR         1           Q501,02         2SD1820A         TRANSISTOR         1           Q505         BlCHND000002         TRANSISTOR         1           Q506         BlCHN				<del>                                     </del>	
Q415         2SB1218ARL         TRANSISTOR         1           Q417         B1CHND000004         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q420-22         2SD1819A         TRANSISTOR         2           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1DEGS000001         TRANSISTOR         1           Q432         B1CEJQ000002         TRANSISTOR         1           Q433         B1CEGD000001         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q435         B1CEGD000001         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CEGD000001         TRANSISTOR         1           Q439         B1CHND00004         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q503         XN0440100L         TRANSISTOR         1           Q506         B1CHND				<b>—</b>	
Q417         B1CHND000004         TRANSISTOR         1           Q418         2SD1819A         TRANSISTOR         1           Q420-22         2SD1819A         TRANSISTOR         3           Q423,24         B1CBGD000001         TRANSISTOR         2           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1DEGS000001         TRANSISTOR         1           Q432         B1CEJQ000002         TRANSISTOR         1           Q433         B1CBGD000001         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBGD000001         TRANSISTOR         1           Q439         B1CHND000004         TRANSISTOR         1           Q440,41         2SD1820A         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507 <td< td=""><td>-</td><td></td><td></td><td><del>                                     </del></td><td></td></td<>	-			<del>                                     </del>	
Q418         2SD1819A         TRANSISTOR         1           Q420-22         2SD1819A         TRANSISTOR         3           Q423,24         B1CBGD000001         TRANSISTOR         2           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1DEGS000001         TRANSISTOR         1           Q432         B1CEJQ000002         TRANSISTOR         1           Q433         B1CEGD000001         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBGD00001         TRANSISTOR         1           Q439         B1CHND00004         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q505         B1CEJQ000001         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q508         X				<del>                                     </del>	
Q420-22         2SD1819A         TRANSISTOR         3           Q423,24         B1CBGD000001         TRANSISTOR         2           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1DEGS000001         TRANSISTOR         1           Q432         B1CEJQ000002         TRANSISTOR         1           Q433         B1CBGD000001         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBGD00001         TRANSISTOR         1           Q439         B1CHND000004         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q510				<del>                                     </del>	
Q423,24         B1CBGD000001         TRANSISTOR         2           Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1DEGS000001         TRANSISTOR         1           Q432         B1CEJQ000002         TRANSISTOR         1           Q433         B1CBGD000001         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBGD00001         TRANSISTOR         1           Q439         B1CHND00004         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ00013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q510         B			<b>†</b>	<u> </u>	
Q430         B1CEJQ000002         TRANSISTOR         1           Q431         B1DEGS000001         TRANSISTOR         1           Q432         B1CEJQ000002         TRANSISTOR         1           Q433         B1CBGD000001         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBGD00001         TRANSISTOR         1           Q439         B1CHND00004         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         1           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ00013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q512         B1CB				<del>                                     </del>	
Q431         B1DEGS000001         TRANSISTOR         1           Q432         B1CEJQ000002         TRANSISTOR         1           Q433         B1CBGD000001         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBGD000001         TRANSISTOR         1           Q439         B1CHND000004         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         1           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q512         B				<del>                                     </del>	
Q432         B1CEJQ000002         TRANSISTOR         1           Q433         B1CBGD000001         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBGD000001         TRANSISTOR         1           Q439         B1CHND000004         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q512         B1CBGD00001         TRANSISTOR         1           Q516         B1D		1		<u> </u>	
Q433         B1CBGD000001         TRANSISTOR         1           Q434         B1CEJQ000002         TRANSISTOR         1           Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBGD000001         TRANSISTOR         1           Q439         B1CHND000004         TRANSISTOR         1           Q440,41         2SD1819A         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1D				<u> </u>	
Q434         B1CEJQ000002         TRANSISTOR         1           Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBGD000001         TRANSISTOR         1           Q439         B1CHND000004         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q511         B1CFDD000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1			<del> </del>	<del>                                     </del>	
Q435         B1CBGD000001         TRANSISTOR         1           Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBGD000001         TRANSISTOR         1           Q439         B1CHND000004         TRANSISTOR         2           Q501,02         2SD1819A         TRANSISTOR         2           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q511         B1CFDD000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1				<del>  .                                     </del>	
Q436         B1CEJQ000002         TRANSISTOR         1           Q438         B1CBGD000001         TRANSISTOR         1           Q439         B1CHND000004         TRANSISTOR         2           Q440,41         2SD1819A         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q511         B1CFND000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHF000002         TRANSISTOR         1           Q519         B1D				<del>                                     </del>	
Q438         B1CBGD000001         TRANSISTOR         1           Q439         B1CHND000004         TRANSISTOR         1           Q440,41         2SD1819A         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q511         B1CFND000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHFCFA00021         TRANSISTOR         1           Q520         B					
Q439         B1CHND000004         TRANSISTOR         1           Q440,41         2SD1819A         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q511         B1CFND000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHFO00002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1C	-			<u> </u>	
Q440,41         2SD1819A         TRANSISTOR         2           Q501,02         2SD1820A         TRANSISTOR         2           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q511         B1CFND000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1D				<u> </u>	
Q501,02         2SD1820A         TRANSISTOR         2           Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q511         B1CFND000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1				<del>                                     </del>	
Q503         XN0440100L         TRANSISTOR         1           Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q511         B1CFND000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1				<u> </u>	
Q505         B1CEJQ000002         TRANSISTOR         1           Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q511         B1CFND000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1				<del>                                     </del>	
Q506         B1CHND000004         TRANSISTOR         1           Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q511         B1CFND000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1				<del>                                     </del>	
Q507         B1DAGQ000013         TRANSISTOR         1           Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         B1DHBD000004         TRANSISTOR         1           Q511         B1CFND000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1				<u> </u>	
Q508         XN0450100L         TRANSISTOR         1           Q509         XN0440100L         TRANSISTOR         1           Q510         BlDHBD000004         TRANSISTOR         1           Q511         BlCFND000005         TRANSISTOR         1           Q512         BlCBGD000001         TRANSISTOR         1           Q516         BlDHBD000004         TRANSISTOR         1           Q517         BlHFCFA00021         TRANSISTOR         1           Q518         BlDEHL000018         TRANSISTOR         1           Q519         BlDEHF000002         TRANSISTOR         1           Q520         BlHFCFA00021         TRANSISTOR         1           Q525         BlCBGD000001         TRANSISTOR         1           Q527         BlDEHL000018         TRANSISTOR         1				<u> </u>	
Q509         XN0440100L         TRANSISTOR         1           Q510         BlDHBD000004         TRANSISTOR         1           Q511         BlCFND000005         TRANSISTOR         1           Q512         BlCBGD000001         TRANSISTOR         1           Q516         BlDHBD000004         TRANSISTOR         1           Q517         BlHFCFA00021         TRANSISTOR         1           Q518         BlDEHL000018         TRANSISTOR         1           Q519         BlDEHF000002         TRANSISTOR         1           Q520         BlHFCFA00021         TRANSISTOR         1           Q525         BlCBGD000001         TRANSISTOR         1           Q527         BlDEHL000018         TRANSISTOR         1				<u> </u>	
Q510         B1DHBD000004         TRANSISTOR         1           Q511         B1CFND000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1			<del> </del>	<del>                                     </del>	
Q511         B1CFND000005         TRANSISTOR         1           Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1			TRANSISTOR	1	
Q512         B1CBGD000001         TRANSISTOR         1           Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1				1	
Q516         B1DHBD000004         TRANSISTOR         1           Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1	Q511	B1CFND00005	TRANSISTOR	1	
Q517         B1HFCFA00021         TRANSISTOR         1           Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1	Q512	B1CBGD00001	TRANSISTOR	1	
Q518         B1DEHL000018         TRANSISTOR         1           Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1	Q516	B1DHBD000004	TRANSISTOR	1	
Q519         B1DEHF000002         TRANSISTOR         1           Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1	Q517	B1HFCFA00021	TRANSISTOR	1	
Q520         B1HFCFA00021         TRANSISTOR         1           Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1	Q518	B1DEHL000018	TRANSISTOR	1	
Q525         B1CBGD000001         TRANSISTOR         1           Q527         B1DEHL000018         TRANSISTOR         1	Q519	B1DEHF000002	TRANSISTOR	1	
Q527 B1DEHL000018 TRANSISTOR 1	Q520	B1HFCFA00021	TRANSISTOR	1	
	Q525	B1CBGD000001	TRANSISTOR	1	
Q530 B1CBGD000001 TRANSISTOR 1	Q527	B1DEHL000018	TRANSISTOR	1	
	Q530	B1CBGD00001	TRANSISTOR	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
Q535	2SD1819A	TRANSISTOR	1	
Q536-38	B1CFQD000001	TRANSISTOR	3	
Q541	B1CBGD00001	TRANSISTOR	1	
Q544	XN0440100L	TRANSISTOR	1	
Q550	B1CHGD000006	TRANSISTOR	1	
Q551,52	B1CBGD000001	TRANSISTOR	2	
Q553	2SD1819A	TRANSISTOR	1	
Q554	B1DHBD000004	TRANSISTOR	1	
Q557	2SD1819A	TRANSISTOR	1	
Q558	B1CHHG000002	TRANSISTOR	1	
Q559	2SD1819A	TRANSISTOR	1	
Q560	B1CHHG000002	TRANSISTOR	1	
Q561,62	2SD1819A	TRANSISTOR	2	
Q564,65	2SD1819A	TRANSISTOR	1	
Q567	B1CBGD000001	TRANSISTOR		
R401	ERJ6GEYJ472	M 4 7FOUM T 1/10W	1	
R401	ERJ6EKF6803	M 4.7KOHM,J,1/10W M 680KOHM, 1/10W	1	
R403	ERJ6ENF4702	M 47KOHM, 1/10W	1	
		M 100KOHM, J,1/10W	1	
R404 R405	ERJ6GEYJ104 ERJ6EKF6803	M 680KOHM, 1/10W	1	
R405	ERJ6GEYJ103	M 10KOHM, J,1/10W	1	
R408	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R410,11	D1F5100E0002	F 3.3 OHM, 5W	2	Δ
R412	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R413	D1F5100E0002	F 3.3 OHM, 5W	1	Λ
R414	ERJ8GEYJ153	M 15KOHM, J,1/8W	1	
R415	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R416	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R417	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R418	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R419	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R420	ERJ6GEYJ474	M 470KOHM, J, 1/10W	1	
R421	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R422	ERJ8GEYJ181	M 180 OHM, J,1/8W	1	
R423	ERJ6GEYJ154	M 150KOHM, J, 1/10W	1	
R424	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R425	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R426	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R427	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R428	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R429	ERJ8GEYJ103	M 10KOHM, J,1/8W	1	
R430	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R431	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R432	ERJ8GEYJ103	M 10KOHM, J,1/8W	1	
R433	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R435	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R436	ERJ8GEYJ153	M 15KOHM, J,1/8W	1	
R437	ERJ6GEYJ183	M 18KOHM, J, 1/10W	1	
R438	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R439	ERG12SJ120	M 12 OHM, J,1/2W	1	
R440	ERJ8GEYJ474	M 470KOHM, J,1/8W	1	
R441,42	ERJ6EKF6803	M 680KOHM, 1/10W	2	
R444	EVMAASA00B23	CONTROL 2KOHMB	1	
R444 R445	ERJ6GEYJ123 ERJ6ENF1003	M 12KOHM, J, 1/10W	1	
R445 R446	ERX2SJR39H	M 100KOHM, 1/10W M0.39 OHM, J, 2W	1	
R447	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R448,49	DOXGR10JA007	RESISTOR ARRAY	2	
R450	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R451	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R452	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R453	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R454	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R455	ERJ6GEYJ106	M 10MOHM,J,1/10W	1	
R456,57	ERJ6GEYJ333	M 33KOHM,J,1/10W	2	
R458	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R461	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R462	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R463	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R464	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R465	ERJ6ENF5603	M 560KOHM, 1/10W	1	
R466,67	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	

Ref.	Part No.	Part Name &	Pcs	Remarks
No. R468	ERJ6GEYJ472	Description M 4.7KOHM,J,1/10W	1	
R469	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R470	ERX2SJR39H	M0.39 OHM, J, 2W	1	
R471	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R472,73	ERJ6ENF5603	M 560KOHM, 1/10W	2	
R474	ERG1SJ104P	M 100KOHM, J, 1W	1	
R475	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R476,77	ERJ14YJ181U	M 181 OHM, J,1/4W	2	
R478	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R479	ERG1SJ104P	M 100KOHM, J, 1W	1	
R480	ERJ6ENF9102	M91.0KOHM, 1/10W	1	
R481	ERJ6GEYJ106	M 10MOHM, J, 1/10W	1	
R482	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R483	ERJ6GEYJ106	M 10MOHM, J, 1/10W	1	
R485	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R486,87	ERJ6GEYJ682	M 6.8KOHM, J, 1/10W	2	
R488	ERJ6GEYJ106	M 10MOHM, J, 1/10W	1	
R489	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R490,91	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R492	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
	ERG12SJ120			
R493 R494-96	ERJ6ENF5603	M 12 OHM, J,1/2W	3	
R497	ERJ6ENF2402	M 560KOHM, 1/10W	1	
-		M 24KOHM, 1/10W	1	
R501	ERJ6GEYJ223	M 22KOHM, J, 1/10W		
R502,03	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R504	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R505	ERJ8GEYJ330	M 33 OHM, J,1/8W	1	
R506	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R507	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R508	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R509-11	ERJ6GEYJ104	M 100KOHM, J, 1/10W	3	
R512	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R513,14	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R515,16	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R517	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R518	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R519,20	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R521,22	ERJ8GEYJ100	M 10 OHM, J,1/8W	2	
R523	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R524	ERJ6GEYJ182	M 1.8KOHM, J, 1/10W	1	
R525	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R526,27	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R528	ERJ6GEYJ4R7	M 4.7 OHM, J, 1/10W	1	
R530	ERJ6RBD3302	M 33KOHM, F, 1/10W	1	
R531	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R532	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R533	ERJ8GEYJ223	M 22KOHM, J,1/8W	1	
R534	ERJ8GEYJ224	M 220KOHM, J,1/8W	1	
R535,36	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R537	ERJ6ENF3602	M 36KOHM, 1/10W	1	
R538	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R539	ERJ6RBD1002	M 1.0KOHM, 1/10W	1	
R540	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R541	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R542	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R543	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R544	ERJ6GEYJ331	M 330 OHM, J, 1/10W	1	
R545	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R546,47	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R548	ERJ8GEYJ102	M 1KOHM, J,1/8W	1	
R549	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R550	ERJ6GEYJ105	M 1MOHM, J, 1/10W	1	
R551	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R552	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R553	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R554	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R555,56	ERJ6GEYJ105	M 1MOHM, J, 1/10W	2	
R557	ERJ8GEYJ471	M 470 OHM, J,1/8W	1	
R558	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R559	ERJ6RBD4702	M 47KOHM, 1/10W	1	
R560	ERJ6ENF1302	M 13KOHM, 1/10W	1	
R561	ERJ6ENF4301	M 4.3KOHM, 1/10W	1	
R562	ERJ6ENF1802	M 18KOHM, 1/10W	1	

	X50U / TH-50PX50U	-		
Ref. No.	Part No.	Part Name &	Pcs	Remarks
	ERJ6GEYJ2R2	Description M 2.2 OHM,J,1/10W	1	
	ERJ6GEYJ474	M 470KOHM, J, 1/10W	1	
R565	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R566	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R567	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R568,69	ERG2SJ181	M 180 OHM, J, 2W	2	
R570	ERJ8GEYJ102	M 1KOHM, J,1/8W	1	
R571	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R572,73	ERJ8ENF3900	M 390 OHM, 1/8W	2	
R574	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R575	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
	ERJ6ENF1202	M 12KOHM, 1/10W	1	
	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R579	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
	ERJ6ENF1002 ERJ6GEYJ473	M 10KOHM, 1/10W	1	
	ERJ6GEYJ103	M 47KOHM,J,1/10W M 10KOHM,J,1/10W	1	
	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
	ERJ8ENF3900	M 390 OHM, 1/8W	1	
	ERJ8GEYJ123	M 12KOHM, J,1/8W	2	
-	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R592	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R593	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R594	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R595	ERJ8GEYJ222	M 2.2KOHM, J,1/8W	1	
R596	ERJ6ENF1002	M 10KOHM, 1/10W	1	
	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
	ERJ8GEYJ391	M 390 OHM, J,1/8W	2	
R601	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R602	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R603	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
	ERJ6GEYJ122 ERJ6ENF1201	M 1.2KOHM, J, 1/10W M 1.2KOHM, 1/10W	1	
R607	ERJ6GEYJ822	M 8.2KOHM, J,1/10W	1	
R608	ERJ8GEYJ332	M 3.3KOHM, J,1/8W	1	
	ERJ6GEYJ822	M 8.2KOHM, J, 1/10W	1	
	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R612	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R613	ERJ6ENF1602	M 16KOHM, 1/10W	1	
R614	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R615-17	ERJ6GEYJ103	M 10KOHM,J,1/10W	3	
R618	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R619	ERJ8RQFR68	M 0.680HM, J,1/8W	1	
R620	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R621	ERJ8GEYJ123	M 12KOHM, J,1/8W	1	
R622	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R623	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R624	ERX2SJR22	M0.22 OHM, J, 2W	1	
R625 R626	ERJ6GEYJ104 ERJ8ENF1503	M 100KOHM,J,1/10W M 15KOHM, 1/8W	1	
R628	EVMAASA00B33	CONTROL 3KOHMB	1	
R629	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R630	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R631	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
	ERJ8GEYJ333 ERJ6GEYJ221	M 33KOHM, J,1/8W M 220 OHM,J,1/10W	1	
R632			1	
R632 R633	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R632 R633 R634	ERJ6GEYJ221 ERJ6GEYJ334	M 220 OHM, J, 1/10W M 330KOHM, J, 1/10W	1	
R632 R633 R634 R636	ERJ6GEYJ221 ERJ6GEYJ334 ERJ8RQFR68	M 220 OHM, J, 1/10W M 330KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 15KOHM, 1/8W M 0.68OHM, J, 1/8W	1 1 1	
R632 R633 R634 R636 R637	ERJ6GEYJ221 ERJ6GEYJ334 ERJ8RQFR68 ERJ8ENF1503 ERJ8RQFR68 ERJ6GEYJ103	M 220 OHM, J, 1/10W M 330KOHM, J, 1/10W M 0.680HM, J, 1/8W M 15KOHM, 1/8W M 0.680HM, J, 1/8W M 10KOHM, J, 1/10W	1 1 1 1 1	
R632 R633 R634 R636 R637 R640	ERJ6GEYJ221 ERJ6GEYJ334 ERJ8RQFR68 ERJ8ENF1503 ERJ8RQFR68 ERJ6GEYJ103 ERJ6GEYJ473	M 220 OHM, J, 1/10W M 330KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 15KOHM, 1/8W M 0.68OHM, J, 1/8W M 10KOHM, J, 1/10W M 47KOHM, J, 1/10W	1 1 1 1 1 1	
R632 R633 R634 R636 R637 R640 R641	ERJ6GEYJ221 ERJ6GEYJ334 ERJ8RQFR68 ERJ8ENF1503 ERJ8RQFR68 ERJ6GEYJ103 ERJ6GEYJ473 ERJ8RQFR68	M 220 OHM, J, 1/10W M 330KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 15KOHM, 1/8W M 0.68OHM, J, 1/8W M 10KOHM, J, 1/10W M 47KOHM, J, 1/10W M 0.68OHM, J, 1/8W	1 1 1 1 1 1 1 3	
R642-44 R645	ERJ6GEYJ221 ERJ6GEYJ334 ERJ8RQFR68 ERJ8ENF1503 ERJ8RQFR68 ERJ6GEYJ103 ERJ6GEYJ473 ERJ8RQFR68 ERJ6GEYJ473	M 220 OHM, J, 1/10W M 330KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 15KOHM, 1/8W M 0.68OHM, J, 1/8W M 10KOHM, J, 1/10W M 47KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 47KOHM, J, 1/10W	1 1 1 1 1 1 1 3 1	
R632 R633 R634 R636 R637 R640 R641 R642-44 R645 R646,47	ERJ6GEYJ221 ERJ6GEYJ334 ERJ8RQFR68 ERJ8RQFR68 ERJ8RQFR68 ERJ6GEYJ103 ERJ6GEYJ473 ERJ8RQFR68 ERJ6GEYJ473 ERJ8RQFR68	M 220 OHM, J, 1/10W M 330KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 15KOHM, 1/8W M 0.68OHM, J, 1/8W M 10KOHM, J, 1/10W M 47KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 47KOHM, J, 1/10W M 47KOHM, J, 1/10W M 22KOHM, J, 1/10W	1 1 1 1 1 1 1 3 1 2	
R632 R633 R634 R636 R637 R640 R641 R642-44 R645 R646,47	ERJ6GEYJ221 ERJ6GEYJ334 ERJ8RQFR68 ERJ8ENF1503 ERJ8RQFR68 ERJ6GEYJ103 ERJ6GEYJ473 ERJ8RQFR68 ERJ6GEYJ473 ERJ6GEYJ473 ERJ6GEYJ223 ERJ6GEYJ223	M 220 OHM, J, 1/10W M 330KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 15KOHM, 1/8W M 0.68OHM, J, 1/8W M 10KOHM, J, 1/10W M 47KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 47KOHM, J, 1/10W M 47KOHM, J, 1/10W M 22KOHM, J, 1/10W M 15KOHM, J, 1/8W	1 1 1 1 1 1 1 3 1 2	
R632 R633 R634 R636 R637 R640 R641 R642-44 R645 R645 R646,47 R648 R649	ERJ6GEYJ221 ERJ6GEYJ334 ERJ8RQFR68 ERJ8RQFR68 ERJ6GEYJ103 ERJ6GEYJ473 ERJ8RQFR68 ERJ6GEYJ473 ERJ6GEYJ473 ERJ6GEYJ223 ERJ6GEYJ223 ERJ8ENF1503 ERJ6GEYJ223	M 220 OHM, J, 1/10W M 330KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 15KOHM, 1/8W M 0.68OHM, J, 1/8W M 10KOHM, J, 1/10W M 47KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 47KOHM, J, 1/10W M 47KOHM, J, 1/10W M 22KOHM, J, 1/10W M 15KOHM, 1/8W M 22KOHM, J, 1/10W	1 1 1 1 1 1 1 3 1 2 1	
R632 R633 R634 R636 R637 R640 R641 R642-44 R645 R646,47 R648 R649 R650	ERJ6GEYJ221 ERJ6GEYJ334 ERJ8RQFR68 ERJ8RQFR68 ERJ6GEYJ103 ERJ6GEYJ473 ERJ8RQFR68 ERJ6GEYJ473 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223	M 220 OHM, J, 1/10W M 330KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 15KOHM, J/8W M 0.68OHM, J, 1/8W M 10KOHM, J, 1/10W M 47KOHM, J, 1/10W M 0.68OHM, J, 1/10W M 47KOHM, J, 1/10W M 22KOHM, J, 1/10W M 15KOHM, J, 1/10W M 12KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W	1 1 1 1 1 1 1 3 1 2 1 1	
R632 R633 R634 R636 R637 R640 R641 R642-44 R645 R646,47 R648 R649 R650 R651	ERJ6GEYJ221 ERJ6GEYJ334 ERJ8RQFR68 ERJ8RQFR68 ERJ6GEYJ103 ERJ6GEYJ473 ERJ6GEYJ473 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223	M 220 OHM, J, 1/10W M 330KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 15KOHM, J/8W M 0.68OHM, J, 1/8W M 10KOHM, J, 1/10W M 47KOHM, J, 1/10W M 0.68OHM, J, 1/10W M 47KOHM, J, 1/10W M 22KOHM, J, 1/10W M 15KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 47KOHM, J, 1/10W M 47KOHM, J, 1/10W	1 1 1 1 1 1 1 3 1 2 1 1 1	
R632 R633 R634 R636 R637 R640 R641 R642-44 R645 R646,47 R648 R649 R650	ERJ6GEYJ221 ERJ6GEYJ334 ERJ8RQFR68 ERJ8RQFR68 ERJ6GEYJ103 ERJ6GEYJ473 ERJ8RQFR68 ERJ6GEYJ473 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223	M 220 OHM, J, 1/10W M 330KOHM, J, 1/10W M 0.68OHM, J, 1/8W M 15KOHM, J/8W M 0.68OHM, J, 1/8W M 10KOHM, J, 1/10W M 47KOHM, J, 1/10W M 0.68OHM, J, 1/10W M 47KOHM, J, 1/10W M 22KOHM, J, 1/10W M 15KOHM, J, 1/10W M 12KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W	1 1 1 1 1 1 1 3 1 2 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R655	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R656	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R657	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R658 R659	ERJ6GEYJ105 ERJ6ENF3002	M 1MOHM, J, 1/10W M 30KOHM, 1/10W	1	
R660	ERJ6ENF3002 ERJ6ENF1202	M 12KOHM, 1/10W	1	
R661	EVMAASA00B53	CONTROL 5KOHMB	1	
R662	ERJ6ENF1303	M 130KOHM, 1/10W	1	
R663	ERJ3GEYJ2R2	M 2.2 OHM, J, 1/16W	1	
R664	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R665	EVMAASA00B23	CONTROL 2KOHMB	1	
R666	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R667,68	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
R669	ERJ6ENF1303	M 130KOHM, 1/10W	1	
R670 R671	ERJ6GEYJ102 EVMAASA00B14	M 1KOHM, J, 1/10W CONTROL 10KOHMB	1	
R674	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R675	ERJ3GEYJ2R2	M 2.2 OHM, J, 1/16W	1	
R676	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R677	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R678	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R679,80	ERJ8RQJR39	M0.39 OHM, 1/8W	2	
R681	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R682	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R683	ERJ6ENF1500	M 150 OHM, 1/10W M 22KOHM, J, 1/10W	1	
R684 R685	ERJ6GEYJ223 ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R686	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R687	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R688	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R689	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R690	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R691	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R692,93	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	2	
R694	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R695 R696	ERJ6ENF1602 ERJ8GEYJ100	M 16KOHM, 1/10W M 10 OHM, J,1/8W	1	
R697	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R698	ERJ8RQJR39	MO.39 OHM, 1/8W	1	
R702	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R703,04	ERG2SJ101	M 100 OHM, J, 2W	2	
R706	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R707	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R708	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R712 R713	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R901	ERJ8GEYJ472 ERJ6ENF2702	M 4.7KOHM, J,1/8W M 27KOHM, 1/10W	1	
R903-06	ERJ8ENF1203	M 12KOHM, 1/8W	4	
R907	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R908	ERJ6GEYJ335	M 3.3MOHM,J,1/10W	1	
R909-11	ERJ6GEYJ106	M 10MOHM,J,1/10W	3	
R912	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R913,14	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R915	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R916 R917	ERJ6GEY0R00 ERJ6GEYJ334	M 0 OHM, 1/10W	1	
R917	ERJ6GEYJ103	M 330KOHM,J,1/10W M 10KOHM,J,1/10W	1	
R920	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R921	ERJ6RBD3092	M30.9KOHM, F, 1/10W	1	
R922	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R925	ERJ6GEYJ335	M 3.3MOHM,J,1/10W	1	
R926,27	ERG2DJW224E	M 220KOHM, J, 2W	2	
R928-31	ERJ8ENF1203	M 12KOHM, 1/8W	4	
R932	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
DI 400	тстисо11	DELAY	-	<u> </u>
RL402 RL403	TSE10801	RELAY	1	<u> </u>
	-5210001		_	
S401,02	J0LT00000009	SWITCH	2	Δ
T401	G4D4A0000107	SWITCHING	1	

Ref.	Part No.	Part Name & Description	Pcs	Remarks
T402	G4D1A0000098	SWITCHING TRANSFORMER	1	Δ
T404	G4D4A0000109	SWITCHING TRANSFORMER	1	Δ
<b>T4</b> 07	ETQ11K5AZ	CHOKE TRANS	1	$\triangle$
T410	G4D2A0000229	SWITCHING TRANSFORMER	1	$\triangle$
T601	G4D2A0000227	SWITCHING TRANSFORMER	1	
W2	ERDS2TJ391	C 390 OHM, J,1/4W	1	
X501	H2B400400021	CRYSTAL	1	
Z1,Z2	K4ZZ01000206	TERMINAL	2	
Z400	TNPA3570	CIRCUIT BOARD P	1	
Z410	TMM7464-2	CLAMPER	1	
Z411	TMME190	CLAMPER	1	
Z412	TMM7443-3	CLAMPER	1	
Z413	TMM7464-2	CLAMPER	1	
Z414	TMME190	CLAMPER	1	
Z420	TMM23417	CLAMPER	1	
Z450-53	EYF52BCY	FUSE HOLDER	4	
ZN401,0 2	D4EAD6210001	VARISTOR	2	Δ
ZN403	D4EA8511A001	VARISTOR	1	Δ
ZN404	D4EAB681A011	VARISTOR	1	Δ

## 15.3. Electrical Replacement Parts List (TH-42PX50U)

## Note:

All parts except parts mentioned [PAVCA] in the Remarks column are supplied by AVC-SPC.

Parts mentioned [PAVCA] are supplied by PAVCA.

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	Part No.	Description	PCS	Remarks
F603	K5D102BNA007	TIME LAG FUSE HIGH(F603)	1	Δ
F601.60	K5D103BMA001	TIME LAG FUSE	2	Δ
2		HIGH(F601		
G11	V1MMEED 20076	EED CONNECTOR	1	
C11	K1KA04BA0107	55P CONNECTOR	1	
C12	K1KA04BA0107 K1MN55BA0076		1	
C21		55P CONNECTOR	1	
C22	K1KA04BA0107	4P CONNECTOR		
C24 C31	K1KA04AA0150 K1MN55BA0076		1	
C32	K1KA12AA0153	55P CONNECTOR 12P CONNECTOR	1	
C32	K1KA04BA0107		1	
C41	K1MN55BA0076		1	
C41	K1KA04BA0107	55P CONNECTOR 4P CONNECTOR	1	
		C 0.1UF, Z, 50V	1	
C2301 C2307	ECJ1VF1A105Z ECA1CMH101		1	
		E 100UF, 16V M 0 OHM, 1/8W	2	
C2310,1 1	ERJ8GEY0R00	H O OHM, I/6W		
C2335	ECJ3YB1A106M	C 10UF, M,6.3V	1	
C2337	ECJ1VB1C473K	C 0.047UF, K, 16V	1	
C2338	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2340	ECJ2FB1C274K	C 0.27UF, Z, 16V	1	
C2341	ECJ1XC1H221J	C 220PF, J, 50V	1	
C2342	ECJ1VB1H152K	C 1500PF, K, 50V	1	
C2343	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C2344	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C2346	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2347	ECA1VHG470	E 47UF, 35V	1	
C2348	ECJ1XC1H221J	C 220PF, J, 50V	1	
C2349	ECJ1VB1H152K	C 1500PF, K, 50V	1	
C2350	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C2351	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C2352	ECJ1VB1C473K	C 0.047UF, K, 16V	1	
C2353	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2355	ECJ2FB1C274K	C 0.27UF, Z, 16V	1	
C2356	ECJ3YB1A106M	C 10UF, M,6.3V	1	
C2372	ECA1HHG100	E 10UF, 50V	1	
C2374	ECA1HHG100	E 10UF, 50V	1	
C2376- 79	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2384- 87	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2428,2 9	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C2430	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2433,3 4	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
C2437,3	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
C2441,4 2	ECJ1XC1H221J	C 220PF, J, 50V	2	
C2445,4	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2449,5	ECA1EHG331	E 330UF, 25V	2	
C2453,5	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2457,5	ECJ2FB0J335K	C 3.3UF, K, 16V	2	
C2461,6 2	ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2465,6	ECJ2FB1E105K	C 1UF, K, 25V	2	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C2469,7 O	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2473,7 4	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2477,7	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2481- 84	ECJ2FB1E224K	C 22UF, K, 25V	4	
	ECJ2XB1H332K	C 3300PF, K, 50V	2	
	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2512	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C2515	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2602	ECA1CHG101	E 100UF, 16V	1	
C2603	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2606		C 3300PF, K, 50V	1	
C2607		C 68UF, Z, 16V	1	
C2608		C 1UF, Z, 10V	1	
C2609	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C2610-	t	C 1UF, Z, 10V	5	
14				
C2615	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C2616		C 68UF, Z, 16V	1	
C2617	<del> </del>	C 3300PF, K, 50V	1	
C2620,2 1	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2625,2 6	ECJ3YB1C475K	C 0.047UF, K, 16V	2	
C2633,3 4	TCUY1C225ZFN	C 2.2UF, 16V	2	
C2637	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
	ECJ1VF1A105Z	C 1UF, Z, 10V	7	
50			l	
	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2652	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2654,5	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C2656		E 100UF, 16V	1	
		C 1UF, Z, 10V	1	
C2660,6	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2662	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2663		C 1UF, Z, 10V	1	
C2664		C 0.1UF, Z, 16V	1	
C2665-		C 0.1UF, Z, 16V	4	
68				
C2670	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2672	ECA1CHG470	E 47UF, 16V	1	
C2673	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2675	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2676	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2678 C2684-	ECJ1VF1A105Z ECJ1VF1A105Z	C 1UF, Z, 10V C 1UF, Z, 10V	6	
89	LCOIVFIAIU5Z	C 10F, Z, 10V	L	
C2701	ECA1CHG101	E 100UF, 16V	1	
C2702	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2703	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2705	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2708	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2710	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2712	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2715	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2717	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2718	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2723	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2725	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2729,3 0	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
4	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2736- 44	ECJ1VF1A105Z	C 1UF, Z, 10V	9	
C2747	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2750	ECA1HHG220	E 22UF, 50V	1	
C2775	ECA1EHG471	E 470UF, 25V	1	

NO.   Description	Ref.	Part No.	Part Name &	Pcs	Pomarka
7		Part No.		PCS	Remarks
C2783		ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C4001 ECJIXC1H102J C 1000PF, J, 50V 1 C4002 ECJIXC1H100J C 18PF, J, 50V 2 6 C4008-0 ECJIXC1H100J C 18PF, J, 50V 2 6 C4008-0 ECJIXSD1C104K C 0.1UF, Z, 16V 4 11 C4012 ERJ3GEYJ680 M 68 OHM, J, 1/16W 1 C4013-1 ECJIXSD1C104K C 0.1UF, Z, 16V 3 15 C4016 ECJIXC1H101J C 100PF, J, 50V 1 C4017, 1 ECJIXBD1C104K C 0.1UF, Z, 16V 1 C4017, 1 ECJIXBD1C104K C 0.1UF, Z, 16V 1 C4012 ECJIXBD1C104K C 0.1UF, Z, 16V 1 C4023 ECJIXBD1C104K C 0.1UF, Z, 16V 1 C4024 ECJIXBD1C104K C 0.1UF, Z, 16V 1 C4025 ECJIXC1H103J C 100PF, J, 50V 1 C4026 ECJIXC1H103J C 100PF, J, 50V 1 C4027 ECJIXC1H103J C 100PF, J, 50V 1 C4030 ECJIXC1H101J C 100PF, J, 50V 1 C4031 ECJIXC1H101J C 100PF, J, 50V 1 C4032 ECJIXC1H101J C 100PF, J, 50V 1 C4033 ECJIXC1H101J C 100PF, J, 50V 1 C4034 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4035 ECJIXP1A105Z C 0.047UF, Z, 16V 1 C4036 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4037 ECJIXB1C104K C 0.01UF, Z, 16V 1 C4038 ECJIXB1C104K C 0.01UF, Z, 16V 1 C4039 ECJIXB1C104K C 0.01UF, Z, 16V 1 C40414, 4 ECJIXB1C104K C 0.01UF, Z, 16V 1 C40414, 4 ECJIXB1C104K C 0.01UF, Z, 16V 1 C40414, 4 ECJIXB1C105K C 0.01UF, Z, 16V 1 C40414, 4 ECJIXB1C105K C 0.01UF, Z, 16V 1 C4051 ECJIXB1C105K C 0.01UF, Z, 16V 1 C4052 ECJIXB1A105X C 0.01UF, Z, 50V 1 C4053 ECJIXB1A105X C 0.01UF, Z, 50V 1 C4054 ECJIXB1C105K C 0.01UF, Z, 50V 1 C4055 ECJIXB1A105K C 0.01UF, Z, 50V 1 C4065 ECJIXB1C105K C 0.01UF, Z, 50V 1 C4067 ECJIXC1H61J C 560PF, J, 50V 1 C4067 ECJIXC1H61J C 560PF, J, 50V 1 C4068 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4074 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4074 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4096 EVHB18330 E 33UF, J, 25V 1 C4099 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4102 EFFD0G560R S6UF,		ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C4002 ECJINBIC104K C 0.1UF, Z, 16V 1 C4005, 0 ECJINCH180J C 18FF, J, 50V 2 C4008- ECJINBIC104K C 0.1UF, Z, 16V 4 11 C4012 ERJ3GEYJ680 M 68 OHM, J, 1/16W 1 C4013- ECJINBIC104K C 0.1UF, Z, 16V 3 15 C4016 ECJINBIC104K C 0.1UF, Z, 16V 2 C4017, 1 ECJINBIC104K C 0.1UF, Z, 16V 1 C4017, 1 ECJINBIC104K C 0.1UF, Z, 16V 1 C4017, 1 ECJINBIC104K C 0.1UF, Z, 16V 1 C4021 ECJINBIC104K C 0.1UF, Z, 16V 1 C4022 ECJINBIC104K C 0.1UF, Z, 16V 1 C4023 ECJINBIC104K C 0.1UF, Z, 16V 1 C4024 ECJINBIC104K C 0.1UF, Z, 16V 1 C4025 ECJINBIC104K C 0.1UF, Z, 16V 1 C4026 ECJINCH180J C 18FF, J, 50V 1 C4027 ECJINCH180J C 12FF, J, 50V 1 C4030 ECJINCH101J C 100FF, J, 50V 1 C4031 ECJINFINON C 0.001UF, X, 50V 1 C4032 ECJINFINON C 0.001UF, X, 50V 1 C4033 ECJINFINON C 0.001UF, X, 50V 1 C4034 ECJINBIC104K C 0.1UF, Z, 16V 1 C4035 ECJINFINON C 0.001UF, X, 16V 1 C4036 ECJINCH101J C 100FF, J, 50V 1 C4037 ECJINCH101J C 100FF, J, 50V 1 C4038 ECJINCH101J C 100FF, J, 50V 1 C4039 ECJINCH101J C 100FF, J, 50V 1 C4042, 4 ECJINBIC105K C 0.01UF, X, 16V 1 C4051 ECJINBIC105K C 0.01UF, X, 16V 1 C4052 ECJINBIC105K C 0.01UF, X, 16V 1 C4053 ECJINBIC105K C 0.01UF, X, 16V 1 C4054 ECJINBOL225K C 2.2UF, X, 6.3V 1 C4055 ECJINBIA105K C 0.01UF, X, 16V 1 C4066 ECJINBIC105K C 0.01UF, X, 16V 1 C4074 ECJINBIC105K C 0.01UF, X, 16V 1 C4074 ECJINBIC105K C 0.01UF, X, 16V 1 C4074 ECJINBIC105K C 0.01UF, X, 16V 1 C4076 ECJINBIC105K C 0.01UF, X, 16V 1 C4077 ECJINBIC105K C 0.01UF, X, 16V 1 C4078 ECJINBIC105K C 0.01UF, X, 16V 1 C4079 ECJINBIC105K C 0.01UF, X, 16V 1 C4071 EERBPOJ470P C 47PF, J, 50V 1 C4072 ECJINBIC105K C 0.01UF, X, 16V 1 C4073 ECJINBIC105K C 0.01UF, X, 16V 1 C4074 ECJINBIC105K C 0.01UF, X, 16V 1 C4075 ECJINBIC105K C 0.01UF, X, 16V 1 C4076 ECJINBIC105K C 0.01UF, X, 16V 1 C4102 EFFEDOS56N E 50FF, J, 50V 1 C4102 EFFEDOS56N E 50FF, J, 50V 1 C4102 EFFEDOS56N E 50FF, J, 50V 1 C4103 ECJINBIC104K C 0.1UF, Z, 16V 1 C4121 ECJINBIC104K C 0.1UF, Z, 16V 1 C4122 ECJINBIC104K C 0.01UF, X, 50V 1 C4133 ECHBSIC104K C 0.01UF, X, 50V 1 C4142 ECJINBIC104K C 0.01UF, X, 50V 1 C4143 ECJINBIC104K C 0.0	C2783	ECA1HHG220	E 22UF, 50V	1	
C4005.0   ECJIXCIH180J   C 18PF, J, 50V   2   C 2008-   C 2008-   C 2018E1C104K   C 0.1UF, Z, 16V   4   C 20102   ERJJSGEVJS80   M 68 OHM, J, J/16W   1   C 2013-   ECJIXB1C104K   C 0.1UF, Z, 16V   3   C 2016-   ECJIXCIH101J   C 100PF, J, 50V   1   C 2017-   ECJIXB1C104K   C 0.1UF, Z, 16V   2   C 2012-   ECJIXB1C104K   C 0.1UF, Z, 16V   1   C 2022-   ECJIXCIH101J   C 100PF, J, 50V   1   C 2033-   ECJIXCIH101J   C 100PF, J, 50V   1   C 2033-   ECJIXCIH101J   C 100PF, J, 50V   1   C 2033-   ECJIXCIH101J   C 100PF, J, 50V   1   C 2034-   ECJIXCIH101J   C 100PF, J, 50V   1   C 2042-   ECJIXCIH201J   C 100PF, J, 50V   1   C 2054-   ECJIXCIH201J   C 100PF, J, 50V   1   C 2055-   ECJIXCIH201J   C 100PF, J, 50V   1   C 2055-   ECJIXCIH201J   C 2007- Z, 50V   1   C 2066-   ECJIXCIH201J   C 2007- Z, 50V   1   C 2067-   ECJIXCIH201J   C 2007- Z, 50V   1   C 2067-   ECJIXCIH201J   C 2007- Z, 50V   1   C 2007-   ECJIXCIH201J   C 2007- Z, 50V   1   C 2007-   ECJIXCIH201J   C 2007- Z, 50V   1   C 2007-   ECJIXCIH201J   C 2007- Z, 50V   1	C4001	ECJ1XC1H102J	C 1000PF, J, 50V	1	
6	C4002	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
11		ECJ1XC1H180J	C 18PF, J, 50V	2	
C4013- ECJIXB1C104K C 0.1UF, Z, 16V 3 15 C4016 ECJIXC1H101J C 100PF, J, 50V 1 C4017, 1 ECJIXB1C104K C 0.1UF, Z, 16V 2 8 C4020 ECJIXB0J105K C 1UF, K, 16V 1 C4021 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4023 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4023 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4024 ECJIXC1H101J C 100PF, J, 50V 1 C4025 ECJIXC1H220J C 22PF, J, 50V 1 C4026 ECJIXC1H101J C 100PF, J, 50V 1 C4030 ECJIXC1H101J C 100PF, J, 50V 1 C4031 ECJIVB1105Z C 1UF, Z, 16V 1 C4033 ECJIVF1A105Z C 1UF, Z, 16V 1 C4034 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4035 ECJIXC1H101J C 100PF, J, 50V 1 C4036 ECJIXC1H101J C 100PF, J, 50V 1 C4037 ECJIXC1H101J C 100PF, J, 50V 1 C4038 ECJIXC1H101J C 100PF, J, 50V 1 C40438 ECJIXC1H101J C 100PF, J, 50V 1 C4051 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4053 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4053 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4055 ECJIVB1A105K C 0.01UF, Z, 50V 1 C4057 ECJIXC1H471J C 470PF, J, 50V 1 C4058 ECJIXC1H561J C 560PF, J, 50V 1 C4063 ECJIXC1H561J C 560PF, J, 50V 1 C4063 ECJIXC1H561J C 560PF, J, 50V 1 C40663 ECJIXC1H561J C 560PF, J, 50V 1 C4067 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4099 ECHYBLE330 E 33UF, Z5V 1 C4099, ECJIXC1H20J C 470PF, J, 6.3V 1 C4099 ECJIXC1C104K C 0.1UF, Z, 16V 1 C4099 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4099, ECJIXB1C104K C 0.1UF, Z, 16V 1 C4102, ECJIXB1C104K C 0.1UF, Z, 16V 1 C4102 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4102 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4102 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4103 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4104 ECJIXC1H680J C 68PF, J, 50V 1 C4105 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4106 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4107 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4108 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4109 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4101 ECHYBOL070K C 0.1UF, Z, 16V 1 C4102 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4103 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4104 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4105 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4106 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4107 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4108 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4109 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4104 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4104 ECJ		ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
15	C4012	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
C4017,1 ECJIXB1C104K C 0.1UF, Z, 16V 2 2 8 8 C4020 ECJIXB0J105K C 1UF, K, 16V 1 1 C4021 ECJIXB1C104K C 0.1UF, Z, 16V 1 1 C4023 ECJIXB1C104K C 0.1UF, Z, 16V 1 1 C4024 ECJIXB1C104K C 0.1UF, Z, 16V 1 1 C4024 ECJIXB1C104K C 0.1UF, Z, 16V 1 1 C4025 ECJIXCH1820J C 18PF, J, 50V 1 1 C4032 ECJIXCH1820J C 18PF, J, 50V 1 1 C4032 ECJIXCH1810J C 100PF, J, 50V 1 1 C4033 ECJIVF1A105Z C 1UF, Z, 10V 1 1 C4034 ECJIVF1A105Z C 1UF, Z, 16V 1 1 C4034 ECJIXB1C104K C 0.1UF, Z, 16V 1 1 C4034 ECJIXB1C104K C 0.047UF, Z, 16V 1 1 C4035 ECJIXCH101J C 100PF, J, 50V 1 1 C4042, 4 ECJIVB1C105K C 0.001UF, K, 16V 2 3 C4051 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4051 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4053 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4055 ECJIVB1A05X C 0.01UF, Z, 16V 1 C4055 ECJIVB1A05X C 0.01UF, Z, 50V 1 C4057 ECJIVB1A05X C 0.01UF, Z, 50V 1 C4059 ECJIVB1A05X C 0.01UF, Z, 50V 1 C4057 ECJIVB1A05X C 0.01UF, Z, 50V 1 C4067 ECJIVB1C105K C 0.01UF, Z, 16V 1 ERHPOJA70P C 47PF, J, 6.3V 1 C4071 ERHPOJA70P C 47PF, J, 6.3V 1 C4096 ECHIVB1C30 E 33UF, 25V 1 C4096 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4102 EFECDOG560R EGUF, 1 C4104 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4121 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4123 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4123 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4123 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4124 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4124 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4123 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4144 ECJIXB1C104K		ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
S	C4016	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4021 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4023 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4024 RCJIXC1180J C 18PF, J, 50V 1 C4025 RCJIXC1120J C 12PF, J, 50V 1 C4030 RCJIXC1H101J C 100PF, J, 50V 1 C4031 RCJIXC1H101J C 100PF, J, 50V 1 C4032 RCJIVB1H105X C 0.001UF, K, 50V 1 C4033 RCJIXF1A105Z C 1UF, Z, 16V 1 C4034 RCJIXCH101J C 100PF, J, 50V 1 C4034 RCJIXCH101J C 100PF, J, 50V 1 C4035 RCJIXF1C475Z C 0.047UF, Z, 16V 1 C4038 RCJIXCH101J C 100PF, J, 50V 1 C40402, 4 RCJIVB1C105K C 0.01UF, K, 16V 2 3 C4051 RCJIVB1A224K C 0.22UF, Z, 50V 1 C4053 RCJIVB1A224K C 0.22UF, Z, 50V 1 C4053 RCJIVB1A224K C 0.22UF, Z, 50V 1 C4055 RCJIVB1A105K C 0.01UF, Z, 16V 1 C4057 RCJIXC1H471J C 470PF, J, 50V 1 C4059 RCJIXC1H471J C 470PF, J, 50V 1 C4067 RCJIXB1C105K C 0.01UF, K, 16V 1 C4071 REREPO470P C 47PF, J, 6.3V 1 C4074 RCJIXB1C104K C 0.01UF, Z, 16V 1 C4099, 0 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4099, 0 RCJIXC1H680J C 12PF, J, 50V 2 0 C4102, 0 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4102 REPCD06560R 56UP, 1 C4120 RECJIXB1C104K C 0.1UF, Z, 16V 1 C4121 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4122 REPCD06560R 56UP, 1 C4123 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4124 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4125 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4126 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4127 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4128 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4129 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4121 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4122 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4123 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4124 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4125 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4126 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4127 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4128 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4129 RCYBOJ470R C 47UF, 6.3V 1 C4131 RCHBOJ470R C 47UF, 6.3V 1 C4133 RERBBC100R C 10UF, K, 50V 1 C4144 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4145- RCJIXB1C104K C 0.1UF, Z, 16V 1 C4146 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4147 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4148 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4149 RCJIXB1C104K C 0.1UF,		ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4023	C4020	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4024	C4021	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4025 RCJIXC1H220J C 22PF, J, 50V 1 C4030 RCJIXC1H101J C 100PF, J, 50V 1 C4033 RCJIXB1103K C 0.001UF, K, 50V 1 C4034 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4034 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4035 RCJIFFIC475Z C 0.047UF, Z, 16V 1 C4038 RCJIXC1H101J C 100PF, J, 50V 1 C4042,4 RCJIXB1C105K C 0.01UF, K, 16V 2 3 C4051 RCJIVB1A224K C 0.22UF, Z, 50V 1 C4053 RCJIVB1A224K C 0.22UF, Z, 50V 1 C4053 RCJIVB1A224K C 0.22UF, Z, 50V 1 C4054 RCJIVB1A224K C 0.22UF, Z, 50V 1 C4055 RCJIVB1A224K C 0.01UF, Z, 50V 1 C4056 RCJIVB1A105K C 0.01UF, Z, 50V 1 C4057 RCJIXC1H471J C 470PF, J, 50V 1 C4063 RCJIXC1H561J C 560PF, J, 50V 1 C4063 RCJIXC1H561J C 560PF, J, 50V 1 C4067 RCJIXB1C105K C 0.01UF, Z, 16V 1 C4096 REWHB1E330 R 33UF, 25V 1 C4096 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4099, 0 RCJIXC1H120J C 12PF, J, 50V 2 C4104 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4099, 0 RCJIXC1H680J C 12PF, J, 50V 1 C4107 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4121 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4121 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4122 REFCD05560R 56UF, 1 C4124 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4125 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4126 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4127 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4128 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4129 REFCD05560R 56UF, 1 C4120 REFCD05560R 56UF, 1 C4121 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4123 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4124 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4125 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4126 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4127 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4128 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4129 REWHB0J470R R 47UF, 6.3V 1 C4130 RCJIXB1C104K C 0.01UF, X, 50V 1 C4143 REWHB0J470R C 0.01UF, X, 50V 1 C4143 REWHB0J470R C 0.01UF, X, 50V 1 C4144 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4145 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4146 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4147 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4148 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4149 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4144 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4145 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4146 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4147 RCJIXB1C104K C 0.1UF, Z, 16V 1 C4148 RCJIXB1C104K C 0.1UF, Z, 16V	C4023	ECJ1XB1C104K		1	
C4030 RCJIXCIHIOLJ C 100PF, J, 50V 1 C4032 RCJIVBIHIO3K C 0.001UF, K, 50V 1 C4033 RCJIVFIAIO5C C 1UF, Z, 16V 1 C4034 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4035 RCJZFFIC475Z C 0.047UF, Z, 16V 1 C4038 RCJIXGIHIOLJ C 100PF, J, 50V 1 C4042, 4 RCJIVBICIO5K C 0.01UF, K, 16V 2 3 C4051 RCJIVBIA224K C 0.22UF, Z, 50V 1 C4053 RCJIVBIA224K C 0.22UF, Z, 50V 1 C4054 RCJIVBIA224K C 0.22UF, Z, 50V 1 C4055 RCJIVBIA224K C 0.01UF, Z, 50V 1 C4055 RCJIVBIA224K C 0.01UF, Z, 50V 1 C4056 RCJIVBIA0SK C 0.01UF, Z, 50V 1 C4057 RCJIXCIH471J C 470PF, J, 50V 1 C4059 RCJIXROJ335K C 33UF, J, 25V 1 C4056 RCJIVBIA0SK C 0.01UF, K, 16V 1 C4067 RCJIVBICIOSK C 0.01UF, K, 16V 1 C4067 RCJIVBICIOSK C 0.01UF, K, 16V 1 C4067 RCJIVBICIOSK C 0.1UF, Z, 16V 1 C4074 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4098 RCJIXCIH660J C 47PF, J, 6.3V 1 C4099, 0 RCJIVCIH120J C 12PF, J, 50V 2 0 C4102, 0 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4102 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4120 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4121 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4122 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4124 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4125 RCJIVBILISS C 0.039UF, K, 16V 1 C4126 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4127 RCJIVBIHISS C 0.01UF, Z, 16V 1 C4128 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4129 REVHBOJ470R E 47UF, 6.3V 1 C4131 RCJIXCHOON C 10UF, X, 50V 1 C4143 RCJIXCHOON C 10UF, X, 50V 1 C4144 RCJIXBICIO4K C 0.1UF, Z, 16V 3 37 C4141 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4142 RCJIXBICIO4K C 0.1UF, Z, 16V 3 37 C4144 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4145 RCJIXBICIO4K C 0.1UF, Z, 16V 1 C4146 RCJIXBICIO4K C		ECJ1XC1H180J			
C4032 ECJIVB1H103K C 0.001UF, K, 50V 1 C4033 ECJIVF1A105Z C 1UF, Z, 10V 1 C4034 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4038 ECJIVF1C475Z C 0.047UF, Z, 16V 1 C4042, 4 ECJIVB1C105K C 0.01UF, K, 16V 2 3 C4042, 4 ECJIVB1C24K C 0.22UF, Z, 50V 1 C4053 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4053 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4053 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4054 ECJIVB00225K C 2.2UF, K, 6.3V 1 C4055 ECJIVB1A105K C 0.01UF, Z, 50V 1 C4057 ECJIXC1H471J C 470PF, J, 50V 1 C4059 ECJIXC1H561J C 560PF, J, 50V 1 C4059 ECJIXC1H561J C 560PF, J, 50V 1 C4067 ECJIXC1H561J C 560PF, J, 50V 1 C4071 EERHP0J470P C 47PP, J, 6.3V 1 C4074 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4099, 0 ECJIXC1H20J C 12PF, J, 50V 2 0 C4102, 0 ECJIXC1H20J C 12PF, J, 50V 2 0 C4102, 0 ECJIXC1H600 C 0.1UF, Z, 16V 1 C4104 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCD05560R 56UF, 1 C4121 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4122 EEFCD05560R 56UF, 1 C4123 ECJIZPB1C684K C 68UF, Z, 16V 1 C4124 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4125 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4126 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4127 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4128 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4129 EEVHB0J470R E 47UF, E, 50V 1 C4129 EEVHB0J470R E 47UF, E, 50V 1 C4133 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4129 EEVHB0J470R E 47UF, E, 50V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4129 EEVHB0J470R E 47UF, E, 50V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4132 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4134 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4135 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4141 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4142 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4143 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4145 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4146 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4147 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4148 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4145 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4148 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4149 ECJIXB1C104K C 0.1UF, Z, 16V 1					
C4033 ECJ1VF1A105Z C 1UF, Z, 10V 1 C4034 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4035 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4038 ECJ1XCH101J C 100PF, J, 50V 1 C4042,4 ECJ1VB1C105K C 0.01UF, K, 16V 2 3 C4051 ECJ1VB1A224K C 0.22UF, Z, 50V 1 C4053 ECJ1VB1A224K C 0.22UF, Z, 50V 1 C4053 ECJ1VB1A224K C 0.22UF, Z, 50V 1 C4054 ECJ1VB1A224K C 0.22UF, Z, 50V 1 C4055 ECJ1VB1A105K C 0.01UF, Z, 50V 1 C4057 ECJ1XCH471J C 470PF, J, 50V 1 C4058 ECJ1XCH471J C 470PF, J, 50V 1 C4063 ECJ1XCH361J C 560PF, J, 50V 1 C4063 ECJ1XCH361J C 560PF, J, 50V 1 C4063 ECJ1XCH361J C 560PF, J, 50V 1 C4066 ECJ1XB1C105K C 0.01UF, K, 16V 1 C4071 EERHPOJ470P C 47PP, J, 6.3V 1 C4098 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4102,0 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4102 EEFCD0G560R 56UF, 1 C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4122 EEFCD0G560R 56UF, 1 C4123 ECJ2FB1C684K C 68UF, Z, 16V 1 C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4125 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4126 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4127 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4128 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4129 EEVHB1C393K C 0.039UF, K, 16V 1 C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4122 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4123 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4125 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4126 ECJ1XB1C393K C 0.039UF, K, 50V 1 C4127 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4128 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131 ECJ1XCH101J C 100PF, J, 50V 1 C4131 ECJ1XCH101J C 100PF, J, 50V 1 C4132 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4145 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4146 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4147 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1					
C4034 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4035 ECJIZFIC475Z C 0.047UF, Z, 16V 1 C4038 ECJIXCHI01J C 100PF, J, 50V 1 C4042,4 ECJIVBIC105K C 0.01UF, K, 16V 2 3 C4051 ECJIVBIA224K C 0.22UF, Z, 50V 1 C4053 ECJIVBIA224K C 0.22UF, Z, 50V 1 C4054 ECJIVBO225K C 2.2UF, K, 6.3V 1 C4055 ECJIVBIA105K C 0.01UF, Z, 50V 1 C4057 ECJIXCHR471J C 470PF, J, 50V 1 C4058 ECJIVBIA105K C 0.01UF, Z, 50V 1 C4059 ECJIXCHR471J C 470PF, J, 50V 1 C4050 ECJIXCHB61J C 560PF, J, 50V 1 C4063 ECJIXCHB61J C 560PF, J, 50V 1 C4067 ECJIXCHB61J C 560PF, J, 50V 1 C4067 ECJIXBIC105K C 0.01UF, K, 16V 1 C4071 EERHPOJ470P C 47PF, J, 6.3V 1 C4098 ECJIXCHB61J C 560PF, J, 50V 1 C4098 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4098 ECJIXCHB61J C 560PF, J, 50V 1 C4099, O ECJIVC1H120J C 12PF, J, 50V 2 0 C4102, O ECJIXBIC104K C 0.1UF, Z, 16V 1 C4120 EEFCD06560R 56UF, 1 C4121 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4122 EEFCD06560R 56UF, 1 C4124 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4125 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4126 ECJIXBIC393K C 0.039UF, K, 16V 1 C4127 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4129 EEVHBDJ370R E 47UF, 6.3V 1 C4131 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4121 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4122 EEJIXBIC104K C 0.1UF, Z, 16V 1 C4124 ECJIXBIC393K C 0.039UF, K, 16V 1 C4125 ECJIXBIC10AK C 0.1UF, Z, 16V 1 C4126 ECJIXBIC393K C 0.039UF, K, 16V 1 C4127 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4128 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4131 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4131 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4132 EEFHBLC100R C 10UF, M, 6.3V 2 C4133 EEEHBLC100R C 10UF, M, 6.3V 2 C4141 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4134 ECJIXBIC104K C 0.1UF, Z, 16V 3 C4144 ECJIXBIC104K C 0.1UF, Z, 16V 3 C4145 ECJIXBIC104K C 0.1UF, Z, 16V 3 C4146 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4147 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4148 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4149 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4144 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4145 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4146 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4147 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4148 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4149 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4155 ECJIXBIC104K C					
C4035 ECJ2FF1C475Z C 0.0470F, Z, 16V 1 C4042, 4 ECJ1VB1C105K C 0.01UF, K, 16V 2 3 C4051 ECJ1VB1A224K C 0.22UF, Z, 50V 1 C4053 ECJ1VB1A224K C 0.22UF, Z, 50V 1 C4055 ECJ1VB1A225K C 2.2UF, K, 6.3V 1 C4056 ECJ1VB1A105K C 0.01UF, Z, 50V 1 C4057 ECJ1VB1A225K C 2.2UF, K, 6.3V 1 C4058 ECJ1VB1A105K C 0.01UF, Z, 50V 1 C4059 ECJ3YB0J335K C 33UF, J, 25V 1 C4059 ECJ3YB0J335K C 33UF, J, 25V 1 C4063 ECJ1VC1H561J C 560PF, J, 50V 1 C4067 ECJ1VB1C105K C 0.01UF, K, 16V 1 C4071 EEEHP0J470P C 47PF, J, 6.3V 1 C4074 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4096 EEVHB1E330 E 33UF, 25V 1 C4098 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4099, O ECJ1VC1H120J C 12PF, J, 50V 2 0 C4102, O ECJ1XB1C104K C 0.1UF, Z, 16V 2 3 C4104 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCDG5560R 56UF, 1 C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4122 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4125 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4126 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4127 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4128 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4120 ECJ1XB1C393K C 0.015UF, Z, 16V 1 C4121 ECJ1XB1C393K C 0.015UF, Z, 16V 1 C4122 ECJ1XB1C393K C 0.015UF, Z, 16V 1 C4123 ECJ1XB1C393K C 0.015UF, Z, 16V 1 C4124 ECJ1XB1C393K C 0.015UF, Z, 16V 1 C4125 ECJ1XB1C30K C 0.1UF, Z, 16V 1 C4131, 3 ECJ3XB0J106M C 10UF, Z, 16V 1 C4132 ECHBD1C104K C 0.1UF, Z, 16V 1 C4134 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4135- ECJ1XB1C30K C 0.1UF, Z, 16V 1 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1XB1C30K C 0.1UF, Z, 16V 1 C4143 ECHBD1C4K C 0.1UF, Z, 16V 1 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4145- ECJ1XB1C304K C 0.1UF, Z, 16V 3 7 C4146 ECJ1XB1C304K C 0.1UF, Z, 16V 1 C4147 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4149 ECJ1XB1C304K C 0.1UF, Z, 16V 1 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1XB1C304K C 0.1UF, Z, 16V 1 C4144 ECJ1XB1C304K C 0.1UF, Z, 16V 1 C4145- ECJ1XB1C304K C 0.1UF, Z, 16V 1 C4146 ECJ1XB1C304K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C304K C 0.1UF, Z, 16V 1				-	
C4038 ECJIXC1H101J C 100PF, J, 50V 1 C4042,4 ECJIVB1C105K C 0.01UF, K, 16V 2 3 C4051 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4053 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4054 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4055 ECJIVB1A105K C 0.01UF, Z, 50V 1 C4057 ECJIXC1H471J C 470PF, J, 50V 1 C4059 ECJIVB1A105K C 0.01UF, Z, 50V 1 C4063 ECJIXC1H561J C 560PF, J, 50V 1 C40663 ECJIXC1H561J C 560PF, J, 50V 1 C4067 ECJIXB1C105K C 0.01UF, K, 16V 1 C4071 EEEHP0J470P C 47PF, J, 6.3V 1 C4096 EEVHB1B330 E 33UF, Z5V 1 C4098 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4099, 0 ECJIXB1C104K C 0.1UF, Z, 16V 1 C41020 ECJIXB1C104K C 0.1UF, Z, 16V 1 C41021 EEFCD06560R 56UF, C 0.1UF, Z, 16V 1 C4121 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4122 EEFCD06560R 56UF, C 0.1UF, Z, 16V 1 C4124 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4125 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4126 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4127 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4128 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4129 EEFCD06560R 56UF, C 0.1UF, Z, 16V 1 C4121 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4122 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4123 ECJZFB1C684K C 68UF, Z, 16V 1 C4124 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4125 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4126 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4127 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4129 EEYHB0J470R E 47UF, 6.3V 1 C4130 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4134 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4135 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4136 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4141 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4141 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 3 47 C4145 ECJIXB1C104K C 0.1UF, Z, 16V 3 47 C4146 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4147 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4148 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4149 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4153, S ECJIXB1C104K C 0.1UF, Z, 16V 1 C4155 ECJIXB1C104K C 0.1UF, Z, 16V 1	<b>-</b>				
C4042,4 ECJIVB1C105K C 0.01UF, K, 16V 2 3 C4051 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4053 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4054 ECJIVB0J225K C 2.2UF, K, 6.3V 1 C4055 ECJIVB1A105K C 0.01UF, Z, 50V 1 C4057 ECJIXC1H471J C 470PF, J, 50V 1 C4067 ECJIXC1H471J C 470PF, J, 50V 1 C4063 ECJIXC1H561J C 560PF, J, 50V 1 C40667 ECJIXB1C105K C 0.01UF, K, 16V 1 C4071 EERHP0J470P C 47PF, J, 6.3V 1 C4096 EEVHB1E330 E 33UF, Z, 16V 1 C4098 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4099, 0 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4099, 0 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4102, 0 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4104 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4107 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, 1 C4121 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4124 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4125 ECJIXB1C393K C 0.039UF, K, 16V 1 C4126 ECJIXB1C393K C 0.039UF, K, 16V 1 C4127 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4128 ECJIXB1C393K C 0.01UF, K, 50V 1 C4130 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4121 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4122 ECJIXB1C393K C 0.039UF, K, 16V 1 C4123 ECJIXB1C393K C 0.039UF, K, 50V 1 C4130 ECJIXB1C393K C 0.01UF, Z, 16V 1 C4121 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4122 ECJIXB1C393K C 0.01UF, K, 50V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4124 ECJIXB1C393K C 0.01UF, K, 50V 1 C4134 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4125 ECJIXB1C393K C 0.01UF, K, 50V 1 C4136 ECJIXB1C393K C 0.01UF, K, 50V 1 C4137 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4128 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4130 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4145 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4146 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4147 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4148 ECJIXB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4145 ECJIXB1C104K C 0.1UF, Z, 16V 3 4 C4155 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4155 ECJIXB1C104K C 0.1UF, Z, 16V 1				<b>—</b>	
3 C4051 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4053 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4054 ECJIVB1A224K C 0.22UF, K, 6.3V 1 C4055 ECJIVB1A105K C 0.01UF, Z, 50V 1 C4057 ECJIXC1H471J C 470PF, J, 50V 1 C4059 ECJIYB1A105K C 33UF, J, 25V 1 C4063 ECJIXC1H561J C 560PF, J, 50V 1 C4066 ECJIXC1H561J C 560PF, J, 50V 1 C4067 ECJIVB1C105K C 0.01UF, K, 16V 1 C4067 ECJIVB1C105K C 0.01UF, K, 16V 1 C4067 ECJIVB1C105K C 0.01UF, Z, 16V 1 C4074 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4096 EEVHB1B330 E 33UF, 25V 1 C4098 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4099, 0 ECJIVC1H120J C 12PF, J, 50V 2 0 C4102, 0 ECJIXB1C104K C 0.1UF, Z, 16V 2 3 C4104 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4107 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, 1 C4121 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4124 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4125 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4126 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4127 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4128 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4121 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4122 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4123 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4124 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4125 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4126 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4132 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4134 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 3 47 C4145 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4146 ECJIXB1C104K C 0.1UF, Z, 16V 3 47 C4147 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4148 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4149 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4145 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4146 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4147 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4148 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4155 ECJIXB1C104K C 0.1UF, Z, 16V 1					
C4053 ECJIVB1A224K C 0.22UF, Z, 50V 1 C4054 ECJIVB0J225K C 2.2UF, K, 6.3V 1 C4055 ECJIVB1A105K C 0.01UF, Z, 50V 1 C4057 ECJIXC1H471J C 470FF, J, 50V 1 C4059 ECJIXB1A105K C 0.01UF, J, 50V 1 C4059 ECJIXB1C105K C 33UF, J, 25V 1 C4063 ECJIXC1H561J C 560PF, J, 50V 1 C4067 ECJIVB1C105K C 0.01UF, K, 16V 1 C4071 EEEHPOJ470P C 47PF, J, 6.3V 1 C4074 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4096 EEVHB1E330 E 33UF, Z5V 1 C4098 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4099, 0 ECJIVC1H120J C 12PF, J, 50V 2 0 C4102, 0 ECJIXB1C104K C 0.1UF, Z, 16V 2 3 C4104 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCD00560R 56UF, 1 C4121 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4122 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4124 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4125 ECJIXB1C393K C 0.039UF, K, 16V 1 C4126 ECJIXB1C393K C 0.039UF, K, 50V 1 C4130 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4130 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4129 ECYBB1H153K C 0.015UF, K, 50V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4132 ECJIXB1C394K C 0.1UF, Z, 16V 1 C4124 ECJIXB1C393K C 0.039UF, K, 16V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4132 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4132 ECJIXB1C394K C 0.1UF, Z, 16V 1 C4134 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4135 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4145 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4146 ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4142 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4145 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4146 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4147 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4148 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4149 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4145 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4155 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4155 ECJIXB1C104K C 0.1UF, Z, 16V 1	3				
C4054 ECJ1VB0J225K C 2.2UF, K, 6.3V 1 C4055 ECJ1VB1A105K C 0.01UF, Z, 50V 1 C4057 ECJ1XC1H471J C 470PF, J, 50V 1 C4059 ECJ3YB0J335K C 33UF, J, 25V 1 C4063 ECJ1XC1H561J C 560PF, J, 50V 1 C40663 ECJ1XC1H561J C 560PF, J, 50V 1 C4067 ECJ1VB1C105K C 0.01UF, K, 16V 1 C4067 ECJ1VB1C105K C 0.01UF, K, 16V 1 C4071 EEEHP0J470P C 47PF, J, 6.3V 1 C4074 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4096 EEVHB1E330 E 33UF, 25V 1 C4098 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4099, 0 ECJ1VC1H120J C 12PF, J, 50V 2 0 C4102, 0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 3 C4104 ECJ1XC1H680J C 68PF, J, 50V 1 C4107 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, 1 C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4123 ECJ2FB1C684K C 68UF, Z, 16V 1 C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4125 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4126 ECJ1XB1C393K C 0.039UF, K, 50V 1 C4127 ECJ1VB1H153K C 0.015UF, K, 50V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4131, 3 ECJ3XB0J106M C 10UF, M, 6.3V 2 C4131 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131 EEHB1C100R C 10PF, J, 16V 1 C4131 EEHB1C100R C 10PF, J, 16V 1 C4133 EEEHB1C100R C 10UF, M, 6.3V 2 C4134 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4135 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4136 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4137 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4148 ECJ1VB1H102K C 0.1UF, Z, 16V 3 47 C4148 ECJ1VB1H102K C 0.1UF, Z, 16V 1 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1				-	
C4055 ECJ1VB1A105K C 0.01UF, Z, 50V 1 C4057 ECJ1XC1H471J C 470PF, J, 50V 1 C4059 ECJ3XB0J335K C 33UF, J, 25V 1 C4063 ECJ1XC1H561J C 560PF, J, 50V 1 C4067 ECJ1VB1C105K C 0.01UF, K, 16V 1 C4067 ECJ1VB1C105K C 0.01UF, K, 16V 1 C4071 EEHPDJ470P C 47PF, J, 6.3V 1 C4074 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4096 EEVHB1E330 E 33UF, 25V 1 C4098 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4099, 0 ECJ1VC1H120J C 12PF, J, 50V 2 0 C4102, 0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 3 C4104 ECJ1XC1H680J C 68PF, J, 50V 1 C4120 EEFCD0G560R 56UF, C 16V 1 C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4123 ECJ2FB1C684K C 68UF, Z, 16V 1 C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4124 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4127 ECJ1VB1H153K C 0.015UF, K, 50V 1 C4131, 3 ECJ3XB0J106M C 0.1UF, Z, 16V 1 C4131, 3 ECJ3XB0J106M C 0.1UF, Z, 16V 1 C4131 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4127 ECJ1VB1H153K C 0.015UF, K, 50V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4121 ECJ1VB1H153K C 0.015UF, K, 50V 1 C4131 EEEHB1C100R C 10FF, J, 16V 1 C4134 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4135 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4136 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4137 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4138 EEEHB1C100R C 10FF, J, 16V 1 C4139 EEEHB1C100R C 10FF, J, 16V 1 C4134 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4135 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4144 ECJ1YB1H103K C 0.000UF, K, 50V 1 C4145 ECJ1XB1C104K C 0.1UF, Z, 16V 3 7 C4148 ECJ1YB1H103K C 0.00UF, K, 50V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1	<b>-</b>			-	
C4057 ECJ1XC1H471J C 470PF, J, 50V 1 C4059 ECJ3YB0J335K C 33UF, J, 25V 1 C4063 ECJ1XC1H561J C 560PF, J, 50V 1 C4067 ECJ1VB1C105K C 0.01UF, K, 16V 1 C4071 EEHPDJ470P C 47PF, J, 6.3V 1 C4074 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4098 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4098 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4099, 0 ECJ1VC1H120J C 12PF, J, 50V 2 0 C4102, 0 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4107 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4108 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4120 EFFCD0G560R 56UF, 1 C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4122 ECJ2FB1C684K C 68UF, Z, 16V 1 C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4125 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4126 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4127 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4128 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131 EEJ1XB1C104K C 0.1UF, Z, 16V 1 C4132 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4133 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131 EEHBL100R C 10PF, J, 16V 1 C4134 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4135 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4136 ECJ1XB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4143 EEHBL100R C 10PF, J, 50V 1 C4143 EEVHDJ470R E 47UF, 6.3V 1 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4145 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1				-	
C4059 ECJ3YB0J335K C 33UF, J, 25V 1 C4063 ECJ1XC1H561J C 560PF, J, 50V 1 C4067 ECJ1VB1C105K C 0.01UF, K, 16V 1 C4071 EEEHP0J470P C 47PF, J,6.3V 1 C4074 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4096 EEVHB1E330 E 33UF, Z5V 1 C4098 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4099,0 ECJ1VC1H120J C 12PF, J, 50V 2 0 C4102,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 3 C4104 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4107 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4122 ECJ2FB1C684K C 68UF, Z, 16V 1 C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4125 ECJ2FB1C684K C 0.1UF, Z, 16V 1 C4126 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131, 3 ECJ3XB0J106M C 10UF, M,6.3V 2 2 C4133 EEEHB1C100R C 10PF, J, 16V 1 C4134 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4135 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4136 ECJ1XB1C393K C 0.015UF, K, 50V 1 C4137 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4138 EEEHB1C100R C 10PF, J, 16V 1 C4139 EEVHB0J470R E 47UF, 6.3V 2 C4131 EEUHSC104K C 0.1UF, Z, 16V 1 C4134 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4135 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4136 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 2 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 2 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 2 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1					
C4063 ECJ1XC1H561J C 560PF, J, 50V 1 C4067 ECJ1VB1C105K C 0.01UF, K, 16V 1 C4071 EEEHPOJ470P C 47PF, J, 6.3V 1 C4074 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4096 EEVHB1E330 E 33UF, 25V 1 C4098 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4099,0 ECJ1VC1H120J C 12PF, J, 50V 2 0 C4102,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 3 C4104 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4107 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, 1 C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4123 ECJ2FB1C684K C 68UF, Z, 16V 1 C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4125 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4126 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4127 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4128 ECJ1XB1C393K C 0.015UF, K, 50V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131,3 ECJ3XB0J106M C 10UF, M, 6.3V 2 2 C4133 EEEHB1C100R C 10PF, J, 16V 1 C4134 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4143 EECHB1C10AR C 0.1UF, Z, 16V 1 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1XB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4143 EEYHB0J470R E 47UF, 6.3V 1 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4145 ECJ1XB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1					
C4067 ECJ1VB1C105K C 0.01UF, K, 16V 1 C4071 EEEHPOJ470P C 47PF, J,6.3V 1 C4074 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4096 EEVHB1E330 E 33UF, 25V 1 C4098 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4099, 0 ECJ1VC1H120J C 12PF, J, 50V 2 0 C4102, 0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 3 C4104 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4107 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, 1 C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4122 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4125 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4126 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4127 ECJ1XB1H153K C 0.015UF, K, 50V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131, 3 ECJ3XB0J106M C 10UF, M,6.3V 2 C4133 EEEHB1C100R C 10UF, J, 16V 1 C4134 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4134 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4135 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4136 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4137 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4138 EEEHB1C100R C 10UF, M,6.3V 2 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 3 77 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4145 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4146 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4147 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4145 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1					
C4071 EEEHPOJ470P C 47PF, J,6.3V 1 C4074 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4096 EEVHB1E330 E 33UF, 25V 1 C4098 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4099,0 ECJ1VC1H120J C 12PF, J, 50V 2 0 C4102,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 3 C4104 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4107 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, 1 C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4123 ECJ2FB1C684K C 68UF, Z, 16V 1 C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4125 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4127 ECJ1XB1C393K C 0.039UF, K, 50V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4122 EEYHB0J470R E 47UF, 6.3V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131,3 EEEHB1C100R C 10UF, M, 6.3V 2 C4134 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4135 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4143 EEZHB1C104K C 0.1UF, Z, 16V 1 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4145 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4146 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4147 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1				-	
C4074 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4096 EEVHB1E330 E 33UF, 25V 1 C4098 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4099,0 ECJIVC1H120J C 12PF, J, 50V 2 0 C4102,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 3 C4104 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4107 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, 1 C4121 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4123 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4124 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4125 ECJIXB1C393K C 0.039UF, K, 16V 1 C4127 ECJIXB1C393K C 0.015UF, K, 50V 1 C4130 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4130 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4131,3 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4131 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4134 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4134 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4135 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4141 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4142 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4145 ECJIXB1C104K C 0.001UF, K, 50V 1 C4146 ECJIXB1C104K C 0.001UF, K, 50V 1 C4147 ECJIXB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJIXB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4155 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4155 ECJIXB1C104K C 0.1UF, Z, 16V 1					
C4096 EEVHB1E330 E 33UF, 25V 1  C4098 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4099,0 ECJ1VC1H120J C 12PF, J, 50V 2  0  C4102,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 3  C4104 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4107 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4120 EEFCD0G560R 56UF, 1  C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4123 ECJ2FB1C684K C 68UF, Z, 16V 1  C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4125 ECJ1XB1C393K C 0.039UF, K, 16V 1  C4127 ECJ1XB1C393K C 0.015UF, K, 50V 1  C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4131,3 ECJ3XB0J106M C 10UF, Z, 16V 1  C4131,3 ECJ3XB0J106M C 10UF, M, 6.3V 2 2  C4133 EEEHB1C100R C 10PF, J, 16V 1  C4134 ECJ1XC1H101J C 100PF, J, 50V 1  C4135 ECJ1XB1C104K C 0.1UF, Z, 16V 3  37  C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4142 ECJ1XB1C104K C 0.1UF, Z, 16V 3  37  C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4142 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4145 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4146 ECJ1XB1C104K C 0.001UF, K, 50V 1  C4147 ECJ1XB1C104K C 0.1UF, Z, 16V 3  47  C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1				_	
C4098 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4099,0 ECJIVC1H120J C 12PF, J, 50V 2 0 C4102,0 ECJIXBIC104K C 0.1UF, Z, 16V 2 3 C4104 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4107 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, 1 C4121 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4123 ECJ2FBIC684K C 68UF, Z, 16V 1 C4124 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4126 ECJIXBIC393K C 0.039UF, K, 16V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4130 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4131,3 ECJ3XB0J106M C 10UF, M,6.3V 2 C4133 EEEHB1C104K C 0.1UF, Z, 16V 1 C4134 ECJIXC1H101J C 100PF, J, 50V 1 C4135 ECJIXBIC104K C 0.1UF, Z, 16V 3 37 C4141 ECJIXBIC104K C 0.1UF, Z, 16V 3 37 C4141 ECJIXBIC104K C 0.1UF, Z, 16V 3 37 C4141 ECJIXBIC104K C 0.1UF, Z, 16V 3 37 C4144 ECJIXBIC104K C 0.1UF, Z, 16V 3 37 C4144 ECJIXBIC104K C 0.1UF, Z, 16V 3 37 C4144 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4145 ECJIXBIC104K C 0.001UF, K, 50V 1 C4146 ECJIXBIC104K C 0.001UF, K, 50V 1 C4147 ECJIXBIC104K C 0.1UF, Z, 16V 3 47 C4148 ECJIXBIC104K C 0.1UF, Z, 16V 3 47 C4148 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4155 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4155 ECJIXBIC104K C 0.1UF, Z, 16V 1					
C4099,0 ECJ1VC1H120J C 12PF, J, 50V 2 0 C4102,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 3 C4104 ECJ1XC1H680J C 68PF, J, 50V 1 C4107 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, 1 C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4123 ECJ2FB1C684K C 68UF, Z, 16V 1 C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4126 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4127 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131,3 ECJ3XB0J106M C 10UF, M,6.3V 2 2 C4133 EEEHB1C100R C 10PF, J, 16V 1 C4134 ECJ1XC1H101J C 100PF, J, 50V 1 C4135- ECJ1XB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4144 ECJ1XB1H103K C 0.001UF, K, 50V 1 C4145- ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1					
C4102,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2  3 C4104 ECJ1XC1H680J C 68PF, J, 50V 1 C4107 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4123 ECJ2FB1C684K C 68UF, Z, 16V 1 C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4125 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4127 ECJ1XB1C393K C 0.015UF, K, 50V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131,3 ECJ3XB0J106M C 10UF, M, 6.3V 2 C4133 EEEHB1C100R C 10PF, J, 16V 1 C4134 ECJ1XC1H101J C 100PF, J, 50V 1 C4135- ECJ1XB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4143 EEVHB0J470R E 47UF, 6.3V 1 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4144 ECJ1XB1C104K C 0.001UF, K, 50V 1 C4145- ECJ1XB1C104K C 0.001UF, K, 50V 1 C4146 ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1	C4099,0				
C4107 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, 1 C4121 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4123 ECJ2FBlC684K C 68UF, Z, 16V 1 C4124 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4126 ECJIXBlC393K C 0.039UF, K, 16V 1 C4127 ECJIVB1H153K C 0.015UF, K, 50V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4130 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4131,3 ECJ3XB0J106M C 10UF, M, 6.3V 2 C4133 EEEHB1C100R C 10FF, J, 16V 1 C4134 ECJIXC1H101J C 100FF, J, 50V 1 C4135- ECJIXBlC104K C 0.1UF, Z, 16V 3 37 C4141 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4142 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4142 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4144 ECJIXBlC104K C 0.001UF, K, 50V 1 C4143 EEVHB0J470R E 47UF, 6.3V 1 C4144 ECJIVB1H103K C 0.001UF, K, 50V 1 C4144 ECJIXB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJIXB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4149 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4149 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4155 ECJIXB1C104K C 0.1UF, Z, 16V 1	C4102,0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4107 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4120 EEFCD0G560R 56UF, 1 C4121 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4123 ECJ2FBlC684K C 68UF, Z, 16V 1 C4124 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4126 ECJIXBlC393K C 0.039UF, K, 16V 1 C4127 ECJIVB1H153K C 0.015UF, K, 50V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4130 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4131,3 ECJ3XB0J106M C 10UF, M, 6.3V 2 C4133 EEEHB1C100R C 10UF, J, 16V 1 C4134 ECJIXC1H101J C 100PF, J, 50V 1 C4135- ECJIXBlC104K C 0.1UF, Z, 16V 3 37 C4141 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4142 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4142 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4144 ECJIXBlC104K C 0.001UF, K, 50V 1 C4145- ECJIXBlC104K C 0.001UF, K, 50V 1 C4146 ECJIVB1H103K C 0.001UF, K, 50V 1 C4147 ECJIXBlC104K C 0.1UF, Z, 16V 3 47 C4148 ECJIVB1H102K C 1000PF, K, 50V 1 C4149 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4149 ECJIXBlC104K C 0.1UF, Z, 16V 1 C4155 ECJIXBlC104K C 0.1UF, Z, 16V 1		ECJ1XC1H680J	C 68PF, J, 50V	1	
C4120 EEFCD0G560R 56UF, 1  C4121 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4123 ECJ2FB1C684K C 68UF, Z, 16V 1  C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4126 ECJ1XB1C393K C 0.039UF, K, 16V 1  C4127 ECJ1VB1H153K C 0.015UF, K, 50V 1  C4129 EEVHB0J470R E 47UF, 6.3V 1  C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4131,3 ECJ3XB0J106M C 10UF, M, 6.3V 2  C4133 EEEHB1C100R C 10UF, J, 16V 1  C4134 ECJ1XC1H101J C 100PF, J, 50V 1  C4135- ECJ1XB1C104K C 0.1UF, Z, 16V 3  37  C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4142 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4142 ECJ1XB1C104K C 0.001UF, K, 50V 1  C4144 ECJ1XB1C104K C 0.001UF, K, 50V 1  C4145- ECJ1XB1C104K C 0.001UF, K, 50V 1  C4146 ECJ1XB1C104K C 0.1UF, Z, 16V 3  47  C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 3  C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1				1	
C4123 ECJ2FB1C684K C 68UF, Z, 16V 1  C4124 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4126 ECJ1XB1C393K C 0.039UF, K, 16V 1  C4127 ECJ1VB1H153K C 0.015UF, K, 50V 1  C4129 EEVHB0J470R E 47UF, 6.3V 1  C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4131,3 ECJ3XB0J106M C 10UF, M, 6.3V 2  C4133 EEEHB1C100R C 10PF, J, 16V 1  C4134 ECJ1XC1H101J C 100PF, J, 50V 1  C4135 ECJ1XB1C104K C 0.1UF, Z, 16V 3  37  C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4142 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4143 EEVHB0J470R E 47UF, 6.3V 1  C4144 ECJ1XB1C104K C 0.001UF, K, 50V 1  C4145 ECJ1XB1C104K C 0.001UF, K, 50V 1  C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 3  47  C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 3  47  C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1	C4120	EEFCD0G560R		1	
C4124 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4126 ECJIXB1C393K C 0.039UF, K, 16V 1 C4127 ECJIVB1H153K C 0.015UF, K, 50V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4130 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4131,3 ECJ3XB0J106M C 10UF, M, 6.3V 2 C4133 EEEHB1C100R C 10PF, J, 16V 1 C4134 ECJIXC1H101J C 100PF, J, 50V 1 C4135- ECJIXB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4142 ECJIXB1C104K C 0.001UF, K, 50V 1 C4143 EEVHB0J470R E 47UF, 6.3V 1 C4144 ECJIXB1C104K C 0.001UF, K, 50V 1 C4145- ECJIXB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJIVB1H103K C 0.001UF, K, 50V 1 C4149 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4149 ECJIXB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJIXB1C104K C 0.1UF, Z, 16V 1	C4121	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4126 ECJ1XB1C393K C 0.039UF, K, 16V 1 C4127 ECJ1VB1H153K C 0.015UF, K, 50V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131,3 ECJ3XB0J106M C 10UF, M, 6.3V 2 C4133 EEEHB1C100R C 10PF, J, 16V 1 C4134 ECJ1XC1H101J C 100PF, J, 50V 1 C4135- ECJ1XB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1XB1C104K C 0.001UF, K, 50V 1 C4144 ECJ1XB1C104K C 0.001UF, K, 50V 1 C4144 ECJ1XB1C104K C 0.001UF, K, 50V 1 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 3 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4155 ECJ1XB1C104K C 0.1UF, Z, 16V 1	C4123	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C4127 ECJ1VB1H153K C 0.015UF, K, 50V 1 C4129 EEVHB0J470R E 47UF, 6.3V 1 C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131,3 ECJ3XB0J106M C 10UF, M,6.3V 2 2 C4133 EEEHB1C100R C 10PF, J, 16V 1 C4134 ECJ1XC1H101J C 100PF, J, 50V 1 C4135- ECJ1XB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4144 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4144 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4145- ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1VB1H102K C 1000PF, K, 50V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4153,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1	C4124	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4129 EEVHB0J470R E 47UF, 6.3V 1  C4130 ECJIXB1C104K C 0.1UF, Z, 16V 1  C4131,3 ECJ3XB0J106M C 10UF, M,6.3V 2  2  C4133 EEEHB1C100R C 10PF, J, 16V 1  C4134 ECJIXC1H101J C 100PF, J, 50V 1  C4135- ECJIXB1C104K C 0.1UF, Z, 16V 3  37  C4141 ECJIXB1C104K C 0.1UF, Z, 16V 1  C4142 ECJIVB1H103K C 0.001UF, K, 50V 1  C4143 EEVHB0J470R E 47UF, 6.3V 1  C4144 ECJIXB1C104K C 0.1UF, Z, 16V 3  47  C4148 ECJIXB1C104K C 0.1UF, Z, 16V 3  C4149 ECJIXB1C104K C 0.1UF, Z, 16V 1  C4155 ECJIXB1C104K C 0.1UF, Z, 16V 1	C4126	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C4130 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4131,3 ECJ3XB0J106M C 10UF, M,6.3V 2 2 C4133 EEEHB1C100R C 10PF, J, 16V 1 C4134 ECJ1XC1H101J C 100PF, J, 50V 1 C4135- ECJ1XB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4143 EEVHE0J470R E 47UF, 6.3V 1 C4144 ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4153,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1				_	
C4131,3 ECJ3XB0J106M C 10UF, M,6.3V 2  C4133 EEEHB1C100R C 10PF, J, 16V 1  C4134 ECJ1XC1H101J C 100PF, J, 50V 1  C4135- ECJ1XB1C104K C 0.1UF, Z, 16V 3  37  C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4142 ECJ1VB1H103K C 0.001UF, K, 50V 1  C4143 EEVHB0J470R E 47UF, 6.3V 1  C4144 ECJ1VB1H103K C 0.001UF, K, 50V 1  C4145- ECJ1XB1C104K C 0.1UF, Z, 16V 3  47  C4148 ECJ1VB1H102K C 1000PF, K, 50V 1  C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4155, 5 ECJ1XB1C104K C 0.1UF, Z, 16V 2  4  C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1				_	
2 C4133 EEEHB1C100R C 10PF, J, 16V 1 C4134 ECJ1XC1H101J C 100PF, J, 50V 1 C4135- ECJ1XB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4143 EEVHB0J470R E 47UF, 6.3V 1 C4144 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4145- ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1VB1H102K C 1000PF, K, 50V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4153,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1				-	
C4134 ECJ1XC1H101J C 100PF, J, 50V 1 C4135- ECJ1XB1C104K C 0.1UF, Z, 16V 3 37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1YB1H103K C 0.001UF, K, 50V 1 C4143 EEVHB0J470R E 47UF, 6.3V 1 C4144 ECJ1YB1H103K C 0.001UF, K, 50V 1 C4145- ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1YB1H102K C 1000PF, K, 50V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4153,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1YB1H103K C 0.001UF, K, 50V 1		ECJ3XB0J106M	C 10UF, M,6.3V	2	
C4135-   ECJ1XB1C104K   C 0.1UF, Z, 16V   3   3   C4141   ECJ1XB1C104K   C 0.1UF, Z, 16V   1   C4142   ECJ1YB1H103K   C 0.001UF, K, 50V   1   C4143   EEVHB0J470R   E 47UF, 6.3V   1   C4144   ECJ1YB1H103K   C 0.001UF, K, 50V   1   C4145-   ECJ1XB1C104K   C 0.1UF, Z, 16V   3   47   C4148   ECJ1YB1H102K   C 1000PF, K, 50V   1   C4149   ECJ1XB1C104K   C 0.1UF, Z, 16V   1   C4153,5   ECJ1XB1C104K   C 0.1UF, Z, 16V   2   4   C4155   ECJ1YB1H103K   C 0.001UF, K, 50V   1   ECJ1YB1H103K   ECJ1YB	C4133	EEEHB1C100R	C 10PF, J, 16V	1	
37 C4141 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4142 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4143 EEVHB0J470R E 47UF, 6.3V 1 C4144 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4145- ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1VB1H102K C 1000PF, K, 50V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4153,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1	C4134	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4142 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4143 EEVHB0J470R E 47UF, 6.3V 1 C4144 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4145- ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1VB1H102K C 1000PF, K, 50V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4153,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1		ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4143 EEVHB0J470R E 47UF, 6.3V 1 C4144 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4145- ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1VB1H102K C 1000PF, K, 50V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4153,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1	C4141	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4144 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4145- ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1VB1H102K C 1000PF, K, 50V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4153,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1	C4142	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4145- ECJ1XB1C104K C 0.1UF, Z, 16V 3 47 C4148 ECJ1VB1H102K C 1000PF, K, 50V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4153,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1	C4143	EEVHB0J470R	E 47UF, 6.3V	1	
47 C4148 ECJ1VB1H102K C 1000PF, K, 50V 1 C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4153,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1				_	
C4149 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4153,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1					
C4153,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 4 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1	C4148	ECJ1VB1H102K	C 1000PF, K, 50V	1	
4 C4155 ECJ1VB1H103K C 0.001UF, K, 50V 1	C4149	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
<del>                                     </del>		ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4160 ECT1XB0.T105K C 1HF K 16V 1	C4155	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
CITO ZCOTADOUTOSK C TOP, R, TOV	C4160	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4161 ECJ1XB1C104K C 0.1UF, Z, 16V 1	C4161	ECJ1XB1C104K		1	
C4164 ERJ3GEY0R00 M 0 OHM, 1/16W 1	C4164	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No. Part No. Part Name & Description   Pcs   Remarks   No.   Description   Pcs   Description   Pcs   Description   Pcs   Description   Pcs   Description   Descriptio	Description   Description
C4165 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4172 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4181,8 ECJ1XB1C104K C 0.1UF, Z, 16V 2 2 C4184 ECJ1XB0J105K C 1UF, K, 16V 1 C4186 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4186 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4191 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4203 EEVHB0J470R E 47UF, 6.3V 1 C4205 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4208 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4215 EEVHB1C470P E 47UF, 16V 1 C4216 ECJ1XC1H181J C 180FF, J, 50V 2 8 C4217,1 ECJ1XC1H330J C 33PF, J, 50V 2 8 C4221 ECJ1XB1C100K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 FJJ0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 1 C4233 EEVHB1C470P E 47UF, 16V 1 C4234,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEHP1C100R C 10PF, J, 16V 1 C4231 EEVHB1C470P E 47UF, 16V 1 C4234,3 ECJ1XB1C104K C 0.1UF, Z, 16V 5 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237 ECJ1XB1C104K C 0.1UF, Z, 16V 5 54 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250 ECJ1XB1C104K C 0.1UF, Z, 16V 5 8 C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	165
C4172 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4181,8 ECJIXB1C104K C 0.1UF, Z, 16V 2 C4184 ECJIXB0J105K C 1UF, K, 16V 1 C4186 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4191 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4203 EEVHB0J470R E 47UF, 6.3V 1 C4205 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4208- ECJIXB1C104K C 0.1UF, Z, 16V 3 10 C4215 EEVHB1C470P E 47UF, 16V 1 C4216 ECJIXC1H181J C 180PF, J, 50V 2 8 C4219,2 ECJIXC1H330J C 33PF, J, 50V 2 0 C4221 ECJIXC1H30J C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10FF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJIXB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4223 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10FF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4231 EEVHB1C470P E 47UF, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10FF, J, 16V 2 3 C4234,3 EEEHP1C100R C 10FF, J, 16V 2 48 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237 ECJIXB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250 ECJIXB1C104K C 0.1UF, Z, 16V 5 48 C4259 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4259 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4259 ECJIXB1C104K C 0.1UF, Z, 16V 1	172
C4181,8   ECJIXBIC104K   C 0.1UF, Z, 16V   2   C4184   ECJIXBOJ105K   C 1UF, K, 16V   1   C4186   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4191   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4203   EEVHBOJ470R   E 47UF, 6.3V   1   C4205   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4208   ECJIXBIC104K   C 0.1UF, Z, 16V   3   10   C4215   EEVHBIC470P   E 47UF, 16V   1   C4216   ECJIVBIH103K   C 0.001UF, K, 50V   1   C4217, 1   ECJIXC1H181J   C 180PF, J, 50V   2   8   C4219, 2   ECJIXC1H30J   C 33PF, J, 50V   2   C4221   ECJIXC1H30J   C 10PF, J, 16V   1   C4224   EEEHBIC100R   C 10PF, J, 16V   1   C4225   F1J0J1060004   C 0.010UF, K, 16V   1   C4227   F1J0J1060004   C 0.010UF, K, 16V   1   C4229, 3   ECJIXBIC104K   C 0.1UF, Z, 16V   2   C4231   EEVHBIC470P   E 47UF, 16V   1   C4229, 3   EEEHPIC100R   C 10PF, J, 16V   1   C4233   EEEHPIC100R   C 10PF, J, 16V   2   C4231   EEVHBIC470P   E 47UF, 16V   1   C4233, 3   EEEHPIC100R   C 10PF, J, 16V   2   C4234, 3   EEEHPIC100R   C 10PF, J, 16V   2   C4234, 3   EEEHPIC100R   C 10PF, J, 16V   2   C4236   EEVHB0J470R   E 47UF, 6.3V   1   C4237   ECJIXBIC104K   C 0.1UF, Z, 16V   12   C4230   EEVHB0J470R   E 47UF, 6.3V   1   C4250   ECJIXBIC104K   C 0.1UF, Z, 16V   5   C4250   ECJIXBIC104K   C 0.1UF, Z, 16V   5   C4259   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4250   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4250   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4250   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4260   ECJIXBIC104K   C 0.	181,8 ECJ1XB1C104K C 0.1UF, Z, 16V 2  184 ECJ1XB0J105K C 1UF, K, 16V 1  186 ECJ1XB1C104K C 0.1UF, Z, 16V 1  191 ECJ1XB1C104K C 0.1UF, Z, 16V 1  203 EEVHB0J470R E 47UF, 6.3V 1  205 ECJ1XB1C104K C 0.1UF, Z, 16V 3  208- ECJ1XB1C104K C 0.1UF, Z, 16V 3  215 EEVHB1C470P E 47UF, 16V 1  216 ECJ1VB1H103K C 0.001UF, K, 50V 1  217,1 ECJ1XC1H181J C 180PF, J, 50V 2  221 ECJ1XB1C470P E 47UF, 16V 1  222 EEVHB1C470P C 10PF, J, 16V 1  222 EEVHB1C470P C 0.010UF, K, 16V 1  223 ECJ1XB1C104K C 0.1UF, Z, 16V 1  227 F1J0J1060004 C 0.010UF, K, 16V 1  229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2  231 EEVHB1C470P E 47UF, 16V 2  231 EEVHB1C470P E 47UF, 16V 2  231 EEVHB1C470P E 47UF, 16V 1  232,3 EEEHP1C100R C 10PF, J, 16V 2  231 EEVHB1C470P E 47UF, 16V 1  232,3 EEEHP1C100R C 10PF, J, 16V 5  234,3 ECJ1XB1C104K C 0.1UF, Z, 16V 12  249 EEVHB0J470R E 47UF, 6.3V 1  250- ECJ1XB1C104K C 0.1UF, Z, 16V 5  257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 5  257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 1  259 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4181,8   ECJIXBIC104K   C 0.1UF, Z, 16V   2   C4184   ECJIXBOJ105K   C 1UF, K, 16V   1   C4186   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4191   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4203   EEVHBOJ470R   E 47UF, 6.3V   1   C4205   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4208   ECJIXBIC104K   C 0.1UF, Z, 16V   3   10   C4215   EEVHBIC470P   E 47UF, 16V   1   C4216   ECJIVBIH103K   C 0.001UF, K, 50V   1   C4217, 1   ECJIXC1H181J   C 180PF, J, 50V   2   8   C4219, 2   ECJIXC1H30J   C 33PF, J, 50V   2   C4221   ECJIXC1H30J   C 10PF, J, 16V   1   C4224   EEEHBIC100R   C 10PF, J, 16V   1   C4225   F1J0J1060004   C 0.010UF, K, 16V   1   C4227   F1J0J1060004   C 0.010UF, K, 16V   1   C4229, 3   ECJIXBIC104K   C 0.1UF, Z, 16V   2   C4231   EEVHBIC470P   E 47UF, 16V   1   C4229, 3   EEEHPIC100R   C 10PF, J, 16V   1   C4233   EEEHPIC100R   C 10PF, J, 16V   2   C4231   EEVHBIC470P   E 47UF, 16V   1   C4233, 3   EEEHPIC100R   C 10PF, J, 16V   2   C4234, 3   EEEHPIC100R   C 10PF, J, 16V   2   C4234, 3   EEEHPIC100R   C 10PF, J, 16V   2   C4236   EEVHB0J470R   E 47UF, 6.3V   1   C4237   ECJIXBIC104K   C 0.1UF, Z, 16V   12   C4230   EEVHB0J470R   E 47UF, 6.3V   1   C4250   ECJIXBIC104K   C 0.1UF, Z, 16V   5   C4250   ECJIXBIC104K   C 0.1UF, Z, 16V   5   C4259   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4250   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4250   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4250   ECJIXBIC104K   C 0.1UF, Z, 16V   1   C4260   ECJIXBIC104K   C 0.	181,8 ECJ1XB1C104K C 0.1UF, Z, 16V 2  184 ECJ1XB0J105K C 1UF, K, 16V 1  186 ECJ1XB1C104K C 0.1UF, Z, 16V 1  191 ECJ1XB1C104K C 0.1UF, Z, 16V 1  203 EEVHB0J470R E 47UF, 6.3V 1  205 ECJ1XB1C104K C 0.1UF, Z, 16V 1  208- ECJ1XB1C104K C 0.1UF, Z, 16V 3  215 EEVHB1C470P E 47UF, 16V 1  216 ECJ1VB1H103K C 0.001UF, K, 50V 1  217,1 ECJ1XC1H181J C 180PF, J, 50V 2  221 ECJ1XB1H103K C 0.001UF, K, 50V 1  222 EEVHB1C470P E 47UF, 16V 1  224 EEEHB1C100R C 10PF, J, 16V 1  225 F1J0J1060004 C 0.010UF, K, 16V 1  227 F1J0J1060004 C 0.010UF, K, 16V 1  229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2  231 EEVHB1C470P E 47UF, 16V 2  231 EEVHB1C470P E 47UF, 16V 2  231 EEVHB1C470P C 0.1UF, Z, 16V 2  231 EEVHB1C470P E 47UF, 16V 1  232,3 EEEHP1C100R C 10PF, J, 16V 1  232,3 EEEHP1C100R C 0.1UF, Z, 16V 2  234,3 ECJ1VB1H272K C 2700PF, K, 50V 2  236 EEVHB0J470R E 47UF, 6.3V 1  249 EEVHB0J470R E 47UF, 6.3V 1  250- ECJ1XB1C104K C 0.1UF, Z, 16V 5  257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 5  257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 1  259 ECJ1XB1C104K C 0.1UF, Z, 16V 1
2 C4184 ECJIXB0J105K C 1UF, K, 16V 1 C4186 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4191 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4203 EEVHB0J470R E 47UF, 6.3V 1 C4205 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4208- ECJIXB1C104K C 0.1UF, Z, 16V 3 10 C4215 EEVHB1C470P E 47UF, 16V 1 C4216 ECJIVB1H103K C 0.001UF, K, 50V 1 C4217,1 ECJIXC1H181J C 180FF, J, 50V 2 8 C4219,2 ECJIXC1H330J C 33PF, J, 50V 2 0 C4221 ECJIVB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F10J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJIXB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEHP1C100R C 10PF, J, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4233,3 EEHP1C100R C 10PF, J, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 ECJIXB1C104K C 0.1UF, Z, 16V 2 3 C4234,3 ECJIVB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJIXB1C104K C 0.1UF, Z, 16V 5 4 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJIXB1C104K C 0.1UF, Z, 16V 5 54 C4259 ECJIXB1C104K C 0.1UF, Z, 16V 1 8 C4259 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4260 ECJIXB1C104K C 0.1UF, Z, 16V 1	184 ECJIXBOJ105K C 1UF, K, 16V 1 186 ECJIXBIC104K C 0.1UF, Z, 16V 1 191 ECJIXBIC104K C 0.1UF, Z, 16V 1 203 EEVHBOJ470R E 47UF, 6.3V 1 205 ECJIXBIC104K C 0.1UF, Z, 16V 1 208- ECJIXBIC104K C 0.1UF, Z, 16V 3 215 EEVHB1C470P E 47UF, 16V 1 216 ECJIVB1H103K C 0.001UF, K, 50V 1 217,1 ECJIXC1H181J C 180PF, J, 50V 2 219,2 ECJIXC1H330J C 33PF, J, 50V 2 221 ECJIVB1H03K C 0.001UF, K, 50V 1 222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227, 3 ECJIXB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 222, 3 ECJIXB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 2 231 EEVHB1C470P E 47UF, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJIVB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJIXB1C104K C 0.1UF, Z, 16V 5 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJIXB1C104K C 0.1UF, Z, 16V 5 257,5 ECJIXB1C104K C 0.1UF, Z, 16V 5 259 ECJIXB0J105K C 1UF, K, 16V 1 260 ECJIXB1C104K C 0.1UF, Z, 16V 1
C4184 ECJIXBOJIO5K C 1UF, K, 16V 1  C4186 ECJIXBIC104K C 0.1UF, Z, 16V 1  C4191 ECJIXBIC104K C 0.1UF, Z, 16V 1  C4203 EEVHBOJ470R E 47UF, 6.3V 1  C4205 ECJIXBIC104K C 0.1UF, Z, 16V 1  C4208 ECJIXBIC104K C 0.1UF, Z, 16V 3  10  C4215 EEVHBIC470P E 47UF, 16V 1  C4216 ECJIVBIH103K C 0.001UF, K, 50V 1  C4217, 1 ECJIXC1H181J C 180PF, J, 50V 2  8  C4219, 2 ECJIXC1H330J C 33PF, J, 50V 2  0  C4221 ECJIVBIH103K C 0.001UF, K, 50V 1  C4222 EEVHBIC470P E 47UF, 16V 1  C4224 EEEHBIC100R C 10PF, J, 16V 1  C4225 F1J0J1060004 C 0.010UF, K, 16V 1  C4229, 3 ECJIXB1C104K C 0.1UF, Z, 16V 2  0  C4231 EEVHBIC470P E 47UF, 16V 1  C4233, 3 EEEHPIC100R C 10PF, J, 16V 2  0  C4231 EEVHBIC470P E 47UF, 16V 1  C4233, 3 EEHPIC100R C 10PF, J, 16V 2  3  C4234, 3 ECJIXB1C104K C 0.1UF, Z, 16V 2  5  C4236 EEVHB0J470R E 47UF, 6.3V 1  C4237 ECJIXB1C104K C 0.1UF, Z, 16V 5  5  C4249 EEVHB0J470R E 47UF, 6.3V 1  C4250 ECJIXB1C104K C 0.1UF, Z, 16V 5  48  C4259 ECJIXB1C104K C 0.1UF, Z, 16V 5  8  C4259 ECJIXB1C104K C 0.1UF, Z, 16V 1  C4260 ECJIXB1C104K C 0.1UF, Z, 16V 1	186 ECJIXB1C104K C 0.1UF, Z, 16V 1 191 ECJIXB1C104K C 0.1UF, Z, 16V 1 203 EEVHB0J470R E 47UF, 6.3V 1 205 ECJIXB1C104K C 0.1UF, Z, 16V 1 208- ECJIXB1C104K C 0.1UF, Z, 16V 1 208- ECJIXB1C104K C 0.1UF, Z, 16V 3 215 EEVHB1C470P E 47UF, 16V 1 216 ECJIVB1H103K C 0.001UF, K, 50V 1 217,1 ECJIXC1H181J C 180PF, J, 50V 2 219,2 ECJIXC1H330J C 33PF, J, 50V 2 221 ECJIVB1H103K C 0.001UF, K, 50V 1 222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJIXB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJIVB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJIXB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJIXB1C104K C 0.1UF, Z, 16V 5 257,5 ECJIXB1C104K C 0.1UF, Z, 16V 5 259 ECJIXB0J105K C 1UF, K, 16V 1 260 ECJIXB1C104K C 0.1UF, Z, 16V 1
C4186 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4191 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4203 EEVHB0J470R E 47UF, 6.3V 1 C4205 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4208- ECJ1XB1C104K C 0.1UF, Z, 16V 3 10 C4215 EEVHB1C470P E 47UF, 16V 1 C4216 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4217, 1 ECJ1XC1H181J C 180FF, J, 50V 2 8 C4219, 2 ECJ1XC1H330J C 33PF, J, 50V 2 0 C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4229, 3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232, 3 EEHF1C100R C 10PF, J, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4233, 3 EEHF1C100R C 10PF, J, 16V 2 3 C4234, 3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	186 ECJIXB1C104K C 0.1UF, Z, 16V 1 191 ECJIXB1C104K C 0.1UF, Z, 16V 1 203 EEVHB0J470R E 47UF, 6.3V 1 205 ECJIXB1C104K C 0.1UF, Z, 16V 1 208- ECJIXB1C104K C 0.1UF, Z, 16V 1 208- ECJIXB1C104K C 0.1UF, Z, 16V 3 215 EEVHB1C470P E 47UF, 16V 1 216 ECJIVB1H103K C 0.001UF, K, 50V 1 217,1 ECJIXC1H181J C 180PF, J, 50V 2 219,2 ECJIXC1H330J C 33PF, J, 50V 2 221 ECJIVB1H103K C 0.001UF, K, 50V 1 222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJIXB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJIVB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJIXB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJIXB1C104K C 0.1UF, Z, 16V 5 257,5 ECJIXB1C104K C 0.1UF, Z, 16V 1 259 ECJIXB0J105K C 1UF, K, 16V 1 260 ECJIXB1C104K C 0.1UF, Z, 16V 1
C4191 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4203 EEVHB0J470R E 47UF, 6.3V 1 C4205 ECJIXBIC104K C 0.1UF, Z, 16V 1 C4208- ECJIXBIC104K C 0.1UF, Z, 16V 3 10 C4215 EEVHB1C470P E 47UF, 16V 1 C4216 ECJIVBIH103K C 0.001UF, K, 50V 1 C4217,1 ECJIXC1H181J C 180PF, J, 50V 2 8 C4219,2 ECJIXC1H330J C 33PF, J, 50V 2 0 C4221 ECJIVB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJIXB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4229,3 ECJIXB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4231 EEVHB1C470P E 47UF, 16V 1 C4230 EEVHB1C470P E 47UF, 16V 1 C4231 EEVHB1C470P E 47UF, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4237- ECJIXB1C104K C 0.1UF, Z, 16V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJIXB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJIXB1C104K C 0.1UF, Z, 16V 5 4 C4259 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4259 ECJIXB1C104K C 0.1UF, Z, 16V 1 C4260 ECJIXB1C104K C 0.1UF, Z, 16V 1	191 ECJIXBIC104K C 0.1UF, Z, 16V 1 203 EEVHB0J470R E 47UF, 6.3V 1 205 ECJIXBIC104K C 0.1UF, Z, 16V 1 208- ECJIXBIC104K C 0.1UF, Z, 16V 3 215 EEVHB1C470P E 47UF, 16V 1 216 ECJIVBIH103K C 0.001UF, K, 50V 1 217,1 ECJIXC1H31J C 180PF, J, 50V 2 219,2 ECJIXB1C104K C 0.001UF, K, 50V 1 222 EEVHB1C470P E 47UF, 16V 1 222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJIXB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJIXB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJIXB1C104K C 0.1UF, Z, 16V 5 257,5 ECJIXB1C104K C 0.1UF, Z, 16V 1 259 ECJIXB0J105K C 1UF, K, 16V 1
C4203 EEVHB0J470R E 47UF, 6.3V 1  C4205 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4208- ECJ1XB1C104K C 0.1UF, Z, 16V 3  10  C4215 EEVHB1C470P E 47UF, 16V 1  C4216 ECJ1VB1H103K C 0.001UF, K, 50V 1  C4217,1 ECJ1XC1H181J C 180PF, J, 50V 2  8  C4219,2 ECJ1XC1H330J C 33PF, J, 50V 2  0  C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1  C4222 EEVHB1C470P E 47UF, 16V 1  C4224 EEEHB1C100R C 10PF, J, 16V 1  C4225 F1J0J1060004 C 0.010UF, K, 16V 1  C4227 F1J0J1060004 C 0.010UF, K, 16V 1  C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2  0  C4231 EEVHB1C470P E 47UF, 16V 1  C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2  0  C4231 EEVHB1C470P E 47UF, 16V 1  C4232,3 EEEHP1C100R C 10PF, J, 16V 2  0  C4231 EEVHB1C470P E 47UF, 16V 1  C4232,3 EEEHP1C100R C 10PF, J, 16V 5  C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2  5  C4236 EEVHB0J470R E 47UF, 6.3V 1  C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 5  48  C4249 EEVHB0J470R E 47UF, 6.3V 1  C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5  48  C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	203 EEVHB0J470R E 47UF, 6.3V 1 205 ECJ1XB1C104K C 0.1UF, Z, 16V 1 208- ECJ1XB1C104K C 0.1UF, Z, 16V 3 215 EEVHB1C470P E 47UF, 16V 1 216 ECJ1VB1H103K C 0.001UF, K, 50V 1 217,1 ECJ1XC1H181J C 180PF, J, 50V 2 219,2 ECJ1XC1H330J C 33PF, J, 50V 2 221 ECJ1VB1H103K C 0.001UF, K, 50V 1 222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1XB1C104K C 0.1UF, Z, 16V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4205 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4208- ECJ1XB1C104K C 0.1UF, Z, 16V 3 10 C4215 EEVHB1C470P E 47UF, 16V 1 C4216 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4217,1 ECJ1XC1H181J C 180PF, J, 50V 2 8 C4219,2 ECJ1XC1H330J C 33PF, J, 50V 2 0 C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 5 C4236 EEVHB0J470R C 10PF, J, 16V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	205 ECJIXB1C104K C 0.1UF, Z, 16V 1 208- ECJIXB1C104K C 0.1UF, Z, 16V 3 215 EEVHB1C470P E 47UF, 16V 1 216 ECJIVB1H103K C 0.001UF, K, 50V 1 217,1 ECJIXC1H31J C 180PF, J, 50V 2 219,2 ECJIXC1H330J C 33PF, J, 50V 2 221 ECJIVB1H103K C 0.001UF, K, 50V 1 222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJIXB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 2 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJIXB1C104K C 0.1UF, Z, 16V 1 237- ECJIXB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJIXB1C104K C 0.1UF, Z, 16V 5 257,5 ECJIXB1C104K C 0.1UF, Z, 16V 2 259 ECJIXB0J105K C 1UF, K, 16V 1 260 ECJIXB1C104K C 0.1UF, Z, 16V 1
C4205 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4208- ECJ1XB1C104K C 0.1UF, Z, 16V 3 10 C4215 EEVHB1C470P E 47UF, 16V 1 C4216 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4217,1 ECJ1XC1H181J C 180PF, J, 50V 2 8 C4219,2 ECJ1XC1H330J C 33PF, J, 50V 2 0 C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 5 C4234,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	205 ECJIXB1C104K C 0.1UF, Z, 16V 1 208- ECJIXB1C104K C 0.1UF, Z, 16V 3 215 EEVHB1C470P E 47UF, 16V 1 216 ECJIVB1H103K C 0.001UF, K, 50V 1 217,1 ECJIXC1H31J C 180PF, J, 50V 2 219,2 ECJIXC1H330J C 33PF, J, 50V 2 221 ECJIVB1H103K C 0.001UF, K, 50V 1 222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJIXB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 2 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJIXB1C104K C 0.1UF, Z, 16V 1 237- ECJIXB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJIXB1C104K C 0.1UF, Z, 16V 5 257,5 ECJIXB1C104K C 0.1UF, Z, 16V 2 259 ECJIXB0J105K C 1UF, K, 16V 1 260 ECJIXB1C104K C 0.1UF, Z, 16V 1
C4208-   ECJ1XB1C104K   C 0.1UF, Z, 16V   3   10   C4215   EEVHB1C470P   E 47UF, 16V   1   C4216   ECJ1VB1H103K   C 0.001UF, K, 50V   1   C4217,1   ECJ1XC1H181J   C 180PF, J, 50V   2   8   C4219,2   ECJ1XC1H330J   C 33PF, J, 50V   2   C4221   ECJ1XC1H330J   C 33PF, J, 50V   1   C4222   EEVHB1C470P   E 47UF, 16V   1   C4224   EEEHB1C100R   C 10PF, J, 16V   1   C4225   F1J0J1060004   C 0.010UF, K, 16V   1   C4227   F1J0J1060004   C 0.010UF, K, 16V   1   C4229,3   ECJ1XB1C104K   C 0.1UF, Z, 16V   2   C4231   EEVHB1C470P   E 47UF, 16V   2   C4231   EEVHB1C470P   E 47UF, 16V   2   C4233   EEEHP1C100R   C 10PF, J, 16V   2   C4234,3   ECJ1VB1H272K   C 2700PF, K, 50V   2   S   C4236   EEVHB0J470R   E 47UF, 6.3V   1   C4237   ECJ1XB1C104K   C 0.1UF, Z, 16V   12   C4249   EEVHB0J470R   E 47UF, 6.3V   1   C4250   ECJ1XB1C104K   C 0.1UF, Z, 16V   5   S   C4259   ECJ1XB1C104K   C 0.1UF, Z, 16V   2   S   C4259   ECJ1XB1C104K   C 0.1UF, Z, 16V   1   C4259   ECJ1XB1C104K   C 0.1UF, Z, 16V   1   C4260   ECJ1XB1C1	208- ECJIXB1C104K C 0.1UF, Z, 16V 3 215 EEVHB1C470P E 47UF, 16V 1 216 ECJIVB1H103K C 0.001UF, K, 50V 1 217,1 ECJIXC1H181J C 180PF, J, 50V 2 219,2 ECJIXC1H330J C 33PF, J, 50V 2 221 ECJIVB1H103K C 0.001UF, K, 50V 1 222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJIXB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 2 231 EEVHB1C470P E 47UF, 16V 2 231 EEVHB1C470P E 47UF, 16V 2 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJIVB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJIXB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJIXB1C104K C 0.1UF, Z, 16V 5 257,5 ECJIXB1C104K C 0.1UF, Z, 16V 2 259 ECJIXB0J105K C 1UF, K, 16V 1 260 ECJIXB1C104K C 0.1UF, Z, 16V 1
10 C4215 EEVHB1C470P E 47UF, 16V 1 C4216 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4217,1 ECJ1XC1H181J C 180PF, J, 50V 2 8 C4219,2 ECJ1XC1H330J C 33PF, J, 50V 2 0 C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237 ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250 ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	215 EEVHB1C470P E 47UF, 16V 1 216 ECJ1VB1H103K C 0.001UF, K, 50V 1 217,1 ECJ1XC1H181J C 180PF, J, 50V 2 219,2 ECJ1XC1H330J C 33PF, J, 50V 2 221 ECJ1VB1H103K C 0.001UF, K, 50V 1 222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237 ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250 ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB1C104K C 0.1UF, Z, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4215 EEVHB1C470P E 47UF, 16V 1 C4216 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4217,1 ECJ1XC1H181J C 180PF, J, 50V 2 8 C4219,2 ECJ1XC1H330J C 33PF, J, 50V 2 0 C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.01UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1XB1C104K C 0.1UF, J, 16V 2 3 C4236 EEVHB0J470R C 47UF, 6.3V 1 C4237 ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250 ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	215
C4216 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4217,1 ECJ1XC1H181J C 180PF, J, 50V 2 8 C4219,2 ECJ1XC1H330J C 33PF, J, 50V 2 0 C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237 ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250 ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	216
C4217,1 ECJ1XC1H181J C 180PF, J, 50V 2 8 C4219,2 ECJ1XC1H330J C 33PF, J, 50V 2 0 C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237 ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250 ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	217,1 ECJIXC1H181J C 180PF, J, 50V 2 219,2 ECJIXC1H330J C 33PF, J, 50V 2 221 ECJIVB1H103K C 0.001UF, K, 50V 1 222 EEVHB1C470P E 47UF, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJIXB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJIVB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237 ECJIXB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250 ECJIXB1C104K C 0.1UF, Z, 16V 5 257,5 ECJIXB1C104K C 0.1UF, Z, 16V 2 259 ECJIXB0J105K C 1UF, K, 16V 1 260 ECJIXB1C104K C 0.1UF, Z, 16V 1
8 C4219,2 ECJ1XC1H330J C 33PF, J, 50V 2 0 C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237 ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250 ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	219,2 ECJ1XC1H330J C 33PF, J, 50V 2  221 ECJ1VB1H103K C 0.001UF, K, 50V 1  222 EEVHB1C470P E 47UF, 16V 1  225 F1J0J1060004 C 0.010UF, K, 16V 1  227 F1J0J1060004 C 0.010UF, K, 16V 1  229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2  231 EEVHB1C470P E 47UF, 16V 1  232,3 EEEHP1C100R C 10PF, J, 16V 2  234,3 ECJ1VB1H272K C 2700PF, K, 50V 2  236 EEVHB0J470R E 47UF, 6.3V 1  237- ECJ1XB1C104K C 0.1UF, Z, 16V 12  249 EEVHB0J470R E 47UF, 6.3V 1  250- ECJ1XB1C104K C 0.1UF, Z, 16V 5  257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2  259 ECJ1XB0J105K C 1UF, K, 16V 1  260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
8 C4219,2 ECJ1XC1H330J C 33PF, J, 50V 2 0 C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237 ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250 ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	219,2 ECJ1XC1H330J C 33PF, J, 50V 2  221 ECJ1VB1H103K C 0.001UF, K, 50V 1  222 EEVHB1C470P E 47UF, 16V 1  225 F1J0J1060004 C 0.010UF, K, 16V 1  227 F1J0J1060004 C 0.010UF, K, 16V 1  229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2  231 EEVHB1C470P E 47UF, 16V 1  232,3 EEEHP1C100R C 10PF, J, 16V 2  234,3 ECJ1VB1H272K C 2700PF, K, 50V 2  236 EEVHB0J470R E 47UF, 6.3V 1  237- ECJ1XB1C104K C 0.1UF, Z, 16V 12  249 EEVHB0J470R E 47UF, 6.3V 1  250- ECJ1XB1C104K C 0.1UF, Z, 16V 5  257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2  259 ECJ1XB0J105K C 1UF, K, 16V 1  260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
0 C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	221 ECJ1VB1H103K C 0.001UF, K, 50V 1 222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB1C104K C 0.1UF, Z, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
0 C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	221 ECJ1VB1H103K C 0.001UF, K, 50V 1 222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB1C104K C 0.1UF, Z, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4221 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4222 EEVHB1C470P E 47UF, 16V 1 C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4222 EEVHB1C470P E 47UF, 16V 1  C4224 EEEHBC100R C 10PF, J, 16V 1  C4225 F1J0J1060004 C 0.010UF, K, 16V 1  C4227 F1J0J1060004 C 0.010UF, K, 16V 1  C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0  C4231 EEVHB1C470P E 47UF, 16V 1  C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3  C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5  C4236 EEVHB0J470R E 47UF, 6.3V 1  C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12  48  C4249 EEVHB0J470R E 47UF, 6.3V 1  C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5  4  C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2  8  C4259 ECJ1XB0J105K C 1UF, K, 16V 1  C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	222 EEVHB1C470P E 47UF, 16V 1 224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4224 EEEHB1C100R C 10PF, J, 16V 1 C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	224 EEEHB1C100R C 10PF, J, 16V 1 225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4225 F1J0J1060004 C 0.010UF, K, 16V 1 C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	225 F1J0J1060004 C 0.010UF, K, 16V 1 227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4227 F1J0J1060004 C 0.010UF, K, 16V 1 C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	227 F1J0J1060004 C 0.010UF, K, 16V 1 229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4231 EEVHB1C470P E 47UF, 16V 1 C4232,3 EEEHP1C100R C 10PF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	229,3 ECJ1XB1C104K C 0.1UF, Z, 16V 2  231 EEVHB1C470P E 47UF, 16V 1  232,3 EEEHP1C100R C 10PF, J, 16V 2  234,3 ECJ1VB1H272K C 2700PF, K, 50V 2  236 EEVHB0J470R E 47UF, 6.3V 1  237- ECJ1XB1C104K C 0.1UF, Z, 16V 12  249 EEVHB0J470R E 47UF, 6.3V 1  250- ECJ1XB1C104K C 0.1UF, Z, 16V 5  257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2  259 ECJ1XB0J105K C 1UF, K, 16V 1  260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
0	231 EEVHB1C470P E 47UF, 16V 1 232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4231 EEVHB1C470P E 47UF, 16V 1  C4232,3 EEEHP1C100R C 10PF, J, 16V 2  3  C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2  5  C4236 EEVHB0J470R E 47UF, 6.3V 1  C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12  48  C4249 EEVHB0J470R E 47UF, 6.3V 1  C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5  4  C4259 ECJ1XB1C104K C 0.1UF, Z, 16V 2  8  C4259 ECJ1XB0J105K C 1UF, K, 16V 1  C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4232,3 EEEHP1C100R C 10FF, J, 16V 2 3 C4234,3 ECJ1VB1H272K C 2700FF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237 - ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250 - ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	232,3 EEEHP1C100R C 10PF, J, 16V 2 234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	234,3 ECJ1VB1H272K C 2700PF, K, 50V 2  236 EEVHB0J470R E 47UF, 6.3V 1  237- ECJ1XB1C104K C 0.1UF, Z, 16V 12  249 EEVHB0J470R E 47UF, 6.3V 1  250- ECJ1XB1C104K C 0.1UF, Z, 16V 5  257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2  259 ECJ1XB0J105K C 1UF, K, 16V 1  260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
3 C4234,3 ECJ1VB1H272K C 2700PF, K, 50V 2 5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	234,3 ECJ1VB1H272K C 2700PF, K, 50V 2  236 EEVHB0J470R E 47UF, 6.3V 1  237- ECJ1XB1C104K C 0.1UF, Z, 16V 12  249 EEVHB0J470R E 47UF, 6.3V 1  250- ECJ1XB1C104K C 0.1UF, Z, 16V 5  257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2  259 ECJ1XB0J105K C 1UF, K, 16V 1  260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
5 C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 4 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	236 EEVHB0J470R E 47UF, 6.3V 1 237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4236 EEVHB0J470R E 47UF, 6.3V 1 C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 54 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	237- ECJ1XB1C104K C 0.1UF, Z, 16V 12  249 EEVHB0J470R E 47UF, 6.3V 1  250- ECJ1XB1C104K C 0.1UF, Z, 16V 5  257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2  259 ECJ1XB0J105K C 1UF, K, 16V 1  260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4237- ECJ1XB1C104K C 0.1UF, Z, 16V 12 48  C4249 EEVHB0J470R E 47UF, 6.3V 1  C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 54  C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8  C4259 ECJ1XB0J105K C 1UF, K, 16V 1  C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	237- ECJ1XB1C104K C 0.1UF, Z, 16V 12  249 EEVHB0J470R E 47UF, 6.3V 1  250- ECJ1XB1C104K C 0.1UF, Z, 16V 5  257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2  259 ECJ1XB0J105K C 1UF, K, 16V 1  260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
48 C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 54 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4249 EEVHB0J470R E 47UF, 6.3V 1 C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 54 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	249 EEVHB0J470R E 47UF, 6.3V 1 250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 54 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	250- ECJ1XB1C104K C 0.1UF, Z, 16V 5 257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
54 C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	257,5 ECJ1XB1C104K C 0.1UF, Z, 16V 2 259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
8 C4259 ECJ1XB0J105K C 1UF, K, 16V 1 C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	259 ECJ1XB0J105K C 1UF, K, 16V 1 260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
C4260 ECJ1XB1C104K C 0.1UF, Z, 16V 1	260 ECJ1XB1C104K C 0.1UF, Z, 16V 1
	261   IRCTIVETHIO3K   C O OOTHE K 50V   1   1
C4261 ECJ1VB1H103K C 0.001UF, K, 50V 1	
C4262 ECJ1XB0J105K C 1UF, K, 16V 1	262   ECJ1XB0J105K   C 1UF. K. 16V   1
C4263- ECJ1XB1C104K C 0.1UF, Z, 16V 3	
65	
C4267- ECJ1XB1C104K C 0.1UF, Z, 16V 3	263- ECJ1XB1C104K C 0.1UF, Z, 16V 3
69	263- ECJ1XB1C104K C 0.1UF, Z, 16V 3
	263- ECJ1XB1C104K C 0.1UF, Z, 16V 3 267- ECJ1XB1C104K C 0.1UF, Z, 16V 3
	263- ECJ1XB1C104K C 0.1UF, Z, 16V 3 267- ECJ1XB1C104K C 0.1UF, Z, 16V 3
	263- ECJ1XB1C104K C 0.1UF, Z, 16V 3 267- ECJ1XB1C104K C 0.1UF, Z, 16V 3 270 ECJ1VB1H103K C 0.001UF, K, 50V 1
C4272 EEVHB0J470R E 47UF, 6.3V 1	263- ECJ1XB1C104K C 0.1UF, Z, 16V 3 267- ECJ1XB1C104K C 0.1UF, Z, 16V 3 270 ECJ1VB1H103K C 0.001UF, K, 50V 1 271 ECJ1XB0J105K C 1UF, K, 16V 1
C4273- ECJ1XB1C104K C 0.1UF, Z, 16V 6	263- ECJ1XB1C104K C 0.1UF, Z, 16V 3 267- ECJ1XB1C104K C 0.1UF, Z, 16V 3 270 ECJ1VB1H103K C 0.001UF, K, 50V 1 271 ECJ1XB0J105K C 1UF, K, 16V 1
78	263- ECJ1XB1C104K C 0.1UF, Z, 16V 3 267- ECJ1XB1C104K C 0.1UF, Z, 16V 3 270 ECJ1VB1H103K C 0.001UF, K, 50V 1 271 ECJ1XB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1
C4279 ECJ1VB1H103K C 0.001UF, K, 50V 1	263- ECJ1XB1C104K C 0.1UF, Z, 16V 3  267- ECJ1XB1C104K C 0.1UF, Z, 16V 3  270 ECJ1VB1H103K C 0.001UF, K, 50V 1  271 ECJ1XB0J105K C 1UF, K, 16V 1  272 EEVHB0J470R E 47UF, 6.3V 1  273- ECJ1XB1C104K C 0.1UF, Z, 16V 6
	263- ECJ1XB1C104K C 0.1UF, Z, 16V 3  267- ECJ1XB1C104K C 0.1UF, Z, 16V 3  270 ECJ1VB1H103K C 0.001UF, K, 50V 1  271 ECJ1XB0J105K C 1UF, K, 16V 1  272 EEVHB0J470R E 47UF, 6.3V 1  273- ECJ1XB1C104K C 0.1UF, Z, 16V 6
	263- ECJ1XB1C104K C 0.1UF, Z, 16V 3  267- ECJ1XB1C104K C 0.1UF, Z, 16V 3  270 ECJ1VB1H103K C 0.001UF, K, 50V 1  271 ECJ1XB0J105K C 1UF, K, 16V 1  272 EEVHB0J470R E 47UF, 6.3V 1  273- ECJ1XB1C104K C 0.1UF, Z, 16V 6  279 ECJ1VB1H103K C 0.001UF, K, 50V 1
	263- ECJIXB1C104K C 0.1UF, Z, 16V 3  267- ECJIXB1C104K C 0.1UF, Z, 16V 3  270 ECJIVB1H103K C 0.001UF, K, 50V 1  271 ECJIXB0J105K C 1UF, K, 16V 1  272 EEVHB0J470R E 47UF, 6.3V 1  273- ECJIXB1C104K C 0.1UF, Z, 16V 6  279 ECJIVB1H103K C 0.001UF, K, 50V 1  280 ECJIVF1A105Z C 1UF, Z, 10V 1
IGADOC   DGT1VDOT10EV   G 1775 V 1677   1 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3  267- ECJIXB1C104K C 0.1UF, Z, 16V 3  270 ECJIVB1H103K C 0.001UF, K, 50V 1  271 ECJIXB0J105K C 1UF, K, 16V 1  272 EEVHB0J470R E 47UF, 6.3V 1  273- ECJIXB1C104K C 0.1UF, Z, 16V 6  279 ECJIVB1H103K C 0.001UF, K, 50V 1  280 ECJIVF1A105Z C 1UF, Z, 10V 1  295 ECJIVB1H103K C 0.001UF, K, 50V 1
C4296 ECJ1XB0J105K C 1UF, K, 16V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3  267- ECJIXB1C104K C 0.1UF, Z, 16V 3  270 ECJIVB1H103K C 0.001UF, K, 50V 1  271 ECJIXB0J105K C 1UF, K, 16V 1  272 EEVHB0J470R E 47UF, 6.3V 1  273- ECJIXB1C104K C 0.1UF, Z, 16V 6  279 ECJIVB1H103K C 0.001UF, K, 50V 1  280 ECJIVF1A105Z C 1UF, Z, 10V 1  295 ECJIVB1H103K C 0.001UF, K, 50V 1  296 ECJIXB0J105K C 1UF, K, 16V 1
C4296 ECJ1XB0J105K C 1UF, K, 16V 1 C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3  267- ECJIXB1C104K C 0.1UF, Z, 16V 3  270 ECJIVB1H103K C 0.001UF, K, 50V 1  271 ECJIXB0J105K C 1UF, K, 16V 1  272 EEVHB0J470R E 47UF, 6.3V 1  273- ECJIXB1C104K C 0.1UF, Z, 16V 6  279 ECJIVB1H103K C 0.001UF, K, 50V 1  280 ECJIVF1A105Z C 1UF, Z, 10V 1  295 ECJIVB1H103K C 0.001UF, K, 50V 1  296 ECJIXB0J105K C 1UF, K, 16V 1
	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIXB1C104K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVF1A105Z C 1UF, Z, 10V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIVB1H103K C 0.001UF, K, 50V 1
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIXB1C104K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVB1H103K C 0.001UF, K, 50V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, Z, 16V 1 297 ECJIXB0J105K C 1UF, K, 16V 1 298 EEEHB0J330R C 33FF, J, 6.3V 1
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIXB1C104K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVF1A105Z C 1UF, Z, 10V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB0J105K C 1UF, K, 16V 1 298 EEEHB0J330R C 33PF, J, 6.3V 1 299, 0 ECJIXB1C104K C 0.1UF, Z, 16V 2
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIXB1H103K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVF1A105Z C 1UF, Z, 10V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB0J105K C 1UF, K, 16V 1 298 EEEHB0J330R C 33PF, J, 6.3V 1 299, 0 ECJIXB1C104K C 0.1UF, Z, 16V 2
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22PF, J, 6.3V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIVB1H103K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVF1A105Z C 1UF, Z, 10V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB0J105K C 1UF, K, 16V 1 298 EEEHB0J330R C 33PF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22PF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIVB1H103K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVF1A105Z C 1UF, Z, 10V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB0J105K C 1UF, K, 16V 1 298 EEEHB0J330R C 33PF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 301 EEEHB0J220R C 22PF, J, 6.3V 1 302 ECJIXB1C104K C 0.1UF, Z, 16V 1
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33FF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22FF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIVB1H103K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVF1A105Z C 1UF, Z, 10V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB0J105K C 1UF, K, 16V 1 298 EEEHB0J330R C 33PF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 301 EEEHB0J220R C 22PF, J, 6.3V 1 302 ECJIXB1C104K C 0.1UF, Z, 16V 1 304 EEVHB0J470R E 47UF, 6.3V 1
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22PF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIVB1H103K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVB1H103K C 0.001UF, K, 50V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, Z, 10V 1 297 ECJIXB1C104K C 0.1UF, K, 16V 1 298 EEEHB0J330R C 33FF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 301 EEEHB0J220R C 22FF, J, 6.3V 1 302 ECJIXB1C104K C 0.1UF, Z, 16V 1 304 EEVHB0J470R E 47UF, 6.3V 1 305- ECJIXB1C104K C 0.1UF, Z, 16V 11
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33FF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22FF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIVB1H103K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVB1H103K C 0.001UF, K, 50V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, Z, 10V 1 297 ECJIXB1C104K C 0.1UF, K, 16V 1 298 EEEHB0J330R C 33FF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 301 EEEHB0J220R C 22FF, J, 6.3V 1 302 ECJIXB1C104K C 0.1UF, Z, 16V 1 304 EEVHB0J470R E 47UF, 6.3V 1 305- ECJIXB1C104K C 0.1UF, Z, 16V 11
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22PF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIVB1H103K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVF1A105Z C 1UF, Z, 10V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB1C104K C 0.1UF, K, 50V 1 298 EEEHB0J330R C 33PF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 301 EEEHB0J220R C 22PF, J, 6.3V 1 302 ECJIXB1C104K C 0.1UF, Z, 16V 1 304 EEVHB0J470R E 47UF, 6.3V 1 305- ECJIXB1C104K C 0.1UF, Z, 16V 11
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22PF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIVB1H103K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVF1A105Z C 1UF, Z, 10V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB1C104K C 0.1UF, K, 50V 1 298 EEEHB0J330R C 33PF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 301 EEEHB0J220R C 22PF, J, 6.3V 1 302 ECJIXB1C104K C 0.1UF, Z, 16V 1 304 EEVHB0J470R E 47UF, 6.3V 1 305- ECJIXB1C104K C 0.1UF, Z, 16V 11 316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22PF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11 C4316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1	263- ECJIXBIC104K C 0.1UF, Z, 16V 3 267- ECJIXBIC104K C 0.1UF, Z, 16V 3 270 ECJIXBIC104K C 0.001UF, K, 50V 1 271 ECJIXBOJ105K C 1UF, K, 16V 1 272 EEVHBOJ470R E 47UF, 6.3V 1 273- ECJIXBIC104K C 0.001UF, K, 50V 1 280 ECJIVBIH103K C 0.001UF, K, 50V 1 295 ECJIVBIH103K C 0.001UF, K, 50V 1 296 ECJIXBOJ105K C 1UF, Z, 10V 1 297 ECJIXBOJ105K C 1UF, K, 16V 1 298 EEEHBOJ330R C 33PF, J, 6.3V 1 298 EEEHBOJ330R C 33PF, J, 6.3V 1 299,0 ECJIXBIC104K C 0.1UF, Z, 16V 2 301 EEEHBOJ220R C 22PF, J, 6.3V 1 302 ECJIXBIC104K C 0.1UF, Z, 16V 1 304 EEVHBOJ470R E 47UF, 6.3V 1 305- ECJIXBIC104K C 0.1UF, Z, 16V 11 316 ECJ2FF1C475Z C 0.047UF, Z, 16V 5
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22PF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11 15 C4316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4317- ECJ1XB1C104K C 0.1UF, Z, 16V 5 21	263- ECJIXBIC104K C 0.1UF, Z, 16V 3 267- ECJIXBIC104K C 0.1UF, Z, 16V 3 270 ECJIXBIC104K C 0.001UF, K, 50V 1 271 ECJIXBOJ105K C 1UF, K, 16V 1 272 EEVHBOJ470R E 47UF, 6.3V 1 273- ECJIXBIC104K C 0.001UF, K, 50V 1 280 ECJIVBIH103K C 0.001UF, K, 50V 1 295 ECJIVBIH103K C 0.001UF, K, 50V 1 296 ECJIXBOJ105K C 1UF, Z, 10V 1 297 ECJIXBOJ105K C 1UF, K, 16V 1 297 ECJIXBOJ105K C 1UF, K, 16V 1 298 EEEHBOJ330R C 33PF, J, 6.3V 1 299,0 ECJIXBIC104K C 0.1UF, Z, 16V 2 301 EEEHBOJ220R C 22PF, J, 6.3V 1 302 ECJIXBIC104K C 0.1UF, Z, 16V 1 304 EEVHBOJ470R E 47UF, 6.3V 1 305- ECJIXBIC104K C 0.1UF, Z, 16V 11 316 ECJ2FF1C475Z C 0.047UF, Z, 16V 5 317- ECJIXBIC104K C 0.1UF, Z, 16V 5
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22PF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11 15 C4316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4317- ECJ1XB1C104K C 0.1UF, Z, 16V 5 21 C4324,2 ECJ1XB1C104K C 0.1UF, Z, 16V 2	263- ECJIXBIC104K C 0.1UF, Z, 16V 3 267- ECJIXBIC104K C 0.1UF, Z, 16V 3 270 ECJIXBIC104K C 0.001UF, K, 50V 1 271 ECJIXBOJ105K C 1UF, K, 16V 1 272 EEVHBOJ470R E 47UF, 6.3V 1 273- ECJIXBIC104K C 0.001UF, K, 50V 1 280 ECJIVBIH103K C 0.001UF, K, 50V 1 295 ECJIVBIH103K C 0.001UF, K, 50V 1 296 ECJIXBOJ105K C 1UF, Z, 10V 1 297 ECJIXBOJ105K C 1UF, K, 16V 1 297 ECJIXBOJ105K C 1UF, K, 16V 1 298 EEEHBOJ330R C 33PF, J, 6.3V 1 299,0 ECJIXBIC104K C 0.1UF, Z, 16V 2 301 EEEHBOJ220R C 22PF, J, 6.3V 1 302 ECJIXBIC104K C 0.1UF, Z, 16V 1 304 EEVHBOJ470R E 47UF, 6.3V 1 305- ECJIXBIC104K C 0.1UF, Z, 16V 11 316 ECJ2FF1C475Z C 0.047UF, Z, 16V 5 317- ECJIXBIC104K C 0.1UF, Z, 16V 5
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22PF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11 15 C4316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4317- ECJ1XB1C104K C 0.1UF, Z, 16V 5 21 C4324,2 ECJ1XB1C104K C 0.1UF, Z, 16V 2 5	263- ECJIXBIC104K C 0.1UF, Z, 16V 3 267- ECJIXBIC104K C 0.1UF, Z, 16V 3 270 ECJIXBIH103K C 0.001UF, K, 50V 1 271 ECJIXBOJ105K C 1UF, K, 16V 1 272 EEVHBOJ470R E 47UF, 6.3V 1 273- ECJIXBIC104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVB1H03K C 0.001UF, K, 50V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXBOJ105K C 1UF, Z, 10V 1 297 ECJIXBOJ105K C 1UF, K, 16V 1 298 EEEHBOJ330R C 33PF, J, 6.3V 1 298 EEEHBOJ330R C 33PF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 301 EEEHBOJ220R C 22PF, J, 6.3V 1 302 ECJIXB1C104K C 0.1UF, Z, 16V 1 304 EEVHBOJ470R E 47UF, 6.3V 1 305- ECJIXB1C104K C 0.1UF, Z, 16V 11 316 ECJ2FF1C475Z C 0.047UF, Z, 16V 5 317- ECJIXB1C104K C 0.1UF, Z, 16V 5 324,2 ECJIXB1C104K C 0.1UF, Z, 16V 5
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22PF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11 15 C4316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4317- ECJ1XB1C104K C 0.1UF, Z, 16V 5 21 C4324,2 ECJ1XB1C104K C 0.1UF, Z, 16V 2 5 C4326 EEVHB0G221P E 220UF, 4V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIXB1H103K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVF1A105Z C 1UF, Z, 10V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB0J105K C 1UF, K, 16V 1 298 EEEHB0J330R C 33PF, J, 6.3V 1 298 EEEHB0J330R C 33PF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 301 EEEHB0J220R C 22PF, J, 6.3V 1 302 ECJIXB1C104K C 0.1UF, Z, 16V 1 304 EEVHB0J470R E 47UF, 6.3V 1 305- ECJIXB1C104K C 0.1UF, Z, 16V 11 316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 317- ECJIXB1C104K C 0.1UF, Z, 16V 5 324,2 ECJIXB1C104K C 0.1UF, Z, 16V 2
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33FF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22FF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11 15 C4316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4317- ECJ1XB1C104K C 0.1UF, Z, 16V 5 21 C4324,2 ECJ1XB1C104K C 0.1UF, Z, 16V 2 5 C4326 EEVHB0G221P E 220UF, 4V 1 C4327 ECJ1XC1H150J C 15FF, J, 50V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIVB1H103K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVF1A105Z C 1UF, Z, 10V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB0J105K C 1UF, K, 16V 1 298 EEEHB0J330R C 33FF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 301 EEEHB0J220R C 22FF, J, 6.3V 1 302 ECJIXB1C104K C 0.1UF, Z, 16V 1 304 EEVHB0J470R E 47UF, 6.3V 1 305- ECJIXB1C104K C 0.1UF, Z, 16V 1 316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 317- ECJIXB1C104K C 0.1UF, Z, 16V 5 324,2 ECJIXB1C104K C 0.1UF, Z, 16V 2 326 EEVHB0G221P E 220UF, 4V 1 327 ECJIXC1H150J C 15FF, J, 50V 1
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33PF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22PF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11 15 C4316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4317- ECJ1XB1C104K C 0.1UF, Z, 16V 5 21 C4324,2 ECJ1XB1C104K C 0.1UF, Z, 16V 2 5 C4326 EEVHB0G221P E 220UF, 4V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIVB1H103K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVF1A105Z C 1UF, Z, 10V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB0J105K C 1UF, K, 16V 1 298 EEEHB0J330R C 33FF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 301 EEEHB0J220R C 22FF, J, 6.3V 1 302 ECJIXB1C104K C 0.1UF, Z, 16V 1 304 EEVHB0J470R E 47UF, 6.3V 1 305- ECJIXB1C104K C 0.1UF, Z, 16V 1 316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 317- ECJIXB1C104K C 0.1UF, Z, 16V 5 324,2 ECJIXB1C104K C 0.1UF, Z, 16V 2 326 EEVHB0G221P E 220UF, 4V 1 327 ECJIXC1H150J C 15FF, J, 50V 1
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33FF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22FF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11 15 C4316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4317- ECJ1XB1C104K C 0.1UF, Z, 16V 5 21 C4324,2 ECJ1XB1C104K C 0.1UF, Z, 16V 2 5 C4326 EEVHB0G221P E 220UF, 4V 1 C4327 ECJ1XC1H150J C 15FF, J, 50V 1	263- ECJIXBIC104K C 0.1UF, Z, 16V 3 267- ECJIXBIC104K C 0.1UF, Z, 16V 3 270 ECJIVBIH103K C 0.001UF, K, 50V 1 271 ECJIXBOJ105K C 1UF, K, 16V 1 272 EEVHBOJ470R E 47UF, 6.3V 1 273- ECJIXBIC104K C 0.1UF, Z, 16V 6 279 ECJIVBIH103K C 0.001UF, K, 50V 1 280 ECJIVBIH103K C 0.001UF, K, 50V 1 295 ECJIVBIH103K C 0.001UF, K, 50V 1 296 ECJIXBOJ105K C 1UF, Z, 10V 1 297 ECJIXBOJ105K C 1UF, K, 16V 1 298 EEEHBOJ330R C 33PF, J, 6.3V 1 299,0 ECJIXBIC104K C 0.1UF, Z, 16V 2 301 EEEHBOJ220R C 22PF, J, 6.3V 1 302 ECJIXBIC104K C 0.1UF, Z, 16V 1 304 EEVHBOJ470R E 47UF, 6.3V 1 305- ECJIXBIC104K C 0.1UF, Z, 16V 11 316 ECJIXBIC104K C 0.1UF, Z, 16V 11 317- ECJIXBIC104K C 0.1UF, Z, 16V 5 324,2 ECJIXBIC104K C 0.1UF, Z, 16V 2 326 EEVHBOG221P E 220UF, 4V 1 327 ECJIXC1H150J C 15PF, J, 50V 1 328 ECJIXC1H180J C 18PF, J, 50V 1
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33FF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22FF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11 15 C4316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4317- ECJ1XB1C104K C 0.1UF, Z, 16V 5 21 C4324,2 ECJ1XB1C104K C 0.1UF, Z, 16V 2 5 C4326 EEVHB0G221P E 220UF, 4V 1 C4327 ECJ1XC1H150J C 15FF, J, 50V 1 C4328 ECJ1XC1H180J C 18FF, J, 50V 1 C4329 ECJ1XB1C104K C 0.1UF, Z, 16V 1	263- ECJIXBIC104K C 0.1UF, Z, 16V 3 267- ECJIXBIC104K C 0.1UF, Z, 16V 3 270 ECJIVBIH103K C 0.001UF, K, 50V 1 271 ECJIXBOJ105K C 1UF, K, 16V 1 272 EEVHBOJ470R E 47UF, 6.3V 1 273- ECJIXBIC104K C 0.001UF, K, 50V 1 280 ECJIVBIH103K C 0.001UF, K, 50V 1 295 ECJIVBIH103K C 0.001UF, K, 50V 1 296 ECJIVBIH103K C 0.001UF, K, 50V 1 297 ECJIXBOJ105K C 1UF, Z, 10V 1 298 EEEHBOJ330R C 10F, K, 16V 1 299, 0 ECJIXBIC104K C 0.1UF, Z, 16V 2 301 EEEHBOJ320R C 33PF, J, 6.3V 1 302 ECJIXBIC104K C 0.1UF, Z, 16V 2 304 EEVHBOJ470R E 47UF, 6.3V 1 305- ECJIXBIC104K C 0.1UF, Z, 16V 1 316 ECJIXBIC104K C 0.1UF, Z, 16V 1 317- ECJIXBIC104K C 0.1UF, Z, 16V 5 317- ECJIXBIC104K C 0.1UF, Z, 16V 5 324,2 ECJIXBIC104K C 0.1UF, Z, 16V 1 326 EEVHBOG221P E 220UF, 4V 1 327 ECJIXC1H150J C 15PF, J, 50V 1 328 ECJIXC1H180J C 15PF, J, 50V 1 329 ECJIXC1H180J C 15PF, J, 50V 1 329 ECJIXC1H180J C 15PF, J, 50V 1 329 ECJIXC1H180J C 15PF, J, 50V 1
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33FF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22FF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11 15 C4316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4317- ECJ1XB1C104K C 0.1UF, Z, 16V 5 21 C4324,2 ECJ1XB1C104K C 0.1UF, Z, 16V 2 5 C4326 EEVHB0G221P E 220UF, 4V 1 C4327 ECJ1XC1H150J C 15FF, J, 50V 1 C4328 ECJ1XC1H180J C 18FF, J, 50V 1 C4329 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4330 ECJ2FF1C475Z C 0.047UF, Z, 16V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIVB1H103K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVF1A105Z C 1UF, Z, 10V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB0J105K C 1UF, K, 16V 1 298 EEEHB0J330R C 33FF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 301 EEEHB0J220R C 22FF, J, 6.3V 1 302 ECJIXB1C104K C 0.1UF, Z, 16V 1 304 EEVHB0J470R E 47UF, 6.3V 1 305- ECJIXB1C104K C 0.1UF, Z, 16V 11 316 ECJIXB1C104K C 0.1UF, Z, 16V 11 317- ECJIXB1C104K C 0.1UF, Z, 16V 5 324,2 ECJIXB1C104K C 0.1UF, Z, 16V 5 324,2 ECJIXB1C104K C 0.1UF, Z, 16V 1 326 EEVHB0G221P E 220UF, 4V 1 327 ECJIXC1H1S0J C 15FF, J, 50V 1 328 ECJIXC1H180J C 18FF, J, 50V 1 329 ECJIXB1C104K C 0.1UF, Z, 16V 1 320 ECJIXB1C104K C 0.1UF, Z, 16V 1 321 ECJIXC1H180J C 18FF, J, 50V 1 322 ECJIXB1C104K C 0.1UF, Z, 16V 1 323 ECJIXC1H180J C 18FF, J, 50V 1 324 ECJIXC1H180J C 18FF, J, 50V 1 325 ECJIXB1C104K C 0.1UF, Z, 16V 1 326 ECJIXC1H180J C 18FF, J, 50V 1 327 ECJIXC1H180J C 18FF, J, 50V 1 328 ECJIXC1H180J C 18FF, J, 50V 1 329 ECJIXC1H180J C 18FF, J, 50V 1
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33FF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22FF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11 15 C4316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4317- ECJ1XB1C104K C 0.1UF, Z, 16V 5 21 C4324,2 ECJ1XB1C104K C 0.1UF, Z, 16V 2 5 C4326 EEVHB0G221P E 220UF, 4V 1 C4327 ECJ1XC1H150J C 15FF, J, 50V 1 C4328 ECJ1XC1H180J C 18FF, J, 50V 1 C4329 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4330 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4331 EEVHB0J470R E 47UF, 6.3V 1	263- ECJIXB1C104K C 0.1UF, Z, 16V 3 267- ECJIXB1C104K C 0.1UF, Z, 16V 3 270 ECJIXB1C104K C 0.001UF, K, 50V 1 271 ECJIXB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJIXB1C104K C 0.1UF, Z, 16V 6 279 ECJIVB1H103K C 0.001UF, K, 50V 1 280 ECJIVB1H103K C 0.001UF, K, 50V 1 295 ECJIVB1H103K C 0.001UF, K, 50V 1 296 ECJIXB0J105K C 1UF, K, 16V 1 297 ECJIXB1C104K C 0.001UF, K, 50V 1 298 EEEHB0J330R C 33PF, J, 6.3V 1 299,0 ECJIXB1C104K C 0.1UF, Z, 16V 2 301 EEEHB0J220R C 22PF, J, 6.3V 1 302 ECJIXB1C104K C 0.1UF, Z, 16V 1 304 EEVHB0J470R E 47UF, 6.3V 1 305- ECJIXB1C104K C 0.1UF, Z, 16V 1 317- ECJIXB1C104K C 0.1UF, Z, 16V 5 324,2 ECJIXB1C104K C 0.1UF, Z, 16V 5 324,2 ECJIXB1C104K C 0.1UF, Z, 16V 1 326 EEVHB0G221P E 220UF, 4V 1 327 ECJIXB1C104K C 0.1UF, Z, 16V 1 328 ECJIXC1H150J C 15PF, J, 50V 1 329 ECJIXB1C104K C 0.1UF, Z, 16V 1 320 ECJIXB1C104K C 0.1UF, Z, 16V 1 321 ECJIXB1C104K C 0.1UF, Z, 16V 1 322 ECJIXB1C104K C 0.1UF, Z, 16V 1 323 ECJIXC1H180J C 18PF, J, 50V 1 324 ECJIXB1C104K C 0.1UF, Z, 16V 1 326 EEVHB0G221P E 220UF, 4V 1 327 ECJIXB1C104K C 0.1UF, Z, 16V 1 328 ECJIXC1H180J C 18PF, J, 50V 1 329 ECJIXB1C104K C 0.1UF, Z, 16V 1 330 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 331 EEVHB0J470R E 47UF, 6.3V 1
C4297 ECJ1VB1H103K C 0.001UF, K, 50V 1 C4298 EEEHB0J330R C 33FF, J, 6.3V 1 C4299,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 0 C4301 EEEHB0J220R C 22FF, J, 6.3V 1 C4302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4304 EEVHB0J470R E 47UF, 6.3V 1 C4305- ECJ1XB1C104K C 0.1UF, Z, 16V 11 15 C4316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 C4317- ECJ1XB1C104K C 0.1UF, Z, 16V 5 21 C4324,2 ECJ1XB1C104K C 0.1UF, Z, 16V 2 5 C4326 EEVHB0G221P E 220UF, 4V 1 C4327 ECJ1XC1H150J C 15FF, J, 50V 1 C4328 ECJ1XC1H180J C 18FF, J, 50V 1 C4329 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C4330 ECJ2FF1C475Z C 0.047UF, Z, 16V 1	263- ECJ1XB1C104K C 0.1UF, Z, 16V 3 267- ECJ1XB1C104K C 0.1UF, Z, 16V 3 270 ECJ1XB1C104K C 0.1UF, K, 50V 1 271 ECJ1XB0J105K C 1UF, K, 16V 1 272 EEVHB0J470R E 47UF, 6.3V 1 273- ECJ1XB1C104K C 0.1UF, Z, 16V 6 279 ECJ1XB1C104K C 0.001UF, K, 50V 1 280 ECJ1YB1H103K C 0.001UF, K, 50V 1 295 ECJ1YB1H103K C 0.001UF, K, 50V 1 296 ECJ1XB0J105K C 1UF, Z, 10V 1 297 ECJ1VB1H103K C 0.001UF, K, 50V 1 298 EEEHB0J330R C 33PF, J, 6.3V 1 2999,0 ECJ1XB1C104K C 0.1UF, Z, 16V 2 301 EEEHB0J220R C 22PF, J, 6.3V 1 302 ECJ1XB1C104K C 0.1UF, Z, 16V 1 304 EEVHB0J470R E 47UF, 6.3V 1 305- ECJ1XB1C104K C 0.1UF, Z, 16V 1 316 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 317- ECJ1XB1C104K C 0.1UF, Z, 16V 5 324,2 ECJ1XB1C104K C 0.1UF, Z, 16V 1 326 EEVHB0G221P E 220UF, 4V 1 327 ECJ1XB1C104K C 0.1UF, Z, 16V 1 328 ECJ1XC1H180J C 15PF, J, 50V 1 329 ECJ1XB1C104K C 0.1UF, Z, 16V 1 330 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 328 ECJ1XC1H180J C 15PF, J, 50V 1 329 ECJ1XB1C104K C 0.1UF, Z, 16V 1 330 ECJ2FF1C475Z C 0.047UF, Z, 16V 1 331 EEVHB0J470R E 47UF, Z, 16V 4
C4262 ECJ1XB0J105K C 1UF, K, 16V 1	262   ECJ1XB0J105K   C 1UF. K. 16V   1
C4262 ECJ1XB0J105K C 1UF, K, 16V 1	262   ECJ1XB0J105K   C 1UF. K. 16V   1
C4262 ECJ1XB0J105K C 1UF, K, 16V 1	262 ECJ1XB0J105K C 1UF, K, 16V 1
C4262 ECJ1XB0J105K C 1UF, K, 16V 1	262 ECJ1XB0J105K C 1UF, K, 16V 1
C4262 ECJ1XB0J105K C 1UF, K, 16V 1	262 ECJ1XB0J105K C 1UF, K, 16V 1
C4262 ECJ1XB0J105K C 1UF, K, 16V 1	262 ECJ1XB0J105K C 1UF, K, 16V 1
C4262 ECJ1XB0J105K C 1UF, K, 16V 1	262 ECJ1XB0J105K C 1UF, K, 16V 1
C4262 ECJ1XB0J105K C 1UF, K, 16V 1	262 ECJ1XB0J105K C 1UF, K, 16V 1
C4262 ECJ1XB0J105K C 1UF, K, 16V 1	262   ECJ1XB0J105K   C 1UF. K. 16V   1
C4262 ECJ1XB0J105K C 1UF, K, 16V 1	262   ECJ1XB0J105K   C 1UF. K. 16V   1
C4262   ECJ1XB0J105K   C 1UF, K, 16V   1	262 ECJ1XB0J105K C 1UF, K, 16V   1
C4262   ECJ1XB0J105K   C 1UF, K, 16V   1	262   ECJ1XB0J105K   C 1UF. K. 16V   1
	202  ECJIABUJIUSK  C IUF, K, IOV   I I
C4263- ECJ1XB1C104K C 0.1UF, Z, 16V 3	
C4263- ECJ1XB1C104K C 0.1UF, Z, 16V 3	
C4263- ECJ1XB1C104K C 0.1UF, Z, 16V 3	
1 1 1	
1 1 1	
65	
	ZUZ   IUCUTUDUUTUJA  C TUF, K, TOV   T
	ZOZ  ECULABUJIUDA  C IUF, K, 16V   1
C4263- ECJ1XB1C104K C 0.1UF, Z, 16V 3	
C4263- ECJ1XB1C104K C 0.1UF, Z, 16V 3	
C4263- ECJ1XB1C104K C 0.1UF, Z, 16V 3	

	PX50U / TH-50PX50L	_		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4339	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4456	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4457	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4459	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4461	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4463,6	F1K1A1060010	C 0.010UF, K,6.3V	2	
4	EG 11 VG1 W1 0 0 T	G 1000DB T 507		
6	ECJIXCIHIU2J	C 1000PF, J, 50V	2	
C4468,6 9	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C4470- 73	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4474- 77	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4478- 81	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4482-	ECJ1XC1H102J	C 1000PF, J, 50V	3	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
	ECJ1XB0J105K	C 1UF, K, 16V	1	
	ECJ1VB1H103K	C 0.001UF, K, 50V	2	
4 C4495-	ECJ1XB0J105K	C 1UF, K, 16V	3	
97		C 1000PF, J, 50V	16	
13				
C4514	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4515	EEFCD0G560R	56UF,	1	
C4516- 27	ECJ1VB1H103K	C 0.001UF, K, 50V	12	
C4528	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
	EC.T2FB0.T225K	C 2.2UF, Z, 16V	1	
C4588	EEEHB0G221P	C 220PF, J, 4V	1	
C4589	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4590	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C4591	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4780	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4781-	ECJ1XC1H102J	C 1000PF, J, 50V	4	
84 C4785	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4787	EEVHB0J470R	E 47UF, 6.3V	1	
C4788	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4789	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4790	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4791	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4792-	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
96	TG T1	G 0 001777 77 F077		
C4797		C 1UE K 16V	1	
C4798 C4799	ECJ1XB0J105K EEEHB1C100R	C 1UF, K, 16V C 10PF, J, 16V	1	
C4799 C4800	ECJ1VB1H103K	C 10PF, 3, 16V C 0.001UF, K, 50V	1	
C4800	ECJ1VB1H103K ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4802	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C5601	ECA1HM220	E 22UF, 50V	1	
C5604	ECA1HHG100	E 10UF, 50V	1	
C5605	EEUFC1E102	E 1000F, 25V	1	
C5606	EEUFC1C821	E 820UF, 16V	1	
C5608	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5609	ECA1HM220	E 22UF, 50V	1	
C5611	EEUFC1E102	E 1000UF, 25V	1	
C5612	EEUFC1C821SB	E 820UF, 16V	1	
C5613	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5616	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5617	EEUFC1C821SB	E 820UF, 16V	1	
C5618,1 9	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C5622	EEUFC1C821	E 820UF, 16V	1	
C5623	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5626	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C5631	EEUFC1C102	E 1000UF, 16V	1	
		•		

Ref. No. No. Description  C5537 RCJVPIC1047Z C 0.47UF, Z, 16V 1  C5641- 44  ECJVPIC104Z C 0.1UF, Z, 16V 1  C5672 RCJXRBIRIO3K C 0.1UF, K, 25V 1  C5673 RCJXRBIRIO3K C 0.1UF, K, 50V 1  C5673 RCJXRBIRIO3K C 0.0UF, K, 50V 1  C5683 RCJAHRG100 E 20UF, 50V 1  C5688 RCJXRBIRIO3K C 0.0UF, K, 50V 1  C5688 RCJXRBIRIO3K C 0.0UF, K, 50V 1  C5688 RCJXRBIRIO3K C 0.0UF, K, 50V 1  C5801,0 REUFC1E471 E 470UF, 25V 2  C5803 EEUFC1E470 E 470UF, 25V 1  C5805 RCJXVRBIRIO3K C 0.1UF, K, 25V 1  C5806 RCJXRBIRIO5C C 1UF, Z, 16V 1  C5809 RCJXVRBIRIO5Z C 1UF, Z, 16V 1  C5810 RCJXRBIRIO5Z C 1UF, Z, 25V 1  C5810 RCJXRBIRIO5Z C 1UF, K, 25V 1  C5811 RCJARBG470 E 470UF, 16V 1  C5812 RCJARBG470 E 470UF, 16V 1  C5812 RCJARBG470 E 100UF, 16V 1  C5812 RCJARBG470 E 200UF, 16V 1  C5813 RCJARBG470 E 200UF, 16V 1  C5814 RCJARBG470 E 200UF, 16V 1  C5815 RCAICM22 E 100UF, 16V 1  C5816 RCAICM22 E 100UF, 16V 1  C5817 RCGRESSOS RCJXYRIBIO5K C 0.1UF, K, 25V 1  C6006 RCAZCM101 E 100UF, 160V 1  C6110- F2AZT201A001 E 200UF, 16V 1  C6111- RCGRESSSJF P 2.5UF, K, 25V 1  C6112 REUFC1E470 E 47UF, 25V 1  C6113 RCJXYBIRIO5K C 1UF, K, 25V 1  C6114 RCJXYBIRIO5K C 1UF, K, 25V 1  C6115 RCJXYBIRIO5K C 1UF, K, 25V 1  C6124 RCAZCM101 E 100UF, 160V 1  C6124 RCAZCM101 E 10UF, 16V 1  C6135 RCJXYBIRIO5K C 1UF, K, 25V 1  C6136 RCJXYBIRIO5K C 1UF, K, 25V 1  C6146 FILL4750004 C 4.7UF, 25V 2  C6153 RCJXYBIRIO5K C 1UF, K, 25V 1  C6156 RCJXYBIRIO5K C 1UF, K, 25V 1  C6157 FILL4750004 C 4.7UF, 25V 1  C6168 RCJXYBIRIO5K C 1UF, K, 25V 1  C6169 RCJXYBIRIO5K C 1UF, K, 25V 1  C6169 RCJXYBIRIO5K C 1UF, K, 25V 1  C6160 RCGRESSFR C 4.7UF, 25V 1  C6161 RCGRESSFR C 4.7UF, 25V 1  C6163 RCJXYBIRIO5K C 1UF, K, 25V 1  C6164 RCJXYBIRIO5K C 1UF, K, 50V 1  C6463 RCJXYBIRIO5K C 1UF, K, 50V 1  C6463 RCJXYBIRIO5K C 1UF, K, 50V 1  C6464 RCGAUMO1 R 100UF, 160V 1  C6465 RCJXYBIRIO5K C 1UF, K, 50V 1  C6466 RCGRESSFR C 1UF, E, 50V 1  C6467 RCJXZBIRIO5K C 1UF, K, 50V 1  C6468- BUJCXZBIRIO4K C 0.1UF, K, 50V			1		
C5641	l .	Part No.		Pcs	Remarks
C5611- ECJZVF1C104Z C 0.1UF, Z, 16V 4 44 45 46 46 47 46 46 47 46 47 46 48 48 48 48 48 48 48 48 48 48 48 48 48		BG T037B1 G47 4B		1	
44   C5670					
C5670		ECJ2VF1C104Z	C 0.10F, Z, 16V	4	
C5673		ECTOYB1E104K	C 0 111F K 25V	1	
C5673   ECJZKBH103K   C 0.01UF, K, 50V   1   C5685   SCAIHMG100   E 10UF, 50V   1   C5686   SCAIHMG100   E 10UF, K, 50V   1   C5686   SCAIZMBH103K   C 0.01UF, K, 50V   1   C5601, 0   EUFCLE471   E 470UF, 25V   2   C5803   EEUFCLE470   E 47UF, 25V   1   C5803   EEUFCLE470   E 47UF, 25V   1   C5803   ECJZKPH105Z   C 1UF, Z, 25V   1   C5809   SCAJZKPH105Z   C 1UF, Z, 25V   1   C5813   ECJZKBHE104K   C 0.1UF, K, 25V   1   C5818   ECALCM471   E 470UF, 16V   1   C5820   ECALCM102   E 1000UF, 16V   1   C5821   ECJZKBHE104K   C 0.1UF, K, 25V   1   C5821   ECJZKBHE104K   C 0.1UF, K, 25V   1   C5822   ECJZKBHE104K   C 0.1UF, K, 25V   1   C5823   ECALCM102   E 1000UF, 16V   1   C5821   ECJZKBHE104K   C 0.1UF, K, 25V   1   C5823   ECALCM102   E 100UF, 16V   1   C 0.000   E 0.000F, 16V   E 0.000F, 16V   E 0.000F, 16V   E 0.000F, E					
C5685   ECAIHHGION   E 10UF, 50V   1					
C5686					
C5801, 0 EUFC1E471 E 470UF, 25V 2  2  C5803 EUGC1E470 E 47UF, 25V 1  C5805 ECJ3FJEL052 C 1UF, Z, 16V 1  C5806 ECJ3FJEL052 C 1UF, Z, 25V 1  C5810 ECALERGATO E 47UF, 25V 1  C5811 ECALERGATO E 47UF, 25V 1  C5813 ECJ3FJEL104K C 0.1UF, K, 25V 1  C5813 ECJ2KBLE104K C 0.1UF, K, 25V 1  C5820 ECALCMA71 E 470UF, 16V 1  C5821 ECJ2KBLE104K C 0.1UF, K, 25V 1  C5822 ECALCMA71 E 470UF, 16V 1  C5822 ECALCMA22 E 2200UF, 16V 1  C6012 F1L2J562A022 C 5600UF, K, 6.3V 1  C6012 F1L2J562A022 C 5600UF, K, 6.3V 1  C6101- ECQE2255JF P 2.5UF, K, 250V 1  C6110- F2A2T201A001 E 200UF, 5  C6118 ECJ3FJEL05K C 1UF, K, 25V 1  C6119- Z EUFC1E221 E 220UF, 25V 2  C6121 EBUFC1E470 E 47UF, 25V 1  C6122 ECALCM101 E 100UF, 160V 1  C6144 ECJ3FJEL05K C 1UF, K, 25V 1  C6145 F1L2J562A022 C 5600UF, K, 6.3V 1  C61646- H 26UFSPLE105K C 1UF, K, 25V 1  C6115 F1L2J562A022 C 5600UF, X, 6.3V 1  C6124 F2A2D221A022 E 22UUF, 20V 2  C6125 ECALCM101 E 100UF, 160V 1  C6126 ECALCM101 E 100UF, 160V 1  C6146- H 26UFSPLE105K C 1UF, K, 25V 1  C6153 ECJ3FJEL05K C 1UF, K, 25V 1  C6155 F1L1E4750004 C 4.7UF, 25V 2  C6156, 5 F1L1E4750004 C 4.7UF, 25V 1  C61659 F1L1E4750004 C 4.7UF, 25V 1  C61668 ECJ3FJEL05K C 1UF, K, 25V 1  C6167 F1L1E4750004 C 4.7UF, 25V 1  C6168 ECJ3FJEL05K C 1UF, K, 25V 1  C6168 ECJ3FJEL05K C 1UF, K, 25V 1  C6169 F1L1E4750004 C 4.7UF, 25V 2  C6168 ECJ3FJEL05K C 1UF, K, 25V 1  C6168 ECJ3FJEL05K C 1UF, K, 25V 1  C6169 F1L1E4750004 C 4.7UF, 25V 2  C6168 ECJ3FJEL05K C 1UF, K, 25V 1  C6431 EUFC1E21 E 20UF, 25V 1  C6432 EUZKBH104K C 0.1UF, K, 50V 1  C6433 EUZKBH105K C 1UF, K, 50V 1  C6434 EUZKBH105K C 1UF, K, 50V 1  C6435 EUCCLSBH106K C 1UF, K, 50V 1  C64466 ECALCH010 E 10UF, 16V 1  C6456 ECALCH010 E 10UF, 16V 1  C6467 ECALCM101 E 10UF, K, 50V 1  C6468 ECALCH010 E 10UF, K, 50V 1  C6472 EUZKBH104K C 0.1UF, K, 50V 1  C6473 EUZKBH105K C 1UF, K, 50V 1  C6474 EUZKBH105K C 1UF, K, 50V 1  C6494 ECAZWBOLO E 10UF, K, 50V 1  C6495 EUCCCACCM10 E 10UF, K, 50V 1  C6496 ECAZCM					
C5803				<del>                                     </del>	
C5803 EUFC1E470 E 47UF, 25V 1 C5805 EQJ3VFJELOSZ C 1UF, Z, 16V 1 C5810 ECAJ3FJELOSZ C 1UF, Z, 25V 1 C5810 ECAJ3FJELOSZ C 1UF, Z, 25V 1 C5811 ECAJ3KD1E104K C 0.1UF, K, 25V 1 C5813 ECAJCMA1 E 47UF, 16V 1 C5818 ECALCMA1 E 47UF, 16V 1 C5821 ECAJCMA1 E 47UF, 16V 1 C5822 ECACCMA2 E 1000UF, 16V 1 C5823 ECALCMA2 E 1000UF, 16V 1 C5823 ECALCMA2 E 200UF, 16V 1 C6101- ECACCMA1 E 100UF, K, 25V 1 C6101- ECQ22255JF P 2.5UF, K, 25V 1 C6110- F2A2T201A001 E 200UF,		EEUFCIE4/I	E 4/00F, 25V		
C5805		FFIIFC1 F470	F 4711F 25V	1	
C5809 RCJ3XP1E105Z C 1UF, Z, 25V 1 C5810 ECALEM6470 E 47UF, 25V 1 C5813 ECAJZEBIE104K C 0.1UF, K, 25V 1 C5818 ECAJCM471 E 470UF, 16V 1 C5820 ECAJCM102 E 1000UF, 16V 1 C5821 ECAJCM102 E 1000UF, 16V 1 C5821 ECAJCM102 E 200UF, 16V 1 C5823 ECAJCM102 E 200UF, 16V 1 C5823 ECAJCM222 E 220UF, 16V 1 C5823 ECAJCM222 E 220UF, 16V 1 C6060 ECAJCM101 E 100UF, 160V 1 C6101- ECQE2255JF P 2.5UF, K, 25V 4 C6101- ECQE2255JF P 2.5UF, K, 25V 1 C6110- F2A2T201A001 E 200UF, 5 C6118 ECJ3YB1E105K C 1UF, K, 25V 1 C6119- Z EBUFC1E221 E 220UF, 25V 1 C6124 F2A2D21A022 E 220UF, 25V 1 C6124 EUGYB1E105K C 1UF, K, 25V 1 C6146- Z ECAJCM101 E 100UF, 160V 1 C6155 F1L184750004 C 4.7UF, 25V 1 C6150. F1L184750004 C 4.7UF, 25V 1 C6153 ECJ3YB1E105K C 1UF, K, 25V 1 C61568 ECJ3YB1E105K C 1UF, K, 25V 1 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6169 ECJ3YB1E105K C 1UF, K, 25V 1 C6434 ECJ3ZB1H03K C 0.01UF, K, 50V 1 C6437 EUJC1C105ZFN C 1UF, 16V 1 C6436 ECJ3ZB1H03K C 0.01UF, K, 50V 1 C6465 ECAZCM101 E 100UF, 160V 1 C64666 ECACCM101 E 10UF, 16V 1 C6467 ECACCM101 E 10UF, 16V 1 C6467 ECACCM101 E 10UF, 16V 1 C6468- F1L1E4750004 C 4.7UF, 25V 1 C6469 ECJ3ZB1H03K C 0.01UF, K, 50V 1 C6469 ECACCM101 E 10UF, 16V 1 C6469 ECACCM101 E 10UF, 16V 1 C6470 ECJ3ZB1H03K C 0.01UF, K, 50V 1 C6471 EUJSB1H04K C 0.01UF, K, 50					
CS810 ECA1EHG470 E 47UF, 25V 1 CS813 ECJZKBIEJO4K C 0.1UF, K, 25V 1 CS820 ECAICM471 E 470UF, 16V 1 CS820 ECAICM471 E 470UF, 16V 1 CS821 ECJZKBIEJO4K C 0.1UF, K, 25V 1 CS821 ECJZKBIEJO4K C 0.1UF, K, 25V 1 CS822 ECAICM222 E 220UF, 16V 1 CS621 F1L2J562A022 C 560UF, K, 6.3V 1 C6012 F1L2J562A022 C 560UF, K, 6.3V 1 C6006 ECACCM101 E 100UF, 160V 1 C6101- F2AZT201A01 E 20UF, K, 25V 4 C6106 ECQE2255JF P 2.5UF, K, 25V 1 C6116 F2AZT201A01 E 20UF, F, 5 C6117 F2AZT201A01 E 20UF, F, 5 C6118 ECJZYBIEJO5K C 1UF, K, 25V 1 C6119 F1L2J562A022 C 5600UF, K, 6.3V 1 C6118 ECJZYBIEJO5K C 1UF, K, 25V 1 C6119 ECJZCZESJF E 220UF, 25V 2 0 C6121 ERUFCIR221 E 220UF, 25V 1 C6122 ECAZCM101 E 100UF, 160V 1 C6124 F2AZD221A022 E 220UF, 20V 1 C6146- F1LE4750004 C 4.7UF, 25V 3 48 C6150, 5 F1L1E4750004 C 4.7UF, 25V 2 C6153 ECJZYBIEJO5K C 1UF, K, 25V 1 C6163 ECJZYBIEJO5K C 1UF, K, 25V 1 C61643 ECJZYBIEJO5K C 1UF, K, 50V 1 C6436 ECJZYBIHO4K C 0.1UF, K, 50V 1 C6437 CUCJZEJNH C 10F, 16V 1 C6436 ECJZZBIHO4K C 0.1UF, K, 50V 1 C6437 EUZZZBIHO5K C 1UF, K, 50V 1 C6438 EUZZZBIHO5K C 1UF, K, 50V 1 C6449 ECAZCM101 E 100UF, 160V 1 C6466, ECJZZBIHO3K C 0.1UF, K, 50V 1 C6467 ECAZCM101 E 10UF, 16V 1 C6472 EUZZZBIHO3K C 0.1UF, K, 50V 1 C6466 ECAZCM101 E 10UF, 16V 1 C6473 EUZZZBIHO3K C 0.0UF, K, 50V 1 C64674 ECJZZBIHO3K C 0.0UF, K, 50V 1 C6475 EZUZZBIHO3K C 0.0UF, K, 50V 1 C6476 ECAZCM101 E 10UF, 16V 1 C6477 EUZZZBIHO3K C 0.0UF, K, 50V 1 C6478 EUZZZBIHO3K C 0.0UF, K, 50V 1 C6493 EUZZZBIHO3K C 0.0UF, K, 50V 1 C6494 ECAZCM101 E 10UF, 160V 1 C6495 EUZZZBIHO3K C 0.0UF, K, 50V 1					
C5813					
C5818   ECA1CM471   E 470UF, 16V   1				<b>-</b>	
C5820 ECA1CM102 E 1000UF, 16V 1 C5821 ECA1CM202 E 2000UF, 16V 1 C5823 ECA1CM202 C 5600UF, 16V 1 C6012 F1L2J562A022 C 5600UF, 16V 1 C60010 ECA2CM101 E 100UF, 160V 1 C60011 ECQE2255JF P 2.5UF, K,250V 4 C61010 ECQE2255JF P 2.5UF, K,250V 1 C6110- ECQE2255JF P 2.5UF, K,250V 1 C6110- ECQE2255JF P 2.5UF, K,250V 1 C61110 F1L2J562A022 C 5600UF, K,6.3V 1 C61110 F1L2J562A022 C 5600UF, K,6.3V 1 C61111 ECQE225JF P 2.5UF, K,25V 1 C6112 ECUFC1E211 E 220UF, 25V 2 C6113 ECUFC1E211 E 220UF, 25V 2 C6114 ECUFC1E470 E 47UF, 25V 1 C6124 F2A2D221A022 E 220UF, 20VV 1 C6124 F2A2D221A022 E 220UF, 25V 3 48 C6144 ECG3YENENIOSK C 1UF, K, 25V 1 C6144 ECG3YENENIOSK C 1UF, K, 25V 1 C6150,5 F1L1E4750004 C 4.7UF, 25V 3 48 C6150,5 F1L1E4750004 C 4.7UF, 25V 2 C6151 ECUFC1E31 E 20UF, E 25V 2 C6151 ECG3YENENIOSK C 1UF, K, 25V 1 C6153 ECG3YENENIOSK C 1UF, K, 25V 1 C6156,5 F1L1E4750004 C 4.7UF, 25V 2 C6158 ECG3YENENIOSK C 1UF, K, 25V 1 C61616,6 TCUY1C105ZFN C 1UF, K, 25V 1 C6163 ECG3YENENIOSK C 1UF, 16V 2 4 C6431 ECG2XENHOSK C 1UF, 16V 1 C6433 ECG3XENENIOSK C 1UF, K, 50V 1 C6433 ECG3XENHOSK C 1UF, 16V 1 C6434 ECG2XENHOSK C 1UF, 16V 1 C6435 EUFC1E221 E 220UF, 5V 1 C6436 ECG1XENIO E 10UF, 16V 1 C6437 ECG2XENHOSK C 1UF, 16V 1 C6438 ECG1XENHOSK C 0.01UF, K, 50V 1 C6456 ECA2CM101 E 10UF, 16V 1 C6457 ECUFC1E221 E 220UF, 5V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6456 ECA2CM101 E 10UF, 16V 1 C6461 ECA1HM101 E 10UF, 50V 1 C6462, 6 F1L1E4750004 C 4.7UF, 25V 1 C6463 ECG1XENIOSK C 0.01UF, K, 50V 1 C6464 ECA2CMG10 E 10UF, 160V 1 C6467 ECA2CMG10 E 10UF, 160V 1 C6468- F1L1E4750004 C 4.7UF, 25V 1 C6469- ECG2XENHOSK C 0.01UF, K, 50V 1 C6469- ECG2XENHOSK C 0.01UF, K, 50V 1 C6469- ECG3XENENCEN C 1UF, K, 50V 1 C6469- ECG2XENHOSK C 0.01UF, K, 50V 1 C6469- ECG3XENENCEN C 1UF, K, 50V 1 C6469- ECG2XENHOSK C 0.01UF, K, 50V 1 C6469- ECG2XENHOSK C 0.01UF, K, 50V 1 C6469- ECG2XENHOSK C 0.01UF, K, 50V 1 C6490 ECG2XENHOSK C 0.01UF, K, 50V 1					
C5821 ECJ2XB1E104K C 0.1UF, K, 25V 1 C5823 ECA1CM222 E 2200UF, 16V 1 C6012 F1L2J562A022 C 5600UF, K, 6.3V 1 C6006 ECA2CM101 E 100UF, 160V 1 C6101- C6101- ECQE2255JF P 2.5UF, K, 250V 4 C6106 ECQE255JF P 2.5UF, K, 250V 1 C6110- F2A2T201A001 E 200UF, 5 C6110- F2A2T201A001 E 200UF, 5 C6111- C611- C6111- C6			+	_	
C5823 ECA1CM222 E 2200UF, 16V 1 C6012 F1L2J562A022 C 5600UF, K, 6. 3V 1 C6060 ECC2CM101 E 100UF, 160V 1 C6101- C6101- C6105 ECC2CS5JF P 2.5UF, K, 250V 4 C6110- C6110- C6110- C6110- C6110- C6110- F2A2T201A001 E 200UF, 55 C61110- F2A2T201A001 E 200UF, 55 C6115 F1L2J562A022 C 5600UF, K, 6. 3V 1 C6118 ECJ3YB1E105K C 1UF, K, 25V 1 C6119, 2 EUUFC1E221 E 220UF, 25V 2 0 C6121 EEUFC1E470 E 47UF, 25V 1 C6124 F2A2D221A002 E 20UF, 160V 1 C6124 F2A2D221A002 E 20UF, 20V 1 C6124 ECJ3YB1B105K C 1UF, K, 25V 1 C6144 ECJ3YB1B105K C 1UF, K, 25V 1 C6144 ECJ3YB1B105K C 1UF, K, 25V 1 C6146- F1L1E4750004 C 4.7UF, 25V 2 1 C6155 F1L1E4750004 C 4.7UF, 25V 2 1 C6156 ECJ3YB1B105K C 1UF, K, 25V 1 C6156, 5 F1L1E4750004 C 4.7UF, 25V 2 7 C61618 ECJ3YB1B105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 2 C6168 ECJ3YB1B105K C 1UF, K, 25V 1 C6168 ECJ3YB1B105K C 1UF, K, 25V 1 C6168 ECJ3YB1B105K C 1UF, K, 50V 1 C6434 ECJ2XB1B105K C 1UF, K, 50V 1 C6434 ECJ2XB1B105K C 1UF, K, 50V 1 C6435 EUGC1E221 E 220UF, 25V 1 C6436 ECJ2XB1B105K C 1UF, K, 50V 1 C6436 ECA1HM221 E 220UF, 25V 1 C6437 EUCZXB1B103K C 0.01UF, K, 50V 1 C6458 ECJ2XB1B105K C 0.1UF, K, 50V 1 C6459 EUFC1E221 E 220UF, 25V 1 C6459 EUFC1E221 E 220UF, 25V 1 C6459 EUGCXB1B103K C 0.01UF, K, 50V 1 C6459 EUGCXB1B103K C 0.01UF, K, 50V 1 C6459 EUGCXB1B103K C 0.01UF, K, 50V 1 C6459 EUGCXBH103K C 0.01UF, K, 50V 1 C64666 ECA2CM010 E 10UF, 160V 1 C6459 EUGCXBH103K C 0.01UF, K, 50V 1 C6466 ECA2CM010 E 10UF, 25V 2 3 C6467 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6476 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6476 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6477 EUGZXB1H103K C 0.01UF, K, 50V 1 C6478 EUGZXB1H103K C 0.01UF, K, 50V 1 C6479 EUGZXB1H103K C 0.01UF, K, 50V 1 C6470 ECJ3YB1B105K C 1UF, K, 25V 1 C6471 ECJ3YB1B105K C 1UF, K, 25V 1 C6472 ECJ3YB1B105K C 1UF, K, 50V 1 C6473 EUGCXB1H103K C 0.01UF, K, 50V 1 C6476 ECG3YB1B105K C 1UF, K, 50V 1 C6479 EUGCXB1H103K C 0.01UF, K, 50V 1 C6470 ECG3YB1B105K C 1UF, K, 50V 1 C6491 ECJ3YB1B105K C 1UF, K, 50V 1 C6492 EUGCXB1H104K C 0.1UF, K, 50V 1					
C6012 F1L2J562A022 C 5600UF, K,6.3V 1 C6060 ECA2CM101 E 100UF, 160V 1 C6101 - ECQE2255JF P 2.5UF, K,250V 4  04 C6106 ECQE2255JF P 2.5UF, K,250V 1 C6110 - F2A2T201A001 E 200UF, 5  14 C6115 F1L2J562A022 C 5600UF, K,6.3V 1 C6115 F1L2J562A022 C 5600UF, K,6.3V 1 C6118 ECJ3YB1E105K C 1UF, K, 25V 1 C6119,2 EEUFC1E221 E 220UF, 25V 2  0 C6121 EEUFC1E470 E 47UF, 25V 1 C6122 ECA2CM101 E 100UF, 160V 1 C6124 F2A2D221A022 E 220UF, 200V 1 C6124 F2A2D221A022 E 220UF, 200V 1 C6124 F2A2D221A022 E 220UF, 200V 1 C6125 F1L1E4750004 C 4.7UF, 25V 3  48 C6150,5 F1L1E4750004 C 4.7UF, 25V 1 C6153 ECJ3YB1E105K C 1UF, K, 25V 1 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6163,6 TCUY1C105ZFN C 1UF, K, 25V 1 C6163,6 TCUY1C105ZFN C 1UF, K, 25V 1 C6432 ECJ2XB1H472K C 4700PF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, K, 25V 1 C6434 ECJ2XB1H105K C 0.01F, K, 50V 1 C6435 EEUFC1E221 E 220UF, 50V 1 C6436 ECA1EM221 E 220UF, 50V 1 C6437 ECJ2XB1H04K C 0.1UF, K, 50V 1 C6438 ECJ2XB1H04K C 0.1UF, K, 50V 1 C6439 ECJ2XB1H04K C 0.1UF, K, 50V 1 C6436 ECA1EM221 E 220UF, 50V 1 C6437 ECJ2XB1H04K C 0.1UF, K, 50V 1 C6458 F1L1E4750004 C 4.7UF, 25V 2 C6459 ECJ2XB1H04K C 0.1UF, K, 50V 1 C6461 ECA1EM101 E 100UF, 160V 1 C6465 ECA2CM101 E 10UF, 160V 1 C6466 ECA2CM101 E 10UF, 160V 1 C6467 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6468 F1L1E4750004 C 4.7UF, 25V 2 C6476 ECA2CM3H103K C 0.01UF, K, 50V 1 C6467 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6468 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6476 ECA2XB1H103K C 0.01UF, K, 50V 1 C6477 ECJ3XB1E105K C 1UF, K, 50V 1 C6478 EUCZXB1H103K C 0.01UF, K, 50V 1 C6479 ECJ3XB1B105K C 1UF, K, 50V 1 C6493 ECJ3XB2J22ZK C 2200FF, K,630V 1 C6494 ECA2VERIO E 10UF, 350V 1 C6493 ECJ3XB2J22ZK C 2200FF, K,630V 1 C6493 ECJ3XB2J22ZK C 2200FF, K,630V 1 C6491 ECJ3XB1H104K C 0.1UF, K, 50V 1 C6493 ECJ3XB1H04K C 0.1UF, K, 50V 1					
C6060 ECA2CM101 E 100UF, 160V 1 C6101- C6101- ECQE2255JF P 2.5UF, K,250V 4 C6106 ECQE2255JF P 2.5UF, K,250V 1 C6110- F2A2T201A001 E 200UF, 5 14 C6115 F1L2J562A022 C 5600UF, K,6.3V 1 C6118 ECJ3YB1B105K C 1UF, K, 25V 1 C6119, 2 EEUFC1E221 E 220UF, 25V 2 C6121 EEUFC1E221 E 20UF, 25V 1 C6122 ECA2CM101 E 100UF, 160V 1 C6124 F2A2D221A022 E 220UF, 25V 1 C6124 ECJ3YB1B105K C 1UF, K, 25V 1 C6124 F2A2D221A02 E 220UF, 25V 2 C6125 ECA2CM100 E 100UF, 160V 1 C6124 F2A2D221A02 E 220UF, 25V 2 C6146- F1L1E4750004 C 4.7UF, 25V 3 48 C6150,5 F1L1E4750004 C 4.7UF, 25V 2 1 C6153 ECJ3YB1B105K C 1UF, K, 25V 1 C6156,5 F1L1E4750004 C 4.7UF, 25V 2 C6158 ECJ3YB1B105K C 1UF, K, 25V 1 C61659 F1L1E4750004 C 4.7UF, 25V 2 C6168 ECJ3YB1B105K C 1UF, K, 25V 1 C6168 ECJ3YB1B105K C 1UF, K, 25V 1 C6169 F1L1E4750004 C 4.7UF, 25V 1 C6163 ECJ3YB1B105K C 1UF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, K, 50V 1 C6434 ECJ2XB1H03K C 1UF, K, 50V 1 C6435 EUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 25V 1 C6437 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6436 ECA2CM101 E 100UF, 160V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6465 ECA2CM101 E 100UF, 160V 1 C6459 EUFC1E270 E 47UF, 25V 1 C6466 ECA2CM101 E 100UF, 50V 1 C6470 ECA2CM101 E 100UF, 50V 1 C6471 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 EUZXB1H103K C 0.01UF, K, 50V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EUZXB1H103K C 0.01UF, K, 50V 1 C6476 ECA2CM101 E 100UF, 50V 1 C6477 ECJ3XB1B105K C 1UF, K, 50V 1 C6478 EUZXB1H103K C 0.01UF, K, 50V 1 C6479 EUZXB1H103K C 0.01UF, K, 50V 1 C6470 ECA2CM101 E 100UF, 160V 1 C6471 ECJ3XB1B105K C 1UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 EUGXB1B105K C 1UF, K, 50V 1 C6474 ECJ2XB1H03K C 0.01UF, K, 50V 1 C6475 EUGXB1B105K C 1UF, K, 50V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3XB1B105K C 1UF, K, 50V 1 C6479 EUGXB1B105K C 1UF, K, 50V 1 C6499 EUGXB1B105K C 1UF, K, 50V 1 C6490 ECA2VB1G100 E 10UF, 500V 1 C6491 ECJ3XB1H00K C 0.1UF, K, 50V 1					
C6101- C6202255JF P 2.5UF, K,250V 4 04 C6110- F2A2T201A001 E 200UF, 5 14 C6115- F1L2J562A022 C 5600UF, K,6.3V 1 C6118 ECJ3YB1E105K C 1UF, K,25V 1 C6119, 2 EEUFC1E221 E 220UF, 25V 2 C6121 EEUFC1E470 E 47UF, 25V 1 C6122 ECACAMO1 E 100UF, K,6.3V 1 C6124 ECJ3YB1E105K C 1UF, K,25V 1 C6125 ECACAMO1 E 100UF, 25V 1 C612614 ECJ3YB1E105K C 1UF, K,25V 1 C6146- F1L1E4750004 C 4.7UF, 25V 2 1 C6150,5 F1L1E4750004 C 4.7UF, 25V 2 1 C6156,5 F1L1E4750004 C 4.7UF, 25V 2 1 C6156,5 F1L1E4750004 C 4.7UF, 25V 2 1 C6156,5 F1L1E4750004 C 4.7UF, 25V 1 C6158 ECJ3YB1E105K C 1UF, K,25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 2 7 C61618 ECJ3YB1E105K C 1UF, K,25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 2 C6168 ECJ3YB1E105K C 1UF, K,25V 1 C6168 ECJ3YB1E105K C 1UF, K,25V 1 C6433 TCUV1C105ZFN C 1UF, K,50V 1 C6434 ECJ2XB1H03K C 1UF, K,50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECALME21 E 220UF, 50V 1 C6437 ECJ2XB1H04K C 0.1UF, K, 50V 1 C6459 EEUFC1E21 E 220UF, 50V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6466 ECALMO1 E 100UF, K, 50V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6466 ECALMO1 E 100UF, K, 50V 1 C6467 ECACMO1 E 10UF, K, 50V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E470 E 47UF, 25V 1 C6476 ECACMO1 E 10UF, K, 50V 1 C6477 EGJ2XB1H103K C 0.01UF, K, 50V 1 C6478 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6479 EEUFC1E470 C 4.7UF, 25V 1 C6470 ECACMO1 E 10UF, K, 50V 1 C6471 ECJ3XB1H103K C 0.01UF, K, 50V 1 C6472 ECJ3XB1H103K C 0.01UF, K, 50V 1 C6473 EUGC2XB1H103K C 0.01UF, K, 50V 1 C6474 ECJ3XB1H103K C 0.01UF, K, 50V 1 C6475 EBUFC1E221 E 220UF, 25V 1 C6476 ECACMO1 E 10UF, K, 50V 1 C6477 EUGJ3XB1E105K C 1UF, K, 50V 1 C6479 EUGC2XB1H103K C 0.01UF, K, 50V 1 C6470 ECACMO1 E 10UF, K, 50V 1 C6471 EUGJ3XB1E105K C 1UF, K, 50V 1 C6471 EUGJ3XB1E105K C 1UF, K, 50V 1 C6472 EUGJ3XB1E105K C 1UF, K, 50V 1 C6473 EUGJ3XB1E105K C 1UF, K, 50V 1 C6492 EUGL3XB1H104K C 0.1UF, K, 50V 1				<b>-</b>	
04   C6106   ECQE2255JF   P 2.5UF, R,250V   1   C6110   F2A2T201A001   E 200UF,   5		<b>+</b>			
C61106 ECQE2255JF P 2.5UF, K,250V 1 C61110 F2A2T201A001 E 200UF, 14 C6115 F1L2J562A022 C 5600UF, K,6.3V 1 C6118 ECJ3YB1E105K C 1UF, K, 25V 1 C6119, 2 EEUFC1E221 E 220UF, 25V 2 C6121 EEUFC1E470 E 47UF, 25V 1 C6122 ECACACMO1 E 100UF, 160V 1 C6124 ECJ3YB1E105K C 1UF, K, 25V 1 C6124 ECJ3YB1E105K C 1UF, K, 25V 1 C6144 ECJ3YB1E105K C 1UF, K, 25V 1 C6145 F1L1E4750004 C 4.7UF, 25V 2 1 C6155 F1L1E4750004 C 4.7UF, 25V 2 1 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6163, 5 F1L1E4750004 C 4.7UF, 25V 2 7 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6163, 6 TCUY1C105ZFN C 1UF, 16V 2 4 C6432 ECJ2XB1H105K C 1UF, K, 25V 1 C6433 TCUY1C105ZFN C 1UF, K, 50V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM21 E 220UF, 50V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 ECUCCE21 E 220UF, 50V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 ECUCCE21 E 220UF, 50V 1 C6450 ECA2CM101 E 100UF, 160V 1 C6451 ECA2CM101 E 100UF, 50V 1 C6452 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6453 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6454 ECA2CM101 E 100UF, 50V 1 C6456 ECA1CM101 E 100UF, 50V 1 C6457 ECACCM101 E 100UF, 50V 1 C6458 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECA2CM101 E 100UF, 50V 1 C6466, 6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466, 6 F1L1E4750004 C 4.7UF, 25V 2 7 C6473 ECUZXB1H103K C 0.01UF, K, 50V 1 C64674 ECA2CM101 E 100UF, 50V 1 C6475 EUECCE221 E 220UF, 25V 1 C6470 ECA2CM101 E 100UF, 50V 1 C6471 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 EUECCE221 E 220UF, 25V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EUECCE221 E 220UF, 25V 1 C6470 ECA2CM101 E 100UF, 60V 1 C6471 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 EUECCE221 E 220UF, 25V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EUECCE221 E 220UF, ESV 1 C6470 ECA2CM101 E 100UF, 60V 1 C6471 ECJ2XB1H104K C 0.01UF, K, 50V 1 C6492 ECJ2XB1H104K C 0.01UF, K, 50V 1		ECQE2255JF	P 2.5UF, K,250V	4	
C6110- F2A2T201A001 E 200UF, 5 14 C6115 F1L2J562A022 C 5600UF, K,6.3V 1 C6118 ECJ3YB1E105K C 1UF, K, 25V 1 C6119, 2 EEUFC1E221 E 220UF, 25V 2 0 C6121 EEUFC1E470 E 47UF, 25V 1 C6122 ECA2CM101 E 100UF, 160V 1 C6124 F2A2D221A022 E 220UF, 200V 1 C6124 F2A2D221A022 E 220UF, 200V 1 C6146- F1L1E4750004 C 4.7UF, 25V 3 48 C6150, 5 F1L1E4750004 C 4.7UF, 25V 2 1 C6153 ECJ3YB1E105K C 1UF, K, 25V 1 C6156, 5 F1L1E4750004 C 4.7UF, 25V 2 7 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C61616, 6 F1L1E4750004 C 4.7UF, 25V 2 7 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6163, 6 TCUY1C1052FN C 1UF, K, 25V 1 C6163, 6 TCUY1C1052FN C 1UF, K, 25V 1 C6432 ECJ2XB1H72K C 4700FF, K, 50V 1 C6433 TCUY1C1052FN C 1UF, 16V 2 C6434 ECJ2XB1H103K C 1UF, 16V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM21 E 220UF, 25V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6458 F1L1E4750004 C 0.1UF, K, 50V 1 C6458 F1L1E4750004 C 0.1UF, K, 50V 1 C6458 F1L1E4750004 C 0.1UF, K, 50V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6457 ECJ2CB1H104K C 0.1UF, K, 50V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6466, 6 F1L1E4750004 C 4.7UF, 25V 2 3 C6466, 6 F1L1E4750004 C 4.7UF, 25V 1 C6467 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6470 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6471 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 EUFC1E221 E 220UF, 25V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EUFC1E221 E 20UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 EUJ3XB1E105K C 1UF, K, 50V 1 C6478 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6479 EUFC1E221 E 20UF, 25V 1 C6470 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6471 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 10UF, 60V 1 C6477 EUJ3XB1E105K C 1UF, K, 50V 1 C6492 ECJ2XB1H104K C 0.1UF, K, 50V 1		EGOESSEE TO	D 2 FIR 7 252	-	
14					
C6115 F1L2J562A022 C 5600UF, K,6.3V 1 C6118 BCJ3YB1E105K C 1UF, K, 25V 1 C6119, 2 EEUFC1E221 E 220UF, 25V 2 C6121 EEUFC1E470 E 47UF, 25V 1 C6122 RCA2CM101 E 100UF, 160V 1 C6124 F2A2D221A022 E 220UF, 25V 1 C6144 F2J3YB1E105K C 1UF, K, 25V 1 C6146- F1L1E4750004 C 4.7UF, 25V 3 48 C6156, 5 F1L1E4750004 C 4.7UF, 25V 2 1 C6156, 5 F1L1E4750004 C 4.7UF, 25V 1 C6156, 5 F1L1E4750004 C 4.7UF, 25V 1 C6156, 5 F1L1E4750004 C 4.7UF, 25V 1 C6156, 6 F1L1E4750004 C 4.7UF, 25V 1 C6156, 6 F1L1E4750004 C 4.7UF, 25V 1 C6158 BCJ3YB1E105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 1 C6163, 6 TCUY1C1052FN C 1UF, K, 25V 1 C6430 TCUY1C1052FN C 1UF, K, 25V 1 C6431 TCUY1C1052FN C 1UF, K, 25V 1 C6433 TCUY1C1052FN C 1UF, K, 50V 1 C6434 BCJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 50V 1 C6436 BCA1HM21 E 220UF, 50V 1 C6437 BCJ2XB1H04K C 0.1UF, K, 50V 1 C6454 BCA2CM101 E 100UF, 160V 1 C6456 F1L1E4750004 C 4.7UF, 25V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EEUFC1E21 E 27 E 20UF, 50V 1 C6450 BCA2CM101 E 100UF, 160V 1 C6451 BCA2CM101 E 100UF, 160V 1 C6452 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6453 TCUY1C1052FN C 1UF, 16V 1 C6454 BCA2CM101 E 100UF, 160V 1 C6455 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6456 F1L1E4750004 C 4.7UF, 25V 1 C6461 BCA1HM101 E 100UF, 160V 1 C6456 BCA2CM101 E 100UF, 160V 1 C6457 EUGC1E21 E 27 E 27 E 20 E 20 E 20 E 20 E 20 E 20		F2A2T2U1AUU1	E 2000F,	) 5	
C6118 ECJ3YB1E105K C 1UF, K, 25V 1 C6119, 2 EEUFC1E221 E 220UF, 25V 2 C6121 EEUFC1E470 E 47UF, 25V 1 C6122 ECA2CM101 E 100UF, 160V 1 C6124 F2A2D221A022 E 220UF, 25V 2 C6144 F2A2D221A022 E 220UF, 25V 1 C6146- F1L1E4750004 C 4.7UF, 25V 1 C6150, 5 F1L1E4750004 C 4.7UF, 25V 2 1 C6153 ECJ3YB1E105K C 1UF, K, 25V 1 C6156, 5 F1L1E4750004 C 4.7UF, 25V 2 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 2 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H105K C 1UF, 16V 2 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM21 E 220UF, 25V 1 C6437 ECJ2XB1H04K C 0.1UF, K, 50V 1 C6458 ECJ2XB1H04K C 0.1UF, K, 50V 1 C6459 ECQ2CM101 E 100UF, 160V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6458 ECJ2XB1H103K C 4.7UF, 25V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6466 ECA2CM101 E 100UF, 150V 1 C6459 ECUFCE470 E 47UF, 25V 1 C6466 ECA2CM101 E 100UF, 50V 1 C6470 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6471 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E210 E 20UF, 25V 1 C6476 ECA2CM101 E 100UF, 50V 1 C6477 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6470 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6471 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 50V 1 C6470 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6471 ECJ3YB1E105K C 1UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, K, 50V 1 C6474 ECJ3YB1E105K C 1UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 50V 1 C6470 ECJ2XB1H104K C 0.01UF, K, 50V 1 C6490 F1K2J332A014 C 3300UF, K, 6.30V 1 C6491 ECA2VHG100 E 10UF, 350V 1		F1T.2.T562A022	C 5600IIE K 6 3V	1	
C6119, 2 EEUFC1E221 E 220UF, 25V 2 C6121 EEUFC1E470 E 47UF, 25V 1 C6122 ECA2CM101 E 100UF, 160V 1 C6124 F2A2D221A022 E 220UF, 200V 1 C6144 ECJ3YB1E105K C 1UF, K, 25V 1 C6146- F1L1E4750004 C 4.7UF, 25V 2 C6150, 5 F1L1E4750004 C 4.7UF, 25V 2 C6153 ECJ3YB1E105K C 1UF, K, 25V 1 C6156, 5 F1L1E4750004 C 4.7UF, 25V 2 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6168, 6 TCUY1C105ZFN C 1UF, 16V 2 4 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H105K C 1UF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2XB1H105K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1M221 E 220UF, 25V 1 C6436 ECA1M221 E 220UF, 25V 1 C6436 ECA2CM101 E 100UF, 160V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EEUFC1E21 E 20UF, 25V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6466 ECA2CM101 E 100UF, 160V 1 C6458 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6466 ECA1CM101 E 100UF, 50V 1 C6466 ECA1CM101 E 100UF, 50V 1 C6466 ECA1CM101 E 100UF, 50V 1 C6467 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, K, 50V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3XB1E105K C 1UF, K, 50V 1 C6477 ECJ3XB1E105K C 1UF, K, 50V 1 C6477 ECJ3XB1E105K C 1UF, K, 50V 1 C6479 EEUFC1E221 E 220UF, Z5V 1 C6470 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6471 ECJ3XB1E105K C 1UF, K, 50V 1 C6472 ECJ3XB1E105K C 1UF, K, 50V 1 C6479 EEUFC1E221 E 220UF, Z5V 1 C6470 ECA2CM101 E 100UF, 160V 1 C6470 ECJ3XB1E105K C 1UF, K, 50V 1 C6490 EEUFC1E221 E 220UF, K, 630V 1 C6490 ECJ3XB1E105K C 1UF, K, 50V 1 C6490 ECJ3XB1E105K C 1UF, K, 50V 3 C6490 ECJ3XB1E105K C 1UF, K, 50V 3 C6490 ECJ3XB1E106K C 1UF, K, 50V 3 C6490 E				<u> </u>	
0 C6121 EEUFC1E470 E 47UF, 25V 1 C6122 ECA2CM101 E 100UF, 160V 1 C6124 F2A2D221A022 E 220UF, 200V 1 C6144 ECJ3YB1E105K C 1UF, K, 25V 1 C6146- F1L1E4750004 C 4.7UF, 25V 3 48 C6150,5 F1L1E4750004 C 4.7UF, 25V 2 1 C6153 ECJ3YB1E105K C 1UF, K, 25V 1 C6156,5 F1L1E4750004 C 4.7UF, 25V 2 7 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 1 C6160,6 F1L1E4750004 C 4.7UF, 25V 1 C61618 ECJ3YB1E105K C 1UF, K, 25V 1 C6163,6 TCUY1C105ZFN C 1UF, 16V 2 4 C6432 ECJ2ZB1H472K C 4700FF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2ZB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6437 ECJ2ZB1H00 E 10UF, 160V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6457 ECJZXB1H103K C 0.1UF, K, 50V 1 C64645 F1L1E4750004 C 4.7UF, 25V 2 3 C6467 ECA2CM101 E 100UF, 50V 1 C6466 ECA1HM101 E 100UF, 160V 1 C6465 F1L1E4750004 C 4.7UF, 25V 2 3 C6472 ECJZXB1H103K C 0.1UF, K, 50V 1 C6475 EEUFC1E271 E 27UF, E5V 1 C6470 ECA2CM101 E 100UF, 160V 1 C6451 ECA1HM101 E 100UF, 160V 1 C6452 ECJZXB1H103K C 0.01UF, K, 50V 1 C6462 ECJZXB1H103K C 0.01UF, K, 50V 1 C6471 ECJZXB1H103K C 0.01UF, K, 50V 1 C6472 ECJZXB1H103K C 0.01UF, K, 50V 1 C6473 EUGYC1E221 E 220UF, 25V 1 C6474 ECJZXB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJZXB1H103K C 0.01UF, K, 50V 1 C6478 EUGYC1E221 E 220UF, 25V 1 C6479 EUGYC1E221 E 220UF, 25V 1 C6470 ECJZXB1H103K C 0.01UF, K, 50V 1 C6471 ECJZXB1H103K C 0.01UF, K, 50V 1 C6472 ECJZXB1H103K C 0.01UF, K, 50V 1 C6473 EUGYC1E221 E 220UF, 25V 1 C6474 ECJZXB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6479 ECJZXB1H103K C 0.01UF, K, 50V 1 C6470 ECJZXB1H103K C 0.01UF, K, 50V 1 C6471 ECJZXB1H103K C 0.01UF, K, 50V 1 C6472 ECJZXB1H103K C 0.01UF, K, 50V 1 C6473 EUGYC1E221 E 220UF, K, 630V 1 C6474 ECJZXB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, K, 630V 1 C6494 ECA2CM101 E 100UF, 50V 1					
C6121 EEUFC1E470 E 47UF, 25V 1 C6122 ECA2CM101 E 100UF, 160V 1 C6124 F2A2D21A022 E 22OUF, 200V 1 C6144 ECJ3YB1E105K C 1UF, K, 25V 1 C6146- F1L1E4750004 C 4.7UF, 25V 3  8 C6150.5 F1L1E4750004 C 4.7UF, 25V 1 C6153 ECJ3YB1E105K C 1UF, K, 25V 1 C6156.5 F1L1E4750004 C 4.7UF, 25V 2 7 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 1 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H105K C 1UF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, K, 50V 1 C6434 ECJ2XB1H03K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6454 ECA2CM101 E 100UF, 160V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6466, 6 F1L1E4750004 C 4.7UF, 25V 2 3 C6467 ECA2CM101 E 100UF, 160V 1 C6458 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6466, 6 F1L1E4750004 C 4.7UF, 25V 2 3 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466 ECA2CM101 E 100UF, 160V 1 C6475 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466 ECA2CM101 E 100UF, 50V 1 C6470 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6471 ECJ3XB1H103K C 0.01UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 EUFC1E221 E 220UF, 25V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3XB1E105K C 1UF, K, 50V 1 C6478 EUFC1E221 E 220UF, E, 50V 1 C6479 EUFC1E221 E 220UF, E, 50V 1 C6470 ECA2CM101 E 100UF, K, 50V 1 C6471 ECJ3XB1E105K C 1UF, K, 50V 1 C6472 ECJ3XB1E105K C 1UF, K, 50V 1 C6473 EUFC1E221 E 220UF, E, 630V 1 C6492 F2A2G100A017 E 100UF, K, 63V 1 91 C6494 ECA2VHG100 E 10UF, 350V 1 C6494 ECA2VHG100 E 10UF, K, 50V 3 03	_	EEUFCIEZZI	E 2200F, 25V	*	
C6122 ECA2CM101 E 100UF, 160V 1 C6124 F2A2D21A022 E 220UF, 200V 1 C6144 ECJ3YB1E105K C 1UF, K, 25V 1 C6146- F1L1E4750004 C 4.7UF, 25V 3  48 C6150,5 F1L1E4750004 C 4.7UF, 25V 2 1 C6153 ECJ3YB1E105K C 1UF, K, 25V 1 C6156,5 F1L1E4750004 C 4.7UF, 25V 2 7 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 1 C6163,6 TCUY1C105ZFN C 1UF, 16V 2 4 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H472K C 4700PF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6457 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6457 EEUFC1E470 E 47UF, 25V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H104K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E21 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6476 ECA2CM101 E 100UF, K, 50V 1 C6477 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6478 EUFC1E221 E 220UF, 25V 1 C6479 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6470 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6471 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6472 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6473 EUFC1E221 E 220UF, 25V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3XB1E105K C 1UF, K, 50V 1 C6492 F2A2G100A017 E 100UF, K, 630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6494 ECA2VHG100 E 10UF, 50V 1		EEUFC1E470	E 47IIF. 25V	1	
C6124 F2A2D221A022 E 220UF, 200V 1 C6144 ECJ3YB1E105K C 1UF, K, 25V 1 C6146- F1L1E4750004 C 4.7UF, 25V 3 48 C6150,5 F1L1E4750004 C 4.7UF, 25V 2 1 C6153 ECJ3YB1E105K C 1UF, K, 25V 1 C6156,5 F1L1E4750004 C 4.7UF, 25V 2 7 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 1 C61616,6 TCUY1C105ZFN C 1UF, K, 25V 1 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6163 TCUY1C105ZFN C 1UF, 16V 2 4 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H472K C 4700PF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6456 ECA2CHG100 E 10UF, 160V 1 C6458 FCA2CHG100 E 10UF, 160V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6466 ECA2HM101 E 100UF, 50V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6466 ECA1HM101 E 100UF, 50V 1 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 16V 1 C6476 ECA2CM101 E 100UF, 16V 1 C6477 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6476 ECA2CM101 E 100UF, 16V 1 C6477 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6476 ECA2CM101 E 100UF, 16V 1 C6477 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6470 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6471 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6476 ECA2CM101 E 100UF, 16V 1 C6477 ECJ3YB1E105K C 1UF, K, 50V 1 C6499 F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6491 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6492 F2A2G100A017 E 10UF, K, 50V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 1				<b>-</b>	
C6144 ECJ3YB1E105K C 1UF, K, 25V 1 C6146- F1L1E4750004 C 4.7UF, 25V 3 48 C6150,5 F1L1E4750004 C 4.7UF, 25V 2 1 C6153 ECJ3YB1E105K C 1UF, K, 25V 1 C6156,5 F1L1E4750004 C 4.7UF, 25V 2 7 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 1 C6169 F1L1E4750004 C 4.7UF, 25V 1 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H472K C 4700PF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, K, 50V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM21 E 220UF, 50V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6461 ECA1HM101 E 100UF, 50V 1 C6466, F1L1E4750004 C 4.7UF, 25V 2 C6461 ECA1HM101 E 100UF, 50V 1 C6466, F1L1E4750004 C 4.7UF, 25V 2 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466, F1L1E4750004 C 4.7UF, 25V 2 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E21 E 220UF, 25V 1 C6476 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6477 ECJ3YB1E105K C 1UF, K, 50V 1 C6476 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6477 ECJ3YB1E105K C 1UF, K, 50V 1 C6499 F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6491 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6493 ECJ3XB2J222K C 2200FF, K, 630V 1 C6494 ECA2VHG100 E 10UF, K, 50V 1 C65501- ECJ2XB1H104K C 0.1UF, K, 50V 1				<del>                                     </del>	
C6146- 48  C6150,5 F1L1E4750004 C 4.7UF, 25V 1  C6153 ECJ3YB1E105K C 1UF, K, 25V 1  C6156,5 F1L1E4750004 C 4.7UF, 25V 2  C6158 ECJ3YB1E105K C 1UF, K, 25V 1  C6159 F1L1E4750004 C 4.7UF, 25V 2  C6159 F1L1E4750004 C 4.7UF, 25V 1  C6163,6 TCUY1C105ZFN C 1UF, K, 25V 1  C6463,6 TCUY1C105ZFN C 1UF, K, 25V 1  C6432 ECJ3YB1E105K C 1UF, K, 25V 1  C6433 TCUY1C105ZFN C 1UF, K, 50V 1  C6434 ECJ2XB1H472K C 4700FF, K, 50V 1  C6435 EEUFC1E221 E 220UF, 25V 1  C6436 ECA1HM221 E 220UF, 50V 1  C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1  C6458 F1L1E4750004 C 4.7UF, 25V 1  C6458 F1L1E4750004 C 4.7UF, 25V 1  C6458 F1L1E4750004 C 4.7UF, 25V 1  C6461 ECA2CM101 E 100UF, 160V 1  C6458 F1L1E4750004 C 4.7UF, 25V 1  C6466, 6 F1L1E4750004 C 4.7UF, 25V 1  C6466, 6 F1L1E4750004 C 4.7UF, 25V 1  C6473 TCUY1C105ZFN C 4.7UF, 25V 1  C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1  C6475 EEUFC1E21 E 20UF, 50V 1  C6476 ECA2CM101 E 100UF, 160V 1  C6477 C6478 F1L1E4750004 C 4.7UF, 25V 1  C6479 C6479 F1L1E4750004 C 4.7UF, 25V 1  C6470 C6471 ECJ2XB1H104K C 0.1UF, K, 50V 1  C6473 TCUY1C105ZFN C 1UF, 16V 1  C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1  C6475 EEUFC1E221 E 220UF, 25V 1  C6476 ECA2CM101 E 100UF, 160V 1  C6477 ECJ2XB1H104K C 0.1UF, K, 50V 1  C6475 EUGZXB1H103K C 0.01UF, K, 50V 1  C6476 ECA2CM101 E 100UF, 160V 1  C6477 ECJ2XB1H103K C 0.01UF, K, 50V 1  C6475 EEUFC1E221 E 220UF, 25V 1  C6476 ECA2CM101 E 100UF, 160V 1  C6477 ECJ2XB1H103K C 0.01UF, K, 50V 1  C6475 EEUFC1E221 E 220UF, 25V 1  C6476 ECA2CM101 E 100UF, 160V 1  C6477 ECJ3XB1E105K C 1UF, K, 50V 1  C6499 F1K2J332A014 C 3300UF, K, 6.3V 3 91  C6492 F2A2G100A017 E 100UF, K, 630V 1  C6493 ECJ3XB2J222K C 220OFP, K, 630V 1  C6494 ECA2VHG100 E 10UF, K, 50V 3				<u> </u>	
48 C6150,5 F1L1E4750004 C 4.7UF, 25V 2 1 C6153 ECJ3YB1E105K C 1UF, K, 25V 1 C6156,5 F1L1E4750004 C 4.7UF, 25V 2 7 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 1 C6163,6 TCUY1C105ZFN C 1UF, 16V 2 4 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H472K C 4700PF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6437 ECJ2XB1H04K C 0.1UF, K, 50V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EEUFC1E27 E 100UF, 160V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EUFC1E470 E 47UF, 25V 1 C6466, F1L1E4750004 C 4.7UF, 25V 1 C6466, F1L1E4750004 C 4.7UF, 25V 1 C6473 TCUY1C105ZFN C 1UF, K, 50V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6476 ECA2CM101 E 100UF, 50V 1 C6477 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6478 TCUY1C105ZFN C 1UF, 16V 1 C6479 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6470 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6471 TCUY1C105ZFN C 1UF, 16V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3XB1H103K C 0.01UF, K, 50V 1 C6479 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6499 F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6492 F2A2G100A017 E 100UF, K, 630V 1 C6493 ECJ3XB2J222K C 2200PF, K, 630V 1 C6494 ECA2VHG100 E 10UF, K, 50V 3 03					
C6150,5 F1L1E4750004 C 4.7UF, 25V 2 C6153 ECJ3YB1E105K C 1UF, K, 25V 1 C6156,5 F1L1E4750004 C 4.7UF, 25V 2 7 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 1 C6163,6 TCUY1C105ZFN C 1UF, 16V 2 4 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H472K C 4700PF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 50V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6437 ECJ2XB1H04K C 0.1UF, K, 50V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6457 ECJ2KB1H004K C 4.7UF, 25V 1 C6466 ECA1HM101 E 100UF, 50V 1 C6466 ECA1HM101 E 100UF, 50V 1 C6466 ECA1HM101 E 100UF, 50V 1 C6467 ECA1HM101 E 100UF, 60V 1 C6467 ECA1HM101 E 100UF, 60V 1 C6470 ECUZXB1H103K C 0.01UF, K, 50V 1 C6471 ECUZXB1H103K C 0.01UF, K, 50V 1 C6472 ECUZXB1H103K C 0.01UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3XB1E105K C 1UF, K, 50V 1 C6479 F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6499 F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6491 ECA2VHG100 E 10UF, 350V 1 C6493 ECJ3XB2J222K C 2200PF, K, 630V 1 C6494 ECA2VHG100 E 10UF, 850V 3		111111111111111111111111111111111111111	C 4.701, 25V		
1		F1L1E4750004	C 4.7UF. 25V	2	
C6156,5 F1L1E4750004 C 4.7UF, 25V 2 7 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 1 C6163,6 TCUY1C105ZFN C 1UF, 16V 2 4 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H472K C 4700PF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EEUFC1E247 E 47UF, 25V 1 C6461 ECA1HM101 E 100UF, 50V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6475 EBUFC1E221 E 220UF, 50V 1 C6476 ECA2CM101 E 100UF, 50V 1 C6477 ECJ3XB1H104K C 0.1UF, K, 50V 1 C6477 ECJ3XB1H103K C 0.01UF, K, 50V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3XB1E105K C 1UF, K, 50V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 50V 1 C6499 F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6492 F2A2G100A017 E 100UF, K, 63V 1 C6494 ECA2XB1H104K C 0.1UF, K, 50V 1 C6494 ECA2XB1H104K C 0.1UF, K, 50V 1 C6494 ECA2XB1H104K C 0.1UF, K, 50V 1 C6494 ECA2XB1H104K C 0.300UF, K, 6.3V 3 91 C6494 ECA2XB1H104K C 0.1UF, K, 50V 1	I .				
7 C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 1 C6163,6 TCUY1C105ZFN C 1UF, 16V 2 4 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H472K C 4700PF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6461 ECA1HM101 E 100UF, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 16V 1 C6477 ECJ3XB1H103K C 0.01UF, K, 50V 1 C6476 ECA2CM101 E 100UF, 16V 1 C6477 ECJ3XB1E105K C 1UF, K, 50V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3XB1E105K C 1UF, K, 50V 1 C6479 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6470 ECA2CM101 E 100UF, 160V 1 C6471 ECJ3XB1E105K C 1UF, K, 50V 1 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 ECJ3XB1E105K C 1UF, K, 50V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3XB1E105K C 1UF, K, 25V 1 C6499 F1K2J332A014 C 3300UF, K, 630V 1 C6492 F2A2G100A017 E 100UF, 350V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6494 ECA2VHG100 E 10UF, 350V 1	C6153	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6158 ECJ3YB1E105K C 1UF, K, 25V 1 C6159 F1L1E4750004 C 4.7UF, 25V 1 C6163,6 TCUY1C105ZFN C 1UF, 16V 2 4 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H472K C 4700PF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6433 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6454 ECA2CM101 E 100UF, 160V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6461 ECA1HM101 E 100UF, 50V 1 C6466, 6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466, 6 F1L1E4750004 C 4.7UF, 25V 2 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 2 C6476 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6477 ECJ3YB1E105K C 1UF, 16V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 50V 1 C6489- F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6494 ECA2VHG100 E 10UF, X, 50V 1 C6494 ECA2VHG100 E 10UF, X, 50V 1 C6494 ECA2VHG100 E 10UF, X, 50V 1 C6494 ECA2VHG100 E 10UF, K, 50V 1 C6494 ECA2VHG100 E 10UF, X, 50V 1 C6494 ECA2VHG100 E 10UF, X, 50V 1 C6494 ECA2VHG100 E 10UF, X, 50V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 1	C6156,5	F1L1E4750004	C 4.7UF, 25V	2	
C6159 F1L1E4750004 C 4.7UF, 25V 1 C6163,6 TCUY1C105ZFN C 1UF, 16V 2 4 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H472K C 4700PF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6436 ECA2KB1H104K C 0.1UF, K, 50V 1 C6437 ECZXB1H104K C 0.1UF, K, 50V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6461 ECA1HM101 E 100UF, 50V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 C64672 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 16V 1 C6477 ECJ3YB1E105K C 1UF, K, 50V 1 C6478 F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6492 F2A2G100A017 E 100UF, K, 50V 1 C6493 ECJ2XB1H104K C 0.1UF, K, 630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6494 ECA2VHG100 E 10UF, K, 50V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3 03	7				
C6163,6 TCUY1C105ZFN C 1UF, 16V 2  4  C6168 ECJ3YB1E105K C 1UF, K, 25V 1  C6432 ECJ2XB1H472K C 4700PF, K, 50V 1  C6433 TCUY1C105ZFN C 1UF, 16V 1  C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1  C6435 EEUFC1E221 E 220UF, 25V 1  C6436 ECA1HM221 E 220UF, 50V 1  C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1  C6454 ECA2CHG100 E 10UF, 160V 1  C6458 F1L1E4750004 C 4.7UF, 25V 1  C6459 EEUFC1E470 E 47UF, 25V 1  C6461 ECA1HM101 E 100UF, 50V 1  C6462,6 F1L1E4750004 C 4.7UF, 25V 2  3  C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1  C6466,6 F1L1E4750004 C 4.7UF, 25V 2  3  C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1  C6473 TCUY1C105ZFN C 1UF, 16V 1  C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1  C6475 EEUFC1E221 E 220UF, 25V 1  C6476 ECA2CM101 E 100UF, 160V 1  C6477 ECJ3XB1E105K C 1UF, K, 50V 1  C6478 F1K2J332A014 C 3300UF, K, 6.3V 3  91  C6492 F2A2G100A017 E 100UF, K, 630V 1  C6493 ECJ2XB1H104K C 0.1UF, K, 630V 1  C6494 ECA2VHG100 E 10UF, 350V 1  C6494 ECA2VHG100 E 10UF, K, 630V 1  C6494 ECA2VHG100 E 10UF, K, 50V 3  C6494 ECA2VHG100 E 10UF, K, 50V 3	C6158	ECJ3YB1E105K	C 1UF, K, 25V	1	
4 C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H472K C 4700PF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6454 ECA2CHG100 E 10UF, 160V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6457 EEUFC1E470 E 47UF, 25V 1 C6461 ECA1HM101 E 100UF, 50V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, K, 50V 1 C6477 ECJ3XB1E105K C 0.01UF, K, 50V 1 C6478 EUFC1E221 E 220UF, 25V 1 C6479 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6470 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6471 ECJ3XB1E105K C 1UF, 16V 1 C6472 ECJ3XB1E105K C 1UF, 16V 1 C6473 F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200FF, K, 630V 1 C6494 ECA2VHG100 E 10UF, 8, 50V 3 C6494 ECA2VHG100 E 10UF, K, 50V 3 C6494 ECA2VHG100 E 10UF, K, 50V 3 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6159	F1L1E4750004	C 4.7UF, 25V	1	
C6168 ECJ3YB1E105K C 1UF, K, 25V 1 C6432 ECJ2XB1H472K C 4700PF, K, 50V 1 C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6454 ECA2CHG100 E 10UF, 160V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6461 ECA1HM101 E 100UF, 50V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6467 ECJ2XB1H103K C 0.01UF, K, 50V 1 C64673 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E21 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3XB1E105K C 1UF, K, 50V 1 C6478 F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6492 F2A2G100A017 E 100UF, K, 630V 1 C6493 ECJ2XB1H104K C 0.1UF, K, 630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6494 ECA2VHG100 E 10UF, K, 630V 1 C6494 ECA2VHG100 E 10UF, K, 50V 1 C6494 ECA2VHG100 E 10UF, K, 50V 1 C6494 ECA2VHG100 E 10UF, K, 50V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6163,6	TCUY1C105ZFN	C 1UF, 16V	2	
C6432         ECJ2XB1H472K         C 4700PF, K, 50V         1           C6433         TCUY1C105ZFN         C 1UF, 16V         1           C6434         ECJ2XB1H103K         C 0.01UF, K, 50V         1           C6435         EEUFC1E221         E 220UF, 25V         1           C6436         ECA1HM221         E 220UF, 50V         1           C6437         ECJ2XB1H104K         C 0.1UF, K, 50V         1           C6454         ECA2CHG100         E 10UF, 160V         1           C6456         ECA2CM101         E 100UF, 160V         1           C6457         F1L1E4750004         C 4.7UF, 25V         1           C6458         F1L1E4750004         C 4.7UF, 25V         1           C6461         ECA1HM101         E 100UF, 50V         1           C6462         F1L1E4750004         C 4.7UF, 25V         2           3         C6465         ECJ2XB1H103K         C 0.01UF, K, 50V         1           C6467         F1L1E4750004         C 4.7UF, 25V         2           7         C6472         ECJ2XB1H103K         C 0.1UF, K, 50V         1           C6473         TCUY1C105ZFN         C 1UF, K, 50V         1           C6476         ECA2CM101	4				
C6433 TCUY1C105ZFN C 1UF, 16V 1 C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6447 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6454 ECA2CHG100 E 10UF, 160V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6461 ECA1HM101 E 100UF, 50V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H103K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489- F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200PF, K, 630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6494 ECA2VHG100 E 10UF, K, 50V 3 C6494 ECA2VHG100 E 10UF, K, 50V 3 C6494 ECA2VHG100 E 10UF, K, 50V 3	C6168	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6434 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6454 ECA2CHG100 E 10UF, 160V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6461 ECA1HM101 E 100UF, 50V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H103K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489- F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200PF, K, 630V 1 C6494 ECA2VHG100 E 10UF, K, 50V 3 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6432	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C6435 EEUFC1E221 E 220UF, 25V 1 C6436 ECA1HM221 E 220UF, 50V 1 C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6454 ECA2CHG100 E 10UF, 160V 1 C6456 ECA2CM101 E 100UF, 160V 1 C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6461 ECA1HM101 E 100UF, 50V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H103K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489- F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200FF, K,630V 1 C6494 ECA2VHG100 E 10UF, K, 50V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6433	TCUY1C105ZFN	C 1UF, 16V	1	
C6436 ECA1HM221 E 220UF, 50V 1  C6437 ECJ2XB1H104K C 0.1UF, K, 50V 1  C6454 ECA2CHG100 E 10UF, 160V 1  C6456 ECA2CM101 E 100UF, 160V 1  C6458 F1L1E4750004 C 4.7UF, 25V 1  C6459 EEUFC1E470 E 47UF, 25V 1  C6461 ECA1HM101 E 100UF, 50V 1  C6462,6 F1L1E4750004 C 4.7UF, 25V 2  3  C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1  C6466,6 F1L1E4750004 C 4.7UF, 25V 2  7  C6472 ECJ2XB1H103K C 0.1UF, K, 50V 1  C6473 TCUY1C105ZFN C 1UF, 16V 1  C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1  C6475 EEUFC1E221 E 220UF, 25V 1  C6476 ECA2CM101 E 100UF, 160V 1  C6477 ECJ3YB1E105K C 1UF, K, 25V 1  C6489- F1K2J332A014 C 3300UF, K, 6.3V 3  91  C6492 F2A2G100A017 E 100UF, 4,630V 1  C6493 ECJ3XB2J222K C 2200PF, K,630V 1  C6494 ECA2VHG100 E 10UF, X, 50V 1  C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6434	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6437         ECJ2XB1H104K         C 0.1UF, K, 50V         1           C6454         ECA2CHG100         E 10UF, 160V         1           C6456         ECA2CM101         E 100UF, 160V         1           C6458         F1L1E4750004         C 4.7UF, 25V         1           C6459         EEUFC1E470         E 47UF, 25V         1           C6461         ECA1HM101         E 100UF, 50V         1           C6462,6         F1L1E4750004         C 4.7UF, 25V         2           3         C6465         ECJ2XB1H103K         C 0.01UF, K, 50V         1           C6466,6         F1L1E4750004         C 4.7UF, 25V         2           7         C6472         ECJ2XB1H104K         C 0.1UF, K, 50V         1           C6473         TCUY1C105ZFN         C 1UF, 16V         1           C6474         ECJ2XB1H103K         C 0.01UF, K, 50V         1           C6475         EEUFC1E221         E 220UF, 25V         1           C6476         ECA2CM101         E 100UF, 160V         1           C6477         ECJ3YB1E105K         C 1UF, K, 25V         1           C6489-         F1K2J332A014         C 3300UF, K,6.3V         3           91         C6492 <t< td=""><td>C6435</td><td>EEUFC1E221</td><td>E 220UF, 25V</td><td>1</td><td></td></t<>	C6435	EEUFC1E221	E 220UF, 25V	1	
C6454         ECA2CHG100         E 10UF, 160V         1           C6456         ECA2CM101         E 100UF, 160V         1           C6458         F1L1E4750004         C 4.7UF, 25V         1           C6459         EEUFC1E470         E 47UF, 25V         1           C6461         ECA1HM101         E 100UF, 50V         1           C6462,6         F1L1E4750004         C 4.7UF, 25V         2           3         C6465         ECJ2XB1H103K         C 0.01UF, K, 50V         1           C6466,6         F1L1E4750004         C 4.7UF, 25V         2           7         C6472         ECJ2XB1H104K         C 0.1UF, K, 50V         1           C6473         TCUY1C105ZFN         C 1UF, 16V         1           C6474         ECJ2XB1H103K         C 0.01UF, K, 50V         1           C6475         EEUFC1E221         E 220UF, 25V         1           C6476         ECA2CM101         E 100UF, 160V         1           C6477         ECJ3YB1E105K         C 1UF, K, 25V         1           C6489-         F1K2J332A014         C 3300UF, K,6.3V         3           91         C6492         F2A2G100A017         E 100UF, 400V         1           C6493	C6436	ECA1HM221	E 220UF, 50V	1	
C6456         ECA2CM101         E 100UF, 160V         1           C6458         F1L1E4750004         C 4.7UF, 25V         1           C6459         EEUFC1E470         E 47UF, 25V         1           C6461         ECA1HM101         E 100UF, 50V         1           C6462,6         F1L1E4750004         C 4.7UF, 25V         2           3         C6465         ECJ2XB1H103K         C 0.01UF, K, 50V         1           C6466,6         F1L1E4750004         C 4.7UF, 25V         2           7         C6472         ECJ2XB1H104K         C 0.1UF, K, 50V         1           C6473         TCUY1C105ZFN         C 1UF, 16V         1           C6474         ECJ2XB1H103K         C 0.01UF, K, 50V         1           C6475         EEUFC1E221         E 220UF, 25V         1           C6476         ECA2CM101         E 100UF, 160V         1           C6476         ECA2CM101         E 100UF, K, 25V         1           C6489-         F1K2J332A014         C 3300UF, K, 6.3V         3           91         C6492         F2A2G100A017         E 100UF, 400V         1           C6493         ECJ3XB2J222K         C 2200PF, K, 630V         1           C6501-	C6437	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6461 ECA1HM101 E 100UF, 50V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6476 ECUZXB1H103K C 0.01UF, K, 50V 1 C6477 ECJ3XB1H103K C 0.01UF, K, 50V 1 C6477 ECJ3XB1E105K C 1UF, 16V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489 F1K2J332A014 C 3300UF, K,6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200FF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6454	ECA2CHG100	E 10UF, 160V	1	
C6458 F1L1E4750004 C 4.7UF, 25V 1 C6459 EEUFC1E470 E 47UF, 25V 1 C6461 ECA1HM101 E 100UF, 50V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489- F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200PF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6494 ECA2VHG100 E 10UF, K, 50V 3 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6456	ECA2CM101	E 100UF, 160V	1	
C6461 ECA1HM101 E 100UF, 50V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489- F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200PF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6458	F1L1E4750004		1	
C6461 ECA1HM101 E 100UF, 50V 1 C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489- F1K2J332A014 C 3300UF, K, 6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200FF, K, 630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3		EEUFC1E470		1	
C6462,6 F1L1E4750004 C 4.7UF, 25V 2 3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489- F1K2J332A014 C 3300UF, K,6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200FF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6461	ECA1HM101		1	
3 C6465 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489 F1K2J332A014 C 3300UF, K,6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200FF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6462,6	F1L1E4750004		2	
C6466,6 F1L1E4750004 C 4.7UF, 25V 2 7 C6472 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489- F1K2J332A014 C 3300UF, K,6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200FF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3				<u></u>	
7 C6472 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489- F1K2J332A014 C 3300UF, K,6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200FF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6465	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6472 ECJ2XB1H104K C 0.1UF, K, 50V 1 C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489- F1K2J332A014 C 3300UF, K,6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200PF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6466,6	F1L1E4750004	C 4.7UF, 25V	2	
C6473 TCUY1C105ZFN C 1UF, 16V 1 C6474 ECJ2XB1H103K C 0.01UF, K, 50V 1 C6475 EEUFC1E221 E 220UF, 25V 1 C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489- F1K2J332A014 C 3300UF, K,6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200PF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	7				
C6474	C6472	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6475	C6473	TCUY1C105ZFN	C 1UF, 16V	1	
C6476 ECA2CM101 E 100UF, 160V 1 C6477 ECJ3YB1E105K C 1UF, K, 25V 1 C6489- F1K2J332A014 C 3300UF, K,6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200PF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6474	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6477	C6475	EEUFC1E221	E 220UF, 25V	1	
C6489- F1K2J332A014 C 3300UF, K,6.3V 3 91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200PF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3 03	C6476	ECA2CM101	E 100UF, 160V	1	
91 C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200PF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3 03	C6477	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6492 F2A2G100A017 E 100UF, 400V 1 C6493 ECJ3XB2J222K C 2200PF, K,630V 1 C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3		F1K2J332A014		3	
C6493	91				
C6494 ECA2VHG100 E 10UF, 350V 1 C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3 03	C6492	F2A2G100A017	E 100UF, 400V	1	
C6501- ECJ2XB1H104K C 0.1UF, K, 50V 3	C6493	ECJ3XB2J222K	C 2200PF, K,630V	1	
03	C6494	ECA2VHG100	E 10UF, 350V	1	
	C6501-	ECJ2XB1H104K	C 0.1UF, K, 50V	3	
C6505	03				
	C6505	ECJ2XB1H104K	C 0.1UF, K, 50V	1	

No.	Part No.	Part Name & Description	Pcs	Remarks
C6507		C 0.1UF, K, 50V	1	
C6509	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6510- 12	F1L1E4750004	C 4.7UF, 25V	3	
C6513	ECA2CM101	E 100UF, 160V	1	
C6514	TCUY1C105ZFN	C 1UF, 16V	1	
C6515,1 6	F1L1E4750004	C 4.7UF, 25V	2	
C6517	TCUY1C105ZFN	C 1UF, 16V	1	
C6519	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6521	F1L1E4750004	C 4.7UF, 25V	1	
C6522 C6524	ECA1VM470 F1K2J471A014	E 47UF, 35V	1	
	ECA2EHG470	C 470UF, K,6.3V E 47UF, 250V	1	
	F1L1E4750004	C 4.7UF, 25V	2	
	F1K2J102A014	C 1000PF,	2	
C6546	F1L1E4750004	C 4.7UF, 25V	1	
C6550	ECA2CM101	E 100UF, 160V	1	
C6551	ECQE2224KF	P 2.2UF, K,250V	1	
C6553	F1L1E4750004	C 4.7UF, 25V	1	
C6554,5 5	F1K2J102A014	C 1000PF,	2	
C6571	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6575,7 6	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C6580,8 1	TCUY1C105ZFN	C 1UF, 16V	2	
C6584	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6585	TCUY1C105ZFN	C 1UF, 16V	1	
C6598	ECA2CM101	E 100UF, 160V	1	
C6600	TCUY1C105ZFN	C 1UF, 16V	1 -	
C6601- 05	F2A2T201A001	E 200UF,	5	
C6607	ECQE2255JF	P 2.5UF, K,250V	1	
C6609	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6610 C6611-	EEUFC1E221 F1L2J222A022	E 220UF, 25V C 2200UF, K,6.3V	3	
13		C 2200UF, K,6.3V	4	
24	FIDZUZZZAUZZ		2	
	F1T.1F4750004	C 4 7ITE 25V		
2	F1L1E4750004	C 4.7UF, 25V		
2 C6634	F1L1E4750004	C 4.7UF, 25V	1	
2 C6634 C6638 C6641,4	F1L1E4750004 F1L1E4750004	C 4.7UF, 25V		
2 C6634 C6638 C6641,4 2 C6650,5	F1L1E4750004 F1L1E4750004 F1L1E4750004	C 4.7UF, 25V C 4.7UF, 25V	1 1	
2 C6634 C6638 C6641,4 2	F1L1E4750004 F1L1E4750004 F1L1E4750004	C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V	1 1 2	
2 C6634 C6638 C6641,4 2 C6650,5 1	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004	C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V	1 1 2 2 2	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z	C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V	1 1 2 2	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653 C6679,8 0	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z	C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 0.1UF, Z, 16V	1 1 2 2 1 2	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653 C6679,8 0 C6681,8 2 C6683,8	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z TCUY1C105ZFN	C 4.7UF, 25V C 0.1UF, 25V C 1UF, 16V	1 1 2 2 1 2	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653 C6679,8 0 C6681,8 2 C6683,8 4 C6701-	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z TCUY1C105ZFN EEUFC1E470 ECQE2255JF	C 4.7UF, 25V C 0.1UF, 2, 16V C 1UF, 16V E 47UF, 25V	1 1 2 2 1 1 2 2 2 2 2 2 2 2 2 1 1 2 2 2 1 1 1 2 2 1 2 1 2 1	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653 C6679,8 0 C6681,8 2 C6683,8 4 C6701- 04	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z TCUY1C105ZFN EEUFC1E470 ECQE2255JF	C 4.7UF, 25V C 0.1UF, 25V C 1UF, 16V E 47UF, 25V P 2.5UF, K,250V	1 1 2 2 1 2 2 2 2	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653 C6679,8 0 C6681,8 2 C6683,8 4 C6701- 04 C6901- 06	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z TCUY1C105ZFN EEUFC1E470 ECQE2255JF TCUY1C105ZFN	C 4.7UF, 25V C 0.1UF, 2, 16V C 1UF, 16V E 47UF, 25V P 2.5UF, K,250V C 1UF, 16V	1 1 2 2 1 2 2 2 2 4	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653 C6679,8 0 C6681,8 2 C6683,8 4 C6701- 06 C6901- 06 C6907,0 8	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z TCUY1C105ZFN EEUFC1E470 ECQE2255JF TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002	C 4.7UF, 25V C 0.1UF, 25V C 1UF, 16V E 47UF, 25V P 2.5UF, K,250V C 1UF, 16V C 1UF, 16V C 1UF, 16V	1 1 2 2 1 2 2 2 4 4 6 2 2	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653 C6679,8 0 C6681,8 2 C6683,8 4 C6701- 04 C6901- 06 C6907,0 8 C6917- 20	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z TCUY1C105ZFN EEUFC1E470 ECQE2255JF TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002	C 4.7UF, 25V C 0.1UF, 2, 16V C 1UF, 16V E 47UF, 25V P 2.5UF, K,250V C 1UF, 16V C 1000PF, K, 50V E 1000UF, 25V	1 1 2 2 1 2 2 2 4 6	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653 C6679,8 0 C6681,8 2 C6683,8 4 C6701- 04 C6901- 06 C6907,0 8 C6917- 20 C6971- 76	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z TCUY1C105ZFN EEUFC1E470 ECQE2255JF TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002 TCUY1C105ZFN	C 4.7UF, 25V C 0.1UF, 2, 16V C 1UF, 16V E 47UF, 25V P 2.5UF, K,250V C 1UF, 16V C 1000PF, K, 50V E 1000UF, 25V C 1UF, 16V	1 1 2 2 1 2 2 2 4 6 6 2 4 6 6	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653 C6679,8 0 C6681,8 2 C6683,8 4 C6701- 04 C6901- 06 C6907,0 8 C6917- 20 C6971- 76 C6971- 76 C6971- 78 C6987- 90 C7103	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z TCUY1C105ZFN EEUFC1E470 ECQE2255JF TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002 TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002	C 4.7UF, 25V C 0.1UF, 25V C 1UF, 16V E 47UF, 25V C 1UF, 16V C 1UF, 16V C 1UF, 16V C 1000PF, K, 50V E 1000UF, 25V C 10F, 16V C 1000PF, K, 50V E 1000UF, 25V C 10F, 16V	1 1 2 2 2 1 2 2 4 6 2 4 6 2 4 1 1	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653 C6679,8 0 C6681,8 2 C6683,8 4 C6701- 04 C6901- 06 C6907,0 8 C6917- 20 C6971- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 771- 771- 771- 771- 771- 771- 77	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z TCUY1C105ZFN EEUFC1E470 ECQE2255JF TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002 TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002	C 4.7UF, 25V C 0.1UF, Z, 16V C 1UF, 16V E 47UF, 25V C 1UF, 16V C 1000PF, K, 50V E 1000UF, Z, 50V C 1UF, 16V C 1000PF, K, 50V E 1000UF, 25V C 10F, 16V C 1000PF, K, 50V	1 1 2 2 2 1 2 2 4 6 2 4 4 6 1 1 1 1	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653 C6679,8 0 C6681,8 2 C6683,8 4 C6701- 04 C6901- 06 C6907-,0 8 C6917- 20 C6977-,7 8 C6977-,7 8 C6987- 90 C7103 C7106 C7107	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z TCUY1C105ZFN EEUFC1E470 ECQE2255JF TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002 TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002 ECJ3XB2A474K ECJ1XC1H101J TCUY1C105ZFN	C 4.7UF, 25V C 0.1UF, Z, 16V C 1UF, 16V E 47UF, 25V P 2.5UF, K,250V C 1UF, 16V C 1000PF, K, 50V E 1000UF, 25V C 1UF, 16V C 1000PF, K, 50V E 1000UF, 25V C 10F, 16V C 1000PF, K, 50V C 10F, 16V C 1000PF, K, 50V C 10F, 16V	1 1 2 2 2 1 2 2 4 6 2 4 4 6 1 1 1 1 1 1 1	
2 C6634 C6638 C6641,4 2 C6650,5 1 C6653 C6679,8 0 C6681,8 2 C6683,8 4 C6701- 04 C6901- 06 C6907,0 8 C6917- 20 C6971- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 C771- 76 771- 771- 771- 771- 771- 771- 77	F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 ECJ1XF1C104Z TCUY1C105ZFN EEUFC1E470 ECQE2255JF TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002 TCUY1C105ZFN ECJ2XB1H102K F1L2E1040002	C 4.7UF, 25V C 0.1UF, Z, 16V C 1UF, 16V E 47UF, 25V C 1UF, 16V C 1000PF, K, 50V E 1000UF, Z, 50V C 1UF, 16V C 1000PF, K, 50V E 1000UF, 25V C 10F, 16V C 1000PF, K, 50V	1 1 2 2 2 1 2 2 4 6 2 4 4 6 1 1 1 1	

No.   Description   1	Ref.	Part No.	Part Name &	Pcs	Remarks
C7143	l	FAIL NO.		FCS	Remains
C7146		ECJ3XB2A474K		1	
C7143					
C7163					
C7166 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7181 SCJIXBICIO4K C 0.1UP, Z, 16V 1 C7185 SCJIXBICIO4K C 0.1UP, Z, 16V 1 C7185 SCJIXBICIO4K C 0.1UP, Z, 16V 1 C7187 SCJIXBICIO4K C 0.1UP, Z, 16V 1 C7189 SCJIXBICIO4K C 0.1UP, Z, 16V 1 C7203 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7206 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7207 TCUYICIO5ZFN C 1UP, 16V 1 C7223 SCJIXBZA474K C 0.47UP, 6.3V 1 C7224 SCJIXBICIO4K C 0.1UP, Z, 16V 3 34 C7225 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7227 TCUYICIO5ZFN C 1UP, 16V 3 34 C7243 SCJIXBZA474K C 0.47UP, 6.3V 1 C7244 SCJIXBICIO4K C 0.1UP, Z, 16V 3 34 C7244 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7247 TCUYICIO5ZFN C 1UP, 16V 1 C7266 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7267 TCUYICIO5ZFN C 1UP, 16V 1 C7268 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7269 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7261 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7281 SCJIXBRICIO4K C 0.1UP, Z, 16V 1 C7300 TCUYICIO5ZFN C 1UP, 16V 1 C7301 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7304 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7324 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7325 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7326 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7326 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7327 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7328 SCJIXCHRIOLJ C 100PP, J, 50V 1 C7421 SCJIXCHRIOLJ C 100PP,					
C7161   CCUYLCIOSEFN   C 1UF, 16V   1					
C7181 SCJIKBICIO4K C 0.1UF, Z, 16V 1 C7187 SCJIKBICIO4K C 0.1UF, Z, 16V 1 C7189 SCJIKBICIO4K C 0.1UF, Z, 16V 1 C7189 SCJIKBICIO4K C 0.1UF, Z, 16V 1 C7189 SCJIKBICIO4K C 0.1UF, Z, 16V 1 C7203 SCJIKBICIO4K C 0.1UF, Z, 16V 1 C7206 SCJIKCHIO1J C 100PF, J, 50V 1 C7207 TCUTICIO5EFR C 1UF, 16V 1 C7208 SCJIKCHIO1J C 100PF, J, 50V 1 C7207 TCUTICIO5EFR C 1UF, 16V 1 C7228 SCJIKCHIO1J C 100PF, J, 50V 1 C7227 TCUTICIO5EFR C 1UF, 16V 1 C7228 SCJIKCHIO1J C 100PF, J, 50V 1 C7227 TCUTICIO5EFR C 1UF, 16V 3 34 C7228 SCJIKCHIO1J C 100PF, J, 50V 1 C7243 SCJIKCHIO1J C 100PF, J, 50V 1 C7246 SCJIKCHIO1J C 100PF, J, 50V 1 C7247 TCUTICIO5EFR C 1UF, 16V 1 C7248 SCJIKCHIO1J C 100PF, J, 50V 1 C7249 TCUTICIO5EFR C 1UF, 16V 1 C7267 TCUTICIO5EFR C 1UF, 16V 1 C7261 SCJIKCHIO1J C 100PF, J, 50V 1 C7263 SCJIKCHIO1J C 100PF, J, 50V 1 C7261 SCJIKCHIO1J C 100PF, J, 50V 1 C7261 SCJIKCHIO1J C 100PF, J, 50V 1 C7301 SCJIKCHIO1J C 100PF, J, 50V 1 C7301 SCJIKCHIO1J C 100PF, J, 50V 1 C7304 SCJIKCHIO1J C 100PF, J, 50V 1 C7304 SCJIKCHIO1J C 100PF, J, 50V 1 C7321 SCJIKCHIO1J C 100PF, J, 50V 1 C7322 SCJIKCHIO1J C 100PF, J, 50V 1 C7324 SCJIKCHIO1J C 100PF, J, 50V 1 C7325 SCJIKCHIO1J C 100PF, J, 50V 1 C7326 SCJIKCHIO1J C 100PF, J, 50V 1 C7326 SCJIKCHIO1J C 100PF, J, 50V 1 C7327 SCJIKCHIO1J C 100PF, J, 50V 1 C7328 SCJIKCHIO1J C 100PF, J, 50V 1 C7329 SCJIKCHIO1J C 100PF, J, 50V 1 C7329 SCJIKCHIO1J C 100PF, J, 50V 1 C7320 SCJIKCHIO1J C 100PF, J, 50V 1 C7328 SCJIKCHIO1J C 100PF, J, 50V 1 C7328 SCJIKCHIO1J C 100PF, J, 50V 1 C7328 SCJIKCHIO1J C 100PF, J, 50V 1 C7424 SCJIKCH					
C7185 ECJIXBICLO4K C 0.1UF, Z, 16V 1 C7187 ECJIXBICLO4K C 0.1UF, Z, 16V 1 C7188 ECJIXBICLO4K C 0.1UF, Z, 16V 1 C7203 ECJIXBICLO4K C 0.1UF, E, 16V 1 C7206 ECJIXCIHIOLJ C 100PF, J, 50V 1 C7207 TCUVICLOSZEN C 1UF, 16V 1 C7207 TCUVICLOSZEN C 1UF, 16V 1 C7223 ECJIXCHOLJ C 100PF, J, 50V 1 C7223 ECJIXCHOLJ C 100PF, J, 50V 1 C7223 ECJIXCHOLJ C 100PF, J, 50V 1 C7224 ECJIXCHOLJ C 100PF, J, 50V 1 C7225 ECJIXCHOLJ C 100PF, J, 50V 1 C7227 TCUVICLOSZEN C 1UF, 16V 1 C7227 TCUVICLOSZEN C 1UF, 16V 1 C7228 ECJIXCHOLJ C 100PF, J, 50V 1 C7246 ECJIXCHOLJ C 100PF, J, 50V 1 C7247 TCUVICLOSZEN C 1UF, 16V 1 C7246 ECJIXCHOLJ C 100PF, J, 50V 1 C7266 ECJIXCHOLJ C 100PF, J, 50V 1 C7267 TCUVICLOSZEN C 1UF, 16V 1 C7263 ECJIXCHOLJ C 100PF, J, 50V 1 C7264 ECJIXCHOLJ C 100PF, J, 50V 1 C7267 TCUVICLOSZEN C 1UF, 16V 1 C7300 TCUVICLOSZEN C 1UF, 16V 1 C7301 ECJIXCHOLJ C 100PF, J, 50V 1 C7300 TCUVICLOSZEN C 1UF, 16V 1 C7301 ECJIXCHOLJ C 100PF, J, 50V 1 C7302 TCUVICLOSZEN C 1UF, 16V 1 C7324 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7344 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7344 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7346 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7347 TCUVICLOSZEN C 1UF, 16V 1 C7348 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7349 TCUVICLOSZEN C 1UF, 16V 1 C7341 ECJIXCHOLJ C 100PF, J, 50V 1 C7341 ECJIXCHOLJ C 100PF, J, 50V 1 C7342 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7343 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7344 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7345 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7346 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7347 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7348 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7349 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7340 TCUVICLOSZEN C 1UF, 16V 1 C7341 ECJIXCHOLJ C 100PF, J, 50V 1 C7342 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7441 ECJIXCHOLJ C 100PF, J, 50V 1 C7441 ECJIXCHOLJ C 100PF, J, 50V 1 C7442 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7443 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7444 ECJIXBZA474K C 0.4TUF, 6.3V 1 C7440 ECJIXCHOLJ C 10TUF, 10V 1 C7441 ECJIXCHOLJ C 10TUF, 1					
C7187 ECJIXBIC104K C 0.1UF, Z, 16V 1 C7189 ECJIXBIC104K C 0.1UF, Z, 16V 1 C7203 ECJIXBIC104K C 0.4TUF, 6.3V 1 C7206 ECJIXCH101J C 100PF, J, 50V 1 C7207 TCUY1C105ZFN C 1UF, 16V 1 C7223 ECJIXBICA74K C 0.4TUF, 6.3V 1 C7223 ECJIXBICA74K C 0.4TUF, 6.3V 1 C7224 ECJIXCH101J C 100PF, J, 50V 1 C7227 TCUY1C105ZFN C 1UF, 16V 1 C7227 TCUY1C105ZFN C 1UF, 16V 1 C7228 ECJIXBIC104K C 0.4TUF, 6.3V 1 C7243 ECJIXBIC104K C 0.4TUF, 6.3V 1 C7244 ECJIXBIC101J C 100PF, J, 50V 1 C7247 TCUY1C105ZFN C 1UF, 16V 1 C7248 ECJIXCH101J C 100PF, J, 50V 1 C7249 ECJIXCH101J C 100PF, J, 50V 1 C7267 TCUY1C105ZFN C 1UF, 16V 1 C7261 ECJIXBIC104K C 0.4TUF, 6.3V 1 C7266 ECJIXCH101J C 100PF, J, 50V 1 C72767 TCUY1C105ZFN C 1UF, 16V 1 C7300 TCUY1C105ZFN C 1UF, 16V 1 C7301 ECJIXBIC104K C 0.4TUF, 6.3V 1 C7301 ECJIXCH101J C 100PF, J, 50V 1 C7304 ECJIXCH101J C 100PF, J, 50V 1 C7304 ECJIXCH101J C 100PF, J, 50V 1 C7321 ECJIXCH101J C 100PF, J, 50V 1 C7324 ECJIXCH101J C 100PF, J, 50V 1 C7344 ECJIXCH101J C 100PF, J, 50V 1 C7346 ECJIXCH101J C 100PF, J, 50V 1 C7347 ECJIXCH101J C 100PF, J, 50V 1 C7348 ECJIXCH101J C 100PF, J, 50V 1 C7364 ECJIXCH101J C 100PF, J, 50V 1 C7365 ECJIXCH101J C 100PF, J, 50V 1 C7366 ECJIXCH101J C 100PF, J, 50V 1 C7367 ECJIXCH101J C 100PF, J, 50V 1 C7368 ECJIXCH101J C 100PF, J, 50V 1 C7369 ECJIXCH101J C 100PF, J, 50V 1 C7361 ECJIXCH101J C 100PF, J, 50V 1 C7364 ECJIXCH101J C 100PF, J, 50V 1 C7365 ECJIXCH101J C 100PF, J, 50V 1 C7366 ECHBOCK C 0.1UF, E, 16V 1 C7387 ECJIXCH101J C 100PF, J, 50V 1 C7388 ECJIXCH101J C 100PF, J, 50V 1 C7401 ECJIXCH101J C 100PF, J, 50V 1 C7401 ECJIXCH101J C 100PF, J, 50V 1 C7402 ECJIXCH101J C 100PF, J, 50V 1 C7404 ECJIXCH101J C 100PF, J, 50V 1 C7406 ECJIXCH101J C 100PF, J, 63V 1 C7407 ECMIXCH101J C 100PF, J, 63V 1 C7408 ECJIXBIC104K C 0					
C7189 ECJIXBIC104K C 0.1UF, Z, 16V 1 C7203 ECJIXC1H01J C 100FF, J, 50V 1 C7207 TCUY1C105ZFN C 1UF, 16V 1 C7223 ECJIXC1H01J C 100FF, J, 50V 1 C7226 ECJIXC1H01J C 100FF, J, 50V 1 C7227 TCUY1C105ZFN C 1UF, 16V 1 C7228 ECJIXC1H01J C 100FF, J, 50V 1 C7227 TCUY1C105ZFN C 1UF, 16V 1 C7232 ECJIXC1H01J C 100FF, J, 50V 1 C7227 TCUY1C105ZFN C 1UF, 16V 3 34 C7243 ECJIXBIC104K C 0.1UF, Z, 16V 3 34 C7243 ECJIXC1H01J C 100FF, J, 50V 1 C7247 TCUY1C105ZFN C 1UF, 16V 1 C7246 ECJIXC1H01J C 100FF, J, 50V 1 C7247 TCUY1C105ZFN C 1UF, 16V 1 C7266 ECJIXC1H10J C 100FF, J, 50V 1 C7267 TCUY1C105ZFN C 1UF, 16V 1 C7300 TCUY1C105ZFN C 1UF, 16V 1 C7301 ECJIXBIC104K C 0.1UF, Z, 16V 1 C7301 ECJIXBIC104K C 0.1UF, Z, 16V 1 C7302 TCUY1C105ZFN C 1UF, 16V 1 C7303 ECJIXBIC10J C 100FF, J, 50V 1 C7321 ECJIXBIC10J C 100FF, J, 50V 1 C7322 TCUY1C105ZFN C 1UF, 16V 1 C7321 ECJIXBIC10J C 100FF, J, 50V 1 C7324 ECJIXBIC10J C 100FF, J, 50V 1 C7324 ECJIXBIC10J C 100FF, J, 50V 1 C7324 ECJIXBIC104K C 0.4UF, 6.3V 1 C7341 ECJIXBIC10J C 100FF, J, 50V 1 C7324 ECJIXBIC10J C 100FF, J, 50V 1 C7328 ECJIXBIC104K C 0.4UF, E.3V 1 C7328 ECJIXBIC104K C 0.4UF, E.3V 1 C7328 ECJIXBIC104K C 0.4UF, E.3V 1 C7329 ECJIXBIC104K C 0.4UF, E.3V 1 C7328 ECJIXBIC104K C 0.4UF, E.3V 1 C7401 ECJIXC1H10J C 100FF, J, 50V 1 C7401 ECJIXC1H10J C 100FF, J, 50V 1 C7421 ECJIXC1H10J C 100FF, J, 50V 1 C7422 ECJIXBIC104K C 0.4UF, E.3V 1 C7423 ECJIXBIC104K C 0.4UF, E.3V 1 C7424 ECJIXBIC104K C 0.4UF, E.3V 1 C7425 ECJIXBIC104K C 0.4UF, E.3V 1 C7426 ECJIXBIC104K C 0.4UF, E.3V 1 C7427 ECJIXBIC104K C 0.4UF, E.3V 1 C7428 ECJIXBIC104K C 0.4UF, E.3V 1 C748				1	
C7203 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7206 ECJ3XCH103J C 100FF, J, 50V 1 C7227 CUTVICIOSZEN C 1UF, 16V 1 C7223 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7226 ECJ3XCH103J C 100FF, J, 50V 1 C7227 CUTVICIOSZEN C 1UF, 16V 1 C7223 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7224 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7225 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7232 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7243 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7243 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7246 ECJ3XCH103J C 100FF, J, 50V 1 C7263 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7266 ECJ3XCH103J C 100FF, J, 50V 1 C7267 CUTVICIOSZEN C 1UF, 16V 1 C7281 ECJ3XB1C104K C 0.1UF, Z, 16V 1 C7300 TCUTICIOSZEN C 1UF, 16V 1 C7301 ECJ3XB1C104K C 0.47UF, 6.3V 1 C7304 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7305 TCUTICIOSZEN C 1UF, 16V 1 C7306 TCUTICIOSZEN C 1UF, 16V 1 C7321 ECJ3XCH103J C 100FF, J, 50V 1 C7322 ECJ3XCH103J C 100FF, J, 50V 1 C7324 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7324 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7340 TCUTICIOSZEN C 1UF, 16V 1 C7341 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7344 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7346 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7347 ECJ3XCH103J C 100FF, J, 50V 1 C7348 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7360 TCUTICIOSZEN C 1UF, 16V 1 C7361 ECJ3XB1C104K C 0.1UF, Z, 16V 1 C7362 ECJ3XB1C104K C 0.1UF, Z, 16V 1 C7363 ECJ3XB1C104K C 0.1UF, Z, 16V 1 C7364 ECJ3XB1C104K C 0.1UF, Z, 16V 1 C7365 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7366 ECJ3XB1C104K C 0.1UF, Z, 16V 1 C7367 ECJ3XB1C104K C 0.1UF, Z, 16V 1 C7368 ECJ3XB1C104K C 0.1UF, Z, 16V 1 C7369 ECJ3XB1C104K C 0.1UF, Z, 16V 1 C7361 ECJ3XB1C104K C 0.1UF, Z, 16V 1 C7404 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7404 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7405 ECJ3XB1C104K C 0.1UF, Z, 16V 1 C7406 ECJ3XB1C104K C 0.1UF, Z, 16V 1 C7407 ECJ3XB1C104K C 0.1UF, E, 16V 1 C7408 ECJ3XB1C104K C 0.1UF, E, 16V 1 C7409 ECJ3XB1C104K C 0.1UF, E, 16V 1 C7401 ECJ3XB1C104K C 0.1UF, E, 16V 1 C7408 ECJ3XB1C104K C 0.1UF, E, 10V 1 C7409 ECJ3XB1C104K C 0.1UF, E, 10V 1 C74	C7187	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7206 ECJIXC1H101J C 100PF, J, 50V 1 C7207 TCUTICIOSZEN C 10F, 16V 1 C7228 ECJIXE2A74K C 0.47UF, 6.3V 1 C7226 ECJIXC1H101J C 100PF, J, 50V 1 C7227 TCUTICIOSZEN C 10F, 16V 1 C7232 ECJIXE1C104K C 0.17UF, Z, 16V 3 34 C7243 ECJIXE1C104K C 0.17UF, Z, 16V 3 34 C7244 ECJIXE1C101J C 100PF, J, 50V 1 C7247 TCUTICIOSZEN C 10F, 16V 1 C7247 TCUTICIOSZEN C 10F, 16V 1 C7248 ECJIXC1H101J C 100PF, J, 50V 1 C7247 TCUTICIOSZEN C 10F, 16V 1 C7266 ECJIXC1H101J C 100PF, J, 50V 1 C7267 TCUTICIOSZEN C 10F, 16V 1 C7267 TCUTICIOSZEN C 10F, 16V 1 C7300 TCUTICIOSZEN C 10F, 16V 1 C7301 ECJIXE1C101J C 100PF, J, 50V 1 C7304 ECJIXE1C101J C 100PF, J, 50V 1 C7305 TCUTICIOSZEN C 10F, 16V 1 C7306 TCUTICIOSZEN C 10F, 16V 1 C7307 TCUTICIOSZEN C 10F, 16V 1 C7321 ECJIXE1C101J C 100PF, J, 50V 1 C7324 ECJIXE2A74K C 0.47UF, 6.3V 1 C7344 ECJIXE2A74K C 0.47UF, 6.3V 1 C7344 ECJIXE2A74K C 0.47UF, 6.3V 1 C7344 ECJIXE2A74K C 0.47UF, 6.3V 1 C7345 ECJIXE2A74K C 0.47UF, 6.3V 1 C7346 ECJIXE2A74K C 0.47UF, 6.3V 1 C7346 ECJIXE2A74K C 0.47UF, 6.3V 1 C7347 ECJIXE2A74K C 0.47UF, 6.3V 1 C7348 ECJIXE2A74K C 0.47UF, 6.3V 1 C7349 ECJIXE1C104K C 0.1UF, Z, 16V 1 C7349 ECJIXE1C105ZEN C 1UF, 16V 1 C7340 ECJIXE1C105ZEN C 1UF, 16V 1 C7341 ECJIXE1C105ZEN C 1UF, 16V 1 C7441 ECJIXE1C105ZEN C 1UF, 16V 1 C7442 ECJIXE1C104K C 0.1UF, Z, 16V 1 C7443 ECJIXE1C104K C 0.1UF, Z, 16V 1 C7444 ECJIXE1C104K C 0.1UF, Z, 16V 1 C7446 ECJIXE1C104K C 0.1UF, E, 10V 1 C7447 ECJIXE1C104K C 0.1UF, E, 10V 1 C7448 ECJIXE1C104K C 0.1UF, E, 10V 1 C7449 ECJIXE1C104K C 0.1UF, E, 10V 1 C7440 ECJIXE1C104K C 0.1UF, E, 10V 1 C7441 ECJIXE1C104K C 0.1UF, E, 10V 1 C7483 ECJUEBIA104K C 0.1UF, K, 10V 2 C81010, 0 ECUEBIA104K C 0.	C7189	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7207 TCUY1C105ZFN C 1UF, 16V 1 C7223 EGJIXC1H101J C 100PF, J, 50V 1 C7227 TCUY1C105ZFN C 1UF, 16V 1 C7228 EGJIXC1H101J C 100PF, J, 50V 1 C7246 EGJIXC1H101J C 100PF, J, 50V 1 C7247 TCUY1C105ZFN C 1UF, 16V 1 C7246 EGJIXC1H101J C 100PF, J, 50V 1 C7267 TCUY1C105ZFN C 1UF, 16V 1 C7268 EGJIXC1H101J C 100PF, J, 50V 1 C7269 TCUY1C105ZFN C 1UF, 16V 1 C7261 EGJIXC1H101J C 100PF, J, 50V 1 C7267 TCUY1C105ZFN C 1UF, 16V 1 C7300 TCUY1C105ZFN C 1UF, 16V 1 C7301 EGJIXC1H101J C 100PF, J, 50V 1 C7301 EGJIXC1H101J C 100PF, J, 50V 1 C7304 EGJIXC1H101J C 100PF, J, 50V 1 C7324 EGJIXC1H101J C 100PF, J, 50V 1 C7344 EGJIXC1H101J C 100PF, J, 50V 1 C7346 EGJIXC1H101J C 100PF, J, 50V 1 C7361 EGJIXC1H101J C 100PF, J, 50V 1 C7361 EGJIXC1H101J C 100PF, J, 50V 1 C7361 EGJIXC1H101J C 100PF, J, 50V 1 C7364 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7383 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7383 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7386 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7404 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7404 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7405 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7406 TCUY1C105ZFN C 1UF, 16V 1 C7407 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7408 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7409 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7401 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7402 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7403 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7404 EGJIXB1C104K C 0.1UF, Z, 16V 1 C7405 EGJIXB1C104K C 0.1UF, E, 10V 1 C7406 TCUY1C105ZFN C 1UF, 16V 1 C7407 EGJIXB1C104K C 0.1UF, E, 10V 1 C7408 EGJIXB1C104K C 0.1UF, E, 10V 1 C7409 EGJIXB1C104K C 0.1UF, E, 10V 1 C7401 EGJIXB1C104K C 0.1UF, E, 10V 1 C7402 EGJIXB1C104K C 0.1UF, E, 10V 1 C7403 EGJIXB1C104K C 0.1UF, E, 10V 1 C7404 E	C7203	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7223 ECJ3XE2A474K C 0.47UF, 6.3V 1 C7226 ECJ3XC1H101J C 100PF, J, 50V 1 C7232	C7206	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7226	C7207	TCUY1C105ZFN	C 1UF, 16V	1	
C7227   TCUY1C105ZFN   C 1UF, 16V   1   3   34   34   34   34   34   34	C7223	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7232-   ECJIXB1C104K   C 0.1UF, Z, 16V   3   3   3   3   3   3   3   3   3	C7226	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7232	C7227	TCUY1C105ZFN	C 1UF, 16V	1	
34				3	
C7246   ECJIXC1H101J   C 100PF, J, 50V   1   C7247   TCUYLC105ZPN   C 10F, 16V   1   C7265   ECJIXC1H101J   C 100PF, J, 50V   1   C7266   ECJIXC1H101J   C 100PF, J, 50V   1   C7267   TCUYLC105ZPN   C 10F, 16V   1   C7281   ECJIXB1C104K   C 0.47UF, 6.3V   1   C7300   TCUYLC105ZPN   C 10F, 16V   1   C7301   ECJIXC1H101J   C 100PF, J, 50V   1   C7301   ECJIXC1H101J   C 100PF, J, 50V   1   C7301   ECJIXC1H101J   C 100PF, J, 50V   1   C7321   ECJIXC1H101J   C 100PF, J, 50V   1   C7322   ECJIXC1H101J   C 100PF, J, 50V   1   C7322   ECJIXC1H101J   C 100PF, J, 50V   1   C7321   ECJIXC1H101J   C 100PF, J, 50V   1   C7324   ECJIXC1H101J   C 100PF, J, 50V   1   C7341   ECJIXC1H101J   C 100PF, J, 50V   1   C7341   ECJIXC1H101J   C 100PF, J, 50V   1   C7361   ECJIXC1H101J   C 100PF, J, 50V   1   C7361   ECJIXC1H101J   C 100PF, J, 50V   1   C7361   ECJIXC1H101J   C 100PF, J, 50V   1   C7364   ECJIXC1H101J   C 100PF, J, 50V   1   C7364   ECJIXC1H101J   C 100PF, J, 50V   1   C7383   ECJIXC1H101J   C 100PF, J, 50V   1   C7383   ECJIXC1H101J   C 100PF, J, 50V   1   C7383   ECJIXC1H101J   C 100PF, J, 50V   1   C7385   ECJIXC1H101J   C 100PF, J, 50V   1   C7385   ECJIXC1H20J   C 0.1UF, Z, 16V   1   C7396, 9   ECJIXC1H20J   C 100PF, J, 50V   2   C7401   ECJIXC1H101J   C 100PF, J, 50V   1   C7424   ECJIXC1H101J   C 100PF, J, 50V   1   C7438   ECJIXE1C104K   C 0.1UF, K,			, , ,		
C7246   ECJIXC1H101J   C 100PF, J, 50V   1   C7247   TCUYLC105ZPN   C 10F, 16V   1   C7265   ECJIXC1H101J   C 100PF, J, 50V   1   C7266   ECJIXC1H101J   C 100PF, J, 50V   1   C7267   TCUYLC105ZPN   C 10F, 16V   1   C7281   ECJIXB1C104K   C 0.47UF, 6.3V   1   C7300   TCUYLC105ZPN   C 10F, 16V   1   C7301   ECJIXC1H101J   C 100PF, J, 50V   1   C7301   ECJIXC1H101J   C 100PF, J, 50V   1   C7301   ECJIXC1H101J   C 100PF, J, 50V   1   C7321   ECJIXC1H101J   C 100PF, J, 50V   1   C7322   ECJIXC1H101J   C 100PF, J, 50V   1   C7322   ECJIXC1H101J   C 100PF, J, 50V   1   C7321   ECJIXC1H101J   C 100PF, J, 50V   1   C7324   ECJIXC1H101J   C 100PF, J, 50V   1   C7341   ECJIXC1H101J   C 100PF, J, 50V   1   C7341   ECJIXC1H101J   C 100PF, J, 50V   1   C7361   ECJIXC1H101J   C 100PF, J, 50V   1   C7361   ECJIXC1H101J   C 100PF, J, 50V   1   C7361   ECJIXC1H101J   C 100PF, J, 50V   1   C7364   ECJIXC1H101J   C 100PF, J, 50V   1   C7364   ECJIXC1H101J   C 100PF, J, 50V   1   C7383   ECJIXC1H101J   C 100PF, J, 50V   1   C7383   ECJIXC1H101J   C 100PF, J, 50V   1   C7383   ECJIXC1H101J   C 100PF, J, 50V   1   C7385   ECJIXC1H101J   C 100PF, J, 50V   1   C7385   ECJIXC1H20J   C 0.1UF, Z, 16V   1   C7396, 9   ECJIXC1H20J   C 100PF, J, 50V   2   C7401   ECJIXC1H101J   C 100PF, J, 50V   1   C7424   ECJIXC1H101J   C 100PF, J, 50V   1   C7438   ECJIXE1C104K   C 0.1UF, K,	C7243	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7247 TCUY1C105ZFN C 1UF, 16V 1 C7263 ECJ3K2B2A474K C 0.47UF, 6.3V 1 C7266 ECJ3KC1H101J C 100PF, J, 50V 1 C7267 TCUY1C105ZFN C 1UF, 16V 1 C7281 ECJ1KB1C104K C 0.1UF, Z, 16V 1 C7301 ECJ1KC1H101J C 100PF, J, 50V 1 C7301 ECJ1KC1H101J C 100PF, J, 50V 1 C7304 ECJ3KB2A474K C 0.47UF, 6.3V 1 C7322 TCUY1C105ZFN C 1UF, 16V 1 C7323 ECJ1KC1H101J C 100PF, J, 50V 1 C7324 ECJ3KC1H101J C 100PF, J, 50V 1 C7344 ECJ3KC2A474K C 0.47UF, 6.3V 1 C7344 ECJ3KC2A474K C 0.47UF, 6.3V 1 C7346 TCUY1C105ZFN C 1UF, 16V 1 C7347 ECJ3KC1H101J C 100PF, J, 50V 1 C7348 ECJ3KC2A474K C 0.47UF, 6.3V 1 C7360 TCUY1C105ZFN C 1UF, 16V 1 C7361 ECJ1KC1H101J C 100PF, J, 50V 1 C7364 ECJ3KC2A474K C 0.47UF, 6.3V 1 C7383 ECJ1KB1C104K C 0.1UF, Z, 16V 1 C7383 ECJ1KB1C104K C 0.1UF, Z, 16V 1 C7385 ECJ1KB1C104K C 0.1UF, Z, 16V 1 C7386 ECJ1KC1H20J C 22PF, J, 50V 2 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7386, 9 ECJ1KC1H20J C 22PF, J, 50V 2 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJ3KC1H101J C 100PF, J, 50V 1 C7404 ECJ3KC2A474K C 0.47UF, 6.3V 1 C7404 ECJ3KC2A474K C 0.47UF, 6.3V 1 C7405 TCUY1C105ZFN C 1UF, 16V 1 C7406 ECJ3KC1H101J C 100PF, J, 50V 1 C7407 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJ1KC1H101J C 100PF, J, 50V 1 C7404 ECJ3KC2A474K C 0.47UF, 6.3V 1 C7424 ECJ3KC1H01J C 100PF, J, 50V 1 C7424 ECJ3KC1A101J C 100PF, J, 50V 1 C7426 ECJ1KC1C105ZFN C 1UF, 16V 1 C7427 ECJ1KC1C105ZFN C 1UF, 16V 1 C7428 ECJ1KC1C105ZFN C 1UF, 16V 1 C7429 ECJ1KC1C105ZFN C 1UF, 16V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ1KC1C105ZFN C 1UF, 16V 1 C7421				1	
C7263					
C7266 ECJIXC1H101J C 100PF, J, 50V 1 C7267 TCUV1C105ZFN C 1UF, 16V 1 C7281 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7300 TCUV1C105ZFN C 1UF, 16V 1 C7301 ECJIXC1H101J C 100PF, J, 50V 1 C7301 ECJIXC1H101J C 100PF, J, 50V 1 C7320 TCUV1C105ZFN C 1UF, 16V 1 C7321 ECJIXC1H101J C 100PF, J, 50V 1 C7321 ECJIXC1H101J C 100PF, J, 50V 1 C7324 ECJIXC1H101J C 100PF, J, 50V 1 C7324 ECJIXC1H101J C 100PF, J, 50V 1 C7341 ECJIXC1H101J C 100PF, J, 50V 1 C7344 ECJIXC1H101J C 100PF, J, 50V 1 C7344 ECJIXC1H101J C 100PF, J, 50V 1 C7344 ECJIXC1H101J C 100PF, J, 50V 1 C7366 TCUV1C105ZFN C 1UF, 16V 1 C7361 ECJIXC1H101J C 100PF, J, 50V 1 C7364 ECJIXCH101J C 100PF, J, 50V 1 C7364 ECJIXCH101J C 100PF, J, 50V 1 C7383 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7389 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7389 ECJIXC1H20J C 0.1UF, Z, 16V 1 C7389 ECJIXC1H20J C 0.1UF, Z, 16V 1 C7389 ECJIXC1H20J C 0.1UF, Z, 16V 1 C7400 TCUV1C105ZFN C 1UF, 16V 1 C7401 ECJIXC1H101J C 100PF, J, 50V 1 C7401 ECJIXC1H101J C 100PF, J, 50V 1 C7401 ECJIXC1H101J C 100PF, J, 50V 1 C7421 ECJIXC1H101J C 100PF, J, 50V 1 C7421 ECJIXC1H101J C 100PF, J, 50V 1 C7424 ECJIXC2A74K C 0.47UF, 6.3V 1 C7424 ECJIXC1H101J C 100PF, J, 50V 1 C7424 ECJIXC2A74K C 0.47UF, 6.3V 1 C7424 ECJIXCH101J C 100PF, J, 50V 1 C7424 ECJIXC1H001J C 100PF, J, 50V 1 C7424 ECJIXCH1001J C 10PF, J, 50V 1 C7426 ECJIXCH1001J C 10PF, J, 50V 1 C7427 ECJIXC1H001J C 10PF, J, 50V 1 C7428 ECJIXCH001Y C 1UF, 16V 1 C7429 ECJIXCH001Y C 1UF, 16V 1 C7440 ECJIXCH001Y C 1UF, 16V 1 C7441 E					
C7267 TCUYIC105ZFN C 1UF, 16V 1 C7281 ECJIXBIC104K C 0.1UF, Z, 16V 1 C7301 TCUYIC105ZFN C 1UF, 16V 1 C7301 ECJIXCH101J C 100FF, J, 50V 1 C7304 ECJIXCH101J C 100FF, J, 50V 1 C7302 TCUYIC105ZFN C 1UF, 16V 1 C7321 ECJIXCH101J C 100FF, J, 50V 1 C7324 ECJIXCH101J C 100FF, J, 50V 1 C7341 ECJIXCH101J C 100FF, J, 50V 1 C7342 ECJIXCH101J C 100FF, J, 50V 1 C7343 ECJIXCH101J C 100FF, J, 50V 1 C7344 ECJIXCH101J C 100FF, J, 50V 1 C7360 TCUYIC105ZFN C 1UF, 16V 1 C7361 ECJIXCH101J C 100FF, J, 50V 1 C7364 ECJIXBIC104K C 0.47UF, 6.3V 1 C7383 ECJIXBIC104K C 0.1UF, Z, 16V 1 C7388 ECJIXBIC104K C 0.1UF, Z, 16V 1 C7389 ECJIXBIC104K C 0.1UF, Z, 16V 1 C7389 ECJIXCH20J C 22FF, J, 50V 2 C7400 TCUYIC105ZFN C 1UF, 16V 1 C7401 ECJIXCH101J C 100FF, J, 50V 1 C7404 ECJ3XE2A474K C 0.47UF, 6.3V 1 C7404 ECJ3XE2A474K C 0.1UF, Z, 16V 1 C7404 ECJ3XE2A474K C 0.1UF, Z, 16V 1 C7404 ECJ3XE2A474K C 0.1UF, Z, 16V 1 C7404 ECJ3XE2A474K C 0.1UF, 10V 1 C7404 ECJ3XE2A474K C 0.47UF, 6.3V 1 C7424 ECJ1XCH101J C 100FF, J, 50V 1 C7424 ECJ3XE2A474K C 0.47UF, 6.3V 1 C7440 TCUYIC105ZFN C 1UF, 16V 1 C7441 ECJ1XCH101J C 100FF, J, 50V 1 C7444 ECJ3XE2A474K C 0.47UF, 6.3V 1 C7446 ECJ3XE2A474K C 0.47UF, 6.3V 1 C7447 ECJ1XCH101J C 100FF, J, 50V 1 C7448 ECJ3XE2A474K C 0.47UF, 6.3V 1 C7483 ECJ1XBIC104K C 0.1UF, Z, 16V 1 C7483 ECJ1XBIC104K C 0.1UF, Z, 16V 1 C7485 ECJ1XBIC104K C 0.1UF, Z, 16V 1 C7487 ECJ1XBIC104K C 0.1UF, Z, 16V 1 C7488 ECJ1XBIC104K C 0.1UF, Z, 16V 1 C7489 ECJ1XBIC104K C 0.1UF, Z, 16V 1 C7481 ECJ1XCH001J C 100FF, J, 50V 1 C7483 ECJ1XBIC104K C 0.1UF, Z, 16V 1 C7483 ECJ1XBIC104K C 0.1UF, Z, 16V 1 C7485 ECJ1XBIC104K C 0.1UF, Z, 16V 1 C7487 ECJ1XBIC104K C 0.1UF, Z, 16V 1 C7488 ECJ1XBIC104K C 0.1UF, K, 10V 2 C8100, 0 ECJ0EBIA104K C 0.1UF, K, 10V 2 C81010, 0 ECJ0EBIA104K C 0.1UF, K, 10V 1 C81010, 0 ECJ0EBIA104K C 0.1UF, K, 10V 6					
C7281 BCJIXBIC104K C 0.1UF, Z, 16V 1 C7300 TCUVIC105ZFN C 1UF, 16V 1 C7301 BCJIXCH101J C 100PF, J, 50V 1 C7304 BCJIXCH101J C 100PF, J, 50V 1 C7320 TCUVIC105ZFN C 1UF, 16V 1 C7321 BCJIXCH101J C 100PF, J, 50V 1 C7322 BCJIXCH101J C 100PF, J, 50V 1 C7324 BCJIXCH101J C 100PF, J, 50V 1 C7324 BCJIXCH101J C 100PF, J, 50V 1 C7340 TCUVIC105ZFN C 1UF, 16V 1 C7341 BCJIXCH101J C 100PF, J, 50V 1 C7344 BCJIXCH101J C 100PF, J, 50V 1 C7361 BCJIXCH101J C 100PF, J, 50V 1 C7361 BCJIXCH101J C 100PF, J, 50V 1 C7364 BCJIXBIC104K C 0.47UF, 6.3V 1 C7383 BCJIXBIC104K C 0.1UF, Z, 16V 1 C7385 BCJIXBIC104K C 0.1UF, Z, 16V 1 C7396, 9 BCJIXCH20J C 22PF, J, 50V 2 C7400 TCUVIC105ZFN C 1UF, 16V 1 C7401 BCJIXCH101J C 100PF, J, 50V 1 C7404 BCJIXCH101J C 100PF, J, 50V 1 C7420 TCUVIC105ZFN C 1UF, 16V 1 C7421 BCJIXCH101J C 100PF, J, 50V 1 C7424 BCJIXCH101J C 100PF, J, 50V 1 C7424 BCJIXCH101J C 100PF, J, 50V 1 C7444 BCJIXCH101J C 100PF, J, 50V 1 C7446 BCJIXCH101J C 100PF, J, 50V 1 C7447 BCJIXCH101J C 100PF, J, 50V 1 C7448 BCJIXCH101J C 100PF, J, 50V 1 C7441 BCJIXCH101J C 100PF, J, 50V 1 C7461 BCJIXCH101J C 100PF, J, 4V 1 C8103 BECHBOG101R C 100PF, J, 4V 1 C8103 BECHBOG101R C 100PF, J, 4V 1 C8104 BCJIXBD					
C7300 TCUY1C105ZFN C 1UF, 16V 1 C7301 ECJIXCH101J C 100PF, J, 50V 1 C7321 ECJIXCH101J C 100PF, J, 50V 1 C7341 ECJIXCH101J C 100PF, J, 50V 1 C7341 ECJIXCH101J C 100PF, J, 50V 1 C7344 ECJIXCH101J C 100PF, J, 50V 1 C7344 ECJIXCH101J C 100PF, J, 50V 1 C7361 ECJIXCH101J C 100PF, J, 50V 1 C7364 ECJIXCH101J C 100PF, J, 50V 1 C7364 ECJIXCH101J C 100PF, J, 50V 1 C7364 ECJIXCH101J C 100PF, J, 50V 1 C7365 ECJIXCH101J C 100PF, J, 50V 1 C7386 ECJIXBLC104K C 0.1UF, Z, 16V 1 C7387 ECJIXCH101J C 0.1UF, Z, 16V 1 C7388 ECJIXCH101J C 0.1UF, Z, 16V 1 C7396, P ECJIXCH102J C 22PF, J, 50V 2 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJIXCH101J C 100PF, J, 50V 1 C7404 ECJIXCH101J C 100PF, J, 50V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJIXCH101J C 100PF, J, 50V 1 C7424 ECJIXCH101J C 100PF, J, 50V 1 C7424 ECJIXCH101J C 100PF, J, 50V 1 C7424 ECJIXCH101J C 10PF, J, 50V 1 C7426 TCUY1C105ZFN C 1UF, 16V 1 C7427 ECUIXCH55PN C 1UF, 16V 1 C7428 ECJIXCH101J C 10PF, J, 50V 1 C7429 ECJIXCH101J C 10PF, J, 50V 1 C7440 ECJIXCH101J C 10PF, J, 50V 1 C7441 ECJIXCH101J C 10PF, J, 50V 1 C7446 ECJIXCH101J C 10PF, J, 50V 1 C7467 ECJIXCH101J C 10PF, J, 50V 1 C7468 ECJIXBLC104K C 0.1UF, E, 16V 1 C7481 ECJIXCH101J C 10PF, J, 50V 1 C7483 ECJIXBLC104K C 0.1UF, Z, 16V 1 C7485 ECJIXBLC104K C 0.1UF, Z, 16V 1 C7487 ECJIXBLC104K C 0.1UF, Z, 16V 1 C7488 ECJIXBLC104K C 0.1UF, Z, 16V 1 C7489 ECJIXBLC104K C 0.1UF, Z, 16V 1 C7481 ECJIXCH101F C 1UF, 16V 1 C7483 ECJIXBLC104K C 0.1UF, K, 10V 2 C8103, 0 ECJOEBIA104K C 0.1UF, K, 6.3V 2 C8103, 0 ECJOEBIA104K C 0.1UF, K, 6.3V 2 C8103 EEEBOG101R C 100PF, J, 4V 1 C8104 EEEBOG101R C 100PF, J, 4V 1 C8104 EEEBOG101R C 10UF, K, 10V 6		<del> </del>			
C7301 ECJIXC1H101J C 100PF, J, 50V 1 C7304 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7320 TCUY1C105ZPN C 1UF, 16V 1 C7321 ECJIXCHH01J C 100PF, J, 50V 1 C7324 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7324 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7340 TCUY1C105ZPN C 1UF, 16V 1 C7341 ECJ1XCHH01J C 100PF, J, 50V 1 C7344 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7346 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7360 TCUY1C105ZPN C 1UF, 16V 1 C7361 ECJ1XCH101J C 100PF, J, 50V 1 C7364 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7368 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7388 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XC1H20J C 22PF, J, 50V 2 C7400 TCUY1C105ZPN C 1UF, 16V 1 C7401 ECJ3XC1H101J C 100PF, J, 50V 1 C7420 TCUY1C105ZPN C 1UF, 16V 1 C7421 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7441 ECJ1XCH101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7441 ECJ1XCH101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7446 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7447 ECJ1XCH101J C 100PF, J, 50V 1 C7448 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7449 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 ECJ1XCH101J C 100PF, J, 50V 1 C7441 ECJ1XCH101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUY1C105ZPN C 1UF, 16V 1 C7461 ECJ1XCH101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7468 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7488 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7489 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7480 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHBOG101R C 100PF, J, 4V 1 C8109 EEEHBOG101R C 100PF, J, 4V 1 C8110 ECJ1VB0J105K C 1UF, K, 6.3V 1 C81112 ECJ1VB0J105K C 1UF, K, 6.3V 1					
C7304 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7320 TCUY1C105ZFN C 1UF, 16V 1 C7321 ECJ1XC1H101J C 100PF, J, 50V 1 C7324 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7340 TCUY1C105ZFN C 1UF, 16V 1 C7341 ECJ1XC1H101J C 100PF, J, 50V 1 C7341 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7344 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7361 TCUY1C105ZFN C 1UF, 16V 1 C7361 ECJ1XC1H101J C 100PF, J, 50V 1 C7364 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7381 ECJ1XB1C104K C 0.1UF, 16V 1 C7383 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7388 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJ1XC1H101J C 100PF, J, 50V 1 C7401 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7446 TCUY1C105ZFN C 1UF, 16V 1 C7447 ECJ1XC1H101J C 100PF, J, 50V 1 C7448 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7449 TCUY1C105ZFN C 1UF, 16V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7466 TCUY1C105ZFN C 1UF, 16V 1 C7467 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7488 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7488 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7488 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7489 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7481 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7481 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7486 ECJ3XB2A174K C 0.47UF, 6.3V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7488 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7489 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7481 ECJ1XB1C104K C 0.1UF, Z, 16V 1					
C7320 TCUY1C105ZFN C 1UF, 16V 1 C7321 ECJ1XC1H101J C 100PF, J, 50V 1 C7324 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7344 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7360 TCUY1C105ZFN C 1UF, 16V 1 C7361 ECJ1XC1H101J C 100PF, J, 50V 1 C7364 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7366 ECJ1XC1H101J C 100PF, J, 50V 1 C7367 ECJ1XC1H101J C 100PF, J, 50V 1 C7381 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7383 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7385 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7396, 9 ECJ1XC1H220J C 22PF, J, 50V 2 7 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJ1XC1H101J C 100PF, J, 50V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7446 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7461 ECJ1XC1H01J C 100PF, J, 50V 1 C7461 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7488 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7488 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099, 0 ECJ0EB1A104K C 0.1UF, Z, 16V 1 C8101, 0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103, 0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106 EEHB0G101R C 100PF, J, 4V 1 C8107 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1					
C7321 ECJ1XC1H101J C 100PF, J, 50V 1 C7324 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7340 TCUY1C105ZFN C 1UF, 16V 1 C7341 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7344 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7360 TCUY1C105ZFN C 1UF, 16V 1 C7361 ECJ1XCH101J C 100PF, J, 50V 1 C7364 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7361 ECJ1XCH101J C 100PF, J, 50V 1 C7361 ECJ1XCH101J C 100PF, J, 50V 1 C7381 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7383 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7385 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7386 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7387 ECJ1XCH1220J C 22PF, J, 50V 2 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJ1XCH101J C 100PF, J, 50V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7422 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7446 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7446 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7446 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7461 ECJ1XCH101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7466 TCUY1C105ZFN C 1UF, 16V 1 C7467 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7488 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7488 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7488 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7489 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099, 0 ECJ0EB1A104K C 0.1UF, Z, 16V 1 C8101, 0 ECJ1VB0J105K C 1UF, K, 6.3V 2 2 C8103, 0 ECJ0EB1A104K C 0.1UF, K, 10V 2 4 C8106, 0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8107, 0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ1XB104K C 0.1UF, K, 10V 1 C8109 EEEHBOG101R C 100PF, J, 4V 1 C8109 EEEHBOG101R C 100PF, J, 4V 1 C8109 EEEHBOG101R C 100PF, J, 4V 1 C8110 ECJ1VB0J105K C 1UF, K, 6.3V 1 C81112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113 ECJ1VB0J105K C 1UF, K, 6.3V 1	C7304			1	
C7324	C7320	TCUY1C105ZFN	C 1UF, 16V	1	
C7340 TCUY1C105ZFN C 1UF, 16V 1 C7341 ECJIXC1H101J C 100PF, J, 50V 1 C7344 ECJIXC2H101J C 100PF, J, 50V 1 C7360 TCUY1C105ZFN C 1UF, 16V 1 C7361 ECJIXC2H101J C 100PF, J, 50V 1 C7364 ECJIXB2A474K C 0.47UF, 6.3V 1 C7364 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7381 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7383 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7388 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7389 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7389 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7396,9 ECJIXC1H220J C 22PF, J, 50V 2 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJIXC1H101J C 100PF, J, 50V 1 C7421 ECJIXC1H101J C 100PF, J, 50V 1 C7421 ECJIXC1H101J C 100PF, J, 50V 1 C7424 ECJIXB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJIXC1H101J C 100PF, J, 50V 1 C7442 ECJIXB2A474K C 0.47UF, 6.3V 1 C7444 ECJIXB2A474K C 0.47UF, 6.3V 1 C7444 ECJIXC3H101J C 100PF, J, 50V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJIXC1H101J C 100PF, J, 50V 1 C7464 ECJIXB2A474K C 0.47UF, 6.3V 1 C7464 ECJIXB1C104K C 0.1UF, E, 16V 1 C7483 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7483 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7485 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7487 ECJIXB1C104K C 0.1UF, Z, 16V 1 C8809, 0 ECJOEB1A104K C 0.1UF, X, 10V 2 C8101, 0 ECJUBOJ105K C 1UF, K, 6.3V 2 C8103, 0 ECJOEB1A104K C 0.1UF, K, 10V 1 C8108 ECJIVBOJ105K C 1UF, K, 6.3V 2 C8108 ECJIVBOJ105K C 1UF, K, 6.3V 1 C8109 EEEHBOG101R C 100PF, J, 4V 1 C8110, 1 ECJUEB1A104K C 0.1UF, K, 10V 1 C81110, 1 ECJUEB1A104K C 0.1UF, K, 10V 1 C81110, 1 ECJUEB1A104K C 0.1UF, K, 10V 1 C81110, 1 ECJUEB1A104K C 0.1UF, K, 10V 1	C7321	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7341 ECJIXC1H101J C 100PF, J, 50V 1 C7344 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7360 TCUY1C105ZFN C 1UF, 16V 1 C7361 ECJIXC1H101J C 100PF, J, 50V 1 C7364 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7381 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7383 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7385 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7386 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7387 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7388 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7389 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7389, ECJIXB1C104K C 0.1UF, Z, 16V 1 C7396,9 ECJIXC1H20J C 22PF, J, 50V 2 7 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJIXC1H101J C 100PF, J, 50V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJIXC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJIXC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7461 ECJIXC1H101J C 100PF, J, 50V 1 C7461 ECJIXC1H101J C 100PF, J, 50V 1 C7461 ECJIXC1H101J C 100PF, J, 50V 1 C7481 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7483 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7485 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7487 ECJIXB1C104K C 0.1UF, Z, 16V 1 C8809, 0 ECJ0EB1A104K C 0.1UF, Z, 16V 1 C8101, 0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8101, 0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEHB0G101R C 100PF, J, 4V 1 C8109 EEHB0G101R C 100PF, J, 4V 1 C8110, 1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8110, 1 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8110, 1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C81110, 1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C81110, 1 ECJ0EB1A104K C 0.1UF, K, 10V 1 C81110, 1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C81111 ECJ1VB0J105K C 1UF, K, 6.3V 1 C81111 ECJ0EB1A104K C 0.1UF, K, 10V 1 C81111 ECJ0EB1A104K C 0.1UF, K, 10V 1 C81111 ECJ0EB1A104K C 0.1UF, K, 10V 1	C7324	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7341 ECJ1XC1H101J C 100PF, J, 50V 1 C7344 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7360 TCUY1C105ZFN C 1UF, 16V 1 C7361 ECJ1XC1H101J C 100PF, J, 50V 1 C7364 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7361 ECJ1XB1C104K C 0.47UF, 6.3V 1 C7381 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7383 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7385 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7386, PECJ1XB1C104K C 0.1UF, Z, 16V 1 C7387, PECJ1XB1C104K C 0.1UF, Z, 16V 1 C7388, PECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389, PECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389, PECJ1XC1H220J C 22PF, J, 50V 2 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7446 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8809, 0 ECJ0EB1A104K C 0.1UF, X, 10V 2 C8101, 0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103, 0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106 EECHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110, 1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8110, 1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C81110, 1 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113 - ECJ0EB1A104K C 0.1UF, K, 10V 6	C7340	TCUY1C105ZFN	C 1UF, 16V	1	
C7344 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7360 TCUV1C105ZFN C 1UF, 16V 1 C7361 ECJ1XC1H101J C 100FF, J, 50V 1 C7364 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7364 ECJ3XB2A474K C 0.1UF, Z, 16V 1 C7383 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7385 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7400 TCUV1C105ZFN C 1UF, 16V 1 C7401 ECJ1XC1H101J C 100PF, J, 50V 1 C7404 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7420 TCUV1C105ZFN C 1UF, 16V 1 C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7446 TCUV1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUV1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7461 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7488 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7488 ECJ1XB1C104K C 0.1UF, K, 10V 2 C8101, 0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8106, 0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8107 EEEHB0G101R C 100PF, J, 4V 1 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8111 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113 ECJ0EB1A104K C 0.1UF, K, 10V 6	C7341	ECJ1XC1H101J		1	
C7360 TCUY1C105ZFN C 1UF, 16V 1 C7361 ECJIXC1H101J C 100PF, J, 50V 1 C7364 ECJIXB1C104K C 0.4TUF, 6.3V 1 C7381 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7383 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7385 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7389 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJIXC1H101J C 100PF, J, 50V 1 C7404 ECJIXB2A474K C 0.4TUF, 6.3V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJIXC1H101J C 100PF, J, 50V 1 C7424 ECJIXB2A474K C 0.4TUF, 6.3V 1 C7424 ECJIXC2AFAK C 0.4TUF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJIXC1H101J C 100PF, J, 50V 1 C7444 ECJIXC2AFAK C 0.4TUF, 6.3V 1 C7446 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJIXC1H101J C 100PF, J, 50V 1 C7444 ECJIXC2AFAK C 0.4TUF, 6.3V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJIXC1H101J C 100PF, J, 50V 1 C7464 ECJIXB2A474K C 0.4TUF, 6.3V 1 C7461 ECJIXC1H101J C 100PF, J, 50V 1 C7464 ECJIXB2A474K C 0.4TUF, 6.3V 1 C7466 TCUY1C105ZFN C 1UF, 16V 1 C7467 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7488 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7487 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7487 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7487 ECJIXB1C104K C 0.1UF, Z, 16V 1 C8101, 0 ECJOEB1A104K C 0.1UF, K, 10V 2 C8101, 0 ECJOEB1A104K C 0.1UF, K, 10V 2 C8108 ECJOEB1A104K C 0.1UF, K, 10V 1 C8108 ECJICBOIOR C 1UF, K, 6.3V 2 C8108 ECJICBOIOR C 1UF, K, 6.3V 1 C8109 EEEHBOG101R C 100PF, J, 4V 1 C8108 ECJICBOIOR C 1UF, K, 10V 1 C8110 ECJICBOIOR C 1UF, K, 10V 1 C8111 ECJICBOIOR C 1UF, K, 10V 2 C8112 ECJICBOIOSK C 1UF, K, 6.3V 1 C8113 ECJICBOIOSK C 1UF, K, 6.3V 1				1	
C7361 ECJ1XC1H101J C 100PF, J, 50V 1 C7364 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7381 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7383 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7385 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7396,9 ECJ1XC1H220J C 22PF, J, 50V 2 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJ1XC1H101J C 100PF, J, 50V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7446 TCUY1C105ZFN C 1UF, 16V 1 C7446 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7461 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, X, 10V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 6.3V 2 C8108 ECJ1XB0101C C 100PF, J, 4V 1 C8108 ECJ1XB0101C C 100PF, J, 4V 1 C8108 ECJ1XB0101C C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8111 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113 ECJ0EB1A104K C 0.1UF, K, 10V 6					
C7364 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7381 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7383 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7385 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389, ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389, ECJ1XC1H220J C 22PF, J, 50V 2 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJ1XC1H101J C 100PF, J, 50V 1 C7404 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7462 ECJ1XC1H101J C 100PF, J, 50V 1 C7463 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7483 ECJ1XC1H104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, Z, 16V 1 C8101,0 ECJ1VB0J105K C 1UF, K, 10V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8111 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1					
C7381 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7383 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7385 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7396,9 ECJ1XC1H220J C 22PF, J, 50V 2 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJ1XC1H101J C 100PF, J, 50V 1 C7404 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7462 ECJ1XB1C104K C 0.47UF, 6.3V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, Z, 16V 1 C8101,0 ECJ1VB0J105K C 1UF, K, 10V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110 ECJ1VB0J105K C 1UF, K, 6.3V 1 C81112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1					
C7383 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7385 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7396,9 ECJ1XC1H220J C 22PF, J, 50V 2 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJ1XC1H101J C 100PF, J, 50V 1 C7404 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7483 ECJ1XB1C104K C 0.47UF, 6.3V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8107 EEEHBOG101R C 100PF, J, 4V 1 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHBOG101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113 ECJ0EB1A104K C 0.1UF, K, 10V 6					
C7385 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7396,9 ECJ1XC1H220J C 22PF, J, 50V 2 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJ1XC1H101J C 100PF, J, 50V 1 C7404 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7462 ECJ1XB1C104K C 0.47UF, 6.3V 1 C7463 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, Z, 16V 1 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113 - ECJ0EB1A104K C 0.1UF, K, 10V 6					
C7389 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C7396,9 ECJ1XC1H220J C 22PF, J, 50V 2  C7400 TCUY1C105ZFN C 1UF, 16V 1  C7401 ECJ1XC1H101J C 100PF, J, 50V 1  C7404 ECJ3XB2A474K C 0.47UF, 6.3V 1  C7420 TCUY1C105ZFN C 1UF, 16V 1  C7421 ECJ1XC1H101J C 100PF, J, 50V 1  C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1  C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1  C7440 TCUY1C105ZFN C 1UF, 16V 1  C7441 ECJ1XC1H101J C 100PF, J, 50V 1  C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1  C7460 TCUY1C105ZFN C 1UF, 16V 1  C7461 ECJ1XC1H101J C 100PF, J, 50V 1  C7462 ECJ1XC1H101J C 100PF, J, 50V 1  C7463 ECJ1XC1H101J C 100PF, J, 50V 1  C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1  C7461 ECJ1XC1H101J C 100PF, J, 50V 1  C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C8099,0 ECJ0EB1A104K C 0.1UF, Z, 16V 1  C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2  C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2  C8105 EEEHB0G101R C 100PF, J, 4V 1  C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2  C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1  C8109 EEEHB0G101R C 100PF, J, 4V 1  C8109 EEEHB0G101R C 100PF, J, 4V 1  C8110 ECJ1VB0J105K C 1UF, K, 6.3V 2  C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1  C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1  C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1  C8113 ECJ0EB1A104K C 0.1UF, K, 10V 6					
C7396,9   ECJIXC1H220J   C 22PF, J, 50V   2   7   7   7   7   7   7   7   7   7					
7 C7400 TCUY1C105ZFN C 1UF, 16V 1 C7401 ECJ1XC1H101J C 100PF, J, 50V 1 C7404 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7446 ECJ1XC1H101J C 100PF, J, 50V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7462 ECJ1XB1C104K C 0.47UF, 6.3V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, Z, 16V 1 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6					
C7400 TCUYIC105ZFN C 1UF, 16V 1 C7401 ECJIXC1H101J C 100PF, J, 50V 1 C7404 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7420 TCUYIC105ZFN C 1UF, 16V 1 C7421 ECJIXC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUYIC105ZFN C 1UF, 16V 1 C7441 ECJIXC1H101J C 100PF, J, 50V 1 C7441 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUYIC105ZFN C 1UF, 16V 1 C7461 ECJIXC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7461 ECJIXC1H101J C 100PF, J, 50V 1 C7462 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7483 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7485 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8103,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8109 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110 EEGJ1VB0J105K C 1UF, K, 10V 2 C81112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113 - ECJ0EB1A104K C 0.1UF, K, 10V 6		ECJ1XC1H220J	C 22PF, J, 50V	2	
C7401 ECJ1XC1H101J C 100PF, J, 50V 1 C7404 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7446 TCUY1C105ZFN C 1UF, 16V 1 C7446 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7462 ECJ1XC1H101J C 100PF, J, 50V 1 C7463 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7481 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8103,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8106 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113 - ECJ0EB1A104K C 0.1UF, K, 10V 6					
C7404 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7446 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7481 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, X, 10V 2 C8103,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C81112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113 - ECJ0EB1A104K C 0.1UF, K, 10V 6					
C7420 TCUY1C105ZFN C 1UF, 16V 1 C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7481 ECJ1XB1C104K C 0.47UF, 6.3V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, X, 10V 2 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C81113 ECJ0EB1A104K C 0.1UF, K, 10V 2	C7401	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7421 ECJ1XC1H101J C 100PF, J, 50V 1 C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7481 ECJ1XB1C104K C 0.47UF, 6.3V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8106 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C81113 ECJ0EB1A104K C 0.1UF, K, 10V 6	C7404	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7424 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7440 TCUY1C105ZFN C 1UF, 16V 1 C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7481 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8103,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8109 EECJ0EB1A104K C 0.1UF, K, 10V 2 C8109 EECJ0EB1A104K C 0.1UF, K, 10V 2 C8101 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8102 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C81112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113 ECJ0EB1A104K C 0.1UF, K, 10V 6	C7420	TCUY1C105ZFN	C 1UF, 16V	1	
C7440 TCUY1C105ZFN C 1UF, 16V 1  C7441 ECJ1XC1H101J C 100PF, J, 50V 1  C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1  C7460 TCUY1C105ZFN C 1UF, 16V 1  C7461 ECJ1XC1H101J C 100PF, J, 50V 1  C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1  C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1  C7481 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1  C8099,0 ECJ0EB1A104K C 0.1UF, Z, 16V 1  C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2  C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2  C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2  C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2  C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1  C8109 EEEHB0G101R C 100PF, J, 4V 1  C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2  C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2  C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 1  C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2  C81112 ECJ1VB0J105K C 1UF, K, 6.3V 1  C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1  C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6	C7421	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7441 ECJ1XC1H101J C 100PF, J, 50V 1 C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7481 ECJ1XB1C104K C 0.47UF, 6.3V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6	C7424	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7481 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8103,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C81113 ECJ0EB1A104K C 0.1UF, K, 10V 6	C7440	TCUY1C105ZFN	C 1UF, 16V	1	
C7444 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7481 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C81113 ECJ0EB1A104K C 0.1UF, K, 10V 6				1	
C7460 TCUY1C105ZFN C 1UF, 16V 1 C7461 ECJ1XC1H101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7481 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 4 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6	C7444	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7461 ECJIXCIH101J C 100PF, J, 50V 1 C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7481 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7483 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7485 ECJIXB1C104K C 0.1UF, Z, 16V 1 C7487 ECJIXB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8101,0 ECJIVB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 4 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6					
C7464 ECJ3XB2A474K C 0.47UF, 6.3V 1 C7481 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7483 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7485 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C7487 ECJ1XB1C104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 0 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 4 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113 - ECJ0EB1A104K C 0.1UF, K, 10V 6					
C7481 ECJIXBIC104K C 0.1UF, Z, 16V 1 C7483 ECJIXBIC104K C 0.1UF, Z, 16V 1 C7485 ECJIXBIC104K C 0.1UF, Z, 16V 1 C7487 ECJIXBIC104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EBIA104K C 0.1UF, K, 10V 2 0 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EBIA104K C 0.1UF, K, 10V 2 4 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EBIA104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EBIA104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113 - ECJ0EBIA104K C 0.1UF, K, 10V 6					
C7483 ECJIXBlC104K C 0.1UF, Z, 16V 1 C7485 ECJIXBlC104K C 0.1UF, Z, 16V 1 C7487 ECJIXBlC104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EBlA104K C 0.1UF, K, 10V 2 0 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EBlA104K C 0.1UF, K, 10V 4 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EBlA104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EBlA104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EBlA104K C 0.1UF, K, 10V 6					
C7485 ECJIXBlC104K C 0.1UF, Z, 16V 1 C7487 ECJIXBlC104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 0 C8101,0 ECJIVB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 4 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106,0 ECJIVB0J105K C 1UF, K, 6.3V 2 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 1 C8112 ECJIVB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6					
C7487 ECJIXBlC104K C 0.1UF, Z, 16V 1 C8099,0 ECJ0EBlA104K C 0.1UF, K, 10V 2 0 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EBlA104K C 0.1UF, K, 10V 4 4 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 7 C8108 ECJ0EBlA104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EBlA104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EBlA104K C 0.1UF, K, 10V 6					
C8099,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 0 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 4 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 7 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6					
0 C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 4 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 7 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6					
C8101,0 ECJ1VB0J105K C 1UF, K, 6.3V 2  C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2  C8105 EEEHB0G101R C 100PF, J, 4V 1  C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2  7  C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1  C8109 EEEHB0G101R C 100PF, J, 4V 1  C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2  1  C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1  C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6		ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8103,0 ECJ0EB1A104K C 0.1UF, K, 10V 2 4 C8105 EEEHB0G101R C 100PF, J, 4V 1 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 7 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6	C8101,0	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
4 C8105 EEEHBOG101R C 100PF, J, 4V 1 C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 7 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHBOG101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6		ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8106,0 ECJ1VB0J105K C 1UF, K, 6.3V 2 7 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6	4				
7 C8108 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8109 EEEHB0G101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6					
C8109 EEEHBOG101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6		ECJ1VB0J105K	C 1UF, K, 6.3V	2	
C8109 EEEHBOG101R C 100PF, J, 4V 1 C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6		ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8110,1 ECJ0EB1A104K C 0.1UF, K, 10V 2 1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6					
1 C8112 ECJ1VB0J105K C 1UF, K, 6.3V 1 C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6					
C8113- ECJ0EB1A104K C 0.1UF, K, 10V 6	1				
	C8112	ECJ1VB0J105K		1	
T8		ECJ0EB1A104K	C 0.1UF, K, 10V	6	
	Γ <sub>T</sub> 8				

	PX50U / TH-50PX50L	<u>'</u>		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8120,2	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
	ECJ0EB1C103K	CO.010UF, K, 16V	2	
9 C8144	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8145	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8162	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8164			1	
	ECJ0EB1C103K		1	
C8200	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8201	ECJ0EF1H103Z	C 0.01UF, Z, 50V	1	
3	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8204	EEEHB0J221P	C 220PF, J, 6.3V	1	
C8205	EEEHB1H220P	C 22PF, J, 50V	1	
C8206,0	EEEHB0J221P	C 220PF, J, 6.3V	2	
C8208	ECJ0EB1C103K		1	
C8209	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8210	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8211	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8214	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8215	ECJ0EC1H200J	C 200PF, K, 50V	1	
C8216	ECJ0EB1H271K	C 270PF, D, 50V	1	
C8217	ECJ0EC1H560J	C 560PF, K, 50V	1	
C8218,1 9	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8220	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8221	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8222	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8223	ECJ0EC1H220J	C 220PF, K, 50V	1	
	ECJ0EF1H103Z	C 0.01UF, Z, 50V	2	
C8226	EEEHB1C470P	C 47PF, J, 16V	1	
C8227	ECJ0EC1H101J	C 100PF, K, 50V	1	
	ECJ0EF1H103Z	C 0.01UF, Z, 50V	2	
9 C8230		C 120PF, K, 50V	1	
			+	
C8231	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8231 C8233 C8234,3			+	
C8231 C8233 C8234,3	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V	1 1 2	
C8231 C8233 C8234,3 5 C8237 C8238,3	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z	C 0.10UF, Z, 16V C 1000PF, K, 50V	1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C0.010UF, K, 16V	1 1 2 1 2	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241-	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V	1 1 2	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241-43	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V	1 1 2 1 2 1 3	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V	1 1 2 1 2 1 3	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 1UF, Z, 10V	1 1 2 1 2 1 3	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241-43 C8244 C8245 C8246	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 1UF, Z, 10V C 47PF, J, 4V	1 1 2 1 2 1 3 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ1VB0J105K ECJ1VF1A105Z ECJ0EB1C103K EEHB0G470R ECJ0EB1A104K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 1UF, Z, 10V C 47PF, J, 4V C 0.1UF, K, 10V	1 1 2 1 2 1 3 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 1UF, Z, 10V C 47PF, J, 4V	1 1 2 1 2 1 3 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEEHB0G470R ECJ0EB1A104K ECJ0EB1A104Z	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 1UF, Z, 10V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 10V C 0.10UF, Z, 16V C 1000PF, K, 50V	1 1 2 1 3 1 1 1 1 1 3 3	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8241-43 C8244-43 C8244 C8245 C8246 C8247 C8248 C8249-51 C8252 C8253-	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ1VB0J105K ECJ1VF1A105Z ECJ0EB1C103K EEHB0G470R ECJ0EB1A104K ECJ0EF1C104Z	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 1UF, Z, 10V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 10V	1 1 2 1 2 1 3 1 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241-43 C8244 C8245 C8246 C8247 C8248 C8249-51 C8252 C8253-55	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEHB0G470R ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 0.010UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 50V C 1000PF, K, 50V C 2200UF, Z, 50V C 2200UF, K, 16V	1 1 2 1 2 1 3 1 1 1 1 1 1 3	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8256	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEHB0G470R ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 1UF, Z, 10V C 0.10UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 50V C 1000PF, K, 50V C 2200UF, Z, 50V C 1000PF, K, 50V	1 1 2 1 2 1 3 1 1 1 1 1 3 3	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEHB0G470R ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H103K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 1UF, Z, 10V C 1UF, Z, 10V C 1UF, Z, 16V C 47PF, J, 4V C 0.10UF, K, 16V C 1000PF, K, 50V C 2200UF, Z, 50V C 1000PF, K, 50V	1 1 2 1 2 1 3 1 1 1 1 1 3 1 1 1 1 3	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ1VB0J105K ECJ1VF1A105Z ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEHB0G470R ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 10T, Z, 10V C 10T, Z, 10V C 10T, X, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, X, 16V C 1000PF, K, 50V C 1000PF, K, 50V	1 1 2 1 2 1 3 1 1 1 1 1 3 1 1 1 1 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9 C8262	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ1VB0J105K ECJ1VB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEHB0G470R ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 1UF, Z, 10V C 10UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 10V C 1000PF, K, 50V C 1000PF, K, 50V	1 1 2 1 2 1 3 1 1 1 1 1 3 1 1 1 1 2 1 1 2 1 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9 C8262 C8263	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ1VB0J105K ECJ1VB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEHB0G470R ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1C103K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 10UF, Z, 10V C 10UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 50V C 1000PF, K, 50V	1 1 2 1 2 1 3 1 1 1 1 1 3 1 1 2 1 1 2 1 1 2 1 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9 C8262	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ1VB0J105K ECJ1VB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEHB0G470R ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 1UF, Z, 10V C 10UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 10V C 1000PF, K, 50V C 1000PF, K, 50V	1 1 2 1 2 1 3 1 1 1 1 1 3 1 1 1 1 2 1 1 2 1 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9 C8262 C8263 C8264,6	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ1VB0J105K ECJ1VB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEHB0G470R ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1C103K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 10UF, Z, 10V C 10UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 50V C 1000PF, K, 50V	1 1 2 1 2 1 3 1 1 1 1 1 3 1 1 2 1 1 2 1 1 2 1 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9 C8262 C8263 C8264,6 5	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEEHB0G470R ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1C103K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 10UF, Z, 10V C 10UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 50V C 1000PF, K, 50V	1 1 2 1 3 1 1 3 1 1 1 2 1 1 1 2 2 1 1 1 2 2 1 1 1 2 2 1 1 1 1 2 1 1 1 1 2 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9 C8262 C8263 C8264,6 5 C8266	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEEHB0G470R ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 0.010UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 50V C 1000PF, K, 50V	1 1 2 1 2 1 3 1 1 1 1 1 3 1 1 2 1 1 2 1 1 2 1 1 2 1 1 1 2 1 1 1 2 1 1 1 2 1 1 1 1 1 2 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8241 43 C8244 C8245 C8246 C8247 C8248 C8249 51 C8252 C8253 55 C8256 C8257 C8258,5 9 C8262 C8263 C8264,6 5 C8266 C8267	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEEHB0G470R ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1C103K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 0.010UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 50V C 1000PF, K, 50V	1 1 2 1 2 1 3 1 1 1 1 1 3 1 1 2 1 1 2 1 1 2 1 1 1 2 1 1 1 2 1 1 1 2 1 1 1 1 1 2 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9 C8262 C8263 C8264,6 5 C8266 C8267 C8270	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEEHB0G470R ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1C103K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 0.010UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 50V C 1000PF, K, 50V	1 1 2 1 1 3 1 1 1 2 1 1 1 1 2 1 1 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9 C8262 C8263 C8264,6 5 C8266 C8267 C8270 C8271	ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEEHB0G470R ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1C103K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, K, 16V C 0.10UF, K, 16V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 0.010UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 10V C 1000PF, K, 50V	1 1 2 1 1 3 1 1 1 2 2 1 1 1 1 1 1 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9 C8262 C8263 C8264,6 5 C8266 C8267 C8270 C8271 C8272 C8273 C8275,7	ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K EEEHB0G470R ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1C103K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 10UF, K, 16V C 10UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 10UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 50V C 1000PF, K, 50V	1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9 C8262 C8263 C8264,6 5 C8266 C8267 C8270 C8271 C8272 C8273 C8275,7 6	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ1VB0J105K ECJ1VF1A105Z ECJ0EB1H102K ECJ0EB1C103K EEHB0G470R ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1H102K ECJ0EB1C103K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1C103K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 10UF, K, 6.3V C 1000PF, K, 50V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 0.10UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 50V C 1000PF, K, 50V	1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9 C8262 C8263 C8264,6 5 C8267 C8270 C8271 C8272 C8273 C8277 6 C8277	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ1VB0J105K ECJ1VF1A105Z ECJ0EB1H102K ECJ1VF1A105Z ECJ0EB1C103K ECHB0G470R ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 10UF, K, 6.3V C 1000PF, K, 50V C 1UF, X, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 0.10UF, X, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 50V C 1000PF, K, 50V C 0.10UF, K, 16V C 0.010UF, K, 16V C 0.010UF, K, 16V C 0.010UF, K, 16V	1 1 2 1 1 1 1 2 1 1 1 1 1 1 1 1 1 2 1	
C8231 C8233 C8234,3 5 C8237 C8238,3 9 C8240 C8241- 43 C8244 C8245 C8246 C8247 C8248 C8249- 51 C8252 C8253- 55 C8256 C8257 C8258,5 9 C8262 C8263 C8264,6 5 C8267 C8270 C8271 C8272 C8273 C8275,7 6 C8277	ECJ0EF1C104Z ECJ0EB1H102K ECJ0EF1C104Z ECJ0EF1C104Z ECJ0EB1C103K ECJ1VB0J105K ECJ1VB0J105K ECJ1VF1A105Z ECJ0EB1H102K ECJ0EB1C103K EEHB0G470R ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1H102K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1C103K ECJ0EB1H102K	C 0.10UF, Z, 16V C 1000PF, K, 50V C 0.10UF, Z, 16V C 0.10UF, Z, 16V C 0.010UF, K, 16V C 10UF, K, 6.3V C 1000PF, K, 50V C 1UF, K, 6.3V C 1000PF, K, 50V C 1UF, Z, 10V C 0.10UF, K, 16V C 47PF, J, 4V C 0.1UF, K, 10V C 0.10UF, K, 50V C 1000PF, K, 50V	1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

Ref. No. Part Name & Pcs Remarks Description C8280,8 ECJOEFIC104Z C 0.10UF, Z, 16V 2 1 C8282 ECJOEBIH102K C 1000PF, K, 50V 1 C82826 ECJOEBIH102K C 1000PF, K, 50V 3 88 C8289 ECJOEBIH102K C 0.1UF, K, 10V 1 C8290 ECJOECHH01J C 100PF, K, 50V 1 C8291 ECJOEBIH102K C 0.1UF, K, 10V 1 C8292,9 ECJOEBIH102K C 1000PF, K, 50V 1 C8292,9 ECJOEBIH102K C 0.1UF, K, 10V 2 3 C8294 ECJOEBIH102K C 1000PF, K, 50V 4 P7 C8295 ECJOEBIH102K C 0.1UF, K, 10V 4 C8296 ECJOEBIH102K C 0.1UF, K, 10V 4 C8297 ECJOEBIH102K C 0.1UF, K, 10V 4 C8298 ECJOEBIH102K C 1000PF, K, 50V 4 P7 C8303 ECJOEFIH103Z C 0.1UF, K, 10V 4 C8304 ECJOEFIH103Z C 0.1UF, K, 10V 1 C8305 ECJOEFIH103Z C 0.10UF, Z, 50V 1 C8306 ECJOEFIC104Z C 0.10UF, Z, 16V 3 10 C8311, 1 ECJUFFIA105Z C 1UF, Z, 10V 2 2 C8313 ECJOEFIC104Z C 0.10UF, Z, 16V 3 15 C8316 EEBHBIC100R C 10PF, J, 16V 1 C8317 ECJOEFIC104Z C 0.10UF, Z, 16V 3 19 C8320 ECJUFFIA105Z C 1UF, Z, 10V 1 C8321 ECJOEFIC104Z C 0.10UF, Z, 16V 4 31 C8321 ECJOEFIC104Z C 0.10UF, Z, 16V 4 31 C8322 ECJUFFIA105Z C 1UF, Z, 10V 1 C8323 ECJOEFIC104Z C 0.10UF, Z, 16V 4 31 C8333 EECHBIC100R C 10PF, J, 16V 1 C8332 ECJOEFIC104Z C 0.10UF, Z, 16V 4 31 C8333 ECJOEFIC104Z C 0.10UF, Z, 16V 4 31 C8333 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8333 ECJOEFIC104Z C 0.10UF, Z, 16V 4 31 C8333 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8336 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8337 EEEHBIC100R C 10PF, J, 16V 1 C8338 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8338 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8338 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8365 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8366 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8379 EEEHBIC104Z C 0.10UF, Z, 16V 1 C8380 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8381 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8381 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C84049 ECJO
C82808, 8   ECJOEFICIO4Z   C 0.10UF, Z, 16V   2   1   2   1   2   2   1   2   2   2
1
C8282
C8286-   CJOEBIA102K   C 1000PF, K, 50V   3   88
CREATED   COLORD   COLOR   C
C8289
C8290
C8290
C8291 ECJUVFIA105Z C 1UF, Z, 10V 1  C8292, 9 ECJOEBIA104K C 0.1UF, K, 10V 2  3  C8294- ECJOEBIH102K C 1000PF, K, 50V 4  97  C8298- ECJOEBIH103Z C 0.1UF, K, 10V 4  01  C8302 ECJOEFIH103Z C 0.01UF, Z, 50V 1  C8303, EEEHB1C470P C 47PF, J, 16V 1  C8304, 0 ECJOEFIH103Z C 0.10UF, Z, 16V 1  C8304, 0 ECJOEFIC104Z C 0.10UF, Z, 16V 3  10  C8308- ECJOEFIC104Z C 0.10UF, Z, 16V 3  10  C8311- ECJUVFIA105Z C 1UF, Z, 10V 2  2  C8311- ECJOEFIC104Z C 0.10UF, Z, 16V 3  15  C8316 EEEHB1C100R C 10PF, J, 16V 1  C8320 ECJUVFIA105Z C 1UF, Z, 10V 1  C8321- ECJOEFIC104Z C 0.10UF, Z, 16V 3  19  C8321 ECJOEFIC104Z C 0.10UF, Z, 16V 4  31  C8322 ECJUVFIA105Z C 1UF, Z, 10V 1  C8321- ECJOEFIC104Z C 0.10UF, Z, 16V 4  31  C8323 EEEHB1C100R C 10PF, J, 16V 4  31  C8332 ECJIVFIA105Z C 1UF, Z, 10V 1  C8228- ECJOEFIC104Z C 0.10UF, Z, 16V 4  31  C8332 ECJIVFIA105Z C 1UF, Z, 10V 1  C8332 ECJIVFIC104Z C 0.10UF, Z, 16V 4  31  C8333 EEEHB1C100R C 10PF, J, 16V 1  C8332 ECJIXB1C153K C 0.015UF, Z, 16V 1  C8333 EEEHB1C100R C 10PF, J, 16V 1  C8333 EEEHB1C100R C 10PF, J, 16V 1  C8336 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8337 EEEHB1C100R C 10PF, J, 16V 1  C8337 EEEHB1C10R C 10PF, J, 16V 1  C8338- ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8365 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8367 ECGB106680R C 0.10UF, Z, 16V 1  C8379 EEEHB0J101P C 100PF, J, 4V 1  C8379 EEEHB0J101P C 100PF, J, 6.3V 1  C8386 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8387 EEEHB0J101P C 100PF, J, 6.3V 1  C83886 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8408 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8408 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8414 ECJOEBIC103K C0.010UF, K, 16V 1
C8292, 9   ECJOEBIA104K   C 0.1UF, K, 10V   2   3   3   3   3   3   3   3   3   3
CR3294-   CCJOEBIH1O2K   C 1000PF, K, 50V   4   97   CR298-   CCJOEBIH1O2K   C 0.1UF, K, 10V   4   01   CR302   ECJOEBIH1O3Z   C 0.01UF, Z, 50V   1   CR303   EEHBIC470P   C 47PF, J, 16V   1   CR3044, 0   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   CR3044, 0   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   CR308-   ECJOEFIC104Z   C 0.10UF, Z, 16V   3   10   CR311, 1   ECJ1VF1A105Z   C 1UF, Z, 10V   2   2   CR311-   ECJ0EFIC104Z   C 0.10UF, Z, 16V   3   15   CR316-   EECHBIC100R   C 10PF, J, 16V   1   CR317-   ECJ0EFIC104Z   C 0.10UF, Z, 16V   3   15   CR316-   EECHBIC100R   C 10PF, J, 16V   1   CR321-   ECJ0EFIC104Z   C 0.10UF, Z, 16V   3   19   CR322   ECJ1VF1A105Z   C 1UF, Z, 10V   2   2   CR321-   ECJ0EFIC104Z   C 0.10UF, Z, 16V   6   CR327-   EECHBIC100R   C 10PF, J, 16V   1   CR328-   ECJ0EFIC104Z   C 0.10UF, Z, 16V   4   31   CR332   ECJ1XBIC153K   C 0.015UF, Z, 16V   4   31   CR333-   ECJ0EFIC104Z   C 0.10UF, Z, 16V   4   36   CR337-   EECHBIC100R   C 10PF, J, 16V   1   CR338-   ECJ0EFIC104Z   C 0.10UF, Z, 16V   4   36   CR337-   ECHBIC100R   C 10PF, J, 16V   1   CR338-   ECJ0EFIC104Z   C 0.10UF, Z, 16V   1   CR338-   ECJ0EFIC104Z   C 0.10UF, Z, 16V   1   CR336-   ECJ0EFIC104Z   C 0.10UF, Z, 16V   1   CR36-   ECJ0EFIC104Z   C 0.10UF, Z, 16V   1   CR375   ECJ0EBIA104K   C 0.1UF, Z, 16V   1   CR375   ECJ0EFIC104Z   C 0.10UF, Z, 16V   1   CR375   ECJ0EBIA104K   C 0.1UF, Z, 16V   1   CR375   ECJ0EBIA
C8294- BCJOEBHA102K C 1000PF, K, 50V 4 97
ST
C8298-
O1
C8303 EEEHB1C470P C 47FF, J, 16V 1 C8304,0 ECJOEC1H150J C 150PF, K, 50V 2 S C8306 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8308- ECJOEF1C104Z C 0.10UF, Z, 16V 3 10 C8311,1 ECJ1VF1A105Z C 1UF, Z, 10V 2 2 C8313- ECJOEF1C104Z C 0.10UF, Z, 16V 3 15 C8316 EEEHB1C100R C 10PF, J, 16V 1 C8317- ECJOEF1C104Z C 0.10UF, Z, 16V 3 19 C8320 ECJ1VF1A105Z C 1UF, Z, 10V 1 C8321- ECJ0EF1C104Z C 0.10UF, Z, 16V 6 26 C8327 EEEHB1C100R C 10PF, J, 16V 6 C8328- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 31 C8332 ECJ1XB1C153K C 0.015UF, Z, 16V 1 C8333- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 16 53 C8355,5 ECJ0EB1A104K C 0.10UF, Z, 16V 1 C8366 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74 C8377 ECGRL0680R C 68PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 63V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8379 EEEHB0J101P C 100PF, J, 63V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8379 EEEHB0J101P C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 63V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C 0.010UF, K, 16V 1
C8303
C8304,0   ECJOEC1H150J   C 150PF, K, 50V   2   5   5   6   6   6   6   6   6   6   6
S
C8306
C8308- ECJOEFIC104Z C 0.10UF, Z, 16V 3 10  C8311,1 ECJ1VF1A105Z C 1UF, Z, 10V 2 2  C8313- ECJOEFIC104Z C 0.10UF, Z, 16V 3 15  C8316 EEEHB1C100R C 10PF, J, 16V 1  C8317- ECJ0EF1C104Z C 0.10UF, Z, 16V 3 19  C8320 ECJ1VF1A105Z C 1UF, Z, 10V 1  C8321- ECJ0EF1C104Z C 0.10UF, Z, 16V 6 26  C8327 EEEHB1C100R C 10PF, J, 16V 1  C83328- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 31  C8332 ECJ1XB1C153K C 0.015UF, Z, 16V 4 31  C8333- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36  C8337 EEEHB1C100R C 10PF, J, 16V 1  C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36  C8337 EEEHB1C100R C 10PF, J, 16V 1  C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 16 53  C8355,5 ECJ0EB1A104K C 0.10UF, Z, 16V 1  C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8366 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8375 ECGRIGOROR C 68PF, J, 4V 1  C8377 ECGRLOGG680R C 68PF, J, 4V 1  C8379 EEEHBOJ101P C 100PF, J, 6.3V 1  C8380 ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84  C8380 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8379 EEEHBOJ101P C 100PF, J, 6.3V 1  C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84  C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8411 ECJ0EB1C103K C0.010UF, Z, 16V 1  C8411 ECJ0EB1C104Z C 0.10UF, Z, 16V 1
10 C8311,1 ECJ1VF1A105Z C 1UF, Z, 10V 2 2 C8313- ECJ0EF1C104Z C 0.10UF, Z, 16V 3 15 C8316 EEEHB1C100R C 10PF, J, 16V 1 C8317- ECJ0EF1C104Z C 0.10UF, Z, 16V 3 19 C8320 ECJ1VF1A105Z C 1UF, Z, 10V 1 C8321- ECJ0EF1C104Z C 0.10UF, Z, 16V 6 26 C8327 EEEHB1C100R C 10PF, J, 16V 1 C8328- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 31 C8332- ECJ1XB1C153K C 0.10UF, Z, 16V 4 31 C8333- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 53 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 16 53 C8355,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 16 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8366 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8366 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8366 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8378 EEEHB0G10R C 0.10UF, Z, 16V 1 C8379 EEEHB0J10P C 100PF, J, 4V 1 C8379 EEEHB0J10P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 CR380- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8379 EEEHB0J10P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 CR380- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8379 EEEHB0J10P C 100PF, J, 4V 1 C8379 EEEHB0J10P C 100PF, J, 4V 1 C8379 EEEHB0J10P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 CR380- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8411 ECJ0EB1C103K C0.010UF, Z, 16V 1
C8311,1 ECJ1VF1A105Z C 1UF, Z, 10V 2 C8313- ECJ0EF1C104Z C 0.10UF, Z, 16V 3 15 C8316 EEEHB1C100R C 10PF, J, 16V 1 C8317- ECJ0EF1C104Z C 0.10UF, Z, 16V 3 19 C8320 ECJ1VF1A105Z C 1UF, Z, 10V 1 C8321- ECJ0EF1C104Z C 0.10UF, Z, 16V 6 26 C8327 EEEHB1C100R C 10PF, J, 16V 1 C8328- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 31 C8332 ECJ1XB1C153K C 0.015UF, Z, 16V 4 36 C8333- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 16 53 C8355,5 ECJ0EB1A104K C 0.1UF, K, 10V 2 6 C8357,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8375 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8377 ECGRLOGG80R C 68PF, J, 4V 1 C8378 EEEHB0J101P C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8380 ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8380 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1
2
C8313- ECJOEFIC104Z C 0.10UF, Z, 16V 3 15
15 C8316 EEEHB1C100R C 10PF, J, 16V 1 C8317- ECJOEF1C104Z C 0.10UF, Z, 16V 3 19 C8320 ECJ1VF1A105Z C 1UF, Z, 10V 1 C8321- ECJ0EF1C104Z C 0.10UF, Z, 16V 6 26 C8327 EEEHB1C100R C 10PF, J, 16V 1 C8328- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 31 C8332 ECJ1XB1C153K C 0.015UF, Z, 16V 1 C8333- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 16 53 C8355,5 ECJ0EB1A104K C 0.1UF, K, 10V 2 6 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0J101P C 100PF, J, 63V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0J101P C 100PF, J, 63V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1
C8316 EEEHBIC100R C 10FF, J, 16V 1 C8317- ECJ0EF1C104Z C 0.10UF, Z, 16V 3 19 C8320 ECJ1VF1A105Z C 1UF, Z, 10V 1 C8321- ECJ0EF1C104Z C 0.10UF, Z, 16V 6 26 C8327 EEEHBIC100R C 10FF, J, 16V 1 C8328- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 31 C8332 ECJ1XB1C153K C 0.015UF, Z, 16V 1 C8333- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 16 53 C8355,5 ECJ0EB1A104K C 0.1UF, K, 10V 2 6 C8357,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8375 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8377 ECGRL0G680R C 68FF, J, 4V 1 C8378 EEEHB0J101P C 100FF, J, 4V 1 C8379 EEEHB0J101P C 100FF, J, 63V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C83879 EEEHB0J101P C 100FF, J, 63V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EB1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8411 ECJ0EB1C103K CO.010UF, K, 16V 1
C8317-   ECJOEFIC104Z   C 0.10UF, Z, 16V   3   C8320   ECJIVFIA105Z   C 1UF, Z, 10V   1   C8321-   ECJOEFIC104Z   C 0.10UF, Z, 16V   6   C8327   EEEHBIC100R   C 10PF, J, 16V   1   C8328-   ECJOEFIC104Z   C 0.10UF, Z, 16V   4   31   C8332   ECJIXBIC153K   C 0.015UF, Z, 16V   4   31   C8333-   ECJOEFIC104Z   C 0.10UF, Z, 16V   4   36   C8337   EEEHBIC100R   C 10PF, J, 16V   1   C8338-   ECJOEFIC104Z   C 0.10UF, Z, 16V   16   53   C8355,5   ECJOEFIC104Z   C 0.10UF, Z, 16V   16   53   C8357,5   ECJOEFIC104Z   C 0.10UF, Z, 16V   2   C8360   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   C8362   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   C8368-   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   C8368-   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   C8368-   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   C8367   ECGREGO680R   C 68PF, J, 4V   1   C8377   ECGRLOG680R   C 68PF, J, 4V   1   C8379   EEEHBOJ101P   C 100PF, J, 6.3V   1   C8386   ECJOEFIC104Z   C 0.10UF, Z, 16V   5   K4   C8386   ECJOEFIC104Z   C 0.10UF, Z, 16V   5   K4   C8386   ECJOEFIC104Z   C 0.10UF, Z, 16V   5   K4   C8386   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   C8390,9   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   C8390,9   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   C8408   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   C8409   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   C8409   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   C8413   ECJOEFIC104Z   C 0.10UF, Z, 16V   1   C8414   ECJOEBIC103K   C0.010UF, K, 16V   1   C8416   ECJOEBIC103K   C0.0
19 C8320 ECJ1VF1A105Z C 1UF, Z, 10V 1 C8321- ECJ0EF1C104Z C 0.10UF, Z, 16V 6 26 C8327 EEEHB1C100R C 10PF, J, 16V 1 C8328- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 31 C8332 ECJ1XB1C153K C 0.015UF, Z, 16V 1 C8333- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 16 53 C8357,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 16 C8357,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8399, 9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8399, 9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8320 ECJ1VF1A105Z C 1UF, Z, 10V 1 C8321- ECJ0EF1C104Z C 0.10UF, Z, 16V 6 C8327 EEEHB1C100R C 10PF, J, 16V 1 C8328- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 31 C8332 ECJ1XB1C153K C 0.015UF, Z, 16V 1 C8333- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 16 53 C8337 EECHB1C100R C 10PF, J, 16V 1 C8335-, 5 ECJ0EF1C104Z C 0.10UF, Z, 16V 2 6 C8357, 5 ECJ0EB1A104K C 0.1UF, K, 10V 2 6 C8357, 5 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0G101R C 100PF, J, 6.3V 1 C8386- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8378 EEEHB0G101R C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8387 ECGRL0G680R C 68PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8411 ECJ0EB1C103K C0.010UF, K, 16V 1
C8321- ECJOEFIC104Z C 0.10UF, Z, 16V 6  C8327 EEEHBIC100R C 10PF, J, 16V 1  C8328- ECJOEFIC104Z C 0.10UF, Z, 16V 4  31  C8332 ECJIXBIC153K C 0.015UF, Z, 16V 1  C8333- ECJOEFIC104Z C 0.10UF, Z, 16V 4  36  C8337 EEEHBIC100R C 10PF, J, 16V 1  C8338- ECJOEFIC104Z C 0.10UF, Z, 16V 16  53  C8355,5 ECJOEBIA104K C 0.1UF, K, 10V 2  6  C8357,5 ECJOEBIA104K C 0.10UF, Z, 16V 1  C8360 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8362 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8368- ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8368- ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8377 ECGRL0G680R C 68PF, J, 4V 1  C8378 EEEHBOJ101P C 100PF, J, 6.3V 1  C8380- ECJOEFIC104Z C 0.10UF, Z, 16V 5  84  C8386 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8379 EEEHBOJ101P C 100PF, J, 6.3V 1  C8380- ECJOEFIC104Z C 0.10UF, Z, 16V 5  84  C8386 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8390,9 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8390,9 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8408 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8409 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8410 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8413 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8414 ECJOEBIC103K C0.010UF, K, 16V 1
26 C8327 EEEHBlC100R C 10PF, J, 16V 1 C8328- 31 C8332 ECJJEF1C104Z C 0.10UF, Z, 16V 4 31 C8333 ECJJEF1C104Z C 0.10UF, Z, 16V 1 C8333- ECJOEF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHBlC100R C 10PF, J, 16V 1 C8338- ECJOEF1C104Z C 0.10UF, Z, 16V 16 53 C8355,5 ECJOEF1C104Z C 0.10UF, Z, 16V 2 6 C8357,5 ECJOEF1C104Z C 0.10UF, Z, 16V 2 8 C8360 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8367 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8368- C8377 ECGRL0680R C 68PF, J, 4V 1 C8378 EEEHBOJ101P C 100PF, J, 6.3V 1 C8379 EEEHBOJ101P C 100PF, J, 6.3V 1 C8386 ECJOEF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJOEF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJOEF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8379 EEEHBOJ101P C 100PF, J, 6.3V 1 C8380 ECJOEF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJOEB1C103K C0.010UF, K, 16V 1
C8327 EEEHB1C100R C 10FF, J, 16V 1 C8328- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 31 C8332 ECJ1XB1C153K C 0.015UF, Z, 16V 1 C8333- ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHB1C100R C 10FF, J, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 16 53 C8355,5 ECJ0EB1A104K C 0.1UF, K, 10V 2 6 C8357,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74 C8375 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0G101R C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8411 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8328- ECJOEFIC104Z C 0.10UF, Z, 16V 4 31  C8332 ECJIXBIC153K C 0.015UF, Z, 16V 1  C8333- ECJOEFIC104Z C 0.10UF, Z, 16V 4 36  C8337 EEEHBIC100R C 10PF, J, 16V 1  C8338- ECJOEFIC104Z C 0.10UF, Z, 16V 16 53  C8355,5 ECJOEBIA104K C 0.1UF, K, 10V 2 6  C8357,5 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8360 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8362 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8365 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8368- ECJOEFIC104Z C 0.10UF, Z, 16V 7  74  C8377 ECGRL0G680R C 68PF, J, 4V 1  C8378 EEEHBOG101R C 100PF, J, 4V 1  C8379 EEEHBOJ101P C 100PF, J, 6.3V 1  C8386 ECJOEFIC104Z C 0.10UF, Z, 16V 5 84  C8386 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8390,9 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8390,9 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8408 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8410 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8413 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8413 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8414 ECJOEBIC104Z C 0.10UF, Z, 16V 1
31 C8332 ECJ1XB1C153K C 0.015UF, Z, 16V 1 C8333 - ECJ0EF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338 - ECJ0EF1C104Z C 0.10UF, Z, 16V 16 53 C8355,5 ECJ0EB1A104K C 0.1UF, K, 10V 2 6 C8357,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368 - ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0G101R C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8332 ECJIXB1C153K C 0.015UF, Z, 16V 1 C8333- ECJOEF1C104Z C 0.10UF, Z, 16V 4 36 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- ECJOEF1C104Z C 0.10UF, Z, 16V 16 53 C8355,5 ECJOEB1A104K C 0.1UF, K, 10V 2 6 C8357,5 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8360 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8377 ECGRL0680R C 68PF, J, 4V 1 C8378 EEEHB0G101R C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8386 ECJOEF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJOEF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJOEB1C104Z C 0.10UF, Z, 16V 1
C8333- 36  C8337 EEEHBIC100R C 10PF, J, 16V 1  C8338- 53  C8355,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 16  C8355,5 ECJ0EB1A104K C 0.1UF, K, 10V 2  6  C8357,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8368- C8368- C8375 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8368- C8375 ECJ0EF1C104Z C 0.10UF, Z, 16V 7  C8376 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8377 ECGRL06680R C 68PF, J, 4V 1  C8378 EEEHB0G101R C 100PF, J, 4V 1  C8379 EEEHB0J101P C 100PF, J, 6.3V 1  C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5  84  C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
36 C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- 53 C8355,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 16 C83557,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 2 8 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- C8375 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0G101R C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8379 ECGRL0G680R C 0.10UF, Z, 16V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8337 EEEHB1C100R C 10PF, J, 16V 1 C8338- ECJ0EF1C104Z C 0.10UF, Z, 16V 16 53 C8355,5 ECJ0EB1A104K C 0.1UF, K, 10V 2 6 C8357,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 8 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0J101P C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C104Z C 0.10UF, Z, 16V 1
C8338- ECJOEFIC104Z C 0.10UF, Z, 16V 16  C8355,5 ECJOEBIA104K C 0.1UF, K, 10V 2  C8357,5 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8360 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8362 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8365 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8368- ECJOEFIC104Z C 0.10UF, Z, 16V 7  C8377 ECGRL0G680R C 68PF, J, 4V 1  C8378 EEEHBOG101R C 100PF, J, 4V 1  C8379 EEEHBOJ101P C 100PF, J, 6.3V 1  C8380- ECJOEFIC104Z C 0.10UF, Z, 16V 5  84  C8386 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8390,9 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8408 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8410 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8413 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8413 ECJOEFIC104Z C 0.10UF, Z, 16V 1  C8414 ECJOEBIC104Z C 0.10UF, Z, 16V 1
53 C8355,5 ECJ0EB1A104K C 0.1UF, K, 10V 2 C8357,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 2 8 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0G101R C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8411 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C104Z C 0.10UF, Z, 16V 1
C8355,5 ECJ0EB1A104K C 0.1UF, K, 10V 2 6 C8357,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 2 8 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74 C8375 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEHB0G101R C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
6 C8357,5 ECJ0EF1C104Z C 0.10UF, Z, 16V 2 8 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74 C8375 ECJ0EB1A104K C 0.10UF, Z, 16V 7 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0G101R C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
8 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74 C8375 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0G101R C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EB1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
8 C8360 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74 C8375 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0G101R C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74 C8375 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0G101R C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8411 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8362 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8365 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74 C8375 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0G101R C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8365 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8368- ECJOEFIC104Z C 0.10UF, Z, 16V 7 74 C8375 ECJOEBIA104K C 0.1UF, K, 10V 1 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHBOG101R C 100PF, J, 4V 1 C8379 EEEHBOJ101P C 100PF, J, 6.3V 1 C8380- ECJOEFIC104Z C 0.10UF, Z, 16V 5 84 C8386 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8390,9 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8408 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8410 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8411 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8413 ECJOEFIC104Z C 0.10UF, Z, 16V 1 C8414 ECJOEBIC103K C0.010UF, K, 16V 1
C8368- ECJ0EF1C104Z C 0.10UF, Z, 16V 7 74  C8375 ECJ0EB1A104K C 0.1UF, K, 10V 1  C8377 ECGRL0G680R C 68PF, J, 4V 1  C8378 EEEHB0G101R C 100PF, J, 4V 1  C8379 EEEHB0J101P C 100PF, J, 6.3V 1  C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5  84  C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8409 ECJ0EB1C104Z C 0.10UF, Z, 16V 1  C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8411 ECJ0EF1C104Z C 0.10UF, Z, 16V 1
74  C8375 ECJ0EB1A104K C 0.1UF, K, 10V 1  C8377 ECGRL0G680R C 68PF, J, 4V 1  C8378 EEEHB0G101R C 100PF, J, 4V 1  C8379 EEEHB0J101P C 100PF, J, 6.3V 1  C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5  84  C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 2  1  C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8409 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8411 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8375 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8377 ECGRL0G680R C 68PF, J, 4V 1 C8378 EEEHB0G101R C 100PF, J, 4V 1 C8379 EEEHB0J101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 2 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EB1C103K C0.010UF, K, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8377 ECGRLOG680R C 68PF, J, 4V 1 C8378 EEEHBOG101R C 100PF, J, 4V 1 C8379 EEEHBOJ101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 2 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EB1C103K C0.010UF, K, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8378 EEEHBOG101R C 100PF, J, 4V 1 C8379 EEEHBOJ101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 2 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EB1C103K C0.010UF, K, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8379 EEEHBOJ101P C 100PF, J, 6.3V 1 C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84 C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 2 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EB1C103K C0.010UF, K, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, Z, 16V 1
C8380- ECJ0EF1C104Z C 0.10UF, Z, 16V 5 84  C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 2 1  C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8409 ECJ0EB1C103K C0.010UF, K, 16V 1  C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
84  C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 2  1  C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8409 ECJ0EB1C103K C0.010UF, K, 16V 1  C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1  C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8386 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 2 1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EB1C103K C0.010UF, K, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8390,9 ECJ0EF1C104Z C 0.10UF, Z, 16V 2  1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EB1C103K C0.010UF, K, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
1 C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EB1C103K C0.010UF, K, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8408 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8409 ECJ0EB1C103K C0.010UF, K, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8409 ECJ0EB1C103K C0.010UF, K, 16V 1 C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8410 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8413 ECJ0EF1C104Z C 0.10UF, Z, 16V 1 C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8414 ECJ0EB1C103K C0.010UF, K, 16V 1
C8415   ECGRL0G680R   C 68PF, J, 4V   1
C8416
C8417 EEEHB1C470P C 47PF, J, 16V 1
C8418 ECJ0EF1C104Z C 0.10UF, Z, 16V 1
C8425 ECJ2FF1A106Z C 0.001UF, Z, 10V 1
C8426 ECJ0EF1C104Z C 0.10UF, Z, 16V 1
C8427 ECJ2FF1A106Z C 0.001UF, Z, 10V 1
C8428 ECJ0EF1C104Z C 0.10UF, Z, 16V 1
1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
C8437   ECJ0EB1A104K   C 0.1HF. K. 10V   1
C8440.4 ECJ0EB1A104K C 0.1UF, K, 10V 1 C8440.4 ECJ0EB1A104K C 0.1UF, K, 10V 2
C84437
C8440,4 ECJ0EB1A104K C 0.1UF, K, 10V 2
C8440,4 ECJ0EB1A104K C 0.1UF, K, 10V 2 1 C8445 ECJ0EB1A104K C 0.1UF, K, 10V 1
C8440,4 ECJ0EB1A104K C 0.1UF, K, 10V 2

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C8450- 52	ECJ2FF1A475Z	C 4.7UF, Z, 10V	3	
C8453	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8456,5	F1J0J475A035	C 4.7UF, K, 16V	2	
C8458	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8461		C 0.1UF, K, 10V	1	
C8467		CO.010UF, K, 16V	1	
C8468	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8469	ECJ1VB0J334K	C 0.33UF, K,6.3V	1	
C8474	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8475,7 6	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
C8477	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8478	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8479,8	ECJ0EB1C103K	CO.010UF, K, 16V	2	
C8482	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8484-	EEEHB1C470P	C 47PF, J, 16V	3	
86	ECTOERIUATIV	C 470DE V 50V	1	
C8492 C8496		C 470PF, K, 50V C 0.1UF, K, 10V	1	
C8500	ECJ0EBIA104R ECJ2FF1A475Z	C 4.7UF, Z, 10V	1	
C8501	ECJ2FF1A4/3Z ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8503,0		C 0.1UF, K, 10V	2	
4				
C8507,0		C 4.7UF, Z, 10V	2	
C8509		C 47PF, J, 16V	1	
C8511	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C8515	<b>+</b>	C0.010UF, K, 16V	1	
C8516	EEEHB1C470P	C 47PF, J, 16V	1	
C8518	ECJ0EB1C103K ECJ0EC1H181J	C0.010UF, K, 16V	2	
C8520,2 1		C 180PF, K, 50V		
C8522,2 3	ECJ0EC1H390J	C 390PF, K, 50V	2	
C8529	ECJ0EC1H080C	C 8PF, D, 50V	1	
C8530	ECJ0EC1H221J	C 220PF, K, 50V	1	
C8531		C 0.012UF, K, 50V	1	
C8532 C8533	ECJ0EB1H182K ECJ0EF1C104Z	C 1800UF, Z, 50V C 0.10UF, Z, 16V	1	
C8534	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C8535	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8536	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8537		C 0.1UF, K, 10V	1	
C8542	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8546,4 7	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8551	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8552	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C8554	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8555	ECJ0EC1H390J	C 390PF, K, 50V	1	
C8556	ECJ0EB1H821K	C 820PF, D, 50V	1	
C8557	ECJ1VB1H123K	C 0.012UF, K, 50V	1	
C8558		CO.010UF, K, 16V	1	
C8559	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8561 C8562	F1J1A106A043	C0.010UF, K, 16V C 0.010UF, K, 16V	1	
C8563	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8564	F1J1A106A043	C 0.010UF, K, 16V	1	
C8567	ECGRL0G680R	C 68PF, J, 4V	1	
C8568	ECJ2FB0J106M	C 10UF, Z,6.3V	1	
C8572	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8573	ECJ2FB0J106M	C 10UF, Z,6.3V	1	
C8578	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8584		C 0.1UF, K, 10V	1	
C8590	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8592	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8594 C8595,9	ECGRL0G680R ECJ0EB1C103K	C 68PF, J, 4V C0.010UF, K, 16V	2	
6				
C8597	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8598	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8600	ECJ0EB1C103K	C0.010UF, K, 16V	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	EGTOED13104K	Description	1	
C8601		C 0.1UF, K, 10V	1	
C8602- 04	ECOUEBICIOSK	C0.010UF, K, 16V	3	
	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8606	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8607	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8608		CO.010UF, K, 16V	1	
C8609	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8610	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8611,1	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
2			_	
C8613	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8614	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8615,1	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
6				
C8617	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8620	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8621	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8622	ECGRL0G680R	C 68PF, J, 4V	1	
C8629,3	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
0				
I .	ECJ0EC1H820J	C 820PF, K, 50V	2	
4		- 40		
C8638		M 10KOHM, J, 1/16W	1	
C8640,4	ECJ0EC1H150J	C 150PF, K, 50V	2	
1		G 45777 7 1677	-	
C9000		C 47PF, J, 16V	1	
C9001	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9004,0	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9006	F1J0J1060004	C 0.010UF, K, 16V	1	
C9007	<b>†</b>	C 47PF, J, 16V	1	
C9008	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9009	F1J0J1060004	C 0.010UF, K, 16V	1	
C9010-	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
12	ECUIAFICIU42	C 0.10F, Z, 16V		
C9013	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9014	ECJ1XC1H101K		1	
C9015-		C 0.1UF, Z, 16V	8	
22			-	
C9023	EEEHB1C470P	C 47PF, J, 16V	1	
C9024	ECJ1XC1H271J		1	
C9025	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9026,2	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
7				
C9028-	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
31				
C9033	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
l .	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
6				
C9201,0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9203	ECJ1XC1H150J	C 15PF, J, 50V	1	
C9204	ECJ1VC1H080C	C 8PF, C, 50V	1	
C9205	F1J0J1060004		1	
C9206,0	ECJ1XB1C104K	C 0.010UF, K, 16V	2	
7	ECO INDICIO4K	C 0.1UF, Z, 16V		
C9303	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9304-	ECJ1XB1C104K	C 0.1UF, Z, 16V	54	
57				
C9358	EEEHB0G221P	C 220PF, J, 4V	1	
C9359	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9360	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9500	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C9502	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C9503-	ECJ1XB1C104K	C 0.1UF, Z, 16V	10	
12				
C9513	EEEHB1C470P	C 47PF, J, 16V	1	
C9514-	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
17				
C9518	EEEHB1C470P	C 47PF, J, 16V	1	
C9519	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9701,0	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
2				
C9703	F1J0J1060004	C 0.010UF, K, 16V	1	
l .	F1J0J1060004	C 0.010UF, K, 16V	2	
6			L	

C9712,1 F 3 C9714,1 F 5 C9716 F C9718 F C9719,2 F	F1J0J1060004	Part Name & Description C 47PF, J, 16V C 0.010UF, K, 16V	Pcs 1 2	Remarks
C9712,1 F 3 C9714,1 F 5 C9716 F C9718 F C9719,2 F 0 C9721,2 F 2	F1J0J1060004		1 . 1	
3 C9714,1 F 5 C9716 F C9718 F C9719,2 F 0 C9721,2 F 2		C 0.010UF, K, 16V	2	
C9714,1 F 5 C9716 E C9718 E C9719,2 F 0 C9721,2 F 2	ECGRL0G680R			
5 C9716 E C9718 E C9719,2 E 0 C9721,2 E		C 68PF, J, 4V	2	
C9718 E C9719,2 E 0 C9721,2 E 2				
C9719,2 E 0 C9721,2 E 2	ECJ1XC1H220J	C 22PF, J, 50V	1	
0 C9721,2 2		C 22PF, J, 50V	1	
2	ECJ1XC1H102J	C 1000PF, J, 50V	2	
	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9/23,2  E	7.	G 0 1777 77 F077		
4	SCJ ZXBIHIU4K	C 0.1UF, K, 50V	2	
C9725 E	CJ1XC1H102J	C 1000PF, J, 50V	1	
		C 1000PF, J, 50V	1	
C9728,2 E	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9730,3 E	EEEHB1C470P	C 47PF, J, 16V	2	
C9732 E	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9733 E	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
	EEEHB1C470P	C 47PF, J, 16V	2	
5 C9736 E	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
<u> </u>		C 0.1UF, Z, 16V	2	
0				
		C 4.7UF, Z, 16V	1	
	ECJ1XF1C104Z ECJ3XF1C475Z	C 0.1UF, Z, 16V C 4.7UF, Z, 16V	2	
4		C 4.70F, A, 10V		
C9800,0 E	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
C9900,0 E	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
1				
CA1-A8 K	K1MN68BA0002	68P CONNECTOR	8	
		001 00111201011		
CB1-B8 K	K1MN68BA0002	68P CONNECTOR	8	
<u> </u>		30P CONNECTOR 14P CONNECTOR	1	
		31P CONNECTOR	1	
D6 K		20P CONNECTOR	1	
D8 K	K1KA08AA0104	8P CONNECTOR	1	
		20P CONNECTOR	1	
	K1KA20AA0009 K1MN55BA0076	20P CONNECTOR	2	
	K1MN55BA0076	55P CONNECTOR 55P CONNECTOR	2	
		DIODE	2	
1	0.111	77077		
D2303,0 M	MA111	DIODE	2	
D2315,1 E	30JCDD000002	DIODE	2	
<b>—</b>	30JCDD000002	DIODE	2	
1	MA111	DIODE	1	
	MA8056M	ZENER DIODE	1	
1.	MA152K	DIODE	2	<u></u>
D2520 E	33AAA0000770	DIODE	1	
		DIODE	1	
	MA8056M	ZENER DIODE	1	
H + + + + + + + + + + + + + + + + + + +		DIODE	1	
	MA152 MA8140M	DIODE	1	
24		ZENER DIODE	6	
D2640- M	MA8140M	ZENER DIODE	21	
<u> </u>	MA729	DIODE	3	
	MA728	DIODE	1	
	MA111	DIODE	3	
27 D4029 M	MA3036L	DIODE	1	
C 2 N	MA3X78900L	DIODE ZENER DIODE	1	
D5610 M		DIODE	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
D5615	B0BC4R700007	DIODE	1	
D5616	B0BC6R600005	DIODE	1	
D5617	B0BC01100001	DIODE	1	
D5618	B0BC03900015	DIODE	1	
D5637,3	MA152	DIODE	2	
8	MAISZ	DIODE	^	
	M3 2 0 4 7 77	GENER RIORE	-	
D5639	MA3047H	ZENER DIODE	1	
D5640	МА3039Н	ZENER DIODE	1	
D5641	MA152	DIODE	1	
D5642	MA3100H	ZENER DIODE	1	
D5643	MA152	DIODE	1	
D5644	MA3068M	ZENER DIODE	1	
D5645-	MA152	DIODE	3	
47	MAIJZ	DIODE		
D5649	MA111	DIODE	1	MA2J111
		DIODE		MAZUIII
D5801	B0JCME000037	DIODE	1	
D5804	MA3120M	ZENER DIODE	1	
D5805,0	MA152	DIODE	2	
6				
D5807	MA111	DIODE	1	
D6013	B0HBSN000008	DIODE	1	
D6018	B0HBSN000008	DIODE	1	
D6101	BOHBSN000008	DIODE	1	
D6110	B0ECHP000003	DIODE	1	
D6111,1	B0HBSN000008	DIODE	2	
2				
D6115,1	B0HBSN000008	DIODE	2	
6				
D6119	B0ECHP000003	DIODE	1	
D6121	B0HBSN000008	DIODE	1	
D6122	B0ECHP000003	DIODE	1	
D6128,2	B0HBSN000008	DIODE	2	
9	Bondskooooo	DIODE .	*	
D6140,4	B0ECHP000003	DIODE	2	
1	BUECHPUUUUU	DIODE	^	
	D0.707000000	DT0DD		
D6149,5	B0JCME000037	DIODE	2	
0				
		l	۱ ـ	
D6151	B0ECHP000003	DIODE	1	
D6151 D6153	B0ECHP000003 B0ECHP000003	DIODE DIODE	1	
			<del></del>	
D6153	B0ECHP000003	DIODE	1	
D6153 D6158,5	B0ECHP000003	DIODE	1	
D6153 D6158,5 9	B0ECHP000003 MA8330M	DIODE ZENER DIODE	2	
D6153 D6158,5 9 D6160	B0ECHP000003 MA8330M LNJ301MPUJA	DIODE ZENER DIODE LED	1 2	
D6153 D6158,5 9 D6160 D6161 D6162	B0ECHP000003 MA8330M LNJ301MPUJA MA8051L MA111	DIODE ZENER DIODE LED ZENER DIODE DIODE	1 2 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111	DIODE ZENER DIODE LED ZENER DIODE DIODE DIODE	1 2 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 MA111	DIODE ZENER DIODE LED ZENER DIODE DIODE DIODE DIODE DIODE	1 2 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 MA111 BOECHP000003	DIODE ZENER DIODE LED ZENER DIODE DIODE DIODE DIODE DIODE DIODE	1 2 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003	DIODE ZENER DIODE LED ZENER DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE	1 2 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 MA111 BOECHP000003	DIODE ZENER DIODE LED ZENER DIODE DIODE DIODE DIODE DIODE DIODE	1 2 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003	DIODE ZENER DIODE LED ZENER DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE	1 2 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111	DIODE ZENER DIODE  LED ZENER DIODE	1 2 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 MA111	DIODE ZENER DIODE LED ZENER DIODE	1 2 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6436 D6451	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 MA111 BOJCKG000002 BOECHP000003	DIODE ZENER DIODE  LED ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6436 D6451 D6452	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 MA111 BOJCKG000002 BOECHP000003 BOHCKS000002	DIODE ZENER DIODE LED ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6436 D6451 D6452 D6453,5	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 MA111 BOJCKG000002 BOECHP000003	DIODE ZENER DIODE  LED ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D6451 D6452 D6453,5	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 BOECHP000002 BOECHP000003 BOHCKS000002 BOECHP000003	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D6451 D6452 D6453,5 4 D6455	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 BOECHP000003 BOECHP000003 BOHCKS000002 BOECHP000003 MA111	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D6451 D6452 D6453,5 4 D6455 D6456	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 BOHCKS000002 BOECHP000003 MA111 BOJCKG000002	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D6435 D6451 D6452 D6453,5 4 D6455 D6456 D6457	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 BOECHP000003 BOECHP000003 BOHCKS000002 BOECHP000003 MA111	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D6451 D6452 D6453,5 4 D6455 D6456	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 BOHCKS000002 BOECHP000003 MA111 BOJCKG000002	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D6435 D6451 D6452 D6453,5 4 D6455 D6456 D6457	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 MA111 BOJCKG000002 BOECHP000003 BOHCKS000002 BOECHP000003 BOHCKS000002 BOECHP000003	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D6435 D6455 D6456 D6457 D6458	BOECHP000003 MA8330M LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 BOHCKS000002 BOECHP000003 MA111 BOECHP000003 BOHCKS000002 BOECHP000003 BOHCKS000002 BOECHP000003	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D6455 D6455 D6455 D6456 D6457 D6458 D6459	BOECHP000003  MA8330M  LNJ301MPUJA  MA8051L  MA111  MA111  BOECHP000003  BOECHP000003  MA111  MA111  BOECHP000003  BOHCKS000002  BOECHP000003  BOHCKS000002  BOECHP000003  MA111  BOECHP000003  MA111  BOECHP000003  MA111	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6436 D6455 D6456 D6457 D6458 D6459 D6450,6	BOECHP000003  MA8330M  LNJ301MPUJA  MA8051L  MA111  MA111  BOECHP000003  BOECHP000003  MA111  MA111  BOECHP000003  BOHCKS000002  BOECHP000003  BOHCKS000002  BOECHP000003  MA111  BOECHP000003  MA111  BOECHP000003  MA111	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6436 D6455 D6456 D6457 D6458 D6459 D6450,6	BOECHP000003 MA8330M  LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 BOHCKS000002 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 BOHCKS000002	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6436 D6451 D6452 D6453,5 4 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6	BOECHP000003 MA8330M  LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 BOHCKS000002 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 BOHCKS000002	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6 6 D6468	BOECHP000003 MA8330M  LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 MA111 BOECHP000003 BOHCKS000002 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6456 D6451 D6452 D6453,5 4 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6 6	BOECHP000003 MA8330M  LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 BOECHP000003 BOHCKS000002 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOHCKS000002 BOECHP000003 MA111 BOHCKS000002 MA111 BOHCKS000002 MA8330M MA111	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6433 D6435 D6435 D6435 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6 6 D6468 D6470,7 1	BOECHP000003 MA8330M  LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 BOECHP000003 BOHCKS000002 BOECHP000003 BOHCKS000002 BOECHP000003 MA111 BOECHP000003 MA111 BOHCKS000002 BOECHP000003 MA111 BOHCKS000002 MA111	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6433 D6435 D6435 D6435 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6 6 D6468 D6470,7 1 D6472	BOECHP000003 MA8330M  LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 MA111 BOJCKG000002 BOECHP000003 BOHCKS000002 BOECHP000003 MA111 BOECHP000003 MA111 BOHCKS000002 BOECHP000003 MA111 BOHCKS000002	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6433 D6435 D6435 D6435 D6455 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6 6 D6468 D6470,7 1 D6472 D6473	BOECHP000003 MA8330M  LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 MA111 BOJCKG000002 BOECHP000003 BOHCKS000002 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOHCKS000002 BOECHP000003 MA111 BOHCKS000002 MA111 BOHCKS000002 MA8330M MA111 BOHCKS000002	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6433 D6435 D6435 D6435 D6455 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6 6 D6468 D6470,7 1 D6472 D6473 D6475	BOECHP000003 MA8330M  LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 BOHCKS000002 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOHCKS000002 BOECHP000003 MA111 BOHCKS000002 MA8330M  MA111 BOHCKS000002 MA8330M  MA111 MA111 BOJCME000037 MA111 MA111	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D6435 D6455 D6455 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6 6 D6467 D6472 D6473 D6475 D6476	BOECHP000003 MA8330M  LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 MA111 BOJCKG000002 BOECHP000003 BOHCKS000002 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOHCKS000002 BOECHP000003 MA111 BOHCKS000002 MA111 BOHCKS000002 MA8330M MA111 BOHCKS000002	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6433 D6435 D6435 D6435 D6455 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6 6 D6468 D6470,7 1 D6472 D6473 D6475	BOECHP000003  MA8330M  LNJ301MPUJA  MA8051L  MA111  MA111  BOECHP000003  BOECHP000003  MA111  MA111  BOJCKG000002  BOECHP000003  BOHCKS000002  BOECHP000003  MA111  BOECHP000003  MA111  BOECHP000003  MA111  BOECHP000003  MA111  BOHCKS000002  BOECHP000003  MA111  BOHCKS000002  MA8330M  MA111  BOHCKS000002	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D6435 D6455 D6455 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6 6 D6467 D6472 D6473 D6475 D6476	BOECHPOOOOO3  MA8330M  LNJ301MPUJA  MA8051L  MA111  MA111  BOECHPOOOOO3  MA111  MA111  BOJCKG000002  BOECHPOOOOO3  BOHCKS000002  BOECHPOOOOO3  MA111  BOJCKG000002  BOECHPOOOOO3  MA111  BOHCKS000002  BOECHPOOOOO3  MA111  BOJCKGOOOOO2  BOECHPOOOOO3  MA111  BOJCKGOOOOO2  BOECHPOOOOO3  MA111  BOJCKGOOOOO2  MA8330M  MA111  BOJCMEOOOO37  MA111  MA111  BOJCMEOOOO37  MA111  BOJCMEOOOOO37	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6436 D6451 D6455 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6 6 D6467 D6472 D6473 D6472 D6473 D6476 D6477	BOECHP000003 MA8330M  LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOHCKS000002 MA8330M  MA111 BOJCME000037 MA111 MA111 BOJCME000037 MA111 MA111 BOJCME000003 MA111 BOJCME000037 MA111 MA111 BOECHP000003 MA111	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D64451 D6455 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6 6 D6468 D6470,7 1 D6472 D6473 D6475 D6476 D6477 D6478 D6479	BOECHP000003 MA8330M  LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOECHP000003 MA111 BOHCKS000002 MA8330M MA111 BOJCME000037 MA111 MA111 BOJCME000037 MA111 BOJCME000037 MA111 MA111 BOJCME000003 MA111	DIODE  ZENER DIODE  LED  ZENER DIODE  DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6153 D6158,5 9 D6160 D6161 D6162 D6166 D6172 D6173 D6195 D6433 D6435 D6435 D6455 D6455 D6456 D6457 D6458 D6459 D6460,6 1 D6465,6 6 D6468 D6470,7 1 D6472 D6473 D6475 D6476 D6477 D6478	BOECHP000003 MA8330M  LNJ301MPUJA MA8051L MA111 MA111 BOECHP000003 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 MA111 BOHCKS000002 BOECHP000003 MA111 BOHCKS000002 BOECHP000003 MA111 BOHCKS000002 MA111 BOHCKS000002 MA8330M MA111 BOHCKS000002 MA8330M MA111 BOJCME000037 MA111 MA111 BOJCME000037 MA111 BOJCME000003 MA111 BOJCME000003 MA111 BOJCME000003	DIODE  ZENER DIODE  LED  ZENER DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

D6484 MA D6485- MA 90 D6491,9 B0 2 D6493,9 MA 4 D6495 B0 D6500,0 MA 1 D6506 MA D6509 MA D6510 B0 D6511 B0 D6512- MA 14 D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6521 B0 D6521 B0	A111 A8056H DECHP000003 A8056H DHCKS000002 DJCME000037 A111 A111 DJCME000037 DHCMM000014 A111 A8240M DJCME000037 A111 DECHP000003 A111	Part Name & Description DIODE DIODE DIODE ZENER DIODE  DIODE  ZENER DIODE  DIODE	Pcs  1 1 6 2 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Remarks
D6483 B0 D6484 MA D6485- MA 90 D6491,9 B0 2 D6493,9 MA 4 D6495 B0 D6500,0 MA D6506 MA D6509 MA D6510 B0 D6511 B0 D6512- MA 14 D6515 MA D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6521 B0 D6521 B0	A111 A8056H A8056H A8056H A8056H AROSENEOUOUZ DJCMEOUOUZ A111 A111 A111 A111 A111 A111 A111 A1	DIODE DIODE ZENER DIODE  ZENER DIODE  ZENER DIODE	1 6 2 2 1 1 2 1 1 1 1 3 1 2	
D6485- MA 90 D6491,9 2 D6493,9 MA 4 D6495 B0 D6500,0 MA 1 D6506 MA D6509 MA D6510 B0 D6511 B0 D6512- MA D6512- MA D6515 MA D6515 MA D6517,1 B0 B0 D6520 MA D6521 B0 D6521 B0 D6521 B0 D6521 B0	A8056H  A8056H  A8056H  A8056H  AROSONOOO2  JJCME000037  A111  A111  A111  A111  JJCME000037  A111  ARE240M  JJCME000037  A111  ARE240M  JJCME0000037  A111  ARECHPO00003	ZENER DIODE  DIODE  ZENER DIODE	6 2 2 1 1 1 2 1 1 1 3 1 2 1 1 2 1 1	
90 D6491,9 D6493,9 MA 4 D6495 B0 D6499 B0 D6500,0 MA 1 D6506 MA D6509 D6510 B0 D6511 B0 D6512- MA D6515 MA D6517,1 B0	DECHP000003  A8056H  DHCKS000002  JJCME000037  A111  A111  A111  JJCME000037  HCMM000014  A111  A8240M  DJCME000037  A111  DECHP000003  A111  DECHP000003	DIODE  ZENER DIODE	2 2 1 1 2 1 1 1 1 3 3 1 2 1 1	
D6491,9 B0 2 D6493,9 MA 4 D6495 B0 D6499 B0 D6500,0 MA 1 D6506 MA D6509 MA D6510 B0 D6511 B0 D6512- MA 14 D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6521 B0 D6521 B0 D6522 MA D6523 B0	A8056H  DHCKS000002  JJCME000037  A111  A111  DJCME000037  DHCMM000014  A111  A8240M  DJCME000037  A111  DECHP000003  A111  DECHP000003	ZENER DIODE	2 1 1 2 1 1 1 1 3 1 2	
2 D6493,9 MA 4 D6495 B0 D6499 B0 D6500,0 MA 1 D6506 MA D6509 MA D6510 B0 D6511 B0 D6512 MA 14 D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6521 B0 D6521 B0 D6521 B0	A8056H  DHCKS000002  JJCME000037  A111  A111  DJCME000037  DHCMM000014  A111  A8240M  DJCME000037  A111  DECHP000003  A111  DECHP000003	ZENER DIODE	2 1 1 2 1 1 1 1 3 1 2	
D6493,9 MA 4 D6495 B0 D6499 B0 D6500,0 MA 1 D6506 MA D6510 B0 D6511 B0 D6512 MA 14 D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6521 B0 D6521 B0 D6521 B0	DHCKS000002 DJCME000037 A111 A111 DJCME000037 DHCMM000014 A111 A8240M DJCME000037 A111 DECHP000003	DIODE	1 1 2 1 1 1 1 3 1 2	
4   D6495   B0   D6499   B0   D6500,0   MA   D6506   MA   D6510   B0   D6511   B0   D6512   MA   D6515   MA   D6517,1   B0   B0   D6520   MA   D6521   B0   D6521   B0   D6521   B0   D6523   B0   D6523	DHCKS000002 DJCME000037 A111 A111 DJCME000037 DHCMM000014 A111 A8240M DJCME000037 A111 DECHP000003	DIODE	1 1 2 1 1 1 1 3 1 2	
D6499 B0 D6500,0 MA 1 D6506 MA D6509 MA D6510 B0 D6511 B0 D6512 MA 14 D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6521 B0	DICME000037 A111 A111 A111 DICME000037 HCMM000014 A111 A8240M DICME000037 A111 DECHP000003 A111 DECHP000003	DIODE	1 2 1 1 1 3 1 2	
D6500,0 MA 1 D6506 MA D6509 MA D6510 B0 D6511 B0 D6512- MA 14 D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6521 B0 D6521 B0 D6523 B0	A111 A111 A111 DJCME000037 DHCMM000014 A111 A8240M DJCME000037 A111 DECHP000003	DIODE	2 1 1 1 1 3 1 2	
1 D6506 MA D6509 MA D6510 B0 D6511 B0 D6512 MA 14 D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6521 B0 D6523 B0	A111 A111 DJCME000037 HCMM000014 A111 A8240M DJCME000037 A111 DECHP000003	DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE	1 1 1 1 3 1 2	
D6506 MA D6509 MA D6510 B0 D6511 B0 D6512 MA 14 D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6522 MA D6523 B0	A111 DJCME000037 DHCMM000014 A111 A8240M DJCME000037 A111 DECHP000003 A111	DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE	1 1 1 3 1 2	
D6509 MA D6510 B0 D6511 B0 D6512 MA 14 D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6522 MA D6523 B0	A111 DJCME000037 DHCMM000014 A111 A8240M DJCME000037 A111 DECHP000003 A111	DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE	1 1 1 3 1 2	
D6511 B0 D6512 MA 14 D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6522 MA D6523 B0	0HCMM000014 01111 08240M 0JCME000037 0H111 0ECHP000003	DIODE DIODE ZENER DIODE DIODE DIODE DIODE	1 3 1 2	
D6512 - MA 14 D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6522 MA D6523 B0	A111 A8240M DJCME000037 A111 DECHP000003 A111 DECHP000003	DIODE ZENER DIODE DIODE DIODE DIODE	3 1 2	
14 D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6522 MA D6523 B0	A8240M DJCME000037 A111 DECHP000003 A111 DECHP000003	ZENER DIODE DIODE DIODE DIODE	1 2	
D6515 MA D6517,1 B0 8 D6520 MA D6521 B0 D6522 MA D6523 B0	JCME000037 A111 DECHP000003 A111 DECHP000003	DIODE DIODE	2	
D6517,1 B0 8 D6520 MA D6521 B0 D6522 MA D6523 B0	JCME000037 A111 DECHP000003 A111 DECHP000003	DIODE DIODE	2	
8 D6520 MA D6521 B0 D6522 MA D6523 B0	A111 DECHP000003 A111 DECHP000003	DIODE	1	
D6521 B0 D6522 MA D6523 B0	DECHP000003 A111 DECHP000003	DIODE		
D6521 B0 D6522 MA D6523 B0	A111 DECHP000003		1	
D6523 B0	ECHP000003	DIODE		
			1	
IDCE24 MA	18051L	DIODE	1	
D0324 MA		ZENER DIODE	1	
_		DIODE	1	
		DIODE	1	
		DIODE	1	
<b>-</b>		DIODE	1	
		DIODE	1	
		DIODE	1	
	18051L	ZENER DIODE	1	
D6546- MA	18330M	ZENER DIODE	3	
48				
D6549,5 MA	1111	DIODE	2	
	)HCKS000002	DIODE	1	
		DIODE	1	
		DIODE	1	
D6555 MA	18056Н	ZENER DIODE	1	
D6556,5 MA	1111	DIODE	2	
7				
		DIODE	1	
		DIODE	1	
		ZENER DIODE	1	
<b>-</b>		DIODE	1	
<b>-</b>		ZENER DIODE	2	
6				
D6587 MA	18056Н	ZENER DIODE	1	
		DIODE	1	
<b>-</b>		DIODE	1	
<u> </u>		DIODE	1	
D6608,0 B0	)HBSN000008	DIODE	2	
	)HBSN000008	DIODE	1	
		DIODE	2	
0				
D6623,2 B0	)HBSN000008	DIODE	2	
	ECHP000003	DIODE	1	
		DIODE	1	
		DIODE	1	
D6651 B0	ECHP000003	DIODE	1	
	ECHP000003	DIODE	2	
D6901,0 MA	18056н	ZENER DIODE	2	
2				
	ECHP000003	DIODE	2	
4 D6061 6 MA	00564	ZENED DIONE		
D6961,6 MA 2	18056Н	ZENER DIODE	2	
D6963,6 B0	DECHP000003	DIODE	2	

		TH-37	PX50U	/ TH-42PX50U / TH-
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D7101-	B0HCMM000014		8	
08 D7201-	B0HCMM000014	DIODE	8	
08 D7301-	B0HCMM000014	DIODE	8	
08				
D7401- 08		DIODE	8	
D8200	B0DDBG000002	DIODE	1	
D8203,0 4	LNJ208R8ARA	LED	2	
D8207	MA728	DIODE	1	
D8208	K7JAAAA00001	· ·	1	
D8210	MA728	DIODE	1	
D8215	MA8039L	ZENER DIODE	1	
D8217	B0JCDD000002	DIODE	1	
D8219	B0JCDD000002	DIODE	1	
D8221	MA8024LTX	ZENER DIODE	1	
D9000- 02	MA3033	ZENER DIODE	3	
D9011,1	MA728	DIODE	2	
D9015,1	MA152K	DIODE	2	
	MA728	DIODE	2	
D9800,0	MA152K	DIODE	2	
D9900,0	MA152K	DIODE	2	
1				
DG1,G2	K1MN40A00024	40P CONNECTOR	2	
DG3	K1KA20B00155	20P CONNECTOR	1	
DG5	K1KA21B00008	21P CONNECTOR	1	
DG15	K1KA60A00156	60P CONNECTOR	1	
	<b>†</b>		1	
DG20	K1MN30A00068	30P CONNECTOR		
DG22	K1KBB0A00006	CONNECTOR	1	
DT04	K1NA68B00037	68P CONNECTOR	1	
DT07	K1KA04BA0050	4P CONNECTOR	1	
DT09	K1NA09D00004	9P CONNECTOR	1	
DT12	K1KAB0A00011	CONNECTOR	1	
2112	KIRIBONOUTI	COMPETON	_	
FL4003- 10	J0HABH000012	LC FILTER	8	
FL4012	J0HABH000012	LC FILTER	1	
FL4014- 17	J0HABB000004	LC FILTER	4	
	EXB38VR000	RESISTOR ARRAY	3	
FL4021- 23	Ј0НАВН000012	LC FILTER	3	
	J0HABH000013	LC FILTER	1	
FL7101	<u> </u>		1	
FL7201		LC FILTER		
FL7301	J0HABH000013	LC FILTER	1	
FL7401 FL8202,	J0HABH000013 J0HAAA000013	LC FILTER LC FILTER	2	
03	ļ			
FL8215	J0HAAB000004	LC FILTER	1	
FL8224- 40	J0HAAB000004	LC FILTER	17	
FL8258	J0HAAB000004	LC FILTER	1	
FL8260		LC FILTER	1	
FL8262,	J0MAB0000164		2	
63 FL9000- 04	J0HABH000013	LC FILTER	5	
FL9300-	Ј0НАВН000013	LC FILTER	3	
02 FL9701,	J0HABH000012	LC FILTER	2	
02 FL9703,	J0HABH000013	LC FILTER	2	
04 FL9800,	J0HABH000013	LC FILTER	2	
01 FL9900,	J0HABH000013	LC FILTER	2	
01				
	•	•	-	

No.	Part No.	Part Name &	Pcs	Remarks
	#11P#40P0004F	Description	_	
		40P CONNECTOR	2	
		12P CONNECTOR	1	
	K1KA10AA0194	10P CONNECTOR	1	
<u> </u>		11P CONNECTOR	1	
		30P CONNECTOR	1	
H50 I	K1MN35A00013	35P CONNECTOR	1	
HMM1-M4	TMM25401	CLAMPER	4	
<del></del>	C1BB00000969	IC	1	
IC2305, 0	C1BB00000818	IC	2	
H + + + + + + + + + + + + + + + + + + +	C1AB00002123	IC	1	
	AN15861A-VT	IC	1	
		IC	1	
	C0ABBB000289	IC	1	
<del></del>			1	
h +	COFBBK000038	IC		
	TC74HC4066TL	IC	1	
	MN102H90MTZ1	IC	1	
	TVRN467	IC	1	
H +	TVRN470	IC	1	
<del></del>	C0EBF0000431	IC	1	
<del>                                     </del>	COCBCACO0275	IC	1	
h +	COCBCBF00009	IC	1	
H 1	C0EBE0000336	IC	1	
	COCBCAC00275	IC	1	
<del> </del>	C1AB00002298	IC	1	
IC4020	COCBCAC00136	IC	1	
IC4022 (	CODBEJG00001	IC	1	
IC4024 (	C1ZBZ0002790	IC	1	
IC4025 (	C0JBAP000020	IC	1	
IC4026	C1AB00002234	IC	1	
IC4027	C3ABQJ000040	IC	1	
IC4028	CODBZFG00055	IC	1	
IC4030 (	C0EBF0000335	IC	1	
IC4031 (	COCBCAC00136	IC	1	
IC5601, 1	N0BF2DE00001	DC-DC CONVERTER	2	
02				
IC5603 (	CODBAJB00004	IC	1	
IC5801 (	CODBAZG00034	IC	1	
IC5803	CODAEZH00017	IC	1	
IC6101-	C0ZBZ0000895	IC	4	
04				
IC6106 (	C0JBAZ000005	IC	1	
IC6107 1	NJM2903M	INTEGRATED CIRCUIT	1	
IC6109 2	AN1431M	LINEAR IC	1	
IC6431 2	AN1431M	LINEAR IC	1	
IC6451 (	COCBALCO0010	IC	1	
IC6452	AN1431M	LINEAR IC	1	
IC6453 (	COCBALCO0010	IC	1	
IC6454,	COCBADC00075	IC	2	
55				
1	AN1431M	LINEAR IC	2	
72				
	AN1431M	LINEAR IC	1	
	C0JBAZ000994	IC	1	
	C0JBAZ000994	IC	1	
	C0ZBZ0001033	IC	1	
<del> </del>	COCBADCO0075	IC	1	
H	C0ZBZ0001033	IC	1	
I I	C0ZBZ0001033	IC	2	
42 TC6E42	GO GRADGO COST	TC	-	
	C0CBADC00075	IC	1	
<del></del>	C0ZBZ0001033	IC	1	
IC6601- (	NJM2903M C0ZBZ0000895	INTEGRATED CIRCUIT	3	
03	GO TD3 3 0 0 0 1 7 1	T.C.	-	
	C0JBAA000174	IC	1	
IC6605, 0	C0JBAZ000005	IC	2	
	AN16042A-VT	IC	6	
IC6901- 06				

NO.   Description	Ref.	Part No.	Part Name &	Pcs	Remarks
10		CO.TRAZO01120		1	
04	04				
104	l .	C0JBAZ001120	ic	4	
10		C0JBAZ001120	IC	4	
10	l .	C0JBAZ001120	IC	4	
IC8200	l .	C3ABRG000061	IC	2	
IC8201   COABBBOO0190   IC	IC8022	C0ZBZ0001052	IC	1	
IC8202	-				
IC8203			-		
1			<del> </del>		
IC8206, C1AB00002221 IC	04				
1					
TC8211   MN884321A		C1AB00002221	IC	2	
TC8216					
TC8219					
IC8220					
IC8222   C3FBRG000004   IC					
IC8223   C3ZBP0000019   IC	-				
TC8227			-		
TC8228					
TC8229					
TC8230					
IC8232	<b>—</b>				
TC8240			MOS IC (LOGIC)	1	
TC8241	IC8235	C0DBZFF00004	IC	1	
1	IC8240	MN2WS0025A-A	IC	1	
TC8244	l .	CODBAZZO0122	IC	2	
TC8245	<b>—</b>	C0FBAK000019	IC	1	
TC9003	IC8245		IC	1	
TC9004					
TC9005,   C0JBAZ000856   TC	IC9001	TVRN570	IC	1	
TC9007			-		
TC9008	IC9003 IC9004 IC9005,	TVRN568 C0EBE0000120	IC IC	1	
TC9200	IC9003 IC9004 IC9005,	TVRN568 C0EBE0000120 C0JBAZ000856	IC IC	1 2	
TC9300	IC9003 IC9004 IC9005, 06 IC9007	TVRN568 C0EBE0000120 C0JBAZ000856 TVRN466	IC IC IC	1 1 2	
TC9301	IC9003 IC9004 IC9005, 06 IC9007 IC9008	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001	IC IC IC	1 1 2 1	
TC9302	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200	TVRN568 C0EBE0000120 C0JBAZ000856 TVRN466 C0DBEJG00001 C1ZBZ0002769	IC IC IC	1 1 2 1 1	
TC9500	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300	TVRN568 C0EBE0000120 C0JBAZ000856 TVRN466 C0DBEJG00001 C1ZBZ0002769 MN84512-A	IC IC IC IC	1 1 2 1 1 1	
TC9502	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301	TVRN568 C0EBE0000120 C0JBAZ000856 TVRN466 C0DBEJG00001 C1ZBZ0002769 MN84512-A PST9128NR	IC (LOGIC)  IC IC IC IC	1 1 2 1 1 1 1	
TC9504	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302	TVRN568 C0EBE0000120 C0JBAZ000856 TVRN466 C0DBEJG00001 C1ZBZ0002769 MN84512-A PST9128NR C3ABQJ000031	IC (LOGIC) IC IC (LOGIC)	1 2 1 1 1 1 1	
TC9700	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9303	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A  PST9128NR  C3ABQJ000031  TVRN512	IC	1 2 1 1 1 1 1 1	
TC9702	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9303 IC9500	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A  PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599	IC I	1 1 2 1 1 1 1 1 1	
JK2601 K1U939A00001 CONNECTOR 1  JK2605 K2HA204A0041 JACK 1  JS2304 - ERJ6GEY0R00 M 0 OHM, 1/10W 8  11  JS2312 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2317 - ERJ6GEY0R00 M 0 OHM, 1/10W 8  24  JS2329 - ERJ6GEY0R00 M 0 OHM, 1/10W 4  32  JS2606, ERJ6GEY0R00 M 0 OHM, 1/10W 2  JS2614 - ERJ6GEY0R00 M 0 OHM, 1/10W 4  17  JS2620, ERJ3GEY0R00 M 0 OHM, 1/16W 2  152620, ERJ3GEY0R00 M 0 OHM, 1/16W 2  152624 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 2  28  JS2630 - ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9303 IC9500 IC9502	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856	IC I	1 1 2 1 1 1 1 1 1 1	
JK2605 K2HA204A0041 JACK 1  JS2304- ERJ6GEY0R00 M 0 OHM, 1/10W 8  11  JS2312 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2317- ERJ6GEY0R00 M 0 OHM, 1/10W 8  24  JS2329- ERJ6GEY0R00 M 0 OHM, 1/10W 4  JS2606, ERJ6GEY0R00 M 0 OHM, 1/10W 2  JS2614- ERJ6GEY0R00 M 0 OHM, 1/10W 4  17  JS2620, ERJ3GEY0R00 M 0 OHM, 1/16W 2  JS2620, ERJ3GEY0R00 M 0 OHM, 1/16W 2  JS2624 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 2  28  JS2630- ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9303 IC9500 IC9502	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856	IC I	1 1 2 1 1 1 1 1 1 1 1	
JK2605 K2HA204A0041 JACK 1  JS2304- ERJ6GEY0R00 M 0 OHM, 1/10W 8  11  JS2312 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2317- ERJ6GEY0R00 M 0 OHM, 1/10W 8  24  JS2329- ERJ6GEY0R00 M 0 OHM, 1/10W 4  JS2606, ERJ6GEY0R00 M 0 OHM, 1/10W 2  JS2614- ERJ6GEY0R00 M 0 OHM, 1/10W 4  17  JS2620, ERJ3GEY0R00 M 0 OHM, 1/16W 2  JS2620, ERJ3GEY0R00 M 0 OHM, 1/16W 2  JS2624 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 2  28  JS2630- ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9500 IC9502 IC9504 IC9700	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001	IC I	1 1 2 1 1 1 1 1 1 1 1 1	
JS2304- ERJ6GEY0R00 M 0 OHM, 1/10W 8 11 JS2312 ERJ3GEY0R00 M 0 OHM, 1/16W 1 JS2317- ERJ6GEY0R00 M 0 OHM, 1/10W 8 24 JS2329- ERJ6GEY0R00 M 0 OHM, 1/10W 4 32 JS2606, ERJ6GEY0R00 M 0 OHM, 1/10W 2 07 JS2614- ERJ6GEY0R00 M 0 OHM, 1/10W 4 17 JS2620, ERJ3GEY0R00 M 0 OHM, 1/16W 2 21 JS2624 ERJ3GEY0R00 M 0 OHM, 1/16W 1 JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 1 JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 2 28 JS2630- ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9303 IC9500 IC9502 IC9504 IC9700	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001	IC I	1 1 2 1 1 1 1 1 1 1 1 1	
11  JS2312 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2317- ERJ6GEY0R00 M 0 OHM, 1/10W 8  24  JS2329- ERJ6GEY0R00 M 0 OHM, 1/10W 4  32  JS2606, ERJ6GEY0R00 M 0 OHM, 1/10W 2  07  JS2614- ERJ6GEY0R00 M 0 OHM, 1/10W 4  17  JS2620, ERJ3GEY0R00 M 0 OHM, 1/16W 2  21  JS2624 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 2  28  JS2630- ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9303 IC9500 IC9502 IC9504 IC9700 IC9702 JK2601	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001  C0DBAZH00020  K1U939A00001	IC I	1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
JS2317- ERJ6GEY0R00 M 0 OHM, 1/10W 8  24  JS2329- ERJ6GEY0R00 M 0 OHM, 1/10W 4  JS2606, ERJ6GEY0R00 M 0 OHM, 1/10W 2  07  JS2614- ERJ6GEY0R00 M 0 OHM, 1/10W 4  17  JS2620, ERJ3GEY0R00 M 0 OHM, 1/16W 2  21  JS2624 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 2  28  JS2630- ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9303 IC9500 IC9502 IC9504 IC9700 IC9702 JK2601	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001  C0DBAZH00020  K1U939A00001	IC I	1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
24  JS2329- ERJ6GEY0R00 M 0 OHM, 1/10W 4  JS2606, ERJ6GEY0R00 M 0 OHM, 1/10W 2  07  JS2614- ERJ6GEY0R00 M 0 OHM, 1/10W 4  17  JS2620, ERJ3GEY0R00 M 0 OHM, 1/16W 2  1  JS2624 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 2  28  JS2630- ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9303 IC9500 IC9500 IC9502 IC9700 IC9700 IC9700	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001  C0DBAZH00020  K1U939A00001  K2HA204A0041	IC I	1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
32  JS2606, ERJ6GEY0R00 M 0 OHM, 1/10W 2  JS2614- ERJ6GEY0R00 M 0 OHM, 1/10W 4  17  JS2620, ERJ3GEY0R00 M 0 OHM, 1/16W 2  21  JS2624 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 2  28  JS2630- ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9500 IC9500 IC9502 IC9700 IC9702 JK2601 JK2605	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A  PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001  C0DBAZH00020  K1U939A00001  K2HA204A0041  ERJ6GEY0R00	IC I	1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
07  JS2614- ERJ6GEY0R00 M 0 OHM, 1/10W 4  17  JS2620, ERJ3GEY0R00 M 0 OHM, 1/16W 2  21  JS2624 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 2  28  JS2630- ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9500 IC9502 IC9504 IC9700 IC9702 JK2601 JK2605 JS2304- 11 JS2312 JS2317-	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A  PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001  C0DBAZH00020  K1U939A00001  K2HA204A0041  ERJ6GEY0R00	IC I	1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
17  JS2620, ERJ3GEY0R00 M 0 OHM, 1/16W 2 21  JS2624 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 2 28  JS2630- ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9504 IC9700 IC9702 JK2601 JK2605 JS2304-11 JS2312 JS2317-24 JS2329-	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A  PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001  C0DBAZH00020  K1U939A00001  K2HA204A0041  ERJ6GEY0R00  ERJ3GEY0R00  ERJ6GEY0R00	IC I	1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
21  JS2624 ERJ3GEY0R00 M 0 OHM, 1/16W 1  JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 2 28  JS2630- ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9500 IC9500 IC9502 IC9504 IC9702 JK2601 JK2605 JS2304-11 JS2312 JS2317-24 JS2329-32 JS2606,	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A PST9128NR C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001  C0DBAZH00020  K1U939A00001  K2HA204A0041  ERJ6GEY0R00  ERJ3GEY0R00  ERJ6GEY0R00	IC I	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
JS2627, ERJ3GEY0R00 M 0 OHM, 1/16W 2 28 JS2630- ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9500 IC9502 IC9504 IC9700 IC9702 JK2601 JK2605 JS2317- 24 JS2329- 32 JS2606, 07 JS2614-	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A  PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001  C0DBAZH00020  K1U939A00001  K2HA204A0041  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00	IC I	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
28 JS2630- ERJ3GEY0R00 M 0 OHM, 1/16W 8	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9500 IC9502 IC9504 IC9700 IC9702 JK2601 JK2605 JS2304- 11 JS2312 JS2317- 24 JS2329- 32 JS2606, 07 JS2614- 17 JS2620,	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A  PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001  C0DBAZH00020  K1U939A00001  K2HA204A0041  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00	IC I	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9502 IC9504 IC9702 JK2601 JK2605 JS2312 JS2312 JS2317 24 JS2329 32 JS2606, 07 JS2620, 21 JS2624	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001  C0DBAZH00020  K1U939A00001  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00	IC I	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
	IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9504 IC9702 IC9504 IC9702 JK2601 JK2605 JS2317- 24 JS2317- 24 JS2329- 32 JS2614- 17 JS2620, 21 JS2624 JS2627,	TVRN568  C0EBE0000120  C0JBAZ000856  TVRN466  C0DBEJG00001  C1ZBZ0002769  MN84512-A PST9128NR  C3ABQJ000031  TVRN512  C1ZBZ0002599  C0JBAZ000856  C0JBAZ000856  C0JBAZ000856  C0DBEJG00001  C0DBAZH00020  K1U939A00001  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00  ERJ6GEY0R00	IC I	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

Ref. No.	Part No.	Part Name &	Pcs	Remarks
JS2645	ERJ3GEY0R00	Description M 0 OHM, 1/16W	1	
JS2652-	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
63	EKOUGETUKUU	H 0 OM, 1/10W	12	
JS2672-	ERJ6GEY0R00	M 0 OHM, 1/10W	16	
87				
JS2692- 03	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
JS2705-	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
12				
JS2714-	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
25			_	
JS2726	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2729 JS2737,	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	2	
38	EKOJGETOKOO	N 0 0MM, 1/10W		
JS2740-	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
42				
JS2744- 49	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
	ERJ6GEY0R00	M 0 OHM, 1/10W	9	
68		11 0 01111, 1, 1011		
JS4003	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4013-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
15	ED TO CEVANA	M 0 OUR 1/10"	-	
JS4019- 21	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
26		·		
	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
35 JS4038,	ED TO GEVORA	M O OHM 1/16W	2	
39	ERJ3GEY0R00	M 0 OHM, 1/16W		
JS4041	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4044-	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
50				
JS4052	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4059- 63	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
JS4067	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5601	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5609-	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
12				
JS5801, 02	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
08		11 0 01111, 1, 1011	-	
JS5810-	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
17				
JS5819	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS6001, 02	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS6100	ERD25V0T	M OHM, 1/10W	1	
JS6534	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS6649	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
K1	K1KA12BA0053	12P CONNECTOR	1	
K2	K1KA02BA0061	2P CONNECTOR	1	
T 2225 2	00310073000	GHOVE COTT	_	
L2305,0	G0A100ZA0033	CHOKE COIL	2	
L2312,1	G0A100ZA0033	CHOKE COIL	2	
3				
L2316-	J0JJC0000011	CHIP INDUCTOR	4	
19	TO THE CO. C.	GWTD T		
L2615	J0JHC0000078	CHIP INDUCTOR	1	
L2617 L4002,0	J0JHC0000078	CHIP INDUCTOR	2	
3	2001120000078	CHIE INDUCTOR		
L4006	J0JHC0000078	CHIP INDUCTOR	1	
L4008	J0JHC0000078	CHIP INDUCTOR	1	
L4012	J0JCC0000241	CHIP INDUCTOR	1	
L4013	J0JHC0000078	CHIP INDUCTOR	1	
L4019	J0JHC0000078	CHIP INDUCTOR	1	
L4021,2 2	J0JHC0000045	CHIP INDUCTOR	2	
L4024,2	J0JHC0000078	CHIP INDUCTOR	2	
5				

Ref.	Part No.	Part Name & Description	Pcs	Remarks
L4027	J0JHC0000078	CHIP INDUCTOR	1	
L4028	J0JCC0000241	CHIP INDUCTOR	1	
L4031	J0JHC0000078	CHIP INDUCTOR	1	
L4035	J0JHC0000078	CHIP INDUCTOR	1	
L4036	J0JCC0000241	CHIP INDUCTOR	1	
L4037- 39	J0JHC0000078	CHIP INDUCTOR	3	
<b>—</b>	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
L4043		CHIP INDUCTOR	1	
L4044		M 0 OHM, 1/16W	1	
L4047,4		CHIP INDUCTOR	2	
L5604	G0A470GA0002	CHOKE COIL	1	
L5605	G1C1R0MA0072 G0A220GA0002	CHOKE COIL	1	
L5607	G0C101K00023		1	
L5608	G1C101K00023	CHOKE COIL	1	
L5609		INDUCTION COIL	1	
L5610		INDUCTION COIL	1	
L5611	G1A150ZA0007	CHOKE COIL	1	
L5612	G0A220GA0002	CHOKE COIL	1	
L5613,1	G1A150ZA0007	CHOKE COIL	2	
L5615	G0A220GA0002	CHOKE COIL	1	
L5616	G1A150ZA0007	CHOKE COIL	1	
L5801	G0C101K00023	PEAKING COIL	1	
L5802	TALL08N101KA	INDUCTION COIL	1	
L5803	G0A220GA0002	CHOKE COIL	1	
L5808	G0A100GA0013	CHOKE COIL	1	
L5810	G0A100GA0013	CHOKE COIL	1	
L6101- 03	G0AR60MA0003	CHOKE COIL	3	
L6104- 06	G0A1R4MA0003	CHOKE COIL	3	
L6107,0	J0JJC0000021	CHIP INDUCTOR	2	
L6113	G0ZZ00002183	PEAKING COIL	1	
L6114	G0C101K00023	PEAKING COIL	1	
L6115- 17	G0ZZ00002183	PEAKING COIL	3	
L6119,2 0	G0ZZ00002183	PEAKING COIL	2	
L6122	G0ZZ00002183	PEAKING COIL	1	
L6124	G0ZZ00002183	PEAKING COIL	1	
L6130	G0ZZ00002183	PEAKING COIL	1	
L6132	G0ZZ00002183	PEAKING COIL	1	
L6134	G0ZZ00002183	PEAKING COIL	1	
L6136	G0ZZ00002183	PEAKING COIL	1	
L6152- 57	G0ZZ00002183	PEAKING COIL	6	
L6158,5	J0JJC0000021	CHIP INDUCTOR	2	
L6161,6	J0JJC0000011	CHIP INDUCTOR	2	
L6431	J0JJC0000021	CHIP INDUCTOR	1	
L6451	J0JJC0000021	CHIP INDUCTOR	1	
L6471	J0JJC0000021	CHIP INDUCTOR	1	
L6472,7	G0ZZ00002183	PEAKING COIL	2	
L6603,0	G0ZZ00002183	PEAKING COIL	2	
L6607	J0JJC0000021	CHIP INDUCTOR	1	
L6609	G0ZZ00002183	PEAKING COIL	1	
L6611- 13	GOAR60MA0003	CHOKE COIL	3	
L6615- 17	G0A1R4MA0003	CHOKE COIL	3	
L6618	G0ZZ00002183	PEAKING COIL	1	
L6621,2	G0ZZ00002183	PEAKING COIL	2	
L6625	G0ZZ00002183	PEAKING COIL	1	
L6631,3	G0ZZ00002183	PEAKING COIL	2	
L6635,3	G0ZZ00002183	PEAKING COIL	2	
Ľ	I .	I		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L6644,4	G0ZZ00002183		2	
5 L6647,4	G0ZZ00002183	PEAKING COIL	2	
16650,5	G0ZZ00002183	PEAKING COIL	2	
L6661,6 2	J0JJC0000011	CHIP INDUCTOR	2	
L8096	J0JHC0000045	CHIP INDUCTOR	1	
L8141- 43	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
L8200- 03	ELJPA270KB	INDUCTION COIL	4	
L8204 L8205	ELJNA82NMB ELJNA47NMB	INDUCTION COIL	1	
L8206	ELJNA56NMB	INDUCTION COIL	1	
L8207	ELJNA47NMB	INDUCTION COIL	1	
L8208	ELJNAR10MF	INDUCTION COIL	1	
L8209	J0JHC0000045	CHIP INDUCTOR	1	
L8211	ELJNA1R5JF	INDUCTION COIL	1	
L8212	ELJNA1R0JF	INDUCTION COIL	1	
L8213,1 4	ELJPA1R0MB	INDUCTION COIL	2	
L8217	ELJNAR56KF	INDUCTION COIL	1	
L8218	J0JHC0000045	CHIP INDUCTOR	1	
0	ELJPA1R0MB	INDUCTION COIL	2	
L8221- 25		CHIP INDUCTOR	5	
2		CHIP INDUCTOR	2	
		CHIP INDUCTOR	1	
L8236,3	J0JHC0000035	CHIP INDUCTOR	2	
L8239	J0JCC0000241	CHIP INDUCTOR	1	
L8240	J0JHC0000045	CHIP INDUCTOR	1	
L8242 L8243,4 4	J0JCC0000078 J0JHC0000045	CHIP INDUCTOR CHIP INDUCTOR	2	
L8252	ELJPA1R0MB	INDUCTION COIL	1	
L8253-	EXC3BB221H	BEAD CHOKE	4	
L8258	J0JHC0000045	CHIP INDUCTOR	1	
L8264- 68	J0JHC0000045	CHIP INDUCTOR	5	
L8269	J0JGC0000036	CHIP INDUCTOR	1	
L8270	G1C100MA0078	INDUCTION COIL	1	
L8271	G1C6R8MA0078	INDUCTION COIL	1	
L8273	G1C100MA0077	INDUCTION COIL	1	
L8274	ELJNA2R7JB	INDUCTION COIL	1	
L8276	J0JBC0000080	CHIP INDUCTOR	1	
L8277	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L9200 L9500,0	G1C150KA0038 J0JHC0000078	CHIP INDUCTOR	2	
1 1 19700	G1C4R3M00003	CHIP INDUCTOR	1	
L9700	G1C4R3M00003	CHIP INDUCTOR	1	
<del></del>				
PA7	K1KA08AA0192	8P CONNECTOR	1	
PA10	K1KA06A00452	6P CONNECTOR	1	
PA20	K1MN30A00068	30P CONNECTOR	1	
PA30	K1MN30A00068	30P CONNECTOR	1	
PA5601,	K5H4022A0023	FUSE	2	
02			<del>                                     </del>	
	K1KA11AA0194	11P CONNECTOR	1	
PB5	K1KA11AA0194 K1KA08AA0192	11P CONNECTOR 8P CONNECTOR	1 1	
	K1KA08AA0192	11P CONNECTOR 8P CONNECTOR 5P CONNECTOR	+-+	
PB5 PB7	K1KA08AA0192	8P CONNECTOR	1	
PB5 PB7 PB30 PB31-34	K1KA08AA0192 K1KA05AA0150 K1KA03AA0192	8P CONNECTOR 5P CONNECTOR 3P CONNECTOR	1	
PB5 PB7 PB30	K1KA08AA0192 K1KA05AA0150	8P CONNECTOR 5P CONNECTOR	1 1 4	
PB5 PB7 PB30 PB31-34	K1KA08AA0192 K1KA05AA0150 K1KA03AA0192 B3PBA0000223	8P CONNECTOR 5P CONNECTOR 3P CONNECTOR	1 1 4	
PB5 PB7 PB30 PB31-34 PC6434 PC6458	K1KA08AA0192 K1KA05AA0150 K1KA03AA0192 B3PBA0000223	8P CONNECTOR  5P CONNECTOR  3P CONNECTOR  IC	1 1 4 1 1	
PB5 PB7 PB30 PB31-34 PC6434 PC6458 PC6467	K1KA08AA0192 K1KA05AA0150 K1KA03AA0192 B3PBA0000223 B3PBA0000223 B3PBA0000223	8P CONNECTOR 5P CONNECTOR 3P CONNECTOR IC IC	1 1 4 1 1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
PC6501, 02	B3PBA0000234	IC	2	
PC6503	B3PBA0000233	IC	1	
PC6505	B3PBA0000233	IC	1	
PC6507	B3PBA0000233	IC	1	
Q2300	2SC584500L	TRANSISTOR	1	
Q2301	2SD601A	TRANSISTOR	1	
Q2302	2SC584500L	TRANSISTOR	1	
Q2314- 17	2SC584500L	TRANSISTOR	4	
Q2323 Q2510,1	2SA207700L 2SD601A	TRANSISTOR	2	
1	ZSDOUIA	TRANSISION		
Q2519	2SB709A	TRANSISTOR	1	
Q2609	2SD601A	TRANSISTOR	1	
Q2611 Q2612	2SD601A 2SB709A	TRANSISTOR TRANSISTOR	1	
Q2618,1	2SD601A	TRANSISTOR	2	
9				
Q4001	2SA207700L	TRANSISTOR	1	
Q4004 Q4006-	2SD601A 2SD601A	TRANSISTOR	1 4	
09	25500111	TRIMBIBION		
Q4012	2SD601A	TRANSISTOR	1	
Q4015- 17	2SD601A	TRANSISTOR	3	
Q4019- 21	2SD601A	TRANSISTOR	3	
Q4022	2SC584500L	TRANSISTOR	1	
Q4024	2SC584500L	TRANSISTOR	1	
Q4026	2SC584500L	TRANSISTOR	1	
Q4039 Q4043,4	2SD0601A 2SD0601A	TRANSISTOR	1 2	
4	ZBD0001R	IRANDIDION		
Q4045	2SA207700L	TRANSISTOR	1	
Q4049	2SA207700L	TRANSISTOR	1	
Q4051- 54	2SD601A	TRANSISTOR	4	
Q4055	2SA207700L	TRANSISTOR	1	
Q4056- 59	2SD601A	TRANSISTOR	4	
Q4062	2SD601A	TRANSISTOR	1	
Q4066,6	2SK2731T146	TRANSISTOR	2	
Q4068	2SD601A	TRANSISTOR	1	
Q5601	B1DHDC000028	TRANSISTOR	1	
Q5602	2SC584500L	TRANSISTOR	1	
Q5603 Q5604,0	B1DHDC000028 2SC584500L	TRANSISTOR TRANSISTOR	2	
5	ZBC304300E	IRANDIDION		
Q5606	B1DHDC000028	TRANSISTOR	1	
Q5607	2SC584500L	TRANSISTOR	1	
Q5610 Q5613	2SC584500L 2SC584500L	TRANSISTOR TRANSISTOR	1	
Q5614	2SK3065T100	FET	1	
Q5641-	2SA207700L	TRANSISTOR	3	
43 Q5644	2SC584500L	TRANSISTOR	1	
Q6001	2SK3997000VE	TRANSISTOR	1	
Q6005	2SK3999000VH	FET	1	
Q6010- 12	B1JADN000001	TRANSISTOR	3	
Q6101	B1ABNF000006	TRANSISTOR	1	
Q6102 Q6115- 17	B1ADNF000006 B1JADN000001	TRANSISTOR	3	
Q6127,2	B1DFKM000002	TRANSISTOR	2	
Q6132	B1ABNF000006	TRANSISTOR	1	
Q6133	B1ADNF000006	TRANSISTOR	1	
Q6134	B1ABNF000006	TRANSISTOR	1	
Q6135	B1ADNF000006 2SC1473A	TRANSISTOR TRANSISTOR	1	
Q6138 Q6141	2SC14/3A 2SD601A	TRANSISTOR	1	
Q6144	B1ABNF000006	TRANSISTOR	1	

Ref. No.	Part No.	Part Name &	Pcs	Remarks
Q6145	B1ADNF000006	Description TRANSISTOR	1	
Q6431	B1BBCJ000004	TRANSISTOR	1	
Q6432	2SB0709A	TRANSISTOR	1	
Q6435	2SD601A	TRANSISTOR	1	
Q6451	2SD1263A	TRANSISTOR	1	
Q6455	2SD814A	TRANSISTOR	1	
Q6471	B1BAEJ000014	TRANSISTOR	1	
Q6472	2SB0709A	TRANSISTOR	1	
Q6474	2SD814A	TRANSISTOR	1	
Q6475- 77	2SD601A	TRANSISTOR	3	
Q6491	2SD1263A	TRANSISTOR	1	
Q6492	2SC1473A	TRANSISTOR	1	
Q6501- 05	2SK620	FET	5	
Q6511,1 2	B1DFFM000003	TRANSISTOR	2	
Q6520	2SD601A	TRANSISTOR	1	
Q6521	B1DFES000002	TRANSISTOR	1	
Q6523	B1ADNF000006	TRANSISTOR	1	
Q6524,2 5	B1ABNF000006	TRANSISTOR	2	
Q6526	B1ADNF000006	TRANSISTOR	1	
Q6530- 40	B1DFHN000001	TRANSISTOR	11	
Q6551	2SD601A	TRANSISTOR	1	
Q6552	B1DEET000002	TRANSISTOR	1	
Q6554	2SD601A	TRANSISTOR	1	
Q6560- 68	B1DFKM000002	TRANSISTOR	9	
Q6581	2SD601A	TRANSISTOR	1	
Q6582,8 3	B1DFET000001	TRANSISTOR	2	
Q6586	B1ADNF000006	TRANSISTOR	1	
Q6601- 03	B1JADN000001	TRANSISTOR	3	
Q6608	B1ABNF000006	TRANSISTOR	1	
Q6609	B1ADNF000006	TRANSISTOR	1	
Q6611- 13	B1JADN000001	TRANSISTOR	3	
Q6619	B1ABNF000006	TRANSISTOR	1	
Q6620	B1ADNF000006	TRANSISTOR	1	
Q6627	B1ABNF000006	TRANSISTOR	1	
Q6628	B1ADNF000006	TRANSISTOR	1	
Q6629	B1ABNF000006	TRANSISTOR	1	
Q6630	B1ADNF000006	TRANSISTOR	1	
Q6634	2SK3997000VE	TRANSISTOR	1	
Q6639,4 0	2SK620	FET	2	
Q6649	2SK3999000VH	FET	1	
Q6731	2SD1263A	TRANSISTOR	1	
Q8200	B1BBAB000039	TRANSISTOR	1	
Q8201	2SD601A	TRANSISTOR	1	
Q8203	B1BBAB000039	TRANSISTOR	1	
Q8209 Q8216	2SA207700L 2SC584500L	TRANSISTOR TRANSISTOR	1	
Q8217-	2SD601A	TRANSISTOR	4	
20 Q8221,2 2	B1MBDDA00003	TRANSISTOR	2	
Q9000,0 1	2SD601A	TRANSISTOR	2	
Q9003	B1DHCC000034	TRANSISTOR	1	
Q9004	2SB709A	TRANSISTOR	1	
Q9008,0 9	2SK2731T146	TRANSISTOR	2	
Q9010,1 1	2SD601A	TRANSISTOR	2	
Q9012,1 3	2SK2731T146	TRANSISTOR	2	
Q9020- 23	2SD601A	TRANSISTOR	4	
Q9500	2SK2731T146	TRANSISTOR	1	
Q9700	2SD601A	TRANSISTOR	1	
Q9701,0 2	B1MBCDA00002	TRANSISTOR	2	
<del></del>	l .	l		

Ref.	Part No.	Part Name &	Pcs	Remarks
No. Q9703,0	2SD601A	Description TRANSISTOR	2	
4 Q9800,0	2SD601A	TRANSISTOR	2	
1	2SD601A			
Q9900,0 1	ZSD601A	TRANSISTOR	2	
R2302	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2303	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R2304	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2305	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2306	ERJ6GEYJ821	M 820 OHM, J, 1/10W	1	
R2307	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2308,0	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	2	
R2310	ERJ3GEYJ184	M 180KOHM,J,1/16W	1	
R2311	ERJ12YJ821	M 820 OHM, J, 1/2W	1	
R2312,1	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
3 R2316-	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
19		·		
R2320	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R2322	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2324	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R2331	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R2338	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2342,4	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2349	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2350	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2351	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R2352,5	ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
R2357	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R2358,5	ERJ3GEYJ683	M 68KOHM,J,1/16W	2	
R2360	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2363	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2364	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R2365,6	ERJ3GEYJ683	M 68KOHM, J, 1/16W	2	
R2367	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2368	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R2369,7	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
0 R2388,8	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
9				
R2390	ERJ3GEYJ203	M 20KOHM, J, 1/16W	1	
R2391	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2392	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R2393	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2394	ERJ3GEYJ203	M 20KOHM, J, 1/16W	1	
R2395,9	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2397,9	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R2436	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2437,3	ERDS2TJ103	C 10KOHM, J,1/4W	2	
R2444,4 5	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R2448,4	ERJ6GEYJ510	M 51 OHM,J,1/10W	2	
R2450	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2451,5	ERJ6GEYJ510	M 51 OHM, J, 1/10W	2	
R2453	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2453	ERJ6ENF1373	M 137KOHM, 1/10W	1	
R2461	ERJ6ENF1103	M 110KOHM, 1/10W	1	
R2464,6	ERJ6GEYJ120	M 12 OHM, J, 1/10W	2	
R2468,6	ERJ6GEYJ331	M 330 OHM,J,1/10W	2	
9 R2488,8	ERJ6GEYJ120	M 12 OHM,J,1/10W	2	
9 R2499	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2501	ERJ6GEY0R00	M 0 OHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2516	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2517	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R2520	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R2524	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2525	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R2526	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R2542	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2545	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2550	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2553	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2557	ERJ6ENF8200	M 820 OHM, 1/10W	1	
R2607	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R2645	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R2646	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2647	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R2648	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2649	ERJ6GEYJ183	M 18KOHM, J, 1/10W	1	
R2650	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2651	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R2652	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2655	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R2659,6 0	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2673 R2680,8 1	ERJ6GEY0R00 ERJ3GEYJ184	M 0 OHM, 1/10W M 180KOHM,J,1/16W	2	
R2682	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2686	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2687	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2690	ERJ3GEYJ182	M 1.8KOHM, J, 1/16W	1	
R2693	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2695	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2696	ERJ3GEYJ105	M 1MOHM, J, 1/16W	1	
R2698	ERJ3GEYJ182	M 1.8KOHM,J,1/16W	1	
R2699	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2700	ERJ3GEYJ274	M 270KOHM, J, 1/16W	1	
R2702	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R2708	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
	ERJ3GEYJ104	M 100KOHM, J, 1/16W	2	
R2725	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R2729- 31	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R2733-	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
36 R2737	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R2737	ERJ3GEYJ102 ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2739	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R2741	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
		M 1KOHM, J, 1/16W	1	
R2744	ERJ3GEYJ102		t	
R2746	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2747	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2751	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2753	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R2754	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2755	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2756	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R2758	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2759	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2761- 64	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2767	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2769,7 0	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2772	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2775 R2777-	ERJ6ENF75R0 ERJ6ENF75R0	M 75 OHM, 1/10W M 75 OHM, 1/10W	1	
79 R2793-	ERJ3GEYJ221	M 220 OHM, J, 1/16W	3	
		1 220 OHM, U, 1/10W	ادا	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R2797- 00	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2801,0 2	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2804	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2807,0	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2810,1 1	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2814,1	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2817,1	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2820	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2821	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R2822- 25	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2830	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R2832,3	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2835	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2837	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R2838	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2848-	ERJ6GEYJ393	M 39KOHM, J, 1/10W	4	
R2854,5	ERJ6GEYJ393	M 39KOHM, J, 1/10W	2	
R2856	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2858 R2859-	ERJ6ENF75R0 ERJ6GEYJ393	M 75 OHM, 1/10W M 39KOHM, J, 1/10W	3	
61 R2863	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2864	ERJ6GEYJ393	M 39KOHM, J, 1/10W	1	
R2866	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2868,6	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R2881	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2883	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2887	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2891- 94	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R2896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2899	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3751	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
R3753	ERJ6ENF3161	M3.16KOHM, 1/10W	1	
R3755 R3756	ERJ6ENF2321 ERJ6ENF1741	M2.32KOHM, 1/10W	1	
R3758	ERJ6ENF1741 ERJ6ENF6651	M1.74KOHM, 1/10W M6.65KOHM, 1/10W	1	
R4001,0	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4003	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4004	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4005	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4006	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4007	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4008	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4010	ERJ3GEYJ104 ERJ3GEYJ103	M 100KOHM, J, 1/16W	1	
R4015 R4016	ERJ3GEYJ273	M 10KOHM, J, 1/16W M 27KOHM, J, 1/16W	1	
R4017	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R4018	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R4020	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4021	ERJ3GEYJ273	M 27KOHM,J,1/16W	1	
R4022	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4023	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R4024,2 5	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4026	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4028,2 9	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4035	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4039	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4040	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4045	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	1	
R4047	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	

		1		
Ref.	Part No.	Part Name &	Pcs	Remarks
No. R4048	ED.T3@EV.T1 02	Description	1	
	ERJ3GEYJ102 ERJ3GEYJ223	M 1KOHM, J, 1/16W	1	
R4050 R4052	TAJAAH0101JV	M 22KOHM,J,1/16W M 100 OHM,J,1/16W	1	
R4052	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4055	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4056	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4059		M 10KOHM,J,1/16W	1	
R4063	ERJ3GEYJ103 ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4064-	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
66	TAURAHUTUTUV	M 100 OHM,0,1/10W	٦	
R4068,6	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
9				
R4070	ERJ3GEYJ154	M 150KOHM, J, 1/16W	1	
R4071-	TAJAAH0101JV	M 100 OHM,J,1/16W	6	
76 D4077	ED TO CEVODOO	M O OHM 1/16W	1	
R4077	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4078,7	ERJ3GEYJ220	M 22 OHM,J,1/16W		
R4082	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4083	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4086	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4088-	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
90				
R4091	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R4092	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4094	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4095	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4098,9	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
9				
R4101	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4102	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4104	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4105	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4106	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4108	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4109	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4110,1	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
1		M AETTOTTE T 1/16T	-	
R4114	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4118	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4119	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4121	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4122	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4123	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4124	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4125	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4126	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4128	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4129	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R4130	TAJAAH0101JV ERJ3GEYJ473	M 100 OHM,J,1/16W M 47KOHM,J,1/16W	1	
R4134 R4135	ERJ3GEYJ4/3 ERJ3EKF1801		1	
R4135	ERJ3EKF1801 ERJ3GEYJ682	M 1.8KOHM, 1/16W M 6.8KOHM,J,1/16W	1	
R4136	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R4141,4	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
2			~	
R4144	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R4145	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4146	ERJ3GEYJ681	M 680 OHM,J,1/16W	1	
R4148,4	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
9				
R4151-	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	
53		w 1 morns = 1 /= ===	-	
R4155	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4158	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4162	ERJ3GEYJ393	M 39KOHM, J, 1/16W	1	
R4169	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4171- 73	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4174	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4175	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4176	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4177	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4179	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4181	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
	·			

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description	_	
R4182,8	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4184	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4185	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4188	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4192	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4193	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4197	ERJ3GEYJ473	M 47KOHM, J, 1/16W M 22 OHM, J, 1/16W	1	
R4199,0	ERJ3GEYJ220	M 22 OHM, 0, 1/16W	2	
R4201	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4202	ERJ3EKF7151	M7.15KOHM, 1/16W	1	
R4203	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4205	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4208	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4212 R4214	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	1	
R4218	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R4219	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4223	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4224	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4225	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4226	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4230,3	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4237	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4238	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R4252,5	ERJ3GEYJ823	M 82KOHM,J,1/16W	2	
3				
R4254	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4255 R4256,5	ERJ3GEYJ332 ERJ3GEYJ104	M 3.3KOHM, J, 1/16W	2	
7	ERUJGETUTUT	M 100KOHM,J,1/16W		
R4259	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R4260,6	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	2	
1		M AETTOTIC T 1/1677		
R4262,6	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4264	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4266	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4267,6	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
8		w 15mome 7 1/16m	-	
R4269 R4281	ERJ3GEYJ153 ERJ3GEY0R00	M 15KOHM, J, 1/16W M 0 OHM, 1/16W	1	
R4282	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R4284	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4286	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R4289	ERJ3GEYJ241	M 240 OHM,J,1/16W	1	
R4291	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R4292	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4298	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4322 R4327,2	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	2	
8				
R4329	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R4339	ERJ3GEYJ391	M 390 OHM, J, 1/16W	1	
R4344,4	ERJ3EKF1301	M 1.3KOHM, 1/16W	2	
R4346	ERJ3EKF1001	M 1KOHM, 1/16W	1	
R4347	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4349,5	ERJ3EKF1801	M 1.8KOHM, 1/16W	2	
0				
R4351	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	
R4356,5	ERJ6GEYJ471	M 470 OHM, J, 1/10W	2	
R4358	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R4359	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4361	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R4365	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4367	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4370	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4371 R4375	ERJ6GEYJ222 ERJ3GEY0R00	M 2.2KOHM,J,1/10W M 0 OHM, 1/16W	1	
R4379,8	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	2	
0		, , , , , , , , . ,		
R4382	ERJ3EKF1600	M 160 OHM, 1/16W	1	

NO.   Description   Page   Pag	0007 111 42	PX50U / TH-50PX50L	1		
R4388,8 ERJ3GEVJ102 M 1KOHM, J,1/16W 1 R4388,8 ERJ3GEVGROO M 0 ORM, 1/16W 2 9 R4391 ERJ3ERF1371 M 13.7 OHM, 1/16W 1 R4408 ERJ3GEVJ103 M 10KOHM, J,1/16W 1 R4408 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4409 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4414 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4414 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4414 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4412 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4412 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4413 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4421 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4421 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4422 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4428 EXB38V220J RESISTOR ARRAY 1 R4429 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4441, 4 DHIGSGORAOQ2 NETWORK RESISTER 2 2 R4441, 4 ERJ3GEVJ220 M 22 OHM, J,1/16W 3 R44441, 4 ERJ3GEVJ220 M 22 OHM, J,1/16W 3 R44441, 4 ERJ3GEVJ220 M 22 OHM, J,1/16W 3 R44441, 4 ERJ3GEVJ220 M 22 OHM, J,1/16W 1 R4444, 5 ERJ3GEVJ220 M 22 OHM, J,1/16W 2 9 R4456 ERJ3GEVJ220 M 22 OHM, J,1/16W 2 9 R4460 ERJ3GEVJ220 M 22 OHM, J,1/16W 2 9 R4460 ERJ3GEVJ200 M 3 M 10KOHM, J,1/16W 2 2 R4460 ERJ3GEVJ103 M 10KOHM, J,1/16W 1 R4461,6 ERJ3EKF202 M 22KOHM, 1/16W 2 2 R4463 ERJ3EKF9192 M 10KOHM, J,1/16W 1 R4466 ERJ3GEVJ102 M 10KOHM, J,1/16W 1 R4466 ERJ3GEVJ102 M 10KOHM, J,1/16W 1 R4467 ERJ3GEVJ102 M 10KOHM, J,1/16W 1 R4468 ERJ3GEVJ103 M 10KOHM, J,1/16W 1 R4469 ERJ3GEVJ103 M 22KOHM, J,1/16W 1 R4469 ERJ3GEVJ103 M 00 OHM, 1/16W 1 R4459 ER		Part No.	Part Name &	Pcs	Remarks
### ### ### ### ### ### ### ### ### ##		ED 12 GEV 11 02		1	
9				1 . 1	
### R4391		ERJ3GEYURUU	M U OHM, 1/16W		
R4492 RAJGEVJ103 M 10KOHM, J, 1/16W 1 R4408 RAJGEVJ120 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4412 ERJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4413 RAJGEVJ220 M 22 OHM, J, 1/16W 1 R4416 ERJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4416 ERJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4423 XBBSV220J RESISTOR ARRAY 1 R4427 ERJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4433, 3 XBBSV220J RESISTOR ARRAY 1 R4437 ERJ3GEVJ220 M 22 OHM, J, 1/16W 3 R4441, 4 DHGS608A002 RESISTOR ARRAY 2 R4441, 4 DHGS608A002 RESISTOR ARRAY 1 R4444 ERJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4446, 4 ERJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4446, 4 ERJ3GEVJ220 M 22 OHM, J, 1/16W 2 R4455 ERJ3GEVJ220 M 22 OHM, J, 1/16W 2 R4460 ERJ3GEVJ403 M 10KOHM, J, 1/16W 5 R4460 ERJ3GEVJ403 M 10KOHM, J, 1/16W 2 R4460 ERJ3GEVJ473 M 47KOHM, J, 1/16W 2 R4460 ERJ3GEVJ473 M 47KOHM, J, 1/16W 1 R4466 ERJ3GEVJ473 M 47KOHM, J, 1/16W 1 R4467 ERJ3GEVJ473 M 47KOHM, J, 1/16W 1 R4468 ERJ3GEVJ473 M 47KOHM, J, 1/16W 1 R4469 ERJ3GEVJ473 M 47KOHM, J, 1/16W 1 R4469 ERJ3GEVJ473 M 47KOHM, J, 1/16W 1 R4469 ERJ3GEVJ473 M 47KOHM, J, 1/16W 1 R4471 ERJ3GEVJ473 M 47KOHM, J, 1/16W 1 R4472 ERJ3GEVJ102 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEVJ102 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEVJ102 M 1KOHM, J, 1/16W 1 R4488 ERJ3GEVJ103 M 10KOHM, J, 1/16W 1 R4490, 9 ERJ3GEVJ103 M 10KOHM, J, 1/16W 1 R4490, 9 ERJ3GEVJ103 M 10KOHM, J, 1/16W 1 R4491 ERJ3GEVJ103 M 10KOHM, J, 1/16W 1 R4491 ERJ3GEVJ103 M 10KOHM, J, 1/16W 1 R4492, 9 ERJ3GEVJ103 M 10KOHM, J, 1/16W 1 R4493 ERJ3GEVJ103 M 10KOHM, J, 1/16W 1 R4494 ERJ3GEVJ103 M 10KOHM, J, 1/16W 1 R4490, 9 ERJ3GEVJ103 M 10KOHM, J, 1/16W 1 R4491, 9 ERJ3GEVJ103 M 10KOHM, J, 1/16W 1 R4490, 9 ERJ3GEVJ103 M 10KOHM, J, 1/16W 1 R4	-	ER.T3EKF1371	M 13.7 OHM. 1/16W	1	
R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4410 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4423 EXBBSV220J RESISTOR ARRAY 1 R4426 EXBSSV220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4428 EXBSSV220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM, J, 1/16W 3 R4428 EXBSSV220J RESISTOR ARRAY 2 R4433.3 EXBSSV220J RESISTOR ARRAY 1 R4431.4 DIHG508A002 ERSISTOR ARRAY 1 R4443.4 ERJ3GEYJ220 M 22 OHM, J, 1/16W 3 R4444 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4445 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4445 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 PR4450 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4461 ERJ3GEYJ220 M 22 ROHM, J, 1/16W 1 R4462 ERJ3GEYJ220 M 22 ROHM, J, 1/16W 1 R4465 ERJ3GEYJ220 M 22 ROHM, J, 1/16W 1 R4466 ERJ3GEYJ202 M 22 ROHM, J, 1/16W 1 R4466 ERJ3GEYJ202 M 22 ROHM, J, 1/16W 1 R4467 ERJ3GEYJ202 M 22 ROHM, J, 1/16W 1 R4468 ERJ3GEYJ102 M 18 ROHM, J, 1/16W 1 R4469 ERJ3GEYJ102 M 18 ROHM, J, 1/16W 1 R4469 ERJ3GEYJ102 M 18 ROHM, J, 1/16W 1 R4471 ERJ3GEYJ102 M 18 ROHM, J, 1/16W 1 R4472 ERJ3GEYJ102 M 18 ROHM, J, 1/16W 1 R4473 ERJ3GEYJ102 M 18 ROHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 18 ROHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 18 ROHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 18 ROHM, J, 1/16W 1 R4494 ERJ3GEYJ103 M 10 ROHM, J, 1/16W 1 R4495 PERJ3GEYJ103 M 10 ROHM, J, 1/16W 1 R4496 ERJ3GEYJ103 M 10 ROHM, J, 1/16W 1 R4497 PERJ3GEYJ103 M 10 ROHM, J, 1/16W 1 R4498 ERJ3GEYJ103 M 10 ROHM, J, 1/16W 1 R4491 ERJ3GEYJ103 M 10 ROHM, J, 1/16W 1 R4492 PERJ3GEYJ103 M 10 ROHM, J, 1/16W 1 R4495 PERJ3GEYJ103 M 10 ROHM, J, 1/16W 1 R4496 ERJ3GEYJ103 M 10 ROHM, J, 1/16W 1 R4496 ERJ3GEYJ103 M 10 ROHM, J, 1/16W 1 R4496 ERJ3GEYJ103 M 10 ROHM, J, 1/16W 1 R4520 ERJ3GEYJ103 M 10 ROHM, J, 1/16W 1 R4521 ERJ3GEYJ103 M 22 ROHM, J, 1/16W 1 R4522 E				+ +	
R4401				<del>                                     </del>	
R4411					
R4414 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4423 ERJ3GEYJ220 RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4428 EXB38V220J RESISTOR ARRAY 1 R4428 EXB38V220J RESISTOR ARRAY 2 R4433,3 EXB38V220J RESISTOR ARRAY 2 R4443,4 ERJ3GEYJ220 M 22 OHM, J, 1/16W 3 R4443,4 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4444,4 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4444,4 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R4445,5 ERJ3GEYJ20 M 22 OHM, J, 1/16W 2 R4445,5 ERJ3GEYJ20 M 22 OHM, J, 1/16W 2 R4450,5 ERJ3GEYJ20 M 22 OHM, J, 1/16W 2 R4450,5 ERJ3GEYJ30 M 10KOHM, J, 1/16W 2 R4450,6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4464,6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4466 ERJ3GEYJ102 M 10KOHM, J, 1/16W 1 R4467 ERJ3GEYJ102 M 10KOHM, J, 1/16W 1 R4468 ERJ3GEYJ102 M 10KOHM, J, 1/16W 1 R4469 ERJ3GEYJ102 M 10KOHM, J, 1/16W 1 R4471 ERJ3GEYJ30 M 3 OHM, J, 1/16W 1 R4472 ERJ3GEYJ102 M 10KOHM, J, 1/16W 1 R4469 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4469 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4469 ERJ3GEYJ33 M 330 OHM, J, 1/16W 1 R4469 ERJ3GEYJ33 M 330 OHM, J, 1/16W 1 R4469 ERJ3GEYJ33 M 330 OHM, J, 1/16W 1 R4469 ERJ3GEYJ33 M 10KOHM, J, 1/16W 1 R4469 ERJ3GEYJ33 M 10KOHM, J, 1/16W 1 R4469 ERJ3GEYJ33 M 330 OHM, J, 1/16W 1 R4469 ERJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4469 ERJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4469 ERJ3GEYJ331 M 330 OHM, J,				<del>                                     </del>	
R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4422 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4426 EXB88V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4428 ERJ3GEYJ220 M 22 OHM,J,1/16W 3 R4433,3 EXB86V220J RESISTOR ARRAY 1 R4433,3 EXB86V220J RESISTOR ARRAY 2 R4433,3 EXB86V220J RESISTOR ARRAY 2 R44435- BRJ3GEYJ220 M 22 OHM,J,1/16W 3 R4441,4 EXJ3GEYJ220 M 22 OHM,J,1/16W 1 R4445- ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4445- ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4448,4 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4450- ERJ3GEYJ303 M 10KOHM,J,1/16W 2 R4455,5 ERJ3GEYJ303 M 10KOHM,J,1/16W 2 R4460 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4461,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4465 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4465 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4466 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4466 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4467 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4468 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4469 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4466 ERJ3GEYJ102 M 10KOHM,J,1/16W 1 R4467 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4468 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4472 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4474 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4498 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4498 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4498 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4498 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4498 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4499,9 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4521 ERJ3GEYJ020 M 10KOHM,J/1/16W 1 R4522 ERJ3GEYOROO M 0 0HM, 1/16W 1 R4530 ERJ3GEYJ020 M 20 OHM, 1/16W 1 R4530 ERJ3GEYJ020 M 20			· .	1 1	
R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4428 EXB38V220J RESISTOR ARRAY 1 R4431, 2 ERJ3GEYJ220 M 22 OHM, J, 1/16W 3 37 R4441, 4 D1HG5608A002 NETWORK RESISTER 2 R4443 EXB38V560J RESISTOR ARRAY 1 R4444 ERJ3GEYJ220 M 22 OHM, J, 1/16W 3 47 R4444, 4 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 9 R4444, 5 ERJ3GEYJ220 M 22 OHM, J, 1/16W 5 54 R4445- ERJ3GEYJ220 M 20 OHM, J, 1/16W 2 9 R4446 ERJ3GEYJ220 M 20 OHM, J, 1/16W 2 9 R4450- ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 9 R4460 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 2 R4461 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4465 ERJ3GEYJ6192 M61.9KOHM, J, 1/16W 1 R4466 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4466 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4466 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4466 ERJ3GEYJ010 M 1KOHM, J, 1/16W 1 R4466 ERJ3GEYJ010 M 1KOHM, J, 1/16W 1 R4466 ERJ3GEYJ010 M 1KOHM, J, 1/16W 1 R4467 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4468 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4472 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4474 ERJ3GEYJ010 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ103 M 30 OHM, J, 1/16W 1 R4474 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4498, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4491 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4492, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4491 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4491 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4492, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4491 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4492, 9 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4493 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4494 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4497 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4499, 9 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4491 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4491 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4491 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4492, 9 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4493, 9 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R44949 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R44949 ERJ3GEYJ103 M 22 OHM, I, 1/16W 1				<del>                                     </del>	
R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 EXB38V220J RESISTOR ARRAY 1 R4428 EXB38V220J RESISTOR ARRAY 1 R4428 EXB38V220J RESISTOR ARRAY 1 R4428 EXB38V220J RESISTOR ARRAY 1 R4431 EXB38V220J RESISTOR ARRAY 2 4 R4435- ERJ3GEYJ220 M 22 OHM, J, 1/16W 3 37 R4441, 4 D1HG5608A002 NETWORK RESISTER 2 2 R4443 EXB38V560J RESISTOR ARRAY 1 R4444 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4445- ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4445- ERJ3GEYJ20 M 22 OHM, J, 1/16W 2 9 R4450- ERJ3GEYJ20 M 22 OHM, J, 1/16W 2 9 R4450- ERJ3GEYJ20 M 0 OHM, 1/16W 2 9 R4460 ERJ3GEYJ20 M 33KOHM, 1/16W 2 9 R4466 ERJ3GEYJ02 M 10KOHM, J, 1/16W 1 R4461 ERJ3GEYJ102 M 10KOHM, J, 1/16W 1 R4465 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4466 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4466 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4466 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4467 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4468 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4472 RAJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4472 RAJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4473 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4490 RBJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4490 RBJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4490 RBJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4490 RBJ3GEYJ103 M 33 OHM, J, 1/16W 1 R4490 RBJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4491 RBJ3GEYJ100 M 10KOHM, J, 1/16W 1 R4490 RBJ3GEYJ100 M 10KOHM, J, 1/16W 1 R4491 RBJ3GEYJ100 M 10KOHM, J, 1/16W 1 R4492 RBJ3GEYJ00 M 0 0HM, 1/16W 1 R4493 RBJ3GEYJ100 M 10KOHM, J, 1/16W 1 R4494 RBJ3GEYJ00 M 0 0HM, 1/16W 1 R44990, BRJ3GEYJ00 M 0 0HM, 1/16W 1 R4521 RBJ3GEYJ00 M 0 0HM, 1/16W 1 RA522 RBJ3GEYJ00 M 0 0HM, 1/16W 1 RA523 RBJ3GEYJ00 M 0 0HM, 1/16W 1 RA523 RBJ3GEYJ00 M 0 0HM, 1/16W 1				<del>                                     </del>	
R4426 EXB38V220J RESISTOR ARRAY 1 R4427 REJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4433, 3 EXB38V220J RESISTOR ARRAY 2 4 R4433, 3 EXB38V220J RESISTOR ARRAY 2 4 R4435- REJ3GEVJ220 M 22 OHM, J, 1/16W 3 37 R4441, 4 DIHG5608A002 NETWORK RESISTER 2 2 R4443 EXB38V560J RESISTOR ARRAY 1 R4444- EXB3GEVJ220 M 22 OHM, J, 1/16W 3 47 R4445- ERJ3GEVJ220 M 22 OHM, J, 1/16W 1 R4445- ERJ3GEVJ220 M 22 OHM, J, 1/16W 2 9 R4446, 5 ERJ3GEVJ220 M 20 OHM, J, 1/16W 2 9 R4450- ERJ3GEVJ103 M 10KOHM, J, 1/16W 2 9 R4460 ERJ3GEVJ103 M 20 OHM, J/16W 2 9 R4460 ERJ3GEVJ103 M 47KOHM, J, 1/16W 1 R4461, 6 ERJ3GEVJ102 M 22 KOHM, J, 1/16W 1 R4462 ERJ3GEVJ102 M 1 ROWN, J, 1/16W 1 R4463 ERJ3GEVJ102 M 1 ROWN, J, 1/16W 1 R4466 ERJ3GEVJ102 M 1 ROWN, J, 1/16W 1 R4466 ERJ3GEVJ102 M 1 ROWN, J, 1/16W 1 R4467 ERJ3GEVJ103 M 30 OHM, J, 1/16W 1 R4471 ERJ3GEVJ102 M 1 ROWN, J, 1/16W 1 R4472 ERJ3GEVJ103 M 47KOHM, J, 1/16W 1 R4471 ERJ3GEVJ102 M 1 ROWN, J, 1/16W 1 R4473 ERJ3GEVJ103 M 1 ROWN, J, 1/16W 1 R4474 ERJ3GEVJ104 M 1 ROWN, J, 1/16W 1 R4473 ERJ3GEVJ105 M 1 ROWN, J, 1/16W 1 R4474 ERJ3GEVJ102 M 1 ROWN, J, 1/16W 1 R4474 ERJ3GEVJ103 M 30 OHM, J, 1/16W 1 R4474 ERJ3GEVJ102 M 1 ROWN, J, 1/16W 1 R4480 ERJ3GEVJ102 M 1 ROWN, J, 1/16W 1 R4480 ERJ3GEVJ103 M 10 KOHM, J, 1/16W 1 R4490,9 ERJ3GEVJ203 M 20 KOHM, J, 1/16W 1 R4591 ERJ3GEVJ103 M 10 KOHM, J, 1/16W 1 R4592 ERJ3GEVJ00 M 0 0 MM, 1/16W 1 R4593 ERJ3GEVJ00 M 0 0				+ +	
R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4428 EXB38V220J RESISTOR ARRAY 1 R4433,3 EXB38V220J RESISTOR ARRAY 2 4 R4435- BRJ3GEYJ220 M 22 OHM,J,1/16W 3 37 R4441,4 D1HG5608A002 NETWORK RESISTER 2 R4443 EXB38V560J RESISTOR ARRAY 1 R4444 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4444 ERJ3GEYJ220 M 22 OHM,J,1/16W 3 47 R4444,4 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 9 R44450- ERJ3GEYJ220 M 22 OHM,J,1/16W 5 54 R4456,5 ERJ3GEYJ030 M 10KOHM,J,1/16W 2 9 R4450- ERJ3GEYJ103 M 10KOHM,J,1/16W 2 9 R4460 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 2 R4466 ERJ3GEYJ103 M 47KOHM,J,1/16W 1 R4466 ERJ3GEYJ102 M 12KOHM,J,1/16W 1 R4466 ERJ3GEYJ010 M 10KOHM,J,1/16W 1 R4466 ERJ3GEYJ010 M 10KOHM,J,1/16W 1 R4466 ERJ3GEYJ010 M 10KOHM,J,1/16W 1 R4467 ERJ3GEYJ103 M 17KOHM,J,1/16W 1 R4468 ERJ3GEYJ010 M 10KOHM,J,1/16W 1 R4471 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 R4471 ERJ3GEYJ330 M 30H,J,1/16W 1 R4472 ERJ3GEYJ010 M 10KOHM,J,1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4491 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4491 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4491 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4492 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4494 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4497 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4498,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4499,9 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4524 ERJ3GEYJ031 M 330 OHM,J,1/16W 1 R4524 ERJ3GEYD201 M 2KOHM,J,1/16W 1 R4525 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4521 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4522 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4523 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4525 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4526 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF8100 M 10 OHM, 1/16W 1 R4528 ERJ3EKF8100 M 10 OHM, 1/16W 1					
R4428 EXB38V220J RESISTOR ARRAY 1 4					
R8433,3 EXB38V220J RESISTOR ARRAY 4 44415- 41 PA				<del>                                     </del>	
### R4435-				<del>                                     </del>	
R4435- RJ3GEYJ220 M 22 OHM,J,1/16W 3 37 84441,4 D1HGS608A002 NETWORK RESISTER 2 2 84443 EXB38V560J RESISTOR ARRAY 1 844445- RJ3GEYJ220 M 22 OHM,J,1/16W 3 47 84445- ERJ3GEYJ560 M 56 OHM,J,1/16W 3 47 84448,4 ERJ3GEYJ220 M 22 OHM,J,1/16W 5 54 84448,5 ERJ3GEYJ220 M 22 OHM,J,1/16W 5 54 84456,5 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 9 84460 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 84461,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 84461,6 ERJ3GEKF6192 M61.9KOHM, 1/16W 1 84463 ERJ3GEKF6192 M61.9KOHM, 1/16W 1 84464 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 84465 ERJ3GEYGR00 M 0 OHM, 1/16W 1 84469 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 84469 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 84471 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 84472 ERJ3GEYJ02 M 1KOHM,J,1/16W 1 84473 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 84474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 84474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 84473 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 84474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 84480 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 84481 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 84482 ERJ3GEYJ103 M 33 OHM,J,1/16W 1 84488 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 84480 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 84480 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 84481 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 84482 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 84484 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 84484 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 84484 ERJ3GEYJ311 M 330 OHM,J,1/16W 1 84484 ERJ3GEYJ311 M 30 OHM,J,1/16W 1 84485 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 84486 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 84487 ERJ3GEYJ311 M 30 OHM,J,1/16W 1 84489 PRJ3EKF1800 M 180 OHM,J,1/16W 1 84490,9 ERJ3EKF1800 M 180 OHM,J,1/16W 1 84491,9 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 84492,9 ERJ3GEYJ070 M 0 OHM,J,1/16W 1 84492,9 ERJ3GEYJ071 M 47KOHM,J,1/16W 1 84524 ERJ3GEYJ000 M 0 OHM,J,1/16W 1 84524 ERJ3GEYJ000 M 0 OHM,J/16W 1		EAB36V2200	RESISION ARRAI		
37 R4441,4 D1HG5608A002 NETWORK RESISTER 2 R4443 EXB38V560J RESISTOR ARRAY 1 R4444 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4444 ERJ3GEYJ220 M 22 OHM,J,1/16W 3 47 R4448,4 ERJ3GEYJ220 M 22 OHM,J,1/16W 5 9 R4450- SRJ3GEYJ000 M 0 OHM, 1/16W 5 8 R4450- ERJ3GEYJ103 M 10KOHM,J,1/16W 2 9 R4450- ERJ3GEYJ103 M 10KOHM,J,1/16W 2 9 R4460 ERJ3GEYJ103 M 22KOHM, 1/16W 2 9 R4460 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4461 ERJ3GEYJ02 M 10KOHM,J,1/16W 1 R4466 ERJ3GEYJ02 M 10KOHM,J,1/16W 1 R4465 ERJ3GEYJ02 M 10KOHM,J,1/16W 1 R4465 ERJ3GEYJ02 M 10KOHM,J,1/16W 1 R4466 ERJ3GEYJ02 M 10KOHM,J,1/16W 1 R4469 ERJ3GEYJ102 M 10KOHM,J,1/16W 1 R4469 ERJ3GEYJ102 M 10KOHM,J,1/16W 1 R4471 ERJ3GEYJ102 M 10KOHM,J,1/16W 1 R4472 ERJ3GEYJ102 M 10KOHM,J,1/16W 1 R4473 ERJ3GEYJ02 M 10KOHM,J,1/16W 1 R4474 ERJ3GEYJ02 M 10KOHM,J,1/16W 1 R4474 ERJ3GEYJ02 M 10KOHM,J,1/16W 1 R4478 ERJ3GEYJ03 M 33 OHM,J,1/16W 1 R4480 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 R4481 ERJ3GEYJ102 M 10KOHM,J,1/16W 1 R4480 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4481 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4482 B RJ3GEYJ103 M 10KOHM,J,1/16W 1 R4483 B RHJGERYJ05 M 10KOHM,J,1/16W 1 R4480 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4481 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4482 B RJ3GEYJ103 M 10KOHM,J,1/16W 1 R4488 B RJ3GEYJ103 M 10KOHM,J,1/16W 1 R4488 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4489 P ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4489 B RJ3GEYJ103 M 10KOHM,J,1/16W 1 R4489 B RJ3GEYJ103 M 10KOHM,J,1/16W 1 R4481 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4482 B RJ3GEYJ103 M 10KOHM,J,1/16W 1 R4483 B RRJ3GEYJ103 M 10KOHM,J,1/16W 1 R44848 B RRJ3GEYJ103 M 10KOHM,J,1/16W 1 R4489 B RJ3GEYJ103 M 10KOHM,J,1/16W 1 R4489 B RJ3GEYJ103 M 10KOHM,J,1/16W 1 R4489 B RJ3GEYJ000 M 0 0HM, 1/16W 1 R4491 P ERJ3GEYJ000 M 0 0HM, 1/16W 1 R4492 P ERJ3GEYJ000 M 0 0HM, 1/16W 1 R4493 P ERJ3GEYJ000 M 0 0HM, 1/16W 1 R4522 ERJ3GEYJ000 M 0 0HM, 1/16W 1 R4522 ERJ3GEYJ000 M 0 0HM, 1/16W 1 R4523 B RJ3GEYJ000 M 0 OHM, 1/16W 1 R4524 ERJ3GEYOROO M 0 0HM, 1/16W 1 R4525 ERJ3GEYOROO M 0 0HM, 1/16W 1		ERIT3GEVIT220	M 22 OHM.J.1/16W	3	
2	37	LNOSCLICZZO	22 0111/0/1/1011		
R44443 EXB38V560J RESISTOR ARRAY 1 R44444 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4445- ERJ3GEYJ220 M 26 OHM,J,1/16W 2 9 R4450- SERJ3GEYJ103 M 10KOHM,J,1/16W 5 54 R4456,5 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 9 R4458,5 ERJ3EKF3302 M 33KOHM, 1/16W 1 R4460 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4461,6 ERJ3GEKF2202 M 22KOHM, 1/16W 1 R4463 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4464 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4465 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4469 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4469 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4469 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4471 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 R4472 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 R4474 ERJ3GEYJ330 M 37 OHM,J,1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4475 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4476 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4477 ERJ3GEYJ330 M 30 OHM,J,1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4480 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4480 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4481 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4482,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4489,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 2 9 R4490,9 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 9 R4490,9 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4499,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 2 9 R4490,9 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4499,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R4499,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4499,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4499,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4499,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4499,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4552 ERJ3GEYJ470 M 47KOHM,J,1/16W 1 R4552 ERJ3GEYJ470 M 47KOHM,J,1/16W 1 R4552 ERJ3GEYJ470 M 47KOHM,J,1/16W 1 R45531,3 ERJ3GEYJ000 M 0 OHM, 1/16W 1 R45540,4 ERJ3GEYJ000 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOROO M 0 OHM, 1/16W 5	R4441,4	D1HG5608A002	NETWORK RESISTER	2	
R4444 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4445- ERJ3GEYJ560 M 56 OHM, J, 1/16W 3 47 R4448, 4 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 9 R44460 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 7 R4458, 5 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 2 R4460 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4461, 6 ERJ3GEYJ020 M 10 OHM, 1/16W 1 R4466 ERJ3GEYJ102 M 18KOHM, J, 1/16W 1 R4466 ERJ3GEYJ102 M 18KOHM, J, 1/16W 1 R4465 ERJ3GEYJ102 M 18KOHM, J, 1/16W 1 R4466 ERJ3GEYJ102 M 18KOHM, J, 1/16W 1 R4467 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4468 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4471 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4472 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4482 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4484 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4484 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4484 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 8 R4484 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4489 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 8 R4489 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4489 ERJ3GEYJ331 M 330 OHM, J, 1/16W 2 8 R4490, 9 ERJ3EKF1800 M 180 OHM, J, 1/16W 2 8 R4492, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4492, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 2 8 R4499, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4499, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4499, 9 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R4522 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R4524 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R4525 ERJ3EKF1200 M 12KOHM, 1/16W 1 R4526 ERJ3EKF1200 M 12KOHM, 1/16W 1 R4527 ERJ3EKF1200 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1200 M 12KOHM, 1/16W 1 R4529 ERJ3EKF1201 M 22 OHM, 1/16W 1 R4521 ERJ3GEYJ201 M 22 OHM, 1/16W 1 R4523 ERJ3EKF300 M 180 OHM, 1/16W 1 R4524 ERJ3GEYJ200 M 22 OHM, 1/16W 1 R4525 ERJ3EKF2001 M 22 OHM, 1/16W 1 R4526 ERJ3EKF300 M 0 0 OHM, 1/16W 1	2				
R4445- ERJ3GEYJ560 M 56 OHM, J,1/16W 3 47 47 47 47 47 47 47 47 47 47 47 47 47	R4443	EXB38V560J	RESISTOR ARRAY	1	
47 R44448,4 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 9 R4450- ERJ3GEYOROO M 0 OHM, 1/16W 5 54 R4456,5 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 7 R4458,5 ERJ3EKF3302 M 33KOHM, 1/16W 2 9 R4460 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4461,6 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4464 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4465 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4466 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4469 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4469 ERJ3GEYJ00 M 1KOHM, J, 1/16W 1 R4471 ERJ3GEYJ30 M 33 OHM, J, 1/16W 1 R4472 ERJ3GEYJ30 M 33 OHM, J, 1/16W 1 R4474 ERJ3GEYJ30 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ30 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4478 ERJ3GEYJ103 M 1KOHM, J, 1/16W 1 R4479 ERJ3GEYJ103 M 1KOHM, J, 1/16W 1 R4480 ERJ3GEYJ103 M 1KOHM, J, 1/16W 1 R4480 ERJ3GEYJ103 M 1KOHM, J, 1/16W 1 R4481 ERJ3GEYJ103 M 1KOHM, J, 1/16W 1 R4482,8 ERJ3GEYJ103 M 1KOHM, J, 1/16W 2 3 R4484,8 ERJ3GEYJ103 M 1OKOHM, J, 1/16W 2 6 R4487 ERJ3GEYJ103 M 1OKOHM, J, 1/16W 2 9 R4490,9 ERJ3GEYJ103 M 1OKOHM, J, 1/16W 1 R4490,9 ERJ3GEYJ103 M 1OKOHM, J, 1/16W 2 1 R4494 ERJ3GEYJ103 M 1OKOHM, J, 1/16W 1 R4499,9 ERJ3GEYJ103 M 1OKOHM, J, 1/16W 2 1 R4491 PRJ3GEYJ105 M 1MOHM, J, 1/16W 1 R4492,9 ERJ3GEYJ103 M 1OKOHM, J, 1/16W 1 R4499,9 ERJ3GEYJ103 M 1OKOHM, J, 1/16W 1 R4499,9 ERJ3GEYJ103 M 1OKOHM, J, 1/16W 1 R4499,9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 2 8 R4491 PRJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4492 PRJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4493 PRJ3GEYJ331 M 330 OHM, J, 1/16W 1 R44949 PRJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4499,9 ERJ3GEYJ311 M 30 OHM, J, 1/16W 1 R4522 ERJ3GEYJ311 M 30 OHM, J, 1/16W 1 R4524 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R4525 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R4526 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4529 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4520 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4521 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4523 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4524 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4531 ARJSEYOROO M 0 OHM, 1/16W 1	R4444	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4448,4 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 9	R4445-	ERJ3GEYJ560	M 56 OHM,J,1/16W	3	<del></del>
9	47				
R4450-		ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
54 R4456,5 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4458,5 ERJ3EKF3302 M 33KOHM, 1/16W 2 9 R4460.6 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4461,6 ERJ3EKF2202 M 22KOHM, 1/16W 2 2 R4463 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4465 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4466 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4466 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4467 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4469 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4472 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4474 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4474 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4480 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4482,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4482,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4489,9 ERJ3EYJ105 M 1MOHM,J,1/16W 2 R4489,9 ERJ3EYJ102 M 1KOHM,J,1/16W 2 R4494 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4494,9 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4494 ERJ3GEYJ104 M 1KOHM,J,1/16W 2 R4495,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4499,9 ERJ3EKF1800 M 180 OHM,J,1/16W 1 R4499,9 ERJ3EKF1800 M 180 OHM,J,1/16W 1 R4499,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4499,9 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4499,9 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4499,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4499,9 ERJ3GEYJ474 M 47KOHM,J,1/16W 1 R4499,9 ERJ3GEYJ474 M 47KOHM,J,1/16W 1 R4499,9 ERJ3GEYJ474 M 47KOHM,J,1/16W 1 R4499,9 E	9				
R4456,5 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 9 R4460 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4461,6 ERJ3EKF2202 M 22KOHM, 1/16W 1 R4463 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4464 ERJ3GEYJ002 M 1KOHM,J,1/16W 1 R4465 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4469 ERJ3GEYJ002 M 1KOHM,J,1/16W 1 R4469 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4469 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4472 ERJ3GEYJ303 M 33 OHM,J,1/16W 1 R4474 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4482,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 6 R4487 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 9 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 1 R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 1 R4490,9 ERJ3GEYJ103 M 1XOHM,J,1/16W 1 R4495,9 ERJ3GEYJ103 M 1XOHM,J,1/16W 2 1 R4495,9 ERJ3GEYJ103 M 1XOHM,J,1/16W 2 1 R4497,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4499,9 ERJ3GEYJ473 M 180 OHM, 1/16W 2 1 R4497,9 ERJ3GEYJ00 M 180 OHM, 1/16W 1 R4497,9 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4522 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4525 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4526 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4521 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4523 ERJ3EKF4300 M 180 OHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 2 R4531,3 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4531,3 ERJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5	R4450-	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
7 R4458,5 ERJ3EKF3302 M 33KOHM, 1/16W 2 9 R4460 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4461,6 ERJ3EKF2202 M 22KOHM, 1/16W 2 2 R4463 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4464 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4465 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4466 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4469 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4461 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4471 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 R4472 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 R4473 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4482,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 84488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4489,9 ERJ3GEYJ105 M 1KOHM,J,1/16W 2 84489,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 84490,9 ERJ3EYJ331 M 330 OHM,J,1/16W 1 R4499,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R4491 ERJ3GEYJ02 M 1KOHM,J,1/16W 1 R4492,9 ERJ3GEYJ03 M 10KOHM,J,1/16W 1 R4493 ERJ3GEYJ02 M 1KOHM,J,1/16W 1 R4493 ERJ3GEYJ02 M 1KOHM,J,1/16W 1 R4491 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4492 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4522 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4524 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4524 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4525 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4521 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4523 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4524 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4525 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4521 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4523 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4524 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4524 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4524 ERJ3EKF1800 M 0 OHM, 1/16W 1				<b>-</b>	
R4458,5 ERJ3EKF3302 M 33KOHM, 1/16W 2		ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
9 R4460 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4461,6 ERJ3EKF2202 M 22KOHM, 1/16W 2 R4463 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4464 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4465 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4466 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4469 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4472 ERJ3GEYJ02 M 1KOHM,J,1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4482,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4488,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 R4488,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 R4489,9 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4490,9 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4499,9 ERJ3GEYJ103 M 1KOHM,J,1/16W 1 R4492,9 ERJ3GEYJ00 M 180 OHM, 1/16W 2 R4495,9 ERJ3GEYJ00 M 180 OHM, 1/16W 1 R4497,9 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4522 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4525 ERJ3EKF1800 M 100 OHM, 1/16W 1 R4526 ERJ3EKF1800 M 100 OHM, 1/16W 1 R4527 ERJ3EKF1800 M 100 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 100 OHM, 1/16W 1 R4521 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4522 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4523 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4524 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4525 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4521 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4530 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM, 1/16W 1 R4531,3 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4531,3 ERJ3GEYOROO M 0 OHM, 1/16W 5 R4531,3 ERJ3GEYOROO M 0 OHM, 1/16W 5 R4530 ERJ3EKF1800 M 0 OHM, 1/16W 1		ED TOERESSOO	M 22VOUM 1/16W	-	
R4460 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4461,6 ERJ3EKF2202 M 22KOHM, 1/16W 2 R4463 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4464 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4465 ERJ3GEYGR00 M 0 OHM, 1/16W 1 R4466 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4467 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4469 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4472 ERJ3GEYJ330 M 33 OHM, J, 1/16W 1 R4474 ERJ3GEYJ473 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4481 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4484 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4484 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4488, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4488, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4490, 9 ERJ3EKF1800 M 180 OHM, J, 1/16W 2 R4490, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 2 R4497, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 2 R4499, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 2 R4499, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 2 R4499, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4499, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4499, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4499, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4491 ERJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4492, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4494 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4495 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R44952 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R44952 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4524 ERJ3GEYJ470 M 100 OHM, J, 1/16W 1 R4525 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R4526 ERJ3GEYJ470 M 100 OHM, J, 1/16W 1 R4527 ERJ3GEYJ470 M 100 OHM, J, 1/16W 1 R4528 ERJ3GEYB600 M 0 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4530 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4531 BRJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4531 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4533 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4534 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4537 ERJ3GEYOR00 M 0 OHM, 1/16W 1		ERUSERFS502	M SSKORM, 1/16W		
R4461,6 ERJ3EKF2202 M 22KOHM, 1/16W 2 2 R4463 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4464 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4465 ERJ3GEYGR00 M 0 OHM, 1/16W 1 R4466 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4469 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4472 ERJ3GEYJ300 M 0 OHM, 1/16W 1 R4473 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4482,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4490,9 ERJ3EKF1800 M 1KOHM,J,1/16W 2 R4490,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 2 R4499,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R4495,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 2 R4497,9 ERJ3GEYJ331 M 370 OHM,J,1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4497,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4522 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4524 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4524 ERJ3GEYJ470 M 100 OHM,J,1/16W 1 R4524 ERJ3GEYJ000 M 0 OHM, 1/16W 1 R4524 ERJ3GEYJ000 M 0 OHM, 1/16W 1 R4524 ERJ3GEYJ000 M 0 OHM, 1/16W 1 R4529 ERJ3EKF1200 M 180 OHM, 1/16W 1 R4520 ERJ3EKF1200 M 2KOHM, 1/16W 1 R4530 ERJ3EKF1200 M 2KOHM, 1/16W 1 R4531 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4531 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4531 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4531 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4531 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4531 ERJ3GEYOR00 M 0 OHM, 1/16W 1		ER.T3GEV.T473	м 47конм .т 1/16W	1	
2 R4463 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4464 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4465 ERJ3GEYGROO M 0 OHM, 1/16W 1 R4466 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4469 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4472 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 R4474 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4474 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4480 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4482 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4484 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 3 R4484 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4489,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4495,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4495,9 ERJ3GEYJ470 M 100 OHM,J,1/16W 1 R4522 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4524 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4525 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4526 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4521 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4522 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4523 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4524 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4525 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4526 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4527 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4530 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4531,3 ERJ3GEYOROO M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOROO M 0 OHM, 1/16W 5					
R4464 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4465 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4466 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4466 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4467 ERJ3GEYJ103 M 47KOHM, J, 1/16W 1 R4471 ERJ3GEYJ330 M 33 OHM, J, 1/16W 1 R4473 ERJ3GEYJ330 M 0 OHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4481 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4482, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4488 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4488, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4488, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4489, 9 ERJ3GEYJ103 M 1KOHM, J, 1/16W 1 R4490, 9 ERJ3EKF1800 M 180 OHM, J, 1/16W 2 R4490, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 2 R4490, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4491 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4495, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4495, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4497, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4497, 9 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R4497, 9 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R4522 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4524 ERJ3GEYJ000 M 0 OHM, 1/16W 1 R4525 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4526 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4527 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4530 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4531, 3 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4530 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4531 - ERJ3GEYOROO M 0 OHM, 1/16W 1 R4531 - ERJ3GEYOROO M 0 OHM, 1/16W 5 R4530 ERJ3EKF2001 M 2COHM, 1/16W 1 R4531 - ERJ3GEYOROO M 0 OHM, 1/16W 5 R4531 - ERJ3GEYOROO M 0 OHM, 1/16W 5 R4530 - ERJ3EKF2000 M 0 OHM, 1/16W 5 R4530 - ERJ3EKF2000 M 0 OHM, 1/16W 5 R4530 - ERJ3EKF2000 M 0 OHM, 1/16W 5	2	INO SERI EE CE	22801117 17108	~	
R4464 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4465 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4466 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4469 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4472 ERJ3GEYJ330 M 33 OHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4482, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4484 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4485, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4487 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4488, 8 ERJ3GEYJ103 M 1KOHM, J, 1/16W 2 R4489, 9 ERJ3EKF1800 M 1KOHM, J, 1/16W 2 R4490, 9 ERJ3EKF1800 M 180 OHM, J, 1/16W 2 R4497 PERJ3GEYJ331 M 330 OHM, J, 1/16W 2 R4499, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4499, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4495, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4495, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4497 PERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4497 PERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4497 PERJ3GEYJ471 M 47O OHM, J, 1/16W 1 R4497 PERJ3GEYJ471 M 47O OHM, J, 1/16W 1 R4499, 9 ERJ3GEYJ471 M 47O OHM, J, 1/16W 1 R4522 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4524 ERJ3GEYDROO M 0 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4530 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4531 BRJ3GEYJ220 M 22 OHM, J, 1/16W 2 R4531 BRJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4530 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4531 BRJ3GEYJ220 M 22 OHM, J, 1/16W 5 R4531 BRJ3GEYJ220 M 22 OHM, J, 1/16W 5	R4463	ERJ3EKF6192	M61.9KOHM, 1/16W	1	
R4465 ERJ3EKF6192 M61.9KOHM, 1/16W 1 R4466 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4469 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM, J,1/16W 1 R4472 ERJ3GEYJ330 M 33 OHM, J,1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4482, 8 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 R4484 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4488 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 R4488 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4488, 8 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 R4488, 8 ERJ3GEYJ105 M 1MOHM, J,1/16W 2 R4489, 9 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4492, 9 ERJ3GEYJ331 M 330 OHM, J,1/16W 2 R4499, 9 ERJ3GEYJ23 M 22KOHM, J,1/16W 1 R4497, 9 ERJ3GEYJ473 M 47KOHM, J,1/16W 2 R4497, 9 ERJ3GEYJ471 M 470 OHM, J,1/16W 1 R4497, 9 ERJ3GEYJ471 M 470 OHM, J,1/16W 1 R4516 TAJAAHO101JV M 100 OHM, J,1/16W 1 R4522 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4524 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4530 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4531, 3 ERJ3GEYJ220 M 22 OHM, J,1/16W 2 R4531, 3 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4531 ERJ3GEYOROO M 0 OHM, 1/16W 5 R4531 ERJ3GEYOROO M 0 OHM, 1/16W 1	R4464			1	
R4466 ERJ3GEYOROO M O OHM, 1/16W 1 R4469 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4472 ERJ3GEYJ330 M 33 OHM, J, 1/16W 1 R4473 ERJ3GEYOROO M O OHM, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4480 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4482, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4485, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4488 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4488, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4488, 8 ERJ3GEYJ105 M 1MOHM, J, 1/16W 2 R4490, 9 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4492, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 2 R4497, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4497, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4497, 9 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R4552 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R4524 ERJ3GEYDROO M 0 OHM, 1/16W 1 R4524 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4531 BRJ3GEYJ220 M 22KOHM, 1/16W 1 R4531 BRJ3GEYJ220 M 22KOHM, 1/16W 1 R4531 BRJ3GEYJ220 M 22 OHM, 1/16W 1 R4533 BRJ3GEYJ220 M 22 OHM, 1/16W 1 R4534 BRJ3GEYOROO M 0 OHM, 1/16W 1 R4537 BRJ3GEYJ220 M 22 OHM, 1/16W 1 R4530 BRJ3EKF4302 M 43KOHM, 1/16W 1 R4530 BRJ3EKF4302 M 43KOHM, 1/16W 1 R4531 BRJ3GEYOROO M 0 OHM, 1/16W 1 R4534 BRJ3GEYOROO M 0 OHM, 1/16W 5 R4537 BRJ3GEYOROO M 0 OHM, 1/16W 5 R4530 BRJ3EKF4302 M 43KOHM, 1/16W 5 R4531 BRJ3GEYOROO M 0 OHM, 1/16W 5 R4534 BRJ3GEYOROO M 0 OHM, 1/16W 5 R4534 BRJ3GEYOROO M 0 OHM, 1/16W 5 R4534 BRJ3GEYOROO M 0 OHM, 1/16W 5				<del>                                     </del>	
R4469 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4471 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4472 ERJ3GEYJ330 M 33 OHM, J, 1/16W 1 R4473 ERJ3GEYQR00 M 0 OHM, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4480 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4484 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4485, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4485, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4487 ERJ3GEYJ103 M 1KOHM, J, 1/16W 2 R4488, 8 ERJ3GEYJ102 M 1KOHM, J, 1/16W 2 R4490, 9 ERJ3EKF1800 M 180 OHM, J, 1/16W 2 R4490, 9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 2 R4494 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4495, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4497, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4497, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4524 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R4525 ERJ3GEYOR00 M 0 OHM, J, 1/16W 1 R4526 ERJ3GEYOR00 M 0 OHM, J, 1/16W 1 R4527 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4520 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4521 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4522 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4523 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4524 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4525 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4526 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 22 OHM, J, 1/16W 2 R4531 - ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531 - ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4533 - ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4534 - ERJ3GEYOR00 M 0 OHM, 1/16W 5				<del>                                     </del>	
R4471 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4472 ERJ3GEYJ330 M 33 OHM,J,1/16W 1 R4473 ERJ3GEYJ0700 M 0 OHM, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4480 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4482,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4484 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4485,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4487 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4488,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4489,9 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4494 ERJ3GEYJ331 M 330 OHM,J,1/16W 2 R4494 ERJ3GEYJ23 M 22KOHM,J,1/16W 1 R4495,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 2 R4497,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4495,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4495,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4521 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4522 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4530 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- R4533- BRJ3GEYOR00 M 0 OHM, 1/16W 5 R4531 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4533- R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5					
R4472 ERJ3GEYJ330 M 33 OHM, J, 1/16W 1 R4473 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R44474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4480 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4482, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 3 R44484 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4485, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4487 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4488, 8 ERJ3GEYJ105 M 1MOHM, J, 1/16W 2 R4490, 9 ERJ3EKF1800 M 180 OHM, J, 1/16W 2 R4492, 9 ERJ3GEYJ2331 M 330 OHM, J, 1/16W 2 R4494 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4495, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4497, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4497, 9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4497, 9 ERJ3GEYJ471 M 47O OHM, J, 1/16W 1 R4522 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4525 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4526 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4527 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531, 3 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R4533 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4534 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4537 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4534 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4535 ERJ3GEYOR00 M 0 OHM, 1/16W 5				<del>                                     </del>	
R4473 ERJ3GEYOROO M O OHM, 1/16W 1 R4474 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4480 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4482,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4484 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4485,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4487 ERJ3GEYJ105 M 1MOHM,J,1/16W 1 R4488,8 ERJ3GEYJ105 M 1KOHM,J,1/16W 2 R4489,9 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4492,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 2 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4497,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4497,9 ERJ3GEYJ471 M 47O OHM,J,1/16W 1 R4524 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4524 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4527 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4530 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4531,3 ERJ3GEYOROO M 0 2KOHM, 1/16W 1 R4533 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4533 ERJ3GEYOROO M 0 OHM, 1/16W 5 R4534 ERJ3GEYOROO M 0 OHM, 1/16W 5 R4537 ERJ3GEYOROO M 0 OHM, 1/16W 5 R4534 ERJ3GEYOROO M 0 OHM, 1/16W 5				+ +	
R4474 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4480 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4482,8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4484 ERJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4485,8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 GR4487 ERJ3GEYJ105 M 1MOHM, J, 1/16W 1 R4488,8 ERJ3GEYJ102 M 1KOHM, J, 1/16W 2 PR4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4492,9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 2 R4494 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4497,9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4497,9 ERJ3GEYJ471 M 470 OHM, J, 1/16W 2 R4516 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4522 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531, 3 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R4533- R4533- R4533- R4534, 4 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R77 R4540, 4 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R77 R4540, 4 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R77 R4540, 4 ERJ3GEYOR00 M 0 OHM, 1/16W 5				<del>                                     </del>	
R4480 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4481 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4482,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4484 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R4485,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4487 ERJ3GEYJ105 M 1MOHM,J,1/16W 1 R4488,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 R4489,9 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4492,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 2 R4494 ERJ3GEYJ223 M 22KOHM,J,1/16W 2 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4497,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4524 ERJ3GEYJ6W00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- R4533- R4533- R4534 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4537 R4534 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4533- R4533- R4534,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4534 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4534 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4535 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4533- R4534,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5	R4473	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4481 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4482,8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4485,8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4485,8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4487 ERJ3GEYJ105 M 1MOHM, J, 1/16W 1 R4488,8 ERJ3GEYJ102 M 1KOHM, J, 1/16W 2 R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4492,9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 2 R4494 ERJ3GEYJ223 M 22KOHM, J, 1/16W 2 R4495,9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4497,9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4497,9 ERJ3GEYJ471 M 470 OHM, J, 1/16W 2 R4516 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R4533- R4533- R4533- R4534,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4537 R4534,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4533- R4533- R4533- R4534,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5	R4474	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4482,8	R4480	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
3 R4484 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R4485,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 6 R4487 ERJ3GEYJ105 M 1MOHM,J,1/16W 1 R4488,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 9 R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 1 R4492,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 2 3 R4494 ERJ3GEYJ223 M 22KOHM,J,1/16W 2 6 R4497,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 8 R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 2 8 R4516 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- R4533- ERJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5	R4481	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4484 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R4485,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4487 ERJ3GEYJ105 M 1MOHM,J,1/16W 1 R4488,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 PR4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4492,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R4494 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 2 R4516 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4524 ERJ3EKF1800 M 12KOHM, 1/16W 1 R4525 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1201 M 2KOHM, 1/16W 1 R4529 ERJ3EKF300 M 180 OHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- R4533- R4534,4 ERJ3GEY0R00 M 0 OHM, 1/16W 5 R4537 R4540,4 ERJ3GEY0R00 M 0 OHM, 1/16W 5 R4537 R4540,4 ERJ3GEY0R00 M 0 OHM, 1/16W 5	R4482,8	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4485,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4487 ERJ3GEYJ105 M 1MOHM,J,1/16W 1 R4488,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 PR4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4492,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R4494 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 BR4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 2 R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4522 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1200 M 180 OHM, 1/16W 1 R4529 ERJ3EKF4300 M 180 OHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- BRJ3GEYOR00 M 0 OHM, 1/16W 5 R4533- BRJ3GEYOR00 M 0 OHM, 1/16W 5 R4534 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4533- ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4534 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4534 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4534 ERJ3GEYOR00 M 0 OHM, 1/16W 5				H . H	
6 R4487 ERJ3GEYJ105 M 1MOHM, J, 1/16W 1 R4488,8 ERJ3GEYJ102 M 1KOHM, J, 1/16W 2 9 R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 1 R4492,9 ERJ3GEYJ331 M 330 OHM, J, 1/16W 1 R4494 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 6 R4497,9 ERJ3GEYJ471 M 470 OHM, J, 1/16W 2 8 R4516 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1200 M 180 OHM, 1/16W 1 R4529 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R4533- R4533- R4533- R4534,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5				1 . 1	
R4487 ERJ3GEYJ105 M 1MOHM,J,1/16W 1 R4488,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 9 R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 1 R4492,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 1 R4494 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 6 R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 2 8 R4516 TAJAAHO101JV M 100 OHM,J,1/16W 1 R4522 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- R4533- BRJ3GEYDR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5 37	R4485,8	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4488,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 2  R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2  R4492,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 2  R4494 ERJ3GEYJ223 M 22KOHM,J,1/16W 1  R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2  R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 2  R4516 TAJAAH0101JV M 100 OHM,J,1/16W 1  R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1  R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1  R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1  R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1  R4531 ERJ3GEYJ220 M 22 OHM,J,1/16W 2  R4533- R4533- BRJ3GEYJ220 M 0 OHM, 1/16W 5  R4534 ERJ3GEYOR00 M 0 OHM, 1/16W 5  R4535 ERJ3GEYOR00 M 0 OHM, 1/16W 2		ER.T3CEV.T10E	м 1монм .т 1/16ы	1	
9 R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 1 R4492,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 2 R4494 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 8 R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 2 8 R4516 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4522 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4524 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- R4533- BRJ3GEYJ220 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5				<del>                                     </del>	
R4490,9 ERJ3EKF1800 M 180 OHM, 1/16W 2 1 R4492,9 ERJ3GEYJ331 M 330 OHM,J,1/16W 2 3 R4494 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 6 R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 2 8 R4516 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 2 R4533- R4533- BRJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5	9	EKO 3GETUTUZ	M INORM, U, I/IOW		
1 R4492,9 R4494 RR4494 RR4495,9 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4497,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 2 R4516 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- R4533- R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4534 R4533- R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5 R4530 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 2	R4490,9	ERJ3EKF1800	M 180 OHM, 1/16W	2	
3 R4494 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 6 R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 2 8 R4516 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531 ERJ3GEY0R00 M 0 OHM,J,1/16W 2 R4533- ERJ3GEY0R00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEY0R00 M 0 OHM, 1/16W 2	1			L⁻	
R4494 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 2 R4516 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- ERJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 2	R4492,9	ERJ3GEYJ331	M 330 OHM, J, 1/16W	2	
R4495,9 ERJ3GEYJ473 M 47KOHM,J,1/16W 2  R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 2  R4516 TAJAAH0101JV M 100 OHM,J,1/16W 1  R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1  R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1  R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1  R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1  R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2  R4533- R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5  37	3				
6 R4497,9 R74497,9 R74516 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF4300 M 28 OHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- R4533- R7 R4540,4 ERJ3GEY0R00 M 0 OHM, 1/16W 5 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 2	R4494	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4497,9 ERJ3GEYJ471 M 470 OHM,J,1/16W 2  R4516 TAJAAH0101JV M 100 OHM,J,1/16W 1  R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1  R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1  R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1  R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1  R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2  R4533- R4533- R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 5  R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 2	R4495,9	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
8 R4516 TAJAAH0101JV M 100 OHM, J,1/16W 1 R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531, 3 ERJ3GEYJ220 M 22 OHM, J,1/16W 2 R4533- ERJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEY0R00 M 0 OHM, 1/16W 2	6			$\vdash$	
R4516 TAJAAH0101JV M 100 OHM, J,1/16W 1 R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1200 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- BRJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEY0R00 M 0 OHM, 1/16W 2	R4497,9	ERJ3GEYJ471	M 470 OHM,J,1/16W	2	
R4522 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- BRJ3GEYJ200 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEY0R00 M 0 OHM, 1/16W 2		ma Taawo 1 0 1	w 100 cm; 7 7 /7 5		
R4524 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- ERJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEY0R00 M 0 OHM, 1/16W 2				<del>                                     </del>	
R4527 ERJ3EKF1202 M 12KOHM, 1/16W 1 R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- ERJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 2				<del>                                     </del>	
R4528 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 2 R4533- ERJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 2	R4524			-	
R4529 ERJ3EKF2001 M 2KOHM, 1/16W 1 R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- ERJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 2	R4527			<del>                                     </del>	
R4530 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4533- ERJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 2	R4528			<del>                                     </del>	
R4531,3 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 2 R4533- ERJ3GEYOR00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEYOR00 M 0 OHM, 1/16W 2	R4529			<del>                                     </del>	
2 R4533- ERJ3GEY0R00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEY0R00 M 0 OHM, 1/16W 2	R4530	ERJ3EKF4302		1	
R4533- ERJ3GEY0R00 M 0 OHM, 1/16W 5 37 R4540,4 ERJ3GEY0R00 M 0 OHM, 1/16W 2	R4531,3	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
37 R4540,4 ERJ3GEY0R00 M 0 OHM, 1/16W 2	2			$\vdash$	
R4540,4 ERJ3GEY0R00 M 0 OHM, 1/16W 2		ERJ3GEY0R00	M 0 OHM, 1/16W	5	
				H	
		ED.T3GEVODOO	IM O OTIM 1/1/14	, ,	
	R4540,4	ERJ3GEY0R00	M 0 OHM, 1/16W	2	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
4	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
6	ERJ3GEYJ330	M 33 OHM, J, 1/16W	2	
R4547- 50	EXB2HV680J	RESISTOR ARRAY	4	
R4551,5 2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4557	ERJ3GEYJ750	M 75 OHM,J,1/16W	1	
R4558	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4559	ERJ3GEYJ203	M 20KOHM, J, 1/16W	1	
R4560,6	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R4562	TAJAAH0680JV	M 68 OHM, J, 1/16W	1	
R4564- 66	TAJAAH0680JV	M 68 OHM,J,1/16W	3	
R4569	EXB38V680J	RESISTOR ARRAY	1	
R4570	EXB2HV680J	RESISTOR ARRAY	1	
R4571	EXB38V680J	RESISTOR ARRAY	1	
R4572,7	ERJ3EKF3002	M 30KOHM, 1/16W	2	
R4575- 77	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4578,7 9	ERJ3EKF1741	M 17.4 OHM, 1/16W	2	
R4581- 85	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4590	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4592	ERJ3GEYJ820	M 82 OHM,J,1/16W	1	
R4593	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4594	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4596	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4597	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4600	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4602	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4603- 22	ERJ3GEYJ820	M 82 OHM, J, 1/16W	20	
R4623	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R4624- 26	EXB38V820J	RESISTOR ARRAY	3	
R4627	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4630	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4632,3	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R4636	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4638	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4639,4	EXB2HV680J	RESISTOR ARRAY	2	
R4643,4	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4650	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4651	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4652	ERJ3GEYJ821	M 820 OHM,J,1/16W	1	
R4653-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4657	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4658	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4660,6	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4666	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R4667,6	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4674	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4676,7	ERJ3GEYJ474	M 470KOHM,J,1/16W	2	
R4678	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4682,8	ERJ3EKF1741	M 17.4 OHM, 1/16W	2	
R4684	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4685	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4686	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4690	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4703	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4706	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4708-	ERJ6GEY0R00	M 0 OHM, 1/10W	40	
R4748	ERJ6ENF7151	M7.15KOHM, 1/10W	1	

R4751,5			1		
## ## ## ## ## ## ## ## ## ## ## ## ##		Part No.		Pcs	Remarks
RA750		ERJ3EKF4302		1	
R4751.5	R4750				
R4754	R4751,5	ERJ3EKF1800		2	
R4755					
RA758				1	
R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4759, 6 ERJ3GEYJ103 M 17KOHM, J, 1/16W 2 R4761, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4767 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4767 ERJ3GEYOROU M 0 OHM, 1/16W 1 R47771 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R47771 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R47771 ERJ3GEYOROU M 0 OHM, J, 1/16W 1 R47771 ERJ3GEYOROU M 0 OHM, J, 1/16W 1 R47771 ERJ3GEYOROU M 0 OHM, J, 1/16W 1 R4780- ERJ5GEY0ROU M 0 OHM, J, 1/10W 1 R5603 ERJ5GEY4522 M 4.5KOHM, J, 1/10W 1 R5604 ERJ5GEYJ222 M 2.2KOHM, J, 1/10W 1 R5605 ERJ5GEYJ222 M 2.2KOHM, J, 1/10W 1 R5606 ERJ5GEYJ222 M 15KOHM, J, 1/10W 1 R5611 ERJ5GEYJ222 M 15KOHM, J, 1/10W 1 R5612 ERJ5GEYJ222 M 22KOHM, J, 1/10W 1 R5613 ERJ5GEYJ222 M 22KOHM, J, 1/10W 1 R5614 ERJ5GEYJ223 M 22KOHM, J, 1/10W 1 R5615,1 ERJ5GEYJ223 M 22KOHM, J, 1/10W 1 R5616 ERJ5GEYJ221 M 22KOHM, J, 1/10W 1 R5617,1 ERJ5GEYJ221 M 22KOHM, J, 1/10W 1 R5618 ERJ5GEYJ221 M 22KOHM, J, 1/10W 1 R5620 ERJ5GEYJ221 M 22KOHM, J, 1/10W 1 R5620 ERJ5GEYJ221 M 1/10W 1 R5621 ERJ5GEYJ233 M 33KOHM, J, 1/10W 1 R5621 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5622 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5623,2 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5624 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5625 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5626 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5627 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5628 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5629 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5631 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5632 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5633 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5634 ERJ5GEYJ21 M 220 OHM, J, 1/10W 1 R5635 ERJ5GEYJ221 M 220 OHM, J, 1/10W 1 R5636 ERJ5GEYJ221 M 220 OHM, J, 1/10W 1 R5637 ERJ5GEYJ221 M 220 OHM, J, 1/10W 1 R5638 ERJ5GEYJ221 M 220 OHM, J, 1/10W 1 R5639 ERJ5GEYJ221 M 220 OHM, J, 1/10W 1 R5640 ERJ5GEYJ221 M 220 OHM, J, 1/10W 1 R5641 ERJ5GEYJ221 M 220 OHM, J, 1/10W 1 R5643 ERJ5GEYJ221 M 220 OHM, J, 1/10W 1 R5646 ERJ5GEYJ231 M 20 OHM, J, 1/10W 1 R5659 ERJ5GEYJ231 M 10KOHM, J, 1/10W 1 R5659 ERJ5GEYJ231 M 10KOHM, J, 1/10W 1 R5669 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5669 ERJ5GEYJ103 M 10KOHM, J, 1/10W 1 R5				_	
R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4767 ERJ3GEYU392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEYU392 M 3.9KOHM,J,1/16W 1 R4771 TAJAAH0101JV M 100 OHM,J/1/16W 1 R4771 TAJAH0101JV M 100 OHM,J,1/16W 1 R4780- ERJ5GEYU303 M 10KOHM,J,1/16W 1 R4780- ERJ5GEYU303 M 10KOHM,J,1/16W 1 R5601 ERJ5GEY0800 M 0 OHM, 1/10W 1 R5603 ERJ5GEY1550 M 255 OHM, 1/10W 1 R5606 ERJ5GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5608 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5610 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ5GEYJ22 M 22KOHM, 1/10W 1 R5612 ERJ5GEYJ333 M 22KOHM, 1/10W 1 R5613 ERJ5GEYJ22 M 22KOHM,J,1/10W 1 R5614 ERJ5GEYJ333 M 33KOHM,J,1/10W 1 R5625 ERJ5GEYJ102 M 10KOHM,J,1/10W 1 R5621 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5631 ERJ5GEYJ221 M 220 OHM,J,1/10W 1 R5632 ERJ5GEYJ102 M 10KOHM,J,1/10W 1 R5633 ERJ5GEYJ102 M 10KOHM,J,1/10W 1 R5633 ERJ5GEYJ102 M 10KOHM,J,1/10W 1 R5634 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5635 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5636 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5637 W 10KOHM,J,1/10W 1 R5638 ERJ5GEYJ102 M 10KOHM,J,1/10W 1 R5639 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5630 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5631 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5632 ERJ5GEYJ471 M 470 OHM,J,1/10W 1 R5633 ERJ5GEYJ221 M 220 OHM,J,1/10W 1 R5634 ERJ5GEYJ222 M 2.2KOHM,J,1/10W 1 R5635 ERJ5GEYJ221 M 220 OHM,J,1/10W 1 R5636 ERJ5GEYJ221 M 220 OHM,J,1/10W 1 R5637 ERJ5GEYJ221 M 220 OHM,J,1/10W 1 R5638 ERJ5GEYJ222 M 2.2KOHM,J,1/10W 1 R5641 ERJ5GEYJ222 M 2.2KOHM,J,1/10W 1 R5642 ERJ5GEYJ33 M 10KOHM,J,1/10W 1 R5653 ERJ5GEYJ221 M 220 OHM,J,1/10W 1 R5664 ERJ5GEYJ321 M 220 OHM,J,1/10W 1 R5665 ERJ5GEYJ33 M 10KOHM,J,1/10W 1 R5666 ERJ5GEYJ33 M 10KOHM,J,1/10W 1 R5667 ERJ5GEYJ33 M 10KOHM,J,1/10W 1 R5669 ERJ5GEYJ33 M				-	
0         R4761,6         ERJ3GEYJ103         M 10KOHM,J,1/16W         2           2         R4765         ERJ3GEYURO         M 3.9KOHM,J,1/16W         1           R4767         ERJ3GEYURO         M 0 0 GHM, 1/16W         1           R4771         TAJAAH0101JV         M 100 OHM,J,1/16W         1           R4775         ERJ3GEYUROO         M 0 0 GHM,J,1/10W         1           R47780-87         ERJ6GEYGEYOROO         M 0 0 GHM,J,1/10W         1           R5601         ERJ6ENF4532         M 4.5KOHM,J,1/10W         1           R5603         ERJ6ERF2550         M 2.55 OHM,J/10W         1           R5604         ERJ6GEYJ222         M 2.2KOHM,J,1/10W         1           R5606         ERJ6GEYJ222         M 2.2KOHM,J,1/10W         1           R5607         ERJ6GEYJ222         M 2.2KOHM,J,1/10W         1           R5610         ERJ6GEYJ223         M 10KOHM,J,1/10W         1           R5611         ERJ6GEYJ221         M 22KOHM,J,1/10W         1           R5612         ERJ6GEYJ221         M 22COHM,J,1/10W         1           R5617,1         ERJ6GEYJ333         M 33KOHM,J,1/10W         1           R5620         RRJ6GEYJ03         M 10KOHM,J,1/10W         1      <				<del>                                     </del>	
2				_	
R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 RAJ3GEYDROO M 0 OBM, 1/16W 1 R4775 ERJ3GEYDROO M 0 OBM, 1/16W 1 R4775 ERJ3GEYDROO M 0 OBM, 1/10W 1 R4776 ERJ3GEYDROO M 0 OBM, 1/10W 1 R4780- ERJ5GEYDROO M 0 OBM, 1/10W 1 R5607 ERJ5GENF4532 M 1.5KOHM, 1/10W 1 R5603 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5607 ERJ5GENF1850 M 15KOHM, 1/10W 1 R5607 ERJ5GENF1850 M 15KOHM, 1/10W 1 R5609 ERJ5GENF1850 M 15KOHM, 1/10W 1 R5610 ERJ5GENF1850 M 15KOHM, 1/10W 1 R5610 ERJ5GENF1850 M 10KOHM,J,1/10W 1 R5611 ERJ5GENF1850 M 10KOHM,J,1/10W 1 R5611 ERJ5GENF1850 M 10KOHM,J,1/10W 1 R5612 ERJ5GENF1850 M 10KOHM,J,1/10W 1 R5613 ERJ5GEYJ103 M 10KOHM,J,1/10W 2 6 R5617,1 ERJ5GEYJ22 M 22 OHM,J,1/10W 1 R5614 ERJ5GEYJ333 M 33KOHM,J,1/10W 1 R5620 ERJ5GEYJ333 M 33KOHM,J,1/10W 1 R5620 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5621 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5622 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5633 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5633 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5634 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5635 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5636 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5637 A BRJ5GEYJ103 M 10KOHM,J,1/10W 1 R5638 ERJ5GEYJ471 M 470 OHM,J,1/10W 1 R5639 ERJ5GEYJ471 M 470 OHM,J,1/10W 1 R5631 ERJ5GEYJ471 M 470 OHM,J,1/10W 1 R5641 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5641 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5643 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5644 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5648 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5649 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5641 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5642 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5643 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5644 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5647 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5648 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5649 ERJ5GEYJ471 M 470 OHM,J,1/10W 1 R5640 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5641 ERJ5GEYJ472 M 4.7KOHM,J,1/10W 1 R5642 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5650 ERJ5GEYJ103 M 10KOHM,J,1/10W 1 R5669 ERJ5GEYJ103 M 10KOHM	R4761,6	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4767 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4771 TAJAAROJOLJV M 100 OHM, J, 1/16W 1 R4780- R4780- ERJ6GEYOROO M 0 OHM, 1/10W 1 R5601 ERJ6GEYOROO M 0 OHM, 1/10W 1 R5603 ERJ6GEYA72 M 4.53KOHM, 1/10W 1 R5603 ERJ6GEYA72 M 4.7KOHM, J, 1/10W 1 R5606 ERJ6GEYA72 M 4.7KOHM, J, 1/10W 1 R5607 ERJ6GEYA72 M 4.7KOHM, J, 1/10W 1 R5608 ERJ6GEYA72 M 4.7KOHM, J, 1/10W 1 R5609 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5610 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5611 ERJ6ENF1603 M 10KOHM, J, 1/10W 1 R5611 ERJ6ENF1603 M 10KOHM, J, 1/10W 1 R5612 ERJ6ENF1607 M 6.5KOHM, 1/10W 1 R5612 ERJ6ENF1607 M 6.5KOHM, 1/10W 1 R5613 ERJ6ENF1607 M 10KOHM, J, 1/10W 1 R5614 ERJ6ENF1607 M 6.5KOHM, 1/10W 1 R5615 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5616 ERJ6ENF1607 M 6.5KOHM, 1/10W 1 R5617 M 6.5KOHM, 1/10W 1 R5618 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5619 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5620 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5620 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5621 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5623 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5624 ERJ6ENF1607 M 4.7KOHM, J, 1/10W 1 R5635 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5636 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5637 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5638 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5639 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5631 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5633 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5634 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5635 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5636 ERJ6GEYJ104 M 470 OHM, J, 1/10W 1 R5637 ERJ6GEYJ104 M 470 OHM, J, 1/10W 1 R5648 ERJ6GEYJ104 M 470 OHM, J, 1/10W 1 R5649 ERJ6GEYJ104 M 470 OHM, J, 1/10W 1 R5641 ERJ6GEYJ104 M 470 OHM, J, 1/10W 1 R5642 ERJ6GEYJ104 M 470 OHM, J, 1/10W 1 R5643 ERJ6GEYJ104 M 470 OHM, J, 1/10W 1 R5644 ERJ6GEYJ104 M 470 OHM, J, 1/10W 1 R5645 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5646 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5650 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R56504 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R56504 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1		ERJ3GEYJ392	M 3.9KOHM.J.1/16W	1	
R4771 TAJAAHO101JV M 100 OHM, J,1/16W 1 R4775 RNJGEYJ103 M 10KOHM, J,1/16W 1 R876780- RNJGEKYR103 M 0 OHM, 1/10W 1 R85601 ERJGEKYR550 M 255 OHM, 1/10W 1 R85603 RNJGEKY2550 M 255 OHM, 1/10W 1 R85606 RNJGEKY1472 M 4.7KOHM, J,1/10W 1 R85606 RNJGEKY1502 M 15KOHM, 1/10W 1 R85607 RNJGEKY1502 M 15KOHM, 1/10W 1 R85608 RNJGEKY1502 M 15KOHM, 1/10W 1 R85609 RNJGEKY1502 M 15KOHM, 1/10W 1 R85609 RNJGEKY1801 M 10KOHM, J,1/10W 1 R85610 ERJGEGYJ103 M 10KOHM, J,1/10W 1 R85611 RNJGEKYB202 M 22KOHM, 1/10W 1 R85612 RNJGEKYB1652 M 16.5KOHM, 1/10W 1 R85612 RNJGEKYB1652 M 22KOHM, J,1/10W 2 R8617.1 ERJGEGYJ223 M 22KOHM, J,1/10W 2 R8617.1 ERJGEGYJ233 M 23KOHM, J,1/10W 1 R8620 RNJGEGYJ102 M 1KOHM, J,1/10W 1 R8620 RNJGEYJ102 M 1KOHM, J,1/10W 1 R8621 ERJGEGYJ03 M 10KOHM, J,1/10W 1 R8623,2 ERJGGEYJ02 M 1KOHM, J,1/10W 1 R8623.2 ERJGGEYJ02 M 1KOHM, J,1/10W 1 R8623.2 ERJGGEYJ472 M 4.7KOHM, J,1/10W 1 R8633 ERJGEKYJ102 M 1KOHM, J,1/10W 1 R8633 ERJGEKYJ03 M 1KOHM, J,1/10W 1 R8634 ERJGGEYJ472 M 4.7KOHM, J,1/10W 1 R8635 ERJGGEYJ471 M 470 OHM, J,1/10W 1 R8638 ERJGEKYJ103 M 10KOHM, J,1/10W 1 R8639 ERJGGEYJ471 M 470 OHM, J,1/10W 1 R8631 ERJGGEYJ471 M 470 OHM, J,1/10W 1 R8633 ERJGGEYJ471 M 470 OHM, J,1/10W 1 R8641 ERJGGEYJ471 M 470 OHM, J,1/10W 1 R8643 ERJGGEYJ471 M 470 OHM, J,1/10W 1 R8644 ERJGGEYJ471 M 470 OHM, J,1/10W 1 R8645 ERJGGEYJ472 M 4.7KOHM, J,1/10W 1 R8641 ERJGGEYJ471 M 470 OHM, J,1/10W 1 R8643 ERJGGEYJ471 M 470 OHM, J,1/10W 1 R8644 ERJGGEYJ471 M 470 OHM, J,1/10W 1 R8645 ERJGGEYJ471 M 470 OHM, J,1/10W 1 R86464 ERJGGEYJ470 M 2.2KOHM, J,1/10W 1 R8647 ERJGGEYJ00 M 0 OHM, J,1/10W 1 R8659 ERJGGEYJ00 M 0 OHM, J,1/10W 1 R8669 ERJGGEYJ00 M 0 OHM, J,1/10W 1 R8669 ERJGGEYJ00 M 0 OHM, J,1/10W 1 R8669 ERJGGEYJ100 M 10KOHM, J,1/10W 1	R4767			H . H	
R4780- ERJ6GEYOROO M O OHM, 1/10W 8 8 876601 ERJ6ENF4532 M4.53KOHM, 1/10W 1   R5603 ERJ6ENF3550 M 255 OHM, 1/10W 1   R5605 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1   R5606 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1   R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1   R5608 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1   R5609 ERJ6ENF1871 M1.87KOHM, J/1/10W 1   R5610 ERJ6ENF1871 M1.87KOHM, J/1/10W 1   R5610 ERJ6ENF18202 M 22KOHM, J,1/10W 1   R5611 ERJ6ENF8202 M 82KOHM, J,1/10W 1   R5612 ERJ6GEYJ223 M 22KOHM, J,1/10W 2   8				1	
### R5601	R4775	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R5601 ERJ6ENF4532 M4.53KOHM, 1/10W 1 R5603 ERJ6GENF2550 M 2.55 ORM, 1/10W 1 R5606 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R5606 ERJ6GEYJ472 M 1.5KOHM, 1/10W 1 R5607 ERJ6GEYJ222 M 2.2KOHM, 1/10W 1 R5609 ERJ6ENF1502 M 1.5KOHM, 1/10W 1 R5610 ERJ6GEYJ223 M 2.0KOHM, 1/10W 1 R5611 ERJ6GENF1652 M 1.6SKOHM, 1/10W 1 R5611 ERJ6GEYJ223 M 22KOHM, 1/10W 1 R5612 ERJ6GEYJ223 M 22KOHM, 1/10W 2 R5613, 1 ERJ6GEYJ223 M 22KOHM, J,1/10W 1 R5614 ERJ6GEYJ233 M 33KOHM, J,1/10W 1 R5615 ERJ6GEYJ333 M 33KOHM, J,1/10W 1 R5616 ERJ6GEYJ333 M 33KOHM, J,1/10W 1 R5621 ERJ6GEYJ333 M 33KOHM, J,1/10W 1 R5621 ERJ6GEYJ00 M 1.0KOHM, J,1/10W 1 R5622 ERJ6GEYJ102 M 1.0KOHM, J,1/10W 1 R5623 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R5624 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R5635 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5636 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5637 A ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5638 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5639 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5631 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5633 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5635 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5636 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5637 A ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5638 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5640 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5641 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5643 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5645 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5646 ERJ6GEYJ321 M 220 OHM, J,1/10W 1 R5647 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5648 ERJ6GEYJ321 M 220 OHM, J,1/10W 1 R5649 ERJ6GEYJ321 M 220 OHM, J,1/10W 1 R5649 ERJ6GEYJ03 M 10KOHM, J, 1/10W 1 R5651 ERJ6GEYJ03 M 10KOHM, J, 1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5669 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5669 ERJ6GEYJ103 M 10KOHM, J, 1/10	R4780-	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
R5603 ERJ6ENF2550 M 255 OHM, 1/10W 1 R5605 ERJ6CEY1472 M 4.7KOHM, J, 1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5608 ERJ6CEY1222 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1, 87KOHM, 1/10W 1 R5610 ERJ6GEY1103 M 10KOHM, J, 1/10W 1 R5611 ERJ6GEY1223 M 22KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615, 1 ERJ6GEY1223 M 22KOHM, J, 1/10W 2 R5615, 2 ERJ6GEY1221 M 220 OHM, J, 1/10W 1 R5617, 1 ERJ6GEY1221 M 220 OHM, J, 1/10W 1 R5619 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5629 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5629 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5620 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5621 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5623, 2 ERJ6GEY102 M 1KOHM, J, 1/10W 2 4 R5635 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5636 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5637 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5638 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5639 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5631 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5632 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5633 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5634 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5635 ERJ6GEY102 M 1KOHM, J, 1/10W 1 R5640 ERJ6GEY102 M 2.2 KOHM, J, 1/10W 1 R5641 ERJ6GEY102 M 2.2 KOHM, J, 1/10W 1 R5642 ERJ6GEY102 M 2.2 KOHM, J, 1/10W 1 R5643 ERJ6GEY102 M 2.2 KOHM, J, 1/10W 1 R5644 ERJ6GEY102 M 2.2 KOHM, J, 1/10W 1 R5645 ERJ6GEY102 M 2.2 KOHM, J, 1/10W 1 R5646 ERJ6GEY102 M 2.2 KOHM, J, 1/10W 1 R5647 ERJ6GEY103 M 10KOHM, J, 1/10W 1 R5648 ERJ6GEY102 M 2.2 KOHM, J, 1/10W 1 R5649 ERJ6GEY102 M 2.2 KOHM, J, 1/10W 1 R5649 ERJ6GEY100 M 0.0 KM, J, 1/10W 1 R5655 ERJ6GEY101 M 200 OHM, J, 1/10W 1 R5656 ERJ6GEY101 M 200 OHM, J, 1/10W 1 R5657 ERJ6GEY101 M 10KOHM, J, 1/10W 1 R5659 ERJ6GEY101 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEY101 M 10KOHM, J, 1/10W 1 R5661 ERJ6GEY101 M 10KOHM, J, 1/10W 1 R5662 ERJ6GEY101 M 10KOHM, J, 1/10W 1 R5663 ERJ6GEY101 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEY101 M 10KOHM, J, 1/10W 1 R5661 ERJ6GEY101 M 10KOHM, J, 1/10W 1 R5662 ERJ6GEY101 M 10KOHM, J, 1/10W 1 R5669 ERJ6GEY101 M 10KOHM, J, 1/10W 1 R5669 ERJ6GEY101 M 10KOHM, J, 1/10W 1 R5669 ERJ6GEY101 M 10KOHM, J, 1/10W 1		ED TERME4E33	M4 F2F0UM 1/10W	1	
R5605 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5606 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5610 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5611 ERJ6ENF202 M 2.5KOHM,J,1/10W 1 R5611 ERJ6ENF202 M 2.5KOHM,J,1/10W 2 6 R5617,1 ERJ6GEYJ221 M 2.2COHM,J,1/10W 1 R5619 ERJ6GEYJ221 M 2.2COHM,J,1/10W 1 R5620 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R5620 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5621 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5623 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5633 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5633 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5633 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5633 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5637 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5638 ERJ6GEYJ472 M 2.2KOHM,J,1/10W 1 R5639 ERJ6GEYJ472 M 2.2KOHM,J,1/10W 1 R5631 ERJ6GEYJ472 M 2.2KOHM,J,1/10W 1 R5634 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5635 ERJ6GEYJ472 M 2.2KOHM,J,1/10W 1 R5636 ERJ6GEYJ472 M 2.2KOHM,J,1/10W 1 R5637 ERJ6GEYJ472 M 2.2KOHM,J,1/10W 1 R5638 ERJ6GEYJ472 M 2.2KOHM,J,1/10W 1 R5639 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5630 ERJ6GEYJ322 M 2.2KOHM,J,1/10W 1 R5641 ERJ6GEYJ322 M 2.2KOHM,J,1/10W 1 R5642 ERJ6GEYJ322 M 2.2KOHM,J,1/10W 1 R5643 ERJ6GEYJ322 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ322 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ321 M 220 OHM,J,1/10W 1 R56464 ERJ6GEYJ321 M 220 OHM,J,1/10W 1 R5647 ERJ6GEYJ321 M 220 OHM,J,1/10W 1 R5648 ERJ6GEYJ303 M 10KOHM,J,1/10W 1 R5649 ERJ6GEYJ304 M 2.2KOHM,J,1/10W 1 R5640 ERJ6GEYJ303 M 10KOHM,J,1/10W 1 R5641 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5642 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5643 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5644 ERJ6GEYJ303 M 10KOHM,J,1/10W 1 R5645 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5647 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5648 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5649 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5659 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5659 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5669 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R5669 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R5669 ERJ6GEYJ103 M 10KOHM,J,1/10W 1				1	
R5606 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6GEY103 M 10KOHM, J,1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6GEYJ223 M 22KOHM, J,1/10W 2 R5615, 1 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5617, 1 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5619 ERJ6GEYJ333 M 33KOHM, J,1/10W 1 R5620 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R5621 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R5623, 2 ERJ6GEYJ103 M 10KOHM, J,1/10W 3 R5625 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R5625 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5632 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5633 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5639 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5641 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5642 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5643 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5644 ERJ6GEYJ221 M 2.2KOHM, J,1/10W 1 R5645 ERJ6GEYJ221 M 2.2KOHM, J,1/10W 1 R5646 ERJ6GEYJ392 M 3.9KOHM, J,1/10W 1 R5647 ERJ6GEYJ391 M 2.0 OHM, J,1/10W 1 R5648 ERJ6GEYJ392 M 3.9KOHM, J,1/10W 1 R5649 ERJ6GEYJ391 M 10KOHM, J,1/10W 1 R5640 ERJ6GEYJ391 M 10KOHM, J,1/10W 1 R5650 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5651 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5652 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5657 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5659 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5650 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5650 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5650 ERJ6GEYJ103 M 10KOHM, J,1/10W 1	R5605			h +	
R5607 ERJ6ENF1502 M 15KOHM, 1/10W 1 R5609 ERJ6ENF1871 M1.87KOHM, 1/10W 1 R5610 ERJ6ENF1871 M 10KOHM, J,1/10W 1 R5611 ERJ6ENF1872 M 10KOHM, J,1/10W 1 R5611 ERJ6ENF1652 M 16.5KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615, 1 ERJ6GEYJ221 M 22KOHM, J,1/10W 2 R5617, 1 ERJ6GEYJ221 M 22O OHM, J,1/10W 2 R5619 ERJ6GEYJ333 M 33KOHM, J,1/10W 1 R5620 ERJ6GEYJ333 M 33KOHM, J,1/10W 1 R5621 ERJ6GEYJ333 M 10KOHM, J,1/10W 1 R5621 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R5622 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R5623 ERJ6GEYJ102 M 10KOHM, J,1/10W 1 R5623 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R5633 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5633 ERJ6GEYJ210 M 10KOHM, J,1/10W 1 R5633 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5634 ERJ6GEYJ21 M 220 OHM, J,1/10W 1 R5635 ERJ6GEYJ21 M 220 OHM, J,1/10W 1 R5636 ERJ6GEYJ21 M 470 OHM, J,1/10W 1 R5637 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5638 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5641 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5643 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5645 ERJ6GEYJ393 M 10KOHM, J,1/10W 1 R5646 ERJ6GEYJ221 M 22CKOHM, J,1/10W 1 R5647 ERJ6GEYJ221 M 2.2KOHM, J,1/10W 1 R5648 ERJ6GEYJ221 M 2.2KOHM, J,1/10W 1 R5649 ERJ6GEYJ221 M 2.2KOHM, J,1/10W 1 R5649 ERJ6GEYJ393 M 3.9KOHM, J,1/10W 1 R5640 ERJ6GEYJ221 M 2.2KOHM, J,1/10W 1 R5641 ERJ6GEYJ221 M 2.2COHM, J,1/10W 1 R5643 ERJ6GEYJ392 M 3.9KOHM, J,1/10W 1 R5644 ERJ6GEYJ221 M 2.2COHM, J,1/10W 1 R5645 ERJ6GEYJ392 M 3.9KOHM, J,1/10W 1 R5646 ERJ6GEYJ221 M 2.2COHM, J,1/10W 1 R5647 ERJ6GEYJ392 M 3.9KOHM, J,1/10W 1 R5648 ERJ6GEYJ393 M 3.9KOHM, J,1/10W 1 R5650 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM, J,1/10W 1	R5606			H . H	
R5610 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5615, 1 ERJ6GEYJ223 M 22KOHM, J, 1/10W 2 6 R5615, 1 ERJ6GEYJ221 M 22COHM, J, 1/10W 2 8 R5617, 1 ERJ6GEYJ221 M 22COHM, J, 1/10W 1 R5617, 1 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R5620 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R5620 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R5623, 2 ERJ6GEYJ103 M 10KOHM, J, 1/10W 2 4 R5623, 2 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5623, 2 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5632 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5633 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5633 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5637, 3 ERJ6GEYJ210 M 10KOHM, J, 1/10W 1 R5638 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R5639 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5639 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5639 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5639 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5639 ERJ6GEYJ472 M 2.2KOHM, J, 1/10W 1 R5639 ERJ6GEYJ472 M 2.2KOHM, J, 1/10W 1 R5640 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5641 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5642 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5643 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5645 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5646 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5647 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5648 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5649 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5640 ERJ6GEYJ210 M 10KOHM, J, 1/10W 1 R5650 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1	R5607		·	H 1	
R5611 ERJ6ENF8202 M 82KOHM, 1/10W 1 R5612 ERJ6ENF1652 M16.5KOHM, 1/10W 1 R5615,1 ERJ6GEYJ221 M 22KOHM,J,1/10W 2 R5617,1 ERJ6GEYJ221 M 22O OHM,J,1/10W 2 R5619 ERJ6GEYJ221 M 22O OHM,J,1/10W 1 R5620 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5621 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5622 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5623,2 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 4 R5625- ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5630 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5631 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5633 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5635 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5636 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5637,3 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5638 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5639 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5631 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5634 ERJ6GEYJ472 M 2.2KOHM,J,1/10W 1 R5635 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5636 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5641 ERJ6GEYJ422 M 2.2KOHM,J,1/10W 1 R5643 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5646 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5647 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5648 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5649 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5640 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5641 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5643 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ210 M 10KOHM,J,1/10W 1 R5646 ERJ6GEYJ210 M 10KOHM,J,1/10W 1 R5650 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5651 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5652 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5653 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5650 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5650 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5651 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5652 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5659 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5650 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	R5609	ERJ6ENF1871	M1.87KOHM, 1/10W	1	
R5612	R5610	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5615,1 ERJ6GEYJ221 M 220 OHM,J,1/10W 2 R5617,1 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5620 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5620 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5623,2 ERJ6GEYJ102 M 4.7KOHM,J,1/10W 1 R5625- ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5632 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5632 ERJ6GEYJ471 M 470 OHM,J/1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5635 ERJ6GEYJ471 M 220 OHM,J,1/10W 1 R5637,3 ERJ6GEYJ472 M 2.2KOHM,J,1/10W 1 R5639 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5634 ERJ6GEYJ472 M 2.2KOHM,J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5634 ERJ6GEYJ471 M 220 OHM,J,1/10W 1 R5634 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5634 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5643 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5644 ERJ6GEYJ472 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5644 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5644 ERJ6GEYJ472 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5644 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1 R5646 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1 R5646 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5651 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5655 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5655 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5657 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5669 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5699 ERJ6	R5611			<del>                                     </del>	
6       R5617,1       ERJ6GEYJ221       M 220 OHM,J,1/10W       2         8       R5619       ERJ6GEYJ333       M 33KOHM,J,1/10W       1         R5620       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R5621       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R5623,2       ERJ6GEYOROO       M 0 OHM, 1/10W       2         4       R5625-       ERJ6GEYJ472       M 4.7KOHM,J,1/10W       3         27       R5630       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5632       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5633       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5635       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5636       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5637,3       ERJ6GEYJ2221       M 220 OHM,J,1/10W       1         R5640       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       1         R5641       ERJ6GEYJ471       M 470 OHM,J,1/10W       1         R5642       ERJ6GEYJ4681       M 680 OHM,J,1/10W       1         R5643       ERJ6GEYJ221       M 2.2KOHM,J,1/10W       1         R5645,4       ERJ6GEYJ103       M 10KOHM,J,1/10W	R5612			<del>                                     </del>	
8 R5619 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R5621 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5621 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5623,2 ERJ6GEYJ03 M 1OKOHM,J,1/10W 1 R5623,2 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 3 R5625- ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5632 ERJ6GEYJ471 M 470 OHM, 1/10W 1 R5633 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5635 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5635 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5639 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5639 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5639 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5639 ERJ6GEYJ221 M 22KOHM,J,1/10W 1 R5639 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5641 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5642 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5644 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5646 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5647 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5648 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1 R5649 ERJ6GEYJ221 M 2.0 OHM,J,1/10W 1 R5651 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5651 ERJ6GEYJ221 M 20 OHM,J,1/10W 1 R5651 ERJ6GEYJ03 M 10KOHM,J,1/10W 1 R5655 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5669 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5699 ERJ6GEYJ	R5615,1 6	ERJ6GEYJ223	M 22KOHM,J,1/10W	2	
R5620 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R5621 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5623, 2 ERJ6GEYOR00 M 0 OHM, 1/10W 2 4 R5625- ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 3 R5630 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5631 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5633 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5635 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R5636 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R5639 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5639 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5639 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5640 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5641 ERJ6GEYJ472 M 2.2KOHM, J, 1/10W 1 R5642 ERJ6GEYJ681 M 680 OHM, J, 1/10W 1 R5644 ERJ6GEYJ681 M 680 OHM, J, 1/10W 1 R5645 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5646 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5647 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5648 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5649 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5649 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5649 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5650 ERJ6GEYJ221 M 20 OHM, J, 1/10W 1 R5651 ERJ6GEYJ221 M 20 OHM, J, 1/10W 1 R5650 ERJ6GEYJ221 M 20 OHM, J, 1/10W 1 R5650 ERJ6GEYJ221 M 20 OHM, J, 1/10W 1 R5650 ERJ6GEYJ221 M 4.7KOHM, J, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5670 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5691 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5692 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5693 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5694 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5699 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5699 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5699 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1		ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
R5621 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5623,2 ERJ6GEY0R00 M 0 OHM, 1/10W 2 4  R5623,2 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 3 27  R5630 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R5632 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5635 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5636 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5637,3 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5639 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5639 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5639 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5640 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5641 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5642 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5646 ERJ6GEYJ221 M 470 OHM,J,1/10W 1 R5647 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5648 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5649 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5649 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5650 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5651 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5655 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5650 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5661 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5669 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5694 PRJ6GEYJ103 M 10KOHM,J,1/10W 1 R5697 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	R5619	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R5623,2 4  R5623-2 ERJ6GEYJ472 M 4.7KOHM,J,1/10W R5630 ERJ6GEYJ471 M 470 OHM,J,1/10W R5631 ERJ6GEYJ471 M 470 OHM,J,1/10W R5633 ERJ6GEYJ212 M 1KOHM,J,1/10W R5633 ERJ6GEYJ21 M 220 OHM,J,1/10W R5637,3 ERJ6GEYJ222 M 2.2KOHM,J,1/10W R5639 ERJ6GEYJ222 M 2.2KOHM,J,1/10W R5640 ERJ6GEYJ471 M 470 OHM,J,1/10W R5641 ERJ6GEYJ472 M 2.2KOHM,J,1/10W R5642 ERJ6GEYJ471 M 470 OHM,J,1/10W R5643 ERJ6GEYJ481 M 680 OHM,J,1/10W R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W R5645 ERJ6GEYJ221 M 2.2KOHM,J,1/10W R5646 ERJ6GEYJ221 M 2.2KOHM,J,1/10W R5647 ERJ6GEYJ221 M 2.2KOHM,J,1/10W R5648 ERJ6GEYJ221 M 2.2KOHM,J,1/10W R5649 ERJ6GEYJ221 M 2.2KOHM,J,1/10W R5650 ERJ6GEYJ221 M 2.2KOHM,J,1/10W R5651 ERJ6GEYJ221 M 2.2KOHM,J,1/10W R5652 ERJ6GEYJ221 M 2.2KOHM,J,1/10W R5653 ERJ6GEYJ221 M 2.2KOHM,J,1/10W R5653 ERJ6GEYJ221 M 2.2KOHM,J,1/10W R5653 ERJ6GEYJ221 M 2.2KOHM,J,1/10W R5655 ERJ6GEYJ203 M 10KOHM,J,1/10W R5666 ERJ6GEYJ103 M 10KOHM,J,1/10W R5667 ERJ6GEYJ103 M 10KOHM,J,1/10W R5669 ERJ6GE	R5620	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
### R5625- 27  R5630				-	
27 R5630 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5632 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5633 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5635 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5637,3 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 R5639 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5640 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5641 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5642 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5643 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5646 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5647 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5648 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5649 ERJ6GEYJ221 M 2.0HM,J,1/10W 1 R5649 ERJ6GEYJ210 M 2.0HM,J,1/10W 1 R5650 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R5651 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R5655 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5657,5 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5661 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5661 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5661 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5665 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5669 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5699 ERJ6GEYJ103 M 10KOHM,J,1/10W 1		ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R5632 ERJ6GEYJ471 M 470 OIM, J, 1/10W 1 R5633 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5635 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R5637, 3 ERJ6GEYJ103 M 10KOHM, J, 1/10W 2 R5639 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5640 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5641 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5642 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5643 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5645 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5646 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5647 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5648 ERJ6GEYJ392 M 3.9KOHM, J, 1/10W 1 R5649 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R5650 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R5651 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5661 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5661 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5661 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5669 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R56694 PRJ6GEYJ103 M 10KOHM, J, 1/10W 1	R5625- 27	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	3	
R5633 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R5634 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5635 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R5637, 3 ERJ6GEYJ103 M 10KOHM, J, 1/10W 2 R5639 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5640 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5641 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5642 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5643 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5645 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5646 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5647 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5648 ERJ6GEYJ221 M 2.2 OHM, J, 1/10W 1 R5649 ERJ6GEYJ392 M 3.9KOHM, J, 1/10W 1 R5650 ERJ6GEYJ210 M 100KOHM, J, 1/10W 1 R5651 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R5653 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5655 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5661 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5665 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5669 ERJ6GEYJ103 M 33KOHM, J, 1/10W 1 R56694, 9 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1	R5630	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5634 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5635 ERJ6GEYJ221 M 220 OHM, J, 1/10W 2 R5637,3 ERJ6GEYJ103 M 10KOHM, J, 1/10W 2 R5639 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5640 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5641 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5642 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5643 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5645, 4 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5646 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5648 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5649 ERJ6GEYJ210 M 2.0HM, J, 1/10W 1 R5650 ERJ6GEYJ21 M 220 OHM, J, 1/10W 1 R5651 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R5652 ERJ6GEYJ210 M 10KOHM, J, 1/10W 1 R5653 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5672 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5672 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5672 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5675 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5675 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5676 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5677 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5679 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5679 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5679 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5693 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5693 ERJ6GEYJ103 M 33KOHM, J, 1/10W 1 R5694, 9 ERJ6GEYJ103 M 33KOHM, J, 1/10W 1 R56994, 9 ERJ6GEYJ103 M 33KOHM, J, 1/10W 1	R5632			1	
R5635 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5637,3 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 R5639 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5640 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5641 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5642 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5643 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645,4 ERJ6ENF2201 M 2.2KOHM,J,1/10W 1 R5646 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5648 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5649 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1 R5650 ERJ6GEYJ210 M 20 OHM,J,1/10W 1 R5651 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5655 ERJ6GEYJ00 M 0 OHM, 1/10W 1 R5655 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5660 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5660 ERJ6GEYJ00 M 0 OHM, 1/10W 1 R5660 ERJ6GEYJ00 M 0 OHM, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5661 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5665 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5669 ERJ6GEYJ103 M 33KOHM,J,1/10W 1	R5633			-	
R5637,3				h +	
8 R5639 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5640 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5641 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5642 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R5643 ERJ6GEYJ681 M 680 OHM, J, 1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5645, 4 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 2 R5647 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5648 ERJ6GEYJ221 M 2.0 OHM, J, 1/10W 1 R5649 ERJ6GEYJ392 M 3.9KOHM, J, 1/10W 1 R5650 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R5651 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R5652 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5653 ERJ6GEYJ103 M 10KOHM, J, 1/10W 2 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5660 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 2 R5660 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5670 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5690 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1				$\vdash$	
R5640 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R5641 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5642 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5643 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645,4 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 2 R5645,4 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R56647 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R56648 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1 R56649 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1 R56550 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R56551 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R56653 ERJ6GEYJ221 M 20 OHM,J,1/10W 1 R56657,5 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 2 R5660 ERJ6GEYJ000 M 0 OHM, 1/10W 1 R5660 ERJ6GEYJ000 M 0 OHM, 1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56690 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56690 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	-		11 201101111707272011	_	
R5641 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5642 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5643 ERJ6GEYJ681 M 680 OHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645,4 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645,4 ERJ6GEYJ221 M 2.2KOHM,J,1/10W 1 R5648 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1 R5649 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1 R5650 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5651 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5655 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5655 ERJ6GEYJ221 M 20 OHM,J,1/10W 1 R5655 ERJ6GEYJ03 M 10KOHM,J,1/10W 2 R5657,5 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 R5659 ERJ6GEYJ700 M 4.7KOHM,J,1/10W 1 R5660 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5661 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5665 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5666 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56690 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56691 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56692 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56693 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56994,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	R5639	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R5642 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5643 ERJ6GEYJ681 M 680 OHM,J,1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R5645,4 ERJ6ENF2201 M 2.2KOHM,J,1/10W 2 6 R5647 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5648 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1 R5649 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R5650 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5651 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5655 ERJ6GEYJ221 M 200 OHM,J,1/10W 1 R5655 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 8 R5657,5 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 R5660 ERJ6GEYJ000 M 4.7KOHM,J,1/10W 1 R5660 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5661 ERJ6GEYJ103 M 10KOHM,J/1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5669 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56693 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R56994,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	R5640	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R5643 ERJ6GEYJ681 M 680 OHM, J, 1/10W 1 R5644 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R5645,4 ERJ6ENF2201 M 2.2KOHM, J, 1/10W 2 6 R5647 ERJ6GEYJ221 M 2.2KOHM, J, 1/10W 1 R5648 ERJ6GEYJ392 M 3.9KOHM, J, 1/10W 1 R5649 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R5650 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R5651 ERJ6GEYJ221 M 220 OHM, J, 1/10W 1 R5653 ERJ6GEYJ231 M 10KOHM, J, 1/10W 4 R5665 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 4 R5665 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5660 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R5660 ERJ6GEYJ470 M 470 OHM, 1/10W 1 R5662 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R5669 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R56694 PRJ6GEYJ103 M 10KOHM, J, 1/10W 1	R5641			h +	
R5644 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R5645,4 ERJ6ENF2201 M 2.2KOHM, 1/10W 2 6 R5647 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5648 ERJ6GEYJ392 M 3.9KOHM, J,1/10W 1 R5649 ERJ6GEYJ104 M 100KOHM, J,1/10W 1 R5650 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5651 ERJ6GEYJ221 M 220 OHM, J,1/10W 1 R5653 ERJ6GEYJ103 M 10KOHM, J,1/10W 4 S6653 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 2 R5665 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R5660 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R5660 ERJ6GEYJ000 M 0 OHM, 1/10W 1 R5661 ERJ6GEYJ000 M 0 OHM, 1/10W 1 R5662 ERJ6GEYJ03 M 10KOHM, J,1/10W 1 R5665 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5667 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5669 ERJ6GEYJ103 M 10KOHM, J,1/10W 1				<del>                                     </del>	
R5645,4 ERJ6ENF2201 M 2.2KOHM, 1/10W 2  R5647 ERJ6GEYJ221 M 220 OHM,J,1/10W 1  R5648 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1  R5649 ERJ6GEYJ104 M 100KOHM,J,1/10W 1  R5650 ERJ6GEYJ221 M 220 OHM,J,1/10W 1  R5651 ERJ6GEYJ221 M 220 OHM,J,1/10W 1  R5653 ERJ6GEYJ103 M 10KOHM,J,1/10W 4  S668 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 2  R5669 ERJ6ENF4700 M 4.7KOHM,J,1/10W 1  R5660 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1  R5660 ERJ6GEYJ000 M 0 OHM, 1/10W 1  R5662 ERJ6GEY0R00 M 0 OHM, 1/10W 1  R5670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R5672 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R5675 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R5676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R5677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R5679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R5660 ERJ6GEYJ103 M 10KOHM,J,1/10W 1				<del>                                     </del>	
6				1	
R5648 ERJ6GEYJ392 M 3.9KOHM,J,1/10W 1 R5649 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R5650 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5651 ERJ6GEYDR00 M 0 OHM, 1/10W 1 R56653 ERJ6GEYJ103 M 10KOHM,J,1/10W 4 S6657,5 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 2 R5660 ERJ6GEYDR00 M 470 OHM, 1/10W 1 R5660 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R5662 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R5662 ERJ6GEYDR00 M 0 OHM, 1/10W 1 R5670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5675 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5680 ERJ6GEYDR00 M 0 OHM, 1/10W 1 R5680 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5692 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5693 ERJ6GEYJ103 M 1KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	_				
R5649 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R5650 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5651 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5653- ERJ6GEYJ103 M 10KOHM,J,1/10W 4 S6657,5 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 2 R5669 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R5660 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5661 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5662 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5675 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5680 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5692 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5693 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	R5647			h +	
R5650 ERJ6GEYJ221 M 220 OHM,J,1/10W 1 R5651 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R5653- ERJ6GEYJ103 M 10KOHM,J,1/10W 4 S66 R5657,5 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 2 R5669 ERJ6GEYOR00 M 470 OHM, 1/10W 1 R5660 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R5661 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R5662 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5675 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5680 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5691 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5692 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5693 ERJ6GEYJ103 M 1KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	R5648			H . H	
R5651 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5653- ERJ6GEYJ103 M 10KOHM,J,1/10W 4 S666 R5657,5 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 2 R5669 ERJ6ENF4700 M 470 OHM, 1/10W 1 R5660 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5662 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R56670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56675 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56779 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5680 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5680 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5692 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5693 ERJ6GEYJ103 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 33KOHM,J,1/10W 1			· ·	H 1	
R5653- ERJ6GEYJ103 M 10KOHM, J, 1/10W 4  R5657,5 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 2  R5659 ERJ6ENF4700 M 470 OHM, 1/10W 1  R5660 ERJ6GEY0R00 M 0 OHM, 1/10W 1  R5662 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R5670 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R5675 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1  R5675 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1  R5676 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R5679 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R5680 ERJ6GEYDR00 M 0 OHM, 1/10W 1  R5692 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1  R5693 ERJ6GEYJ103 M 33KOHM, J, 1/10W 1  R5694, 9 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1					
56  R5657,5  R76659  R76659  R76600  R77600  R	R5653-			_	
8 R5659 ERJ6ENF4700 M 470 OHM, 1/10W 1 R5660 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5662 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R56670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5672 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5675 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56690 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R56690 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5693 ERJ6GEYJ103 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 2			w 4 Eme 1 - 1		
R5660 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5662 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5672 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5675 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5680 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5692 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5693 ERJ6GEYJ103 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 S	R5657,5	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R5662 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5670 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R5672 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5675 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5680 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5692 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5693 ERJ6GEYJ103 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 S	R5659	ERJ6ENF4700	M 470 OHM, 1/10W	1	
R5670 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5672 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5675 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5680 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5692 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5693 ERJ6GEYJ103 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 S					
R5672 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5675 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5680 ERJ6GEYJ103 M 0 OHM, 1/10W 1 R5692 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5693 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 S	R5662				
R5675 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R5676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5680 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R5692 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5693 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 5				<del>                                     </del>	
R5676 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5680 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5692 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5693 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 5				<del>                                     </del>	
R5679 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R5680 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5692 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5693 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 5	R5676			1	
R5680 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R5692 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R5693 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 5	R5679				
R5693 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 5	R5680			1	
R5694,9 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R5692	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
5	R5693			<del>                                     </del>	
R5696 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1	R5694,9 5	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
	R5696	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R5801	ERJ6ENF9100	M 910 OHM, 1/10W	1	
R5802	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R5803	ERJ6ENF2741	M2.74KOHM, 1/10W	1	
R5804	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5805- 08	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	4	
R5809	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R5812	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R5815	ERJ6ENF3900	M 390 OHM, 1/10W	1	
R5819	ERJ6ENF2941	M2.94KOHM, 1/10W	1	
R5820	ERX3FJSR22D	M 2.2 OHM, J, 3W	1	
R5822-	ERJ6GEYJ101	M 100 OHM,J,1/10W	3	
	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
	ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
	ERJ14YJ5R6U	M 6.2OHM, 1/4W	2	
R6020- 25	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6081- 83	ERJ6ENF8202	M 82KOHM, 1/10W	3	
	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6102	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6106- 11	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6112	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6113	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6116	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6117- 20	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
R6121,2	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6123	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6124- 27	ERJ6GEYJ101	M 100 OHM,J,1/10W	4	
R6129	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6134	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6135	ERG1FJS472D	M 4.7KOHM, J, 1W	1	
R6136	ERG2FJS123D	M 12KOHM, J, 2W	1	
R6140	ERJ6GEYJ203	M 20KOHM,J,1/10W	1	
R6141	ERJ6GEYJ243	M 24KOHM, J, 1/10W	1	
R6142	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6144	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6145	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6147	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6148,4	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6150	ERJ6GEYJ243	M 24KOHM,J,1/10W	1	
R6151	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6152,5	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6154	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R6155,5	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	2	
R6157	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6158	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6159	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6160	EXB38V470J	RESISTOR ARRAY	1	
R6161	EXB38V472J	RESISTOR ARRAY	1	
R6162	EXB38V470J	RESISTOR ARRAY	1	
R6163	EXB38V472J	RESISTOR ARRAY	1	
R6164,6 5	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6166,6 7	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6171,7 2	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6175	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6176,7 7	ERX2FJSR22D	M0.22 OHM, J, 2W	2	
R6181	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6183	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6187	ERX2FJSR22D	M0.22 OHM, J, 2W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6188	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6189	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R6191	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R6193	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6195	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6197	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6198,9	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
9				
R6214	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6431,3	ERJ12YJ1R0	M 1 OHM, J,1/2W	2	
2				
R6433	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6434	ERDS1FJ221	C 220 OHM, J,1/2W	1	
R6435	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6436	ERJ6ENF1543	M 154KOHM, 1/10W	1	
R6437	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6438	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R6439-	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	3	
41				
R6442	ERJ6ENF9531	M9.53KOHM, 1/10W	1	
R6443	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
	ERJ6GEYJ563	M 56KOHM, J, 1/10W	2	
5			~	
R6446	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6448	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R6450,5	ERX1FJSR22D	M0.22 OHM, J, 1W	2	
1	TVVIL OOK77D	MU.ZZ OHM, U, IW		
R6452	ERJ12YJ153U	M 15KOHM, 1/2W	1	
R6453	ERJ6GEYJ513	M 51KOHM,J,1/10W	1	
R6454	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6455	ERJ14YJ433U		1	
		M 43KOHM, 1/2W	t t	
R6456	ERJ6ENF6202	M 62KOHM, 1/10W	1	
R6457,5 8	ERJ6ENF2491	M2.49KOHM, 1/10W	2	
	EDGOE TG101D	W 100 OTW T OW	-	
R6459	ERG2FJS101D	M 100 OHM, J, 2W	1	
R6460,6 1	ERJ6GEYJ513	M 51KOHM,J,1/10W	2	
R6464	ERJ6ENF6202	M 62KOHM, 1/10W	1	
R6465	ERX3FJS8R2D	M 8.2 OHM, J, 3W	1	
	ERJ6GEYJ223	<del> </del>	<del>                                     </del>	
R6466		M 22KOHM, J, 1/10W	1	
R6467	ERJ6GEYJ122	M 1.2KOHM, J, 1/10W	1	
R6468	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6469	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	1	
R6470	ERJ14YJ203U	M 20KOHM, 1/2W	1	
R6472	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6473	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6474	ERG2FJS680D	M 680 OHM, J, 2W	1	
R6475	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R6476	ERJ6ENF2403	M 240KOHM, 1/10W	1	
R6478	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R6479	ERJ6GEYJ513	M 51KOHM,J,1/10W	1	
R6480	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6481	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	1	
R6482	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6483	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	1	
R6484	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6485,8	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
6			~	
R6487	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6488	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6489	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6491	ERJ12YJ104U	M 100KOHM, 1/2W	1	
R6491	ERJ6ENF2153	M 215KOHM, 1/10W	1	
R6493	ERJ6ENF2703		1	
		M 270KOHM, 1/10W	t t	
R6494	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
R6495	ERJ6ENF5231	M5.23KOHM, 1/10W	1	
R6496	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6497	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6498,9	ERX1FJS8R2D	M 8.2 OHM, J, 1W	2	
9	_		$\vdash$	
R6500	ERJ6GEYJ122	M 1.2KOHM, J, 1/10W	1	
R6501-	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	9	
09			$\vdash$	
R6510	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	

		1		
Ref.	Part No.	Part Name &	Pcs	Remarks
No.	ERX3FJS2R2D	Description M 2.2 OHM, J, 3W	2	
R6511,1	ERASFUSZRZD	M 2.2 OHM, U, SW	^	
R6513	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6514	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6515	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6516	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6517	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6518	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6519	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6520	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6521	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6522	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6523	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6524	ERJ6ENF5621	M5.62KOHM, 1/10W	1	
R6525	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6526	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6527	ERJ14YJ102	M 1KOHM, J,1/4W	1	
R6528	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6529	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6530-	ERJ6GEYJ470	M 47 OHM, J, 1/10W	11	
40		17 0111707171011		
R6542	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6543	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6544	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6545	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6546	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6547,4	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	2	
8			_	
R6549	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6550	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6551	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6552	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6553	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6554,5	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
	ED TECENTARA	M 2 2VOUM T 1/10W	1	
R6556 R6557	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6558	ERJ6GEYJ470 ERJ6ENF5621	M 47 OHM, J, 1/10W M5.62KOHM, 1/10W	1	
R6559	ERJ6GEYJ222	M 2.2KOHM, J,1/10W	1	
R6560-	ERJ6GEYJ100	M 10 OHM, J, 1/10W	9	
68	Linducation	M 10 Olm, 0, 1, 10W		
	ERJ6GEYJ103		1	
68 R6570 R6571-		M 10KOHM,J,1/10W M 470 OHM,J,1/10W		
R6570	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6570 R6571-	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6570 R6571- 78	ERJ6GEYJ103 ERJ6GEYJ471	M 10KOHM,J,1/10W M 470 OHM,J,1/10W	1 8	
R6570 R6571- 78 R6579	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W	1 8	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103	M 10KOHM,J,1/10W M 470 OHM,J,1/10W M 150 OHM,J,1/10W M 10KOHM,J,1/10W	1 8 1	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF3902	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W	1 8 1 1 1 2	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF3902 ERJ6ENF7501	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W	1 8 1 1 2	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF3902	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W	1 8 1 1 1 2	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF3902 ERJ6ENF7501	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W	1 8 1 1 2	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ152	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W	1 8 1 1 2 1 2	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF3902 ERJ6ENF7501 ERJ6GEYJ152 ERJ6GEYJ103	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 1.5KOHM, J, 1/10W	1 8 1 1 2 1 2	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF73902 ERJ6ENF7501 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 2.2KOHM, J, 1/10W	1 8 1 1 2 1 2	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF7501 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W M 2.2KOHM, J, 1/10W M 10KOHM, J, 1/10W	1 8 1 1 2 1 2	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6589	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF7501 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W M 2.2KOHM, J, 1/10W M 10KOHM, J, 1/10W	1 8 1 1 2 1 2	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6589 R6590,9 1	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF7501 ERJ6ENF7501 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W	1 8 1 1 1 2 1 1 1 2 1 1 2 1 1 2 1 1 2 1 1 2 1 1 2 1 1 2 1 1 1 2 1 1 1 2 1 1 1 2 1 1 1 1 2 1	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6589 R6590,9 1	ERJ6GEYJ103 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6ENF7501 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W	1 8 1 1 1 2 1 2 1 1 1 2	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6589 R6590,9 1 R6592,9 3 R6594 R6595- 98	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF73902 ERJ6ENF7501 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ105 ERJ6GEYJ105	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10WOHM, J, 1/10W M 10WOHM, J, 1/10W M 10WOHM, J, 1/10W M 10WOHM, J, 1/10W M 10OKOHM, J, 1/10W M 10OKOHM, J, 1/10W	1 8 1 1 1 2 1 1 2 2 1 1 1 2 2	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6589 R6590,9 1 R6592,9 3 R6594 R6595- 98 R6599	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF73902 ERJ6ENF7501 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ105 ERG1FJS104D ERJ6GEYJ472 ERJ6GEYJ101	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10O OHM, J, 1/10W M 100KOHM, J, 1/10W M 100KOHM, J, 1/10W M 100KOHM, J, 1/10W	1 8 1 1 1 2 1 1 2 2 1 1 1 2 2	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6589 R6590,9 1 R6592,9 3 R6594 R6595- 98 R6599 R6600	ERJ6GEYJ103 ERJ6GEYJ171 ERJ6GEYJ171 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF7501 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ105 ERG1FJS104D ERJ6GEYJ105 ERG1FJS104D ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W	1 8 1 1 1 2 1 1 1 2 2 1 1 1 2 2 1 1 4	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6589 R6590,9 1 R6592,9 3 R6594 R6595- 98 R6599 R6600 R6602	ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6ENF73902 ERJ6ENF7501 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ105 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ105 ERG1FJS104D ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100KOHM, J, 1/10W	1 8 1 1 1 2 1 1 1 2 2 1 1 1 2 2 1 1 1 1	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6590,9 1 R6592,9 3 R6594 R6595- 98 R6599 R6600 R6602 R6603	ERJ6GEYJ103 ERJ6GEYJ171 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ105 ERG1FJS104D ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ103 ERJ6GEYJ103	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 470 OHM, J, 1/W M 10KOHM, J, 1/10W	1 8 1 1 2 1 2 1 1 1 2 2 1 1 1 2 2 1 1 1 1	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6599 R6590,9 1 R6592,9 3 R6594 R6595- 98 R6599 R6600 R6602 R6603 R6604	ERJ6GEYJ103 ERJ6GEYJ171 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ105 ERG1FJS104D ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100KOHM, J, 1/10W M 10KOHM, J, 1/10W	1 8 1 1 2 1 2 1 1 1 2 2 1 1 1 2 2 1 1 1 1	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6590,9 1 R6592,9 3 R6594 R6595- 98 R6599 R6600 R6602 R6600 R6602 R6603	ERJ6GEYJ103 ERJ6GEYJ171 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ105 ERG1FJS104D ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ103 ERJ6GEYJ103	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 470 OHM, J, 1/W M 10KOHM, J, 1/10W	1 8 1 1 2 1 2 1 1 1 2 2 1 1 1 2 2 1 1 1 1	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6599 R6590,9 1 R6592,9 3 R6594 R6595- 98 R6599 R6600 R6602 R6603 R6604	ERJ6GEYJ103 ERJ6GEYJ171 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ105 ERG1FJS104D ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100KOHM, J, 1/10W M 100KOHM, J, 1/10W M 100KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 10KOHM, J, 1/10W	1 8 1 1 2 1 2 1 1 1 2 2 1 1 1 2 2 1 1 1 1	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6588,8 6 R6587 R6588 R6599 R6590,9 1 R6592,9 3 R6594 R6595- 98 R6599 R6600 R6602 R6603 R6604 R6605- 07	ERJ6GEYJ103 ERJ6GEYJ171 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ152 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ103 ERJ6GEYJ103 ERG1FJS471D ERJ6GEYJ103 ERJ6GEYJ100 ERJ6GEYJ100	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100KOHM, J, 1/10W M 10KOHM, J, 1/10W	1 8 1 1 2 1 2 1 1 2 2 1 1 1 2 2 1 1 1 1	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6589 R6590,9 1 R6592,9 3 R6594 R6595- 98 R6590 R6600 R6602 R6603 R6604 R6605- 07 R6608 R6609,1	ERJ6GEYJ103 ERJ6GEYJ171 ERJ6GEYJ171 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6ENF7501 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ103 ERJ6GEYJ103 ERG1FJS471D ERJ6GEYJ103 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 1.5KOHM, J, 1/10W M 1.0KOHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100KOHM, J, 1/10W M 100KOHM, J, 1/10W M 100KOHM, J, 1/10W M 100 OHM, J, 1/10W M 10 OHM, J, 1/10W	1 8 1 1 1 2 1 1 2 2 1 1 1 1 2 2 1 1 1 1	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6589 R6590,9 1 R6592,9 3 R6594 R6595- 98 R6599 R6600 R6602 R6603 R6604 R6605- 07 R6608 R6609,1	ERJ6GEYJ103 ERJ6GEYJ151 ERJ6GEYJ151 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ102 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ105 ERJ6GEYJ101 ERJ6GEYJ105 ERG1FJS104D ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 1.5KOHM, J, 1/10W M 1.0KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100KOHM, J, 1/10W M 100KOHM, J, 1/10W M 100KOHM, J, 1/10W M 100 OHM, J, 1/10W	1 8 1 1 2 1 2 1 1 2 2 1 1 1 2 2 1 1 1 1	
R6570 R6571- 78 R6579 R6580 R6581 R6582,8 3 R6584 R6585,8 6 R6587 R6588 R6589 R6590,9 1 R6592,9 3 R6594 R6595- 98 R6599 R6600 R6602 R6603 R6604 R6605- 07 R6608 R6609,1 0	ERJ6GEYJ103 ERJ6GEYJ171 ERJ6GEYJ171 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6ENF7501 ERJ6GEYJ152 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ101 ERJ6GEYJ103 ERJ6GEYJ103 ERG1FJS471D ERJ6GEYJ103 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100 ERJ6GEYJ100	M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 150 OHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 39KOHM, 1/10W M 7.5KOHM, 1/10W M 1.5KOHM, J, 1/10W M 1.5KOHM, J, 1/10W M 1.0KOHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/10W M 100 OHM, J, 1/10W M 100KOHM, J, 1/10W M 100KOHM, J, 1/10W M 100KOHM, J, 1/10W M 100 OHM, J, 1/10W M 10 OHM, J, 1/10W	1 8 1 1 1 2 1 1 2 2 1 1 1 1 2 2 1 1 1 1	

Ref.	Part No	Part Name &	Pcs	Remarks
No.	Part No.	Description	Pcs	Kemar Ks
R6633	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6634,3	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
5	ED TCCEVT1E1	N. 150 OTH T 1/10W		
R6636- 38	ERJ6GEYJ151	M 150 OHM,J,1/10W	3	
R6639	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6640	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6641,4	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6643	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6644	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6645,4	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
6				
R6647	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6648- 50	ERJ6GEYJ102	M 1KOHM, J, 1/10W	3	
R6651	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6654,5	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
5	TD 76 GDW 71 00	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		
R6657- 59	ERJ6GEYJ102	M 1KOHM, J, 1/10W	3	
R6660	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6663,6	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	·
4				
R6665	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6666- 69	ERJ6GEYJ104	M 100KOHM,J,1/10W	4	
R6670,7	ERJ6GEYJ154	M 150KOHM,J,1/10W	2	
1 P6672	ED.TECEVITAN	м 10корм т 1/10м	1	
R6672 R6675,7	ERJ6GEYJ103 ERJ6GEYJ224	M 10KOHM,J,1/10W M 220KOHM,J,1/10W	2	
6	_1000910221			
R6677	ERG1FJS101D	M 100 OHM, J, 1W	1	
R6687,8	ERX2FJSR22D	M0.22 OHM, J, 2W	2	
R6691	EXB38V470J	RESISTOR ARRAY	1	
R6692	EXB38V472J	RESISTOR ARRAY	1	
R6693	EXB38V470J	RESISTOR ARRAY	1	
R6694	EXB38V472J	RESISTOR ARRAY	1	
R6695	EXB38V470J	RESISTOR ARRAY	1	
R6696	EXB38V472J	RESISTOR ARRAY	1	
R6697	EXB38V470J	RESISTOR ARRAY	1	
R6698	EXB38V472J	RESISTOR ARRAY	1	
R6701- 03	ERJ6ENF8202	M 82KOHM, 1/10W	3	
R6801,0	EXB38V680J	RESISTOR ARRAY	2	
R6815	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6815	ERJ3GEY0R00 ERJ14YJ5R6U	M 0 OHM, 1/16W M 6.2OHM, 1/4W	2	
R6815 R6828,2 9 R6852,5	†		-	
R6815 R6828,2 9 R6852,5	ERJ14YJ5R6U ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
R6815 R6828,2 9 R6852,5 3 R6901	ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06	ERJ14YJ5R6U ERJ14YJ5R6U ERJ6GEYJ101 ERJ6GEYJ221	M 6.20HM, 1/4W  M 6.20HM, 1/4W  M 100 OHM,J,1/10W  M 220 OHM,J,1/10W	2 2 1 5	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ6GEYJ101  ERJ6GEYJ221  ERJ6GEYJ103	M 6.20HM, 1/4W  M 6.20HM, 1/4W  M 100 OHM,J,1/10W  M 220 OHM,J,1/10W  M 10KOHM,J,1/10W	2 2 1 5	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14	ERJ14YJ5R6U ERJ14YJ5R6U ERJ6GEYJ101 ERJ6GEYJ221	M 6.20HM, 1/4W  M 6.20HM, 1/4W  M 100 OHM,J,1/10W  M 220 OHM,J,1/10W	2 2 1 5	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14 R6915,1 6	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ6GEYJ101  ERJ6GEYJ221  ERJ6GEYJ103	M 6.20HM, 1/4W  M 6.20HM, 1/4W  M 100 OHM,J,1/10W  M 220 OHM,J,1/10W  M 10KOHM,J,1/10W	2 2 1 5	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14 R6915,1 6 R6971	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ6GEYJ101  ERJ6GEYJ221  ERJ6GEYJ103  ERJ6GEYJ224	M 6.20HM, 1/4W M 6.20HM, 1/4W M 100 OHM,J,1/10W M 220 OHM,J,1/10W M 10KOHM,J,1/10W M 220KOHM,J,1/10W	2 2 1 5 4	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14 R6915,1 6 R6971 R6972- 76	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ16GEYJ101  ERJ6GEYJ221  ERJ6GEYJ103  ERJ6GEYJ103	M 6.20HM, 1/4W M 6.20HM, 1/4W M 100 OHM,J,1/10W M 220 OHM,J,1/10W M 10KOHM,J,1/10W M 220KOHM,J,1/10W	2 2 1 5 4 2	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14 R6915,1 6 R6971 R6972- 76 R6981- 84 R6985,8	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ6GEYJ101  ERJ6GEYJ221  ERJ6GEYJ103  ERJ6GEYJ224  ERJ6GEYJ221	M 6.20HM, 1/4W  M 6.20HM, 1/4W  M 100 OHM,J,1/10W  M 220 OHM,J,1/10W  M 220KOHM,J,1/10W  M 100 OHM,J,1/10W  M 220 OHM,J,1/10W	2 2 1 5 4 2 1 5	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14 R6915,1 6 R6971 R6972- 76 R6981- 84 R6985,8 6	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ6GEYJ101  ERJ6GEYJ221  ERJ6GEYJ103  ERJ6GEYJ224  ERJ6GEYJ221  ERJ6GEYJ101  ERJ6GEYJ221	M 6.20HM, 1/4W  M 6.20HM, 1/4W  M 100 OHM,J,1/10W  M 220 OHM,J,1/10W  M 10KOHM,J,1/10W  M 100 OHM,J,1/10W  M 100 OHM,J,1/10W  M 100 OHM,J,1/10W  M 100 OHM,J,1/10W	2 2 1 5 4 2 1 5	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14 R6915,1 6 R6971 R6972- 76 R6981- 84 R6985,8 6 R7100	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ16GEYJ101  ERJ6GEYJ221  ERJ6GEYJ103  ERJ6GEYJ224  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ221	M 6.20HM, 1/4W M 6.20HM, 1/4W M 100 OHM,J,1/10W M 220 OHM,J,1/10W M 10KOHM,J,1/10W M 220KOHM,J,1/10W M 100 OHM,J,1/10W M 200 OHM,J,1/10W M 220 OHM,J,1/10W M 200 OHM,J,1/10W	2 2 1 5 4 2 1 5 4 2 2	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14 R6915,1 6 R6971 R6972- 76 R6981- 84 R6985,8 6 R7100 R7102	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ16GEYJ101  ERJ6GEYJ221  ERJ6GEYJ103  ERJ6GEYJ224  ERJ6GEYJ101  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ2224	M 6.20HM, 1/4W M 6.20HM, 1/4W M 6.20HM, 1/4W M 100 OHM,J,1/10W M 220 OHM,J,1/10W M 10KOHM,J,1/10W M 220KOHM,J,1/10W M 100 OHM,J,1/10W M 220 OHM,J,1/10W M 20KOHM,J,1/10W M 20KOHM,J,1/10W M 10KOHM,J,1/10W	2 2 1 5 4 2 1 5 4 1	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14 R6915,1 6 R6971 R6972- 76 R6981- 84 R6985,8 6 R7100 R7102 R7103	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ16GEYJ101  ERJ16GEYJ103  ERJ16GEYJ101  ERJ16GEYJ101  ERJ16GEYJ101  ERJ16GEYJ103  ERJ16GEYJ103  ERJ16GEYJ103	M 6.20HM, 1/4W M 6.20HM, 1/4W M 6.20HM, 1/4W M 100 OHM,J,1/10W M 220 OHM,J,1/10W M 10KOHM,J,1/10W M 220KOHM,J,1/10W M 100 OHM,J,1/10W M 220 OHM,J,1/10W M 220KOHM,J,1/10W M 0 OHM,J,1/10W	2 2 1 5 4 2 1 1 1	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R69911- 14 R6975,1 6 R6971 R6972- 76 R6981- 84 R6985,8 6 R7100 R7102 R7103 R7104- 07	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ16GEYJ101  ERJ16GEYJ221  ERJ16GEYJ224  ERJ16GEYJ221  ERJ16GEYJ221  ERJ16GEYJ221  ERJ16GEYJ221  ERJ16GEYJ221  ERJ16GEYJ221  ERJ16GEYJ2221  ERJ16GEYJ2221  ERJ16GEYJ2221  ERJ16GEYJ2221	M 6.20HM, 1/4W M 6.20HM, 1/4W M 6.20HM, 1/4W M 100 OHM,J,1/10W M 220 OHM,J,1/10W M 10KOHM,J,1/10W M 220KOHM,J,1/10W M 100 OHM,J,1/10W M 220 OHM,J,1/10W M 20 OHM,J,1/10W M 20KOHM,J,1/10W M 20KOHM,J,1/10W M 10KOHM,J,1/10W	2 2 1 5 4 2 1 1 1 1 1	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14 R6915,1 6 R6971 R6972- 76 R6981- 84 R6985,8 6 R7100 R7102 R7103 R7104-	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ6GEYJ101  ERJ6GEYJ221  ERJ6GEYJ224  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ103  ERJ6GEYJ222  ERJ8GEYJ103  ERJ6GEYJ224  ERJ8GEYJ224  ERJ8GEYJ224  ERJ8GEYJ224  ERJ8GEYJ224  ERJ8GEYJ224	M 6.20HM, 1/4W  M 6.20HM, 1/4W  M 100 OHM,J,1/10W  M 220 OHM,J,1/10W  M 10KOHM,J,1/10W  M 220KOHM,J,1/10W  M 100 OHM,J,1/10W  M 200 OHM,J,1/10W  M 220 OHM,J,1/10W  M 0 OHM,J,1/10W  M 220KOHM,J,1/10W  M 220KOHM,J,1/10W  M 220KOHM,J,1/10W  M 220KOHM,J,1/10W  M 220KOHM,J,1/10W	2 2 1 5 4 2 1 5 4 1 1 1 4 4	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14 R6915,1 6 R6971 R6972- 76 R6981- 84 R6985,8 6 R7100 R7102 R7103 R7104- 07 R7108,0	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ6GEYJ101  ERJ6GEYJ221  ERJ6GEYJ224  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ103  ERJ6GEYJ222  ERJ8GEYJ103  ERJ6GEYJ224  ERJ8GEYJ224  ERJ8GEYJ224  ERJ8GEYJ224  ERJ8GEYJ224  ERJ8GEYJ224	M 6.20HM, 1/4W  M 6.20HM, 1/4W  M 100 OHM,J,1/10W  M 220 OHM,J,1/10W  M 10KOHM,J,1/10W  M 220KOHM,J,1/10W  M 100 OHM,J,1/10W  M 200 OHM,J,1/10W  M 220 OHM,J,1/10W  M 0 OHM,J,1/10W  M 220KOHM,J,1/10W  M 220KOHM,J,1/10W  M 220KOHM,J,1/10W  M 220KOHM,J,1/10W  M 220KOHM,J,1/10W	2 2 1 5 4 2 1 5 4 1 1 1 4 4	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14 R6915,1 6 R6971 R6972- 76 R6981- 84 R6985,8 6 R7100 R7102 R7103 R7104- 07 R7108,0 9 R7111	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ6GEYJ101  ERJ6GEYJ221  ERJ6GEYJ224  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ222  ERJ6GEYJ222  ERJ6GEYJ222  ERJ8GEYJ222  ERJ8GEYJ222  ERJ8GEYJ222  ERJ8GEYJ000  TAJAAH0470JV  ERJ3GEYJ102  ERJ12YJ220  ERJ16GEY0R00	M 6.20HM, 1/4W  M 6.20HM, 1/4W  M 100 OHM,J,1/10W  M 220 OHM,J,1/10W  M 10KOHM,J,1/10W  M 220KOHM,J,1/10W  M 100 OHM,J,1/10W  M 220 OHM,J,1/10W  M 220 OHM,J,1/10W  M 10KOHM,J,1/10W  M 220KOHM,J,1/10W  M 220KOHM,J,1/10W  M 220KOHM,J,1/10W  M 0 OHM, 1/8W  M 47 OHM,J,1/16W  M 1KOHM,J,1/16W  M 10KOHM,J,1/16W  M 10KOHM,J,1/16W	2 2 1 5 4 2 1 1 1 1 4 2 2	
R6815 R6828,2 9 R6852,5 3 R6901 R6902- 06 R6911- 14 R6915,1 6 R6971 R6972- 76 R6981- 84 R6985,8 6 R7100 R7102 R7103 R7104- 07 R7108,0 9 R7111 R7114-	ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ14YJ5R6U  ERJ6GEYJ101  ERJ6GEYJ221  ERJ6GEYJ224  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ221  ERJ6GEYJ222  ERJ6GEYJ222  ERJ6GEYJ222  ERJ6GEYJ222  ERJ6GEYJ222  ERJ6GEYJ2220  ERJ12YJ220  ERJ12YJ220  TAJAAH0470JV	M 6.20HM, 1/4W M 6.20HM, 1/4W M 6.20HM, 1/4W M 100 OHM,J,1/10W M 220 OHM,J,1/10W M 10KOHM,J,1/10W M 220KOHM,J,1/10W M 100 OHM,J,1/10W M 220 OHM,J,1/10W M 220KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 220KOHM,J,1/10W M 220KOHM,J,1/10W M 0 OHM, 1/8W M 47 OHM,J,1/16W M 1KOHM,J,1/16W M 120 OHM, J,1/16W M 147 OHM,J,1/16W	2	

Ref.	Part No.	Part Name & Description	Pcs	Remarks
R7123	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R7124		M 22KOHM,J,1/16W	1	
R7125- 27		M 22 OHM,J, 1/2W	3	
R7128	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7129	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7131	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7132- 35	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7137	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7140	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7142	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7143	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7145- 47	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7148	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7149		M 22 OHM,J, 1/2W	1	
R7151-		M 47 OHM,J,1/16W	7	
57		·		
R7158	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7160		M 0 OHM, 1/8W	1	
R7162		M 47 OHM,J,1/16W	1	
R7163		M 0 OHM, 1/16W	1	
R7165- 67	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7168	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7169	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7171	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7172,7	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7200	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7202	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7205- 07	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7208	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7209	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7211	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7212,1 3	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7214- 19	TAJAAH0470JV	M 47 OHM,J,1/16W	6	
R7220	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7222	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7224	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7225-	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
27 R7228	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7229	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7231		M 47 OHM, J, 1/16W	1	
R7232-	EXB38V470J	RESISTOR ARRAY	6	
37				
R7238	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R7240	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7242	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7244	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7245- 47	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7248	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7249		M 22 OHM, J, 1/2W	1	
R7251	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7252		M 22KOHM, J, 1/16W	1	
R7253	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R7254-	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7260	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7262	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7265-	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
67 R7268	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7269	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7271		M 47 OHM, J, 1/16W	1	
R7272,7	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7274	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7300	ERJ8GEY0R00	M 0 OHM, 1/8W	1	

Ref. No. Part Name & Description R7301,0 EXB38V470J RESISTOR ARRAY 2 R7303 TAJAAH0470JV M 47 ORM,J,1/16W 1 R7305- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7308 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7309 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7310 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R7311 ERJ6SW470J RESISTOR ARRAY 1 R7311 ERJ6SW470J RESISTOR ARRAY 1 R7312 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7314- ERJ3GEYJ102 M 22KOHM,J,1/16W 1 R7319 ERJ3GEYJ102 M 22KOHM,J,1/16W 1 R7319 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7311 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7320 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7321,2 EXB38V470J RESISTOR ARRAY 2 2 R7323 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7321,2 EXB38V470J RESISTOR ARRAY 2 2 R7323 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7322- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7328 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7329 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7331 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7333 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R73340 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R73340 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7340 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7340 ERJ8GEY0R00 M 0 OHM, 1/16W 2 2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7340 ERJ3GEY0R00 M 0 OHM, 1/16W 2 2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7340 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7340 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7340 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7340 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7341 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7345- TAJAAH0470JV M 47 OHM,J,1/16W 1 R7350- TAJAAH0470JV M 47 OHM,J,1/16W 1 R7350- TAJAAH0470JV M 47 OHM,J,1/16W 1 R7350- TAJAAH0470JV M 47 OHM,J,1/16W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7356 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7360 ERJ6GEY0R00 M 0 OHM, 1/8W 1 R7361 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7360 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7410 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7400 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7	
R7301,0 EXB38V470J RESISTOR ARRAY 2 2 7787305 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7305- BRJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7308 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7309 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7310 EXB36V470J RESISTOR ARRAY 1 R7311 EXB38V470J RESISTOR ARRAY 1 R7311 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7314- ERJ3GEY1020 M 22KOHM,J,1/16W 1 R7315- BRJ3GEYJ223 M 22KOHM,J,1/16W 1 R7316- BRJ3GEYJ223 M 22KOHM,J,1/16W 1 R7320 ERJ3GEYJ04 M 100KOHM,J,1/16W 1 R7320 ERJ3GEYJ04 M 100KOHM,J,1/16W 1 R7321,2 EXB38V470J RESISTOR ARRAY 2 2 R7323 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7325- BRJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7328 ERJ6GEYJ020 M 20 OHM, 1/10W 1 R7331 EXJ6GEY0R00 M 0 OHM, 1/10W 1 R7332 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV RESISTOR ARRAY 1 R7331 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7331 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7334 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7340 ERJ8SW470J RESISTOR ARRAY 1 R7331 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7340 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7340 ERJ8GEY0R00 M 0 OHM, 1/16W 2 2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7340 ERJ8GEY0R00 M 0 OHM, 1/16W 2 2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEYUZ20 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7354 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7354 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7355 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7356 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7357 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7358 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7360 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7361 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7362 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7363 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7364 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7368 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7368 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7368 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7361 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7362 ERJ12YJ220 M 22 OHM,J	arks
R7303 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7305- ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7308 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7309 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7310 ERJ6GEYJ102 M 1ROHM, J, 1/10W 1 R7311 EXB38V470J RESISTOR ARRAY 1 R7311 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7311 ERJ3GEYOROO M 0 OHM, 1/16W 1 R7311 ERJ3GEYOROO M 0 OHM, 1/16W 1 R7311 ERJ3GEYOROO M 0 OHM, 1/16W 1 R7312 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7313 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7314 ERJ3GEYOROO M 0 OHM, 1/8W 1 R7315 ERJ3GEYJ203 M 22 OHM, J, 1/16W 1 R7316 ERJ3GEYJ20 M 22 OHM, J, 1/10W 1 R7317 ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7328 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7330 EXB3EV470J RESISTOR ARRAY 2 2 R7323 TAJAAH0470JV M 47 OHM, J, 1/10W 1 R7330 EXB3EV470J RESISTOR ARRAY 1 R7331 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7332 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7333 EXB3EV470J RESISTOR ARRAY 1 R7331 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM, J, 1/10W 1 R7333 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7334 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7334 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7341 ERJ3GEYOROO M 0 OHM, 1/16W 2 2 R7343 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7345 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7348 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7347 ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7348 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7348 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7348 ERJ6GEYOROO M 0 OHM, 1/10W 1 R73550 TAJAAH0470JV M 47 OHM, J, 1/16W 3 52 R7354 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7365 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7412 TAJAH0470JV M 47 OHM, J, 1/16W 1 R7414 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7418 ERJ3GEYJ223 M 22 OHM, J	
R7305- ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7309 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7309 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7310 ERA6GEYJ102 M 1KOHM, J, 1/10W 1 R7311 ERSB8V470J RESISTOR ARRAY 1 R7312 TAJAAH0470JV M 47 OHM, J, 1/16W 1 17 R7318 ERJ3GEYJ233 M 22KOHM, J, 1/16W 1 R7319 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R7319 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R7319 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R7321, 2 EXB38V470J RESISTOR ARRAY 2 2 R7323 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7321, 2 EXB38V470J RESISTOR ARRAY 2 2 R7323 TAJAAH0470JV M 47 OHM, J, 1/2W 3 27 R7325- ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7330 EXB38V470J RESISTOR ARRAY 1 R7329 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7332 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7333 ERJ6GEYJ24 M 22OKOHM, J, 1/10W 1 R7331 ERJ6GEYJ24 M 22OKOHM, J, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7334 ERJ6GEYJ00 M 0 OHM, 1/8W 1 R7341, 4 ERJ3GEYJ224 M 22OKOHM, J, 1/10W 1 R7341, 4 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 47 R7344 ERJ3GEYJ220 M 22 OHM, J, 1/2W 3 47 R7345 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7346 ERJ6GEYOROO M 0 OHM, 1/8W 1 R7347 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7348 ERJ6GEYOROO M 0 OHM, 1/8W 1 R7349 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7354 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7349 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7358 ERJ6GEYOROO M 0 OHM, 1/8W 1 R7358, 5 ERJ6GEYOROO M 0 OHM, 1/8W 1 R7365 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7366 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7367 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7360 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7361 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7362 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7365 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7360 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7361 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7362 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7363 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7364 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7367 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7418 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7418 ERJ3GEYOROO M 0 OHM, 1	
07         R7308         ERJ6GEYOROD         M 0 OHM, 1/10W         1           R7310         ERJ6GEYJ102         M 1KOHM, J, 1/10W         1           R7311         ERJ6GEYJ102         M 1KOHM, J, 1/10W         1           R7311         EXB38V470J         RESISTOR ARRAY         1           R7312         TAJAAH0470JV         M 4 7 OHM, J, 1/16W         4           17         ERJ3GEYJ223         M 22KOHM, J, 1/16W         4           17         ERJ3GEYJ223         M 22KOHM, J, 1/16W         1           R7318         ERJ3GEYJ223         M 22KOHM, J, 1/16W         1           R7318         ERJ3GEYJ223         M 22KOHM, J, 1/16W         1           R7318         ERJ3GEYJ223         M 22KOHM, J, 1/16W         1           R73210         ERJ3GEYJ000         M 0 OHM, 1/10W         1           R73217         ERJ12YJ220         M 22 OHM, J, 1/2W         3           27         R7328         ERJ6GEY000         M 0 OHM, 1/10W         1           R7331         ERJ6GEY000         M 0 OHM, 1/10W         1           R7331         ERJ6GEY000         M 0 OHM, 1/16W         1           R7334         TAJAAH0470JW         M 7 OHM, J,1/16W         1           R7	
R7310	
R7310 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R7311 ERB38V470J RESISTOR ARRAY 1 R7312 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7314 ERJ3GEY0R00 M 0 OHM, 1/16W 4 17 R7318 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7320 ERJ8GEY0R00 M 0 OHM, 1/8W 1 R7321,2 ERB38V470J RESISTOR ARRAY 2 2 R7323 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7325 ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7328 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7329 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7331 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7333 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7332 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7333 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7333 ERJ6GEY0R00 M 0 OHM, 1/8W 1 R7334 ERJ6GEY0R00 M 0 OHM, 1/8W 1 R7335 ERJ6GEYJ224 M 22OKOHM,J,1/10W 1 R7341,4 ERJ3GEY0R00 M 0 OHM, 1/8W 1 R7344- ERJ3GEY0R00 M 0 OHM, 1/10W 2 2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7345- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7346 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7347 ERJ3GEY0R00 M 0 OHM, 1/10W 1 R7348 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7350- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7366 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7367 ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7358- TAJAAH0470JV M 47 OHM,J,1/16W 1 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 2 9 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7361 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7362 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7360 ERJ3GEY0R00	
R7311 EXB38V470J RESISTOR ARRAY 1 R7312 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7314 - ERJ3GEYJ203 M 0 OHM, 1/16W 4 R7318 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7319 ERJ3GEYJ2104 M 100KOHM, J, 1/16W 1 R7320 ERJ8GEYJ007 M 0 OHM, 1/16W 1 R7321, 2 EXB38V470J RESISTOR ARRAY 2 R7323 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7325 - ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7328 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7329 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7331 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7332 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7333 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7333 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7334 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7341, 4 ERJ3GEY0R00 M 0 OHM, 1/16W 2 R7344 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7345 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7348 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7345 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7346 ERJ3GEY0R00 M 0 OHM, 1/16W 2 R7347 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7349 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7348 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7348 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7350 TAJAAH0470JV M 47 OHM, J, 1/16W 4 R7350 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7363 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7361 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7362 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7363 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7364 ERJ12YJ220 M 22 OHM, J 1/2W 3 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7363 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7364 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7363 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7364 ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7361 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7362 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7363 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R73640 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R73640 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R73640 ERJ3GEY0R00 M 0 OHM,	
R7312 TAJAAH0470JV M 47 OHM,J,1/16W 1 17 R7314- ERJ3GEY0R00 M 0 OHM, 1/16W 4 17 R7318 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7319 ERJ3GEY104 M 100KOHM,J,1/16W 1 R7320 ERJ8GEY0R00 M 0 OHM, 1/8W 1 R7321, 2 EXB38V470J RESISTOR ARRAY 2 2 R7323 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7328 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7330 EXB38V470J RESISTOR ARRAY 1 2 R7328 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7330 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7334 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7334 ERJ6GEY0R00 M 0 OHM, 1/16W 1 R7340 ERJ8GEY0R00 M 0 OHM, 1/16W 1 R7341, 4 ERJ3GEY0R00 M 0 OHM, 1/16W 2 2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7345- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7354- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7355- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM,J,1/16W 4 F7365- ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7365- ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7365- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7366 ERJ8GEY0R00 M 0 OHM, 1/10W 2 9 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7367- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368- ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7360 ERJ8GEYOR00 M 0 OHM, 1/10W 1 R7361- ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7362- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7363 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7365- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7360 ERJ8GEYOR00 M 0 OHM, 1/10W 1 R7361 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7362- ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7363 ERJ6GEYOR00 M 0 OHM, 1/16W 1 R7364 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7460 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7460 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7460- ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7461 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7462- ERJ12YJ220 M 22 OHM,J, 1/16W 1	
R7314- ERJ3GEYOROO M O OHM, 1/16W 4 17 R7318 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7319 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7320 ERJ8GEYOROO M O OHM, 1/8W 1 R7321,2 EXB38V470J RESISTOR ARRAY 2 2 R7323 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7325- ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7328 ERJ6GEYOROO M O OHM, 1/10W 1 R7329 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7330 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEYOROO M O OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7331 ERJ6GEY0224 M 22 OKOHM,J,1/10W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7341 ERJ3GEYOROO M O OHM, 1/16W 2 2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7345- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEY0ROO M O OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEYOROO M O OHM, 1/10W 1 R7350- TAJAAH0470JV M 47 OHM,J,1/16W 1 R7355- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7355- TAJAAH0470JV M 47 OHM,J,1/16W 1 R7360 ERJBGEYOROO M O OHM, 1/10W 1 R7360 ERJBGEYOROO M O OHM, 1/10W 2 9 R7360 ERJBGEYOROO M O OHM, 1/10W 1 R7361 TAJAAH0470JV M 47 OHM,J,1/16W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7372 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7370-7 ERJ3GEYOROO M O OHM, 1/10W 1 R7400 ERJ8GEYOROO M O OHM, 1/10W 1 R7401 ERJ6GEYOROO M O OHM, 1/10W 1 R7401 ERJ6GEYOROO M O OHM, 1/10W 1 R7402 ERJ3GEYOROO M O OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7404 ERJ6GEYOROO M O OHM, 1/10W 1 R7405 ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEYOROO M O OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7409 ERJ3GEYOROO M O OHM, 1/10W 1 R7410 ERJ6GEYOROO M O OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7428 ERJ6GEYOROO M O OHM, 1/	
17 R7318 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7320 ERJ8GEYOROO M 0 ORM, 1/8W 1 R7321, 2 EXB38V470J RESISTOR ARRAY 2 2 R7323 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7325- ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7328 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7329 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7331 ERJ6GEYOROO M 0 OHM, 1/10W 1 R73329 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R73329 ERJ6GEYOROO M 0 OHM, 1/10W 1 R73330 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEYOROO M 0 OHM, 1/10W 1 R73329 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R73339 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R73339 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R73340 ERJ8GEYOROO M 0 OHM, 1/16W 2 R7341, 4 ERJ3GEYOROO M 0 OHM, 1/16W 2 R7341, 5 ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7345- ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7348 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7349 ERJ2YJ220 M 22 OHM, J, 1/2W 1 R7350- TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7351- TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7352- TAJAAH0470JV M 47 OHM, J, 1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM, J, 1/16W 3 52 R7355- ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7360 ERJ8GEYOROO M 0 OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7361 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7362 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7363 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7370, 7 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7371 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7372 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7400 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7405- ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7410- ERJ6GEYOROO M 0 OHM, 1/10W 1 R7409 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7410 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7423 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7428 ERJ6GEYOROO M 0 OHM,	
R7319 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7320 ERJ3GEYOROO M 0 OHM, 1/8W 1 R7321,2 EXB38V470J RESISTOR ARRAY 2 2 R7323 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7325- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7328 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7329 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7330 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R73330 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEYDROO M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7333 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7340 ERJ3GEYOROO M 0 OHM, 1/16W 2 2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7345- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7350- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7355- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7356- ERJ6GEYOROO M 0 OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7363 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7363 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7365- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7370-7 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7400 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7404 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7405 ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7414 ERJ3GEYJ220 M 22 OHM,J, 1/2W 1 R7415 ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7416 ERJ3GEYJ200 M 0 OHM, 1/10W 1 R7417 ERJ3GEYJ200 M 0 OHM, 1/10W 1 R7418 ERJ3GEYJ200 M 0 OHM, 1/10W 1 R7419 ERJ3GEYJ200 M 0 OHM, 1/10W 1 R7419 ERJ3GEYJ200 M 0 OHM, 1/10W 1 R7412 ERJ3GEYJ200 M 0 OHM, 1/10W 1 R7412 ERJ3GEYJ200 M 0 OHM, 1/10W 1 R7412 ERJ3GEYJ200 M 0 OHM, 1/10W 1 R7414 ERJ3GEYJ200 M 0 OHM, 1/10W 1 R7418 ERJ3GEYJ200 M 0 OHM, 1/10W 1 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1	
R7320 ERJ8GEYOROO M O OHM, 1/8W 1 R7321,2 EXB38V470J RESISTOR ARRAY 2 R7321,2 EXB38V470J RESISTOR ARRAY 2 R7323 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7325- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7328 ERJ6GEYOROO M O OHM, 1/10W 1 R7329 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7330 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEYOROO M O OHM, 1/10W 1 R7331 ERJ6GEYOROO M O OHM, 1/10W 1 R7339 ERJ6GEYJ224 M 220KOHM,J,1/16W 1 R7339 ERJ6GEYJ224 M 220KOHM,J,1/16W 1 R7340 ERJ8GEYOROO M O OHM, 1/8W 1 R7341,4 ERJ3GEYOROO M O OHM, 1/16W 2 2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7345- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEYOROO M O OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7350- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7355- ERJ6GEYOROO M O OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M O OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7370,7 ERJ3GEYOROO M O OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7404 ERJ6GEYOROO M O OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7404 ERJ6GEYOROO M O OHM, 1/10W 1 R7408 ERJ6GEYOROO M O OHM, 1/10W 1 R7408 ERJ6GEYOROO M O OHM, 1/10W 1 R7418 ERJ3GEYJ220 M 22 OHM,J, 1/2W 1 R7418 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7419 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7423 TAJAAH0470JV M 22 OHM,J,1/16W 1 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1	
R7321,2 EXB38V470J RESISTOR ARRAY 2 2 R7323 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7325- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7328 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7329 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7330 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7339 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7339 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7340 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7341,4 ERJ3GEY0R00 M 0 OHM, 1/16W 2 2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7345- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 3 52 R7354- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7355- TAJAAH0470JV M 47 OHM,J,1/16W 3 57 R7358,5 ERJ6GEY0R00 M 0 OHM, 1/10W 2 9 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 2 9 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 1 R7365- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7360 ERJ8GEYOR00 M 0 OHM, 1/10W 1 R7360 ERJ8GEYOR00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7360 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7360 ERJ3GEYOR00 M 0 OHM, 1/10W 1 R7360 ERJ3GEYOR00 M 0 OHM, 1/10W 1 R7360 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7401 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7402 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7404 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7408 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7414 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7414 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7413 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7414 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7424 ERJ6GEYOR00 M 0 OHM, 1/10W 1	
2	
R7325- ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7328 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7329 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7330 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7339 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7330 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7331 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7332 TAJAAH0470JV M 47 OHM,J,1/16W 2 R7341,4 ERJ3GEYOROO M 0 OHM, 1/8W 1 R7341,4 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7345- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7350- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM,J,1/16W 4 57 R7356- ERJ6GEYOROO M 0 OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M 0 OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7365- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7370,7 ERJ3GEYOROO M 0 OHM, 1/16W 1 R7372 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7400 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7413 ERJ3GEYJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7413 ERJ3GEYJ220 M 22 OHM,J, 1/2W 3 07 R7418 ERJ3GEYJ221 M 22 OHM,J, 1/16W 1 R7419 ERJ3GEYJ220 M 22 OHM,J, 1/16W 1 R7425 ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7425 ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1	
27 R7328 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7329 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7330 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM, J, 1/10W 1 R7339 ERJ6GEYUZ24 M 220KOHM, J, 1/10W 1 R7340 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7341, 4 ERJ3GEYOROO M 0 OHM, 1/16W 2 R7343 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7345- ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7348 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7350- TAJAAH0470JV M 47 OHM, J, 1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM, J, 1/16W 4 57 R7358, 5 ERJ6GEYOROO M 0 OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M 0 OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7365- ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7370,7 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7370,7 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7372 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7372 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7372 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7400 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7405- ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7400 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7402 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7404 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7405- ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6EYOROO M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7414 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7415 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7416 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7417 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7418 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R7425- ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1	
R7328 ERJ6GEYOROO M O OHM, 1/10W 1 R7329 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7330 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEYOROO M O OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM, J, 1/10W 1 R7339 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R7340 ERJ8GEYOROO M O OHM, 1/8W 1 R7341, 4 ERJ3GEYOROO M O OHM, 1/16W 2 2 R7343 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7345- ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7348 ERJ6GEYOROO M O OHM, 1/10W 1 R7350- TAJAAH0470JV M 47 OHM, J, 1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM, J, 1/16W 3 57 R7358,5 ERJ6GEYOROO M O OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M O OHM, 1/10W 1 R7365- ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7370,7 ERJ3GEYOROO M O OHM, 1/10W 1 R7370,7 ERJ3GEYOROO M O OHM, 1/16W 2 1 R7370 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7370 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7401 ERJ6GEYOROO M O OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7405- ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEYOROO M O OHM, 1/10W 1 R7409 ERJ3GEYOROO M O OHM, 1/10W 1 R7401 ERJ6GEYOROO M O OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7404 ERJ8GEYOROO M O OHM, 1/10W 1 R7405- ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEYOROO M O OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEYOROO M O OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7410 ERJ6GEYOROO M O OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7413 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7414 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7415 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7418 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7425 ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7428 ERJ6GEYOROO M O OHM, 1/10W 1	
R7329 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7330 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7339 ERJ6GEYOROO M 0 OHM, 1/8W 1 R7340 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7341, 4 ERJ3GEYOROO M 0 OHM, 1/16W 2 R7343 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7345- ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7348 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7350- TAJAAH0470JV M 47 OHM, J, 1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM, J, 1/16W 4 57 R7358,5 ERJ6GEYOROO M 0 OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M 0 OHM, 1/10W 2 9 R7363 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7365- ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7370,7 ERJ3GEYOROO M 0 OHM, 1/16W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/16W 1 R7402 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7404 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7405- ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7410 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7413 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R7414 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R7418 ERJ3GEYJ223 M 22 OHM, J, 1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R7425 ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1	
R7330 EXB38V470J RESISTOR ARRAY 1 R7331 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM, J,1/16W 1 R7339 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7340 ERJ8GEY0R00 M 0 OHM, 1/8W 1 R7341,4 ERJ3GEY0R00 M 0 OHM, 1/16W 2 R7341,4 ERJ3GEY0R00 M 0 OHM, 1/16W 2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7345- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7350- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM,J,1/16W 4 57 R7358,5 ERJ6GEY0R00 M 0 OHM, 1/10W 2 9 R7360 ERJ8GEY0R00 M 0 OHM, 1/10W 2 9 R7361 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7363 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7358 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7370,7 ERJ3GEY0R00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7370,7 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R7400 ERJ8GEY0R00 M 0 OHM, 1/16W 1 R7401 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7404 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7418 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7420 ERJ8GEYOR00 M 0 OHM, 1/8W 1 R7421 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7422 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEYOR00 M 0 OHM, 1/10W 1	
R7331 ERJ6GEYOROO M O OHM, 1/10W 1 R7332 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7339 ERJ6GEYJ224 M 220KOHM, J, 1/10W 1 R7340 ERJ8GEYOROO M O OHM, 1/8W 1 R7341, 4 ERJ3GEYOROO M O OHM, 1/16W 2 R7343 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7345- ERJ12YJ220 M 22 OHM, J, 1/2W 3 47 R7348 ERJ6GEYOROO M O OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7350- TAJAAH0470JV M 47 OHM, J, 1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM, J, 1/16W 4 57 R7358, 5 ERJ6GEYOROO M O OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M O OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M O OHM, 1/8W 1 R7365- ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7370,7 ERJ3GEYOROO M O OHM, 1/16W 2 1 R7370,7 ERJ3GEYOROO M O OHM, 1/16W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7370,7 ERJ3GEYOROO M O OHM, 1/16W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7370,7 ERJ3GEYOROO M O OHM, 1/16W 2 1 R7372 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7400 ERJ8GEYOROO M O OHM, 1/10W 1 R7401 ERJ6GEYOROO M O OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R74040 ERJ8GEYOROO M O OHM, 1/10W 1 R7405- ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEYOROO M O OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEYOROO M O OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7410 ERJ6GEYJ102 M 1ROHM, J, 1/16W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7418 ERJ3GEYJ223 M 22 OHM, J, 1/2W 1 R7418 ERJ3GEYJ223 M 22 OHM, J, 1/16W 1 R7419 ERJ3GEYJ223 M 22 OHM, J, 1/16W 1 R7425- ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7425 ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1	
R7332 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7339 ERJ6GEYJ224 M 220KOHM,J,1/10W 1 R7340 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7341,4 ERJ3GEYOROO M 0 OHM, 1/16W 2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7345 ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7350- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM,J,1/16W 4 57 R7358,5 ERJ6GEYOROO M 0 OHM, 1/10W 2 9 R7360 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7363 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7370,7 ERJ3GEYOROO M 0 OHM, 1/10W 1 R7372 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7372 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7400 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7402 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R74040 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7402 ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEYJ102 M 1KOHM,J,1/16W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7418 ERJ3GEYJ223 M 22 OHM,J, 1/2W 1 R7418 ERJ3GEYJ223 M 22 KOHM,J,1/16W 1 R7420 ERJ8GEYOROO M 0 OHM, 1/16W 1 R7421 ERJ3GEYJ223 M 22 KOHM,J,1/16W 1 R7422 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R7423 TAJAH0470JV M 47 OHM,J,1/16W 1 R7424 ERJ3GEYJ223 M 22 KOHM,J,1/16W 1 R7425 ERJ12YJ220 M 0 0 OHM, 1/16W 1 R7425 ERJ12YJ220 M 0 0 OHM, 1/16W 1 R7425 ERJ12YJ220 M 0 0 OHM, 1/10W 1 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1	
R7340 ERJ8GEYOROO M O OHM, 1/8W 1 R7341,4 ERJ3GEYOROO M O OHM, 1/16W 2 R7343 TAJAAHO47OJV M 47 OHM,J,1/16W 1 R7345- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEYOROO M O OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7350- TAJAAHO47OJV M 47 OHM,J,1/16W 3 52 R7354- TAJAAHO47OJV M 47 OHM,J,1/16W 4 57 R7358,5 ERJ6GEYOROO M O OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M O OHM, 1/8W 1 R7363 TAJAAHO47OJV M 47 OHM,J,1/16W 1 R7365- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7370,7 ERJ3GEYOROO M O OHM, 1/16W 2 1 R7400 ERJ8GEYOROO M O OHM, 1/16W 2 1 R7401 ERJ6GEYOROO M O OHM, 1/16W 1 R7403 TAJAAHO47OJV M 47 OHM,J,1/16W 1 R7401 ERJ6GEYOROO M O OHM, 1/10W 1 R7403 TAJAAHO47OJV M 47 OHM,J,1/16W 1 R7401 ERJ6GEYOROO M O OHM, 1/10W 1 R7403 TAJAAHO47OJV M 47 OHM,J,1/16W 1 R7401 ERJ6GEYOROO M O OHM, 1/10W 1 R7403 TAJAAHO47OJV M 47 OHM,J,1/16W 1 R7401 ERJ6GEYOROO M O OHM, 1/10W 1 R7403 TAJAAHO47OJV M 47 OHM,J,1/16W 1 R7404 ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEYOROO M O OHM, 1/10W 1 R7412 TAJAAHO47OJV M 47 OHM,J,1/16W 1 R7414- ERJ3GEYOROO M O OHM, 1/16W 4 17 R7418 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7419 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEYOROO M O OHM, 1/10W 1	
R7341,4	
2 R7343 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7345- ERJ12YJ220 M 22 OHM,J, 1/2W 3 47 R7348 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7350- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM,J,1/16W 4 57 R7358,5 ERJ6GEY0R00 M 0 OHM, 1/10W 2 9 R7360 ERJ8GEY0R00 M 0 OHM, 1/8W 1 R7363 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7366- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7370,7 ERJ3GEY0R00 M 0 OHM, 1/16W 2 1 R7370,7 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R7400 ERJ8GEY0R00 M 0 OHM, 1/16W 1 R7401 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7410 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7411 TAJAH0470JV M 47 OHM,J,1/16W 1 R7412 TAJAH0470JV M 47 OHM,J,1/16W 1 R7414- ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R7414- ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R7415 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7416 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7428 ERJ6GEYOR00 M 0 OHM, 1/10W 1	
R7343 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7345- ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7348 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7350- TAJAAH0470JV M 47 OHM, J, 1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM, J, 1/16W 4 57 R7358,5 ERJ6GEYOROO M 0 OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7363 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7365- ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7370,7 ERJ3GEYOROO M 0 OHM, 1/16W 2 1 R7372 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7400 ERJ8GEYOROO M 0 OHM, 1/16W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R74040 ERJ8GEYOROO M 0 OHM, 1/10W 1 R7405- ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7410 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7410 ERJ6GEYJ102 M 1KOHM, J, 1/16W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7414- ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7413 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R7420 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7425- ERJ12YJ220 M 22 OHM, J, 1/2W 3 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1	
R7345-	
R7348 ERJ6GEYOROO M O OHM, 1/10W 1 R7349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7350- TAJAAHO470JV M 47 OHM,J,1/16W 3 52 R7354- TAJAAHO470JV M 47 OHM,J,1/16W 4 57 R7358,5 ERJ6GEYOROO M O OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M O OHM, 1/8W 1 R7363 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7365- ERJ12YJ22O M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7369 ERJ12YJ22O M 22 OHM,J, 1/2W 1 R7370,7 ERJ3GEYOROO M O OHM, 1/16W 2 1 R7372 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7400 ERJ8GEYOROO M O OHM, 1/8W 1 R7401 ERJ6GEYOROO M O OHM, 1/10W 1 R7403 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7404 ERJ6GEYOROO M O OHM, 1/10W 1 R7405- ERJ12YJ22O M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEYOROO M O OHM, 1/10W 1 R7409 ERJ12YJ22O M 22 OHM,J, 1/2W 3 07 R7410 ERJ6GEYOROO M O OHM, 1/10W 1 R7411 ERJ6GEYOROO M O OHM, 1/10W 1 R7412 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7414- ERJ3GEYOROO M O OHM, 1/16W 4 17 R7418 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R7418 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7420 ERJ8GEYOROO M O OHM, 1/16W 1 R7419 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7420 ERJ8GEYOROO M O OHM, 1/8W 1 R7421 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7422 ERJ8GEYOROO M O OHM, 1/8W 1 R7423 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7424 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7425- ERJ12YJ22O M 22 OHM,J, 1/2W 3 R7428 ERJ6GEYOROO M O OHM, 1/10W 1	
R7349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7350- TAJAAH0470JV M 47 OHM, J, 1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM, J, 1/16W 4 57 R7358,5 ERJ6GEYOROO M 0 OHM, 1/10W 2 9 R7360 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7363 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7365- ERJ12YJ22O M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ22O M 22 OHM, J, 1/2W 1 R7370,7 ERJ3GEYOROO M 0 OHM, 1/16W 2 1 R7372 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7400 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7405- ERJ12YJ22O M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7409 ERJ12YJ22O M 22 OHM, J, 1/2W 3 07 R7410 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7414- ERJ3GEYOROO M 0 OHM, 1/16W 1 R7414- ERJ3GEYOROO M 0 OHM, 1/16W 1 R7418 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R7418 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7419 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7420 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7420 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7423 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7423 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7425- ERJ12YJ22O M 22 OHM, J, 1/2W 3 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1	
R7350- TAJAAH0470JV M 47 OHM,J,1/16W 3 52 R7354- TAJAAH0470JV M 47 OHM,J,1/16W 4 57 R7358,5 ERJ6GEY0R00 M 0 OHM, 1/10W 2 9 R7360 ERJ8GEY0R00 M 0 OHM, 1/8W 1 R7363 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7365- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7370,7 ERJ3GEY0R00 M 0 OHM, 1/16W 2 1 R7370 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7400 ERJ8GEY0R00 M 0 OHM, 1/8W 1 R7401 ERJ6GEY0R00 M 0 OHM, 1/8W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7410 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7411 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7414- ERJ3GEY0R00 M 0 OHM, 1/16W 4 17 R7418 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R7418 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7420 ERJ8GEYOR00 M 0 OHM, 1/8W 1 R7420 ERJ8GEYOR00 M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7428 ERJ6GEYOR00 M 0 OHM, 1/10W 1	
52         R7354-       TAJAAH0470JV       M 47 OHM,J,1/16W       4         57       R7358,5       ERJ6GEY0R00       M 0 OHM, 1/10W       2         9       R7360       ERJ8GEY0R00       M 0 OHM, 1/8W       1         R7363       TAJAAH0470JV       M 47 OHM,J,1/16W       1         R7365-       ERJ12YJ220       M 22 OHM,J, 1/2W       3         67       R7368       ERJ6GEY0R00       M 0 OHM, 1/10W       1         R7369       ERJ12YJ220       M 22 OHM,J, 1/2W       1         R7372       TAJAAH0470JV       M 47 OHM,J,1/16W       1         R7400       ERJ8GEY0R00       M 0 OHM, 1/8W       1         R7401       ERJ6GEY0R00       M 0 OHM, 1/10W       1         R7403       TAJAAH0470JV       M 47 OHM,J,1/16W       1         R7405-       ERJ12YJ220       M 22 OHM,J, 1/2W       3         07       R7408       ERJ6GEY0R00       M 0 OHM, 1/10W       1         R7410       ERJ6GEY0R00       M 10 OHM, 1/10W       1         R7412       TAJAAH0470JV       M 47 OHM,J,1/16W       1         R7418       ERJ3GEYJ223       M 22KOHM,J,1/16W       1         R7418       ERJ3GEYJ04       M 100KOHM,J,	
57         R7358,5       ERJ6GEY0R00       M 0 OHM, 1/10W       2         9       R7360       ERJ8GEY0R00       M 0 OHM, 1/8W       1         R7363       TAJAAH0470JV       M 47 OHM,J,1/16W       1         R7365-       ERJ12YJ220       M 22 OHM,J, 1/2W       3         67       R7368       ERJ6GEY0R00       M 0 OHM, 1/10W       1         R7369       ERJ12YJ220       M 22 OHM,J, 1/2W       1         R7370,7       ERJ3GEY0R00       M 0 OHM, 1/16W       2         1       R7400       ERJ8GEY0R00       M 0 OHM, 1/10W       1         R7401       ERJ6GEY0R00       M 0 OHM, 1/10W       1         R7403       TAJAAH0470JV       M 47 OHM,J,1/16W       1         R7405-       ERJ12YJ220       M 22 OHM,J, 1/2W       3         07       ERJ12YJ220       M 22 OHM,J, 1/2W       1         R7408       ERJ6GEY0R00       M 0 OHM, 1/10W       1         R7410       ERJ6GEYJ102       M 1KOHM,J,1/10W       1         R7412       TAJAAH0470JV       M 47 OHM,J,1/16W       1         R7418       ERJ3GEYJ223       M 22KOHM,J,1/16W       1         R7419       ERJ3GEY0R00       M 0 OHM, 1/8W       1	
9 R7360 ERJ8GEYOROO M O OHM, 1/8W 1 R7363 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7365- ERJ12YJ220 M 22 OHM,J, 1/2W 3 67 R7368 ERJ6GEYOROO M O OHM, 1/10W 1 R7370,7 ERJ3GEYOROO M O OHM, 1/16W 2 1 R7370,7 ERJ3GEYOROO M O OHM, 1/16W 1 R7370 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7400 ERJ8GEYOROO M O OHM, 1/10W 1 R7401 ERJ6GEYOROO M O OHM, 1/10W 1 R7403 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEYOROO M O OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7410 ERJ6GEYOROO M O OHM, 1/10W 1 R7411 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7412 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7414- ERJ3GEYOROO M O OHM, 1/16W 4 17 R7418 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R7419 ERJ3GEYOROO M O OHM, 1/16W 1 R7420 ERJ8GEYOROO M O OHM, 1/8W 1 R7423 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7423 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7423 TAJAAHO470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEYOROO M O OHM, 1/10W 1	
R7363 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7365- ERJ12YJ220 M 22 OHM, J, 1/2W 3 67 R7368 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7370, 7 ERJ3GEY0R00 M 0 OHM, 1/16W 2 1 R7372 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7401 ERJ6GEY0R00 M 0 OHM, 1/8W 1 R7403 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7405- ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7410 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7414- ERJ3GEY0R00 M 0 OHM, 1/16W 1 R7418 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R7418 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R7420 ERJ8GEYOR00 M 0 OHM, 1/8W 1 R7420 ERJ8GEYOR00 M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7423 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7425- ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7425- ERJ12YJ220 M 22 OHM, J, 1/16W 1 R7425- ERJ12YJ220 M 22 OHM, J, 1/16W 1	
R7365- ERJ12YJ220 M 22 OHM, J, 1/2W 3  R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1  R7369 ERJ12YJ220 M 22 OHM, J, 1/2W 1  R7370, 7 ERJ3GEYOROO M 0 OHM, 1/16W 2  1  R7372 TAJAAH0470JV M 47 OHM, J,1/16W 1  R7401 ERJ6GEYOROO M 0 OHM, 1/8W 1  R7403 TAJAAH0470JV M 47 OHM, J,1/16W 1  R7405- ERJ12YJ220 M 22 OHM, J, 1/2W 3  07  R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1  R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 1  R7410 ERJ6GEYOROO M 0 OHM, 1/10W 1  R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1  R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1  R7414 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1  R7418 ERJ3GEYJ223 M 22 OHM, J, 1/16W 1  R7419 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1  R7420 ERJ8GEYJ104 M 100KOHM, J, 1/16W 1  R7420 ERJ8GEYJ104 M 100KOHM, J, 1/16W 1  R7423 TAJAAH0470JV M 47 OHM, J, 1/16W 1  R7423 TAJAAH0470JV M 47 OHM, J, 1/16W 1  R7425- ERJ12YJ220 M 22 OHM, J, 1/16W 1  R7425- ERJ12YJ220 M 22 OHM, J, 1/16W 1  R7428 ERJ6GEYOROO M 0 OHM, J, 1/16W 1	
67 R7368 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7370,7 ERJ3GEY0R00 M 0 OHM, 1/16W 2 1 R7372 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7400 ERJ8GEY0R00 M 0 OHM, 1/8W 1 R7401 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEY0R00 M 1 KOHM,J,1/16W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7414- ERJ3GEY0R00 M 0 OHM, 1/16W 4 17 R7418 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7419 ERJ3GEYJ04 M 100KOHM,J,1/16W 1 R7420 ERJ8GEYJ104 M 100KOHM,J,1/16W 1 R7420 ERJ8GEYOR00 M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEYOR00 M 0 OHM, 1/10W 1	
R7368 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7369 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7370,7 ERJ3GEYOROO M 0 OHM, 1/16W 2 1 R7372 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7400 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7414- ERJ3GEYOROO M 0 OHM, 1/16W 1 R7415- ERJ3GEYOROO M 0 OHM, 1/10W 1 R7416 ERJ3GEYOROO M 0 OHM, 1/16W 1 R7417 ERJ3GEYOROO M 0 OHM, 1/16W 1 R7418 ERJ3GEYOROO M 0 OHM, 1/16W 1 R7419 ERJ3GEYOROO M 0 OHM, 1/16W 1 R7420 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7420 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1	
R7370,7 ERJ3GEYOROO M O OHM, 1/16W 2 1 R7372 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7400 ERJ8GEYOROO M O OHM, 1/8W 1 R7401 ERJ6GEYOROO M O OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 O7 R7408 ERJ6GEYOROO M O OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7414- ERJ3GEYOROO M O OHM, 1/16W 4 17 R7418 ERJ3GEYOROO M O OHM, 1/16W 1 R7419 ERJ3GEYOROO M O OHM, 1/16W 1 R7419 ERJ3GEYOROO M O OHM, 1/16W 1 R7420 ERJ8GEYOROO M O OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEYOROO M O OHM, 1/10W 1	
1 R7372 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7400 ERJ8GEYOR00 M 0 OHM, 1/8W 1 R7401 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7414- ERJ3GEYOR00 M 0 OHM, 1/16W 4 17 R7418 ERJ3GEYJ023 M 22KOHM,J,1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7420 ERJ8GEYJ104 M 100KOHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEYOR00 M 0 OHM, 1/10W 1	
R7372 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7400 ERJ8GEYOR00 M 0 OHM, 1/8W 1 R7401 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 O7 R7408 ERJ6GEYOR00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 T7414- ERJ3GEYOR00 M 0 OHM, 1/16W 4 T7 R7418 ERJ3GEYJ23 M 22KOHM,J,1/16W 1 R7419 ERJ3GEYJ04 M 100KOHM,J,1/16W 1 R7420 ERJ8GEYJ104 M 100KOHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 ERJ6GEYOR00 M 0 OHM, 1/8W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3	
R7400 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7401 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 O7 R7408 ERJ6GEYOROO M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7414- ERJ3GEYOROO M 0 OHM, 1/16W 4 17 R7418 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7419 ERJ3GEYJ04 M 100KOHM,J,1/16W 1 R7420 ERJ8GEYJ104 M 100KOHM,J,1/16W 1 R7420 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1	
R7401 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 R7408 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 TR7414- ERJ3GEYOR00 M 0 OHM, 1/16W 4 TR7418 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7419 ERJ3GEYJ04 M 100KOHM,J,1/16W 1 R7420 ERJ8GEYOR00 M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 Z7 R7428 ERJ6GEYOR00 M 0 OHM, 1/10W 1	
R7403 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7405- ERJ12YJ220 M 22 OHM,J, 1/2W 3 07 R7408 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7414- ERJ3GEYJ23 M 22KOHM,J,1/16W 1 R7418 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7419 ERJ3GEYJ04 M 100KOHM,J,1/16W 1 R7420 ERJ8GEYJ04 M 100KOHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R7405- ERJ12YJ220 M 22 OHM, J, 1/2W 3 07 R7408 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7410 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7414- ERJ3GEYJ223 M 22KOHM, J, 1/16W 4 17 R7418 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7419 ERJ3GEYJ04 M 100KOHM, J, 1/16W 1 R7420 ERJ8GEYJ04 M 100KOHM, J, 1/16W 1 R7423 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7423 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7425- ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7428 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R7408 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R7409 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R7410 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7414- ERJ3GEY0R00 M 0 OHM, 1/16W 4 17 R7418 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7420 ERJ8GEY0R00 M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R7409 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R7410 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7414- ERJ3GEY0R00 M 0 OHM, 1/16W 4 17 R7418 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R7420 ERJ8GEYOR00 M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7425- ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7428 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R7410 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R7412 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7414- ERJ3GEYOR00 M 0 OHM, 1/16W 4 17 R7418 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7420 ERJ8GEYOR00 M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEYOR00 M 0 OHM, 1/10W 1	
R7412 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7414- ERJ3GEY0R00 M 0 OHM, 1/16W 4 17 R7418 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R7420 ERJ8GEY0R00 M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM, J, 1/16W 1 R7425- ERJ12YJ220 M 22 OHM, J, 1/2W 3 27 R7428 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R7414- ERJ3GEY0R00 M 0 OHM, 1/16W 4 17 R7418 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7420 ERJ8GEY0R00 M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R7418 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R7419 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R7420 ERJ8GEY0R00 M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R7420 ERJ8GEYOROO M 0 OHM, 1/8W 1 R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEYOROO M 0 OHM, 1/10W 1	
R7423 TAJAAH0470JV M 47 OHM,J,1/16W 1 R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R7425- ERJ12YJ220 M 22 OHM,J, 1/2W 3 27 R7428 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
27 R7428 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R7429 ER.T12V.T220 M 22 OHM .T 1/2W 1	
M.725 ERO1210220 M 22 Offm, U, 1/2W 1	
R7430 ERJ6GEYJ224 M 220KOHM,J,1/10W 1	
R7432 TAJAAH0470JV M 47 OHM,J,1/16W 1	
R7434- EXB38V470J RESISTOR ARRAY 6	
R7440 ERJ8GEYOROO M O OHM, 1/8W 1	
R7441 ERJ6GEY0R00 M 0 OHM, 1/10W 1	
R7443 TAJAAH0470JV M 47 OHM,J,1/16W 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No. R7445-	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
47 D7440	ED TCGEWODOO	M 0 0774 1 /1074	-	
R7448 R7449	ERJ6GEY0R00 ERJ12YJ220	M 0 OHM, 1/10W M 22 OHM,J, 1/2W	1	
R7452	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7460	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7463	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7465- 67	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7468	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7469	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7470,7	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7472 R7483-	TAJAAH0470JV TAJAAH0470JV	M 47 OHM, J, 1/16W M 47 OHM, J, 1/16W	6	
88				
R7489,9	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R8137	ERJ2GEJ121	M 120 ОНМ, J,0.063W	1	
R8140,4 1	ERJ3EKF1001	M 1KOHM, 1/16W	2	
R8144- 47	D1HG5608A002	NETWORK RESISTER	4	
R8148,4	D1HG3908A002	NETWORK RESISTER	2	
R8150- 62	ERJ2GEJ390	M 39 OHM, J,0.063W	13	
R8163- 66	ERJ2GEJ560	M 56 OHM, J,0.063W	4	
R8200- 03	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	4	
R8206	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8207	ERJ2GEJ561	M 60 OHM, J,0.063W	1	
R8208	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8209	ERJ2GEJ273	M 27KOHM ,J,0.063W	1	
R8210	ERJ2GE0R00	M 0.0 OHM,	1	
R8211	ERJ2GEJ102	J,0.063W M 1KOHM, J,0.063W	1	
R8215	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8216	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8217	ERJ2GEJ561	M 60 OHM, J,0.063W	1	
R8218	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8219	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
R8220	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8221	ERJ3GEYJ391	M 390 OHM, J, 1/16W	1	
R8222	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8223	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8224	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8228	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	1	
R8229	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8230	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8231	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8232	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8233	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R8234 R8237	ERJ2GEJ102 ERJ3GEYJ150	M 1KOHM, J,0.063W M 15 OHM,J,1/16W	1	
R8240	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8241	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8242	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R8243	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R8244	ERJ3GEYJ150	M 15 OHM,J,1/16W	1	
R8245,4 6	ERJ2GEJ392	м 3.9KOHM, J,0.063W	2	
R8248	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8250	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	

	1	1		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8251	ERJ2GEJ122	м 1.2KOHM, J,0.063W	1	
R8258	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8262- 65	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8266,6 7	ERJ2GEJ821	M 820 OHM, J,0.063W	2	
R8268,6 9	ERJ3GEYJ471	M 470 OHM,J,1/16W	2	
R8270	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
R8272	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8273,7 4	ERJ3GEYJ560	M 56 OHM,J,1/16W	2	
R8275	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R8276	ERJ2GEJ183	M 18KOHM ,J,0.063W	1	
R8277	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R8278	ERJ3EKF1201	M 1.2KOHM, 1/16W	1	
R8279,8 0	ERJ2GEJ102	м 1конм, ј,0.063w	2	
R8281	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8282- 84	ERJ2GEJ102	M 1KOHM, J,0.063W	3	
R8285	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8286	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8287	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8288	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8289,9 0	ERJ2GEJ103	м 10конм, J,0.063W	2	
R8291	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8292	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
DOSOS	TD TO GE T1 00	M 1070TM T 0 063W	-	
R8293	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8293 R8297	ERJ2GEJ103 ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8297	ERJ2GEJ102	м 1конм, J,0.063W м 2.7конм,	1	
R8297 R8300	ERJ2GEJ102 ERJ2GEJ272	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM,	1	
R8297 R8300 R8301 R8303	ERJ2GEJ102 ERJ2GEJ272 ERJ2GE0R00	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM,	1 1 1	
R8297 R8300 R8301 R8303	ERJ2GEJ102 ERJ2GEJ272 ERJ2GE0R00 ERJ2GEJ272	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM,	1 1 1	
R8297 R8300 R8301 R8303 R8304,0	ERJ2GEJ102 ERJ2GEJ272 ERJ2GE0R00 ERJ2GEJ272 ERJ2GE0R00	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W	1 1 1 2	
R8297 R8300 R8301 R8303 R8304,0 5 R8306	ERJ2GEJ102 ERJ2GEJ272 ERJ2GEOR00 ERJ2GEJ272 ERJ2GEOR00 EXB38V472J	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W RESISTOR ARRAY M 4.7KOHM,	1 1 1 2	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313	ERJ2GEJ102 ERJ2GEJ272 ERJ2GE0R00 ERJ2GE0R00 EXB38V472J ERJ2GEJ472 ERJ2GE0R000 ERJ2GEJ472	M 1KOHM, J,0.063W  M 2.7KOHM, J,0.063W  M 0.0 OHM, J,0.063W  M 2.7KOHM, J,0.063W  M 0.0 OHM, J,0.063W  RESISTOR ARRAY  M 4.7KOHM, J,0.063W  M 0.0 OHM, J,0.063W	1 1 1 2 1 1 1 2	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316- 18	ERJ2GEJ102 ERJ2GEJ272 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEOR00 EXB38V472J ERJ2GEJ472 ERJ2GEOR00 ERJ2GEJ472 ERJ2GEJ472	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W RESISTOR ARRAY M 4.7KOHM, J,0.063W M 0.0 OHM, J,0.063W	1 1 1 2 1 1 1 2	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316- 18 R8322- 36	ERJ2GEJ102 ERJ2GEJ272 ERJ2GE0R00 ERJ2GE0R00 ERJ2GE0R00 EXB38V472J ERJ2GEJ472 ERJ2GE0R00 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 100 OHM, J,0.063W M 100 OHM, J,0.063W	1 1 1 2 1 1 1 2 3 15	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316- 18 R8322- 36 R8339	ERJ2GEJ102 ERJ2GEJ272 ERJ2GE0R00 ERJ2GE0R00 ERJ2GE0R00 EXB38V472J ERJ2GEJ472 ERJ2GEOR00 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ101 ERJ2GEJ101	M 1KOHM, J,0.063W  M 2.7KOHM, J,0.063W  M 0.0 OHM, J,0.063W  M 2.7KOHM, J,0.063W  M 2.7KOHM, J,0.063W  RESISTOR ARRAY  M 4.7KOHM, J,0.063W  M 0.0 OHM, J,0.063W  M 0.0 OHM, J,0.063W  M 10.063W  M 10.063W  M 100 OHM, J,0.063W  M 100 OHM, J,0.063W	1 1 1 2 1 1 1 2 3 15	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316- 18 R8322- 36 R8339 R8341	ERJ2GEJ102 ERJ2GEJ272 ERJ2GE0R00 ERJ2GE0R00 ERJ2GE0R00 EXB38V472J ERJ2GEJ472 ERJ2GEOR00 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ101 ERJ2GEJ101 ERJ2GEJ103 ERJ2GEJ103	M 1KOHM, J,0.063W  M 2.7KOHM, J,0.063W  M 0.0 OHM, J,0.063W  M 2.7KOHM, J,0.063W  M 2.7KOHM, J,0.063W  RESISTOR ARRAY  M 4.7KOHM, J,0.063W  M 0.0 OHM, J,0.063W  M 0.0 OHM, J,0.063W  M 10.063W  M 10.063W  M 100 OHM, J,0.063W  M 100 OHM, J,0.063W  M 100 OHM, J,0.063W  M 100 OHM, J,0.063W	1 1 1 2 1 1 1 2 3 15 1	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316- 18 R8322- 36 R8339 R8341 R8343	ERJ2GEJ102 ERJ2GEJ272 ERJ2GE0R00 ERJ2GE0R00 ERJ2GE0R00 EXB38V472J ERJ2GEJ472 ERJ2GE0R00 ERJ2GEJ472 ERJ2GEJ472 ERJ2GE0R00 ERJ2GEJ101 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W RESISTOR ARRAY M 4.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W M 10.063W M 10.063W M 10.063W M 10.063W M 10.063W M 100 OHM, J,0.063W	1 1 1 2 1 1 1 2 3 15 1 1	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316- 18 R8322- 36 R8339 R8341	ERJ2GEJ102 ERJ2GEJ272 ERJ2GE0R00 ERJ2GE0R00 ERJ2GE0R00 EXB38V472J ERJ2GEJ472 ERJ2GEOR00 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ101 ERJ2GEJ101 ERJ2GEJ103 ERJ2GEJ103	M 1KOHM, J,0.063W  M 2.7KOHM, J,0.063W  M 0.0 OHM, J,0.063W  M 2.7KOHM, J,0.063W  M 2.7KOHM, J,0.063W  RESISTOR ARRAY  M 4.7KOHM, J,0.063W  M 0.0 OHM, J,0.063W  M 0.0 OHM, J,0.063W  M 10.063W  M 10.063W  M 100 OHM, J,0.063W  M 100 OHM, J,0.063W  M 100 OHM, J,0.063W  M 100 OHM, J,0.063W	1 1 1 2 1 1 1 2 3 15 1	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316- 18 R8322- 36 R8339 R8341 R8343 R8345	ERJ2GEJ102 ERJ2GEJ272 ERJ2GEOR00 ERJ2GEJ272 ERJ2GEOR00 EXB38V472J ERJ2GEJ472 ERJ2GEOR00 ERJ2GEJ472 ERJ2GEJ101 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 10.0 OHM, J,0.063W M 10.0 OHM, J,0.063W M 10KOHM, J,0.063W	1 1 1 2 1 1 1 2 3 15 1 1 1 1	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316-18 R8322-36 R8339 R8341 R8343 R8345 R8347	ERJ2GEJ102 ERJ2GEJ272 ERJ2GEOROO ERJ2GEJ272 ERJ2GEOROO ERJ2GEJ272 ERJ2GEOROO EXB38V472J ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ101 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 10.0 OHM, J,0.063W M 10.0 OHM, J,0.063W M 10.0 OHM, J,0.063W M 100 OHM, J,0.063W M 10KOHM, J,0.063W	1 1 1 2 1 1 1 2 3 15 1 1 1 1 1	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316-18 R8322-36 R8339 R8341 R8343 R8345 R8347 R8349	ERJ2GEJ102 ERJ2GEJ272 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ101 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ104	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W RESISTOR ARRAY M 4.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 10.0 OHM, J,0.063W M 10.0 OHM, J,0.063W M 100 OHM, J,0.063W M 100 OHM, J,0.063W M 100 OHM, J,0.063W M 10KOHM, J,0.063W M 3.9KOHM, J,0.063W M 3.9KOHM, J,0.063W M 3.9KOHM,	1 1 1 2 1 1 1 2 3 15 1 1 1 1 1 1	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316-18 R8322-36 R8339 R8341 R8343 R8345 R8347 R8349 R8349 R8351 R8354	ERJ2GEJ102 ERJ2GEJ272 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ101 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ104 ERJ2GEJ104 ERJ2GEJ392 ERJ2GEJ392	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 1.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 1.0KOHM, J,0.063W M 10KOHM, J,0.063W M 3.9KOHM, J,0.063W M 3.9KOHM, J,0.063W M 3.9KOHM, J,0.063W	1 1 1 2 1 1 1 2 3 15 1 1 1 1 1 1 1 1	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316-18 R8322-36 R8339 R8341 R8345 R8347 R8345 R8347 R8349 R8351 R8354	ERJ2GEJ102 ERJ2GEJ272 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ101 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ104 ERJ2GEJ104 ERJ2GEJ104 ERJ2GEJ392 ERJ2GEJ392 ERJ2GEJ392	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 1.7KOHM, J,0.063W M 1.7KOHM, J,0.063W M 1.0KOHM, J,0.063W M 10KOHM, J,0.063W M 3.9KOHM, J,0.063W M 0.0HM, 1/16W	1 1 1 2 1 1 1 2 3 15 1 1 1 1 1 1 1 1 1	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316-18 R8322-36 R8339 R8341 R8343 R8345 R8347 R8349 R8349 R8351 R8354	ERJ2GEJ102 ERJ2GEJ272 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ101 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ104 ERJ2GEJ104 ERJ2GEJ392 ERJ2GEJ392	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 10.0 OHM, J,0.063W M 10.0 OHM, J,0.063W M 10KOHM, J,0.063W M 3.9KOHM, J,0.063W M 0.0HM, 1/16W M 3.9 OHM, J,0.063W	1 1 1 2 1 1 1 2 3 15 1 1 1 1 1 1 1 1	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316-18 R8322-36 R8339 R8341 R8343 R8345 R8347 R8349 R8351 R8354 R8355 R8356,5 7 R8358	ERJ2GEJ102 ERJ2GEJ272 ERJ2GEOR00 ERJ2GEJ272 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ101 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ104 ERJ2GEJ104 ERJ2GEJ104 ERJ2GEJ392 ERJ2GEJ392 ERJ2GEJ392 ERJ2GEJ392 ERJ2GEJ390 ERJ2GEJ390 ERJ2GEJ390	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 10.0 OHM, J,0.063W M 10.0 OHM, J,0.063W M 10KOHM, J,0.063W M 3.9KOHM, J,0.063W M 3.9KOHM, J,0.063W M 3.9KOHM, J,0.063W M 0 OHM, 1/16W M 39 OHM, J,0.063W M 10 OHM, 1/16W	1 1 1 2 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316- 18 R8322- 36 R8339 R8341 R8343 R8345 R8347 R8345 R8347 R8349 R8351 R8354 R8355 R8356,5 7 R8358 R8370	ERJ2GEJ102 ERJ2GEJ272 ERJ2GE0R00 ERJ2GE0R00 ERJ2GE0R00 ERJ2GEJ272 ERJ2GE0R00 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ101 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ104 ERJ2GEJ104 ERJ2GEJ392 ERJ2GEJ392 ERJ2GEJ392 ERJ3GEY0R00 ERJ2GEJ390 ERJ2GEJ390 ERJ2GEJ390 ERJ2GEOR00	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 100 OHM, J,0.063W M 10KOHM, J,0.063W M 3.9KOHM, J,0.063W M 0 OHM, 1/16W M 39 OHM, J,0.063W M 0 OHM, 1/16W M 0 OHM, 1/16W M 0.0 OHM,	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
R8297 R8300 R8301 R8303 R8304,0 5 R8306 R8307 R8313 R8314,1 5 R8316-18 R8322-36 R8339 R8341 R8343 R8345 R8347 R8349 R8351 R8354 R8355 R8356,5 7 R8358	ERJ2GEJ102 ERJ2GEJ272 ERJ2GEOR00 ERJ2GEJ272 ERJ2GEOR00 ERJ2GEOR00 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ472 ERJ2GEJ101 ERJ2GEJ103 ERJ2GEJ103 ERJ2GEJ104 ERJ2GEJ104 ERJ2GEJ104 ERJ2GEJ392 ERJ2GEJ392 ERJ2GEJ392 ERJ2GEJ392 ERJ2GEJ390 ERJ2GEJ390 ERJ2GEJ390	M 1KOHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 2.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 0.0 OHM, J,0.063W M 4.7KOHM, J,0.063W M 4.7KOHM, J,0.063W M 0.0 OHM, J,0.063W M 10KOHM, J,0.063W M 3.9KOHM, J,0.063W M 0 OHM, 1/16W M 0 OHM, 1/16W M 0 OHM, 1/16W	1 1 1 2 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No. R8373-	ERJ2GEJ560	M 56 OHM, J,0.063W	7	
79 R8381,8	ERJ2GE0R00	M 0.0 OHM,	2	
2	D1HG5608A002	J, 0.063W	1	
R8383 R8384	ERJ2GEJ472	NETWORK RESISTER M 4.7KOHM,	1	
		J,0.063W		
R8385 R8386	ERJ2GEJ223	M 22KOHM, J,0.063W NETWORK RESISTER	1	
R8386	D1HG5608A002 EXB38V560J	RESISTOR ARRAY	1	
R8388	D1HG5608A002	NETWORK RESISTER	1	
R8390	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8391	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8392	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8393,9	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8395	EXB38V560J	RESISTOR ARRAY	1	
R8396-	ERJ2GEJ560	M 56 OHM, J,0.063W	3	
98				
R8399	EXB2HV223JV	NETWORK RESISTER	1	
R8407,0	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8409,1 0	EXB38V560J	RESISTOR ARRAY	2	
R8411,1 2	ERJ2GEJ392	M 3.9KOHM, J,0.063W	2	
R8414	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8415	EXB38V560J	RESISTOR ARRAY	1	
R8416	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8419	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8420	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8421	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8422,2	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R8435	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8436	ERJ3EKF4992	M 49.9KOHM, 1/16W	1	
R8460	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8464,6	EXB2HV104JV	RESISTOR ARRAY	2	
R8467	D1HG1008A002	NETWORK RESISTER	1	
R8468	ERJ2GE0R00	M 0.0 OHM,	1	
R8470	ERJ2GE0R00	J,0.063W M 0.0 OHM,	1	
	ZKO Z G Z G Z G K G G	J,0.063W		
R8471,7 2	ERJ2GEJ472	м 4.7KOHM, J,0.063W	2	
R8474	D1HG1008A002	NETWORK RESISTER	1	
R8475	ERJ2GE0R00	M 0.0 OHM,	1	
R8476	ERJ3EKF1102	J,0.063W M 11KOHM, 1/16W	1	
R8477	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8478	ERJ3EKF5601	M 5.6KOHM, 1/16W	1	
R8479,8	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8481	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	1	
R8483- 87	ERJ2GEJ560	м 56 ОНМ, Ј,0.063W	5	
R8488	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8489	ERJ2GEJ101	M 100 OHM,	1	
R8491-	ERJ2GEJ101	J,0.063W M 100 ОНМ,	4	
94 R8495	ERJ2GE0R00	J,0.063W М 0.0 ОНМ,	1	
R8497,9	ERJ2GE0R00	J,0.063W M 0.0 OHM,	2	
8 R8500	ERJ2GE0R00	J,0.063W M 0.0 OHM,	1	
		J,0.063W		
R8501	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8503 R8504,0	ERJ2GEJ562 ERJ2GEJ103	M 5.6KOHM, J, 0.063W M 10KOHM, J, 0.063W	2	
5		, 0,0.003#	_	

Ref.	PX50U / TH-50PX50U	Part Name &	Pcs	Remarks
No.		Description		
	ERJ2GEJ562 ERJ2GEJ203	M 5.6KOHM, J, 0.063W M 20KOHM, J, 0.063W	2	
9	110101010	1 20NO1117070.003N		
R8510	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8511	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R8512- 18	ERJ2GEJ103	M 10KOHM, J,0.063W	7	
R8519	ERJ2GEJ392	М 3.9КОНМ,	1	
R8524	ERJ2GEJ222	J,0.063W M 2.2KOHM,	1	
R8525,2	ERJ2GEJ103	J,0.063W M 10KOHM, J,0.063W	2	
6 R8527	ERJ2GEJ392	м 3.9конм,	1	
		J,0.063W		
R8528- 30	ERJ2GEJ103	M 10KOHM, J,0.063W	3	
R8531	EXB38V560J	RESISTOR ARRAY	1	
R8532- 35	ERJ2GEJ560	M 56 OHM, J,0.063W	4	
R8536	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8537	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8538	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8539	ERJ2GE0R00	м 0.0 ОНМ,	1	
D0E40	ED 1205 1100	J,0.063W	-1	
R8540 R8541-	ERJ2GEJ103 ERJ2GEJ560	M 10KOHM, J,0.063W M 56 OHM, J,0.063W	7	
47 R8548	ERJ2GE0R00	м 0.0 ОНМ,	1	
		J,0.063W		
R8551 R8552	ERJ2GEJ103 ERJ2GEJ560	M 10KOHM, J,0.063W	1	
R8552 R8554-	ERJ2GEJ560 ERJ2GEJ560	M 56 OHM, J,0.063W M 56 OHM, J,0.063W	3	
56 R8557	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8558	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8559	EXB38V560J	RESISTOR ARRAY	1	
R8560,6	ERJ2GEJ560	м 56 ОНМ, J,0.063W	2	
R8562	ERJ2GEJ332	м 3.3KOHM, J,0.063W	1	
R8564	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8565	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8566,6 7	ERJ2GEJ560	м 56 ОНМ, Ј,0.063W	2	
R8568,6 9	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8570- 73	ERJ2GEJ560	м 56 ОНМ, Ј,0.063W	4	
R8574	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8575 02	ERJ2GEJ330	м 33 ОНМ, Ј,0.063W	1	
R8575	ERJ3GEYJ181	M 180 OHM,J,1/16W	1	
R8576-	ERJ2GEJ330	м 33 ОНМ, J,0.063W	5	
R8582- 95	ERJ2GEJ330	M 33 OHM, J,0.063W	14	
R8596,9	D1HG33080001	NETWORK RESISTER	2	
7 R8598- 00	D1HG5608A002	NETWORK RESISTER	3	
R8601	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8602	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8605-	ERJ2GEJ103	M 10KOHM, J,0.063W	11	
R8617	ERJ2GE0R00	M 0.0 OHM,	1	
R8629	ERJ2GEJ103	J,0.063W M 10KOHM, J,0.063W	1	
R8630,3	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
1 R8632-	ERJ2GEJ560	M 56 OHM, J,0.063W	6	
37 R8640	ERJ2GE0R00	м 0.0 ОНМ,	1	
		J,0.063W		
R8641	ERJ2GEJ560	M 56 OHM, J,0.063W	1	<u> </u>

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	ED TOGE TE CO	Description	_	
R8643,4	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8645,4	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
6				
R8647	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8648,4	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
9				
R8650	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8651	ERJ2GEJ101	M 100 OHM,	1	
R8652	ERJ2GEJ332	J,0.063W M 3.3KOHM,	1	
K8032	ER02GE0332	J, 0.063W	-	
R8653	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8654,5	ERJ2GE0R00	м 0.0 ОНМ,	2	
5		J,0.063W		
R8656	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8657	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R8658	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8659	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8661	ERJ2GE0R00	M 0.0 OHM,	1	
R8665	D1HG1218A002	J,0.063W	1	
R8666	ERJ2GE0R00	M 0.0 OHM,	1	
Roood	ERUZGEURUU	J,0.063W	-	
R8668	ERJ2GE0R00	м 0.0 онм,	1	
		J,0.063W		
R8670	ERJ2GE0R00	м 0.0 ОНМ,	1	
		J,0.063W		
R8673	D1HG1218A002	NETWORK RESISTER	1	
R8674	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8678	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R8682	ERJ3EKF1303	M 130KOHM, 1/16W	1	
R8686,8	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8688,8	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8690	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
R8691	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8692	ERJ3EKF5102	M51.0KOHM, 1/16W	1	
R8693	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
R8694	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8695	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8696	ERJ3EKF5102	M51.0KOHM, 1/16W	1	
R8697	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8698	ERJ2GEJ472	м 4.7КОНМ, J,0.063W	1	
R8700	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8702	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8703	ERJ2GEJ472	м 4.7КОНМ,	1	
		J,0.063W		
R8704	ERJ2GEJ101	M 100 OHM,	1	
R8705	ED.TOGETOOO	J,0.063W M 2.2KOHM,	1	
120,03	ERJ2GEJ222	J,0.063W	1	
R8706	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8707	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8708	ERJ2GEJ222	м 2.2КОНМ,	1	
		J,0.063W		
R8709	ERJ3EKF8872	M88.7KOHM, 1/16W	1	
R8710	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8711	ERJ2GEJ222	M 2.2KOHM,	1	
R8712	ERJ2GEJ472	J,0.063W M 4.7KOHM,	1	
R8713,1	ERJ2GE0R00	J,0.063W М 0.0 ОНМ,	2	
4		J,0.063W		
R8715	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8716	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8719,2	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8722-	ERJ2GE0R00	м 0.0 ОНМ,	4	
25 R8727	ERJ3EKF1102	J,0.063W M 11KOHM, 1/16W	1	
R8731	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8733	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	

Ref. No.	Part No.	Part Name &	Pcs	Remarks
D0734		Description		110111011110
R8734	ERJ2GE0R00	м 0.0 ОНМ, J,0.063W	1	
R8735	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8736	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R8737	ERJ2GE0R00	м 0.0 ОНМ,	1	
		J,0.063W		
R8738	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R8741	ERJ3EKF8872	M88.7KOHM, 1/16W	1	
R8748	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8749	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8751-	ERJ2GE0R00	м 0.0 ОНМ,	3	
53		J,0.063W		
R8755- 58	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8765	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8770	ERJ2GE0R00	M 0.0 OHM,	1	
		J,0.063W		
R8774	ERJ2GE0R00	M 0.0 OHM,	1	
D0776	ED TOCEODOO	J,0.063W M 0.0 OHM,	1	
R8776	ERJ2GE0R00	J,0.063W	-	
R8777	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8778,7	ERJ2GE0R00	м 0.0 ОНМ,	2	
9		J,0.063W		
R8780,8 1	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
	EXB38VR000	RESISTOR ARRAY	6	
R8788	ERJ2GE0R00	M 0.0 OHM,	1	
R8790	ERJ6GEY0R00	J,0.063W M 0 OHM, 1/10W	1	
R8791	ERJ2GEJ152	M 1.5KOHM,	1	
		J,0.063W		
R8792,9 3	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	2	
R8795- 98	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8799- 02	ERJ2GEJ103	M 10KOHM, J,0.063W	4	
R8817,1 8	ERJ2GEJ473	M 47KOHM, J, 0.063W	2	
R9000	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9002	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9004	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9006	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9007 R9009	ERJ3GEYJ102 ERJ3GEYJ103	M 1KOHM,J,1/16W M 10KOHM,J,1/16W	1	
R9010	EXB2HV272JV	RESISTOR ARRAY	1	
	EXB2HV272JV	RESISTOR ARRAY	1	
R9013	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9015-	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
18				
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9020,2 1	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R9022	ERJ6ENF1001	M 1KOHM, 1/10W	1	
	ERJ6ENF1601	M 1.6KOHM, 1/10W	1	
R9024	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9026	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9028	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9029,3	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9033,3	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9035,3	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R9039	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9040	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	<u></u>
R9041	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9042	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9043,4	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
4				
	ERJ3GEYJ102 ERJ3GEYJ123	M 1KOHM,J,1/16W M 12KOHM,J,1/16W	1	

		111-37	FAJUU	/ In-42FA300 / In-
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description	_	
R9047- 50	TAJAAH0101JV	M 100 OHM, J, 1/16W	4	
	ED 12 CEV 11 0 2	M 1070UM T 1/16W	1	
R9052	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9053	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W		
R9054,5	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R9056,5	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
7	ERUJGETUZZU	M 22 OHM, 0, 1/10W		
R9058,5	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
9	LNOSCLIOSCL	1 3.0Kolim, 0, 1, 10K	-	
R9060-	TAJAAH0101JV	M 100 OHM,J,1/16W	8	
67				
R9068-	ERJ3GEYJ103	M 10KOHM, J, 1/16W	5	
72				
R9073	EXB2HV470JV	RESISTOR ARRAY	1	
R9074	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9075	EXB2HV470JV	RESISTOR ARRAY	1	
R9076	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9077-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
79				
R9080	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R9081	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9082-	TAJAAH0101JV	M 100 OHM, J, 1/16W	8	
89			<u> </u>	
R9090	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9091,9	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
2				
R9093	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R9094	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9095-	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
98				
R9102-	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
04				
R9105	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9107-	ERJ3GEYJ393	M 39KOHM,J,1/16W	3	
09				
R9110	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9111,1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
2				
R9113	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9114-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
16				
R9117,1	EXB38VR000	RESISTOR ARRAY	2	
8	ED TOGEWODOO	M 0 077M 1/16W	1	
		M 0 OHM, 1/16W	1	
R9120,2	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9122-	ED 12 CEV 11 0 2	M 10KOHM,J,1/16W	2	
24	ERJ3GEYJ103	M IUKOHM,U,I/IOW	3	
R9125,2	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
6	LNOSCLICICL	11 1101111/0/1/1011	-	
R9127,2	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
8				
R9130	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9131-	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	3	
33				
R9134-	TAJAAH0101JV	M 100 OHM,J,1/16W	3	
36				
R9137	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9140-	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
42				
R9145-	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
47				
R9160,6	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
1			_	
R9162,6	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
3 D0164 6	ma Taarro101	M 100 OTH T 1/10	_	
R9164,6	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9200-	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
02 02	IAUAARU#/UUV	m = / Onm, U, 1/10W		
R9204	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R9206,0	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
7		10101111,0,1/10W		
R9210	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9300-	D1HG33080001	NETWORK RESISTER	5	
04			-	
R9305	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
-	•	•		

(50U / TH-42I	PX50U / TH-50PX50L	J		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D1HG33080001	NETWORK RESISTER	2	
R9308	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9309	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9313- 16	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9318,1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9321	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9323	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9324- 28	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9329	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9330- 33	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9335,3	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9337	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
R9338	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
R9339- 42	ERJ6ENF1001	M 1KOHM, 1/10W	4	
R9500- 03	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9505- 10	TAJAAH0101JV	M 100 OHM,J,1/16W	6	
R9511	EXB2HV272JV	RESISTOR ARRAY	1	
R9512	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9513	EXB2HV272JV	RESISTOR ARRAY	1	
R9515	EXB2HV272JV	RESISTOR ARRAY	1	
R9516,1	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9518	EXB2HV470JV	RESISTOR ARRAY	1	
R9519- 21	EXB38V470J	RESISTOR ARRAY	3	
3	EXB2HV470JV	RESISTOR ARRAY	2	
R9524- 26		M 47 OHM,J,1/16W	3	
R9527	EXB38V470J	RESISTOR ARRAY	1	
R9528,2	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R9531	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9533,3	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9536	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R9537,3	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9540	ERJ3GEYJ304V	M 300KOHM,J,1/16W	1	
R9543	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9547	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9700	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9702-	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
7		M 1KOHM, 1/10W	2	
R9708	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9709	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9714 R9716,1	ERJ3GEY0R00 ERJL14KJ33M	M 0 OHM, 1/16W M 33 OHM, J,1/4W	2	
7 R9718	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9719	ERJ6ENF1742	M17.4KOHM, 1/10W	1	
R9720	ERJ6ENF6342	M6.34KOHM, 1/10W	1	
R9721	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9722,2 3	ERJ3GEYJ100	M 10 OHM,J,1/16W	2	
R9724	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9725	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9726,2	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9728,2	ERJ6ENF2002	M 20KOHM, 1/10W	2	
R9738,3	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9740-	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R9800	EXB38V470J	RESISTOR ARRAY	1	

No.	Ref.	Part No.	Part Name &	Pcs	Remarks
04		Part No.		PCS	Remarks
R9806,0 EXB38V470J RESISTOR ARRAY 2   R8308,0 EMJ3GEYJ220 M 22 OHM,J,1/16W 1   R8411 RB4J3GEYJ103 M 10KOHM,J,1/16W 1   R8411 RB4J3GEYJ104 M 10KOHM,J,1/16W 1   R8813 RB4J3GEYJ103 M 10KOHM,J,1/16W 1   R8813 RB4J3GEYJ103 M 10KOHM,J,1/16W 1   R8814 RB4J3GEYJ103 M 10KOHM,J,1/16W 1   R8815 RB4J3GEYJ103 M 10KOHM,J,1/16W 1   R8816,1 RB4J3GEYJ103 M 10KOHM,J,1/16W 1   R8816,1 RB4J3GEYJ103 M 10KOHM,J,1/16W 1   R8816,1 RB4J3GEYJ103 M 22 OHM,J,1/16W 2   R8816,1 RB4J3GEYJ103 M 22 OHM,J,1/16W 2   R8816,1 RB4J3GEYJ103 M 22 OHM,J,1/16W 2   R8822,2 REZHV470JV RESISTOR ARRAY 1   R8822,2 REZHV470JV RESISTOR ARRAY 2   R8822,2 REZHV470JV RESISTOR ARRAY 1   R8823 RB4J3GEYJ103 M 10KOHM,J,1/16W 1   R8990 RB4J3GEYJ103 M 22 OHM,J,1/16W 1   R8991 RB4J3GEYJ20 M 22 OHM,J,1/16W 1   R8991 RB4J3GEYJ20 M 22 OHM,J,1/16W 1   R8911 RB4J3GEYJ20 M 22 OHM,J,1/16W 1   RB4J3GEYJ20 M 22 OHM,		EXB2HV470JV	RESISTOR ARRAY	3	
R9808,0 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9811 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R9811 ERJ3GEYJ104 M 10KOKHM, J, 1/16W 1 R9813 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R9814 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R9815 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R9816,1 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R9816,1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R9817 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R9820,2 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R9820,2 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9820,2 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9820,2 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9820,2 ERJ3GEYJ2103 M 10KOHM, J, 1/16W 1 R9930 EXB2HV470JV RESISTOR ARRAY 1 R9900 EXJ3GEYJ103 M 10KOHM, J, 1/16W 1 R9901 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R9902 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R9903 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R9904 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R9905 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R9906 EXB2HV470JV RESISTOR ARRAY 1 R9907 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R9908 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R9908 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R9909 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R9908 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R9909 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R9901 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R9902 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R9901 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R9912 EXB2HV470JV RESISTOR ARRAY 1 R9913 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 6 R9914 EXB2HV470JV RESISTOR ARRAY 1 R9915 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 6 RP317 ERZB2HV470JV RESISTOR ARRAY 1 R9913 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 RR1L TNPA3596AC CIRCUIT BOARD DT 1 PAVCA A RTL TNPA3596AC CIRCUIT BOARD DT 1 A RTL TNPA3591 CIRCUIT BOARD DT 1 A RTL TNPA3591 CIRCUIT BOARD DT 1 A RTL TNPA3591 CIRCUIT BOARD DT 1 A RTL TNPA3594 CIRCUIT BOARD DT 1 A RTL TNPA3595 CIRCUIT BOARD SS 1 A RTL TNPA3596 CIRCUIT BOARD SS 1 A RTL TNPA3598 CIRCUIT BOARD SS 1 A RTL TNPA3598 CIRCUIT BOARD SS 1 A RTL TNPA3	R9806,0	EXB38V470J	RESISTOR ARRAY	2	
R9810	R9808,0	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9911	-	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9813 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R9814 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R9815 ERJ3GEYJ200 M 10KOHM,J,1/16W 1 R9816,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R9816,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R9819 EXB2HV470JV RESISTOR ARRAY 1 R9820,2 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R9820,2 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9823,2 EKB2HV470JV RESISTOR ARRAY 1 R9824 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R9830 EKB2HV470JV RESISTOR ARRAY 1 R99901 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R99902 ERJ3GEYJ104 M 10OKOHM,J,1/16W 1 R99903 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R9905 ERJ3GEYJ104 M 10OKOHM,J,1/16W 1 R9907 ERJ3GEYJ104 M 10OKOHM,J,1/16W 1 R9908,0 EXB2HV470JV RESISTOR ARRAY 1 R9908,0 EXB2HV470JV RESISTOR ARRAY 1 R9908,0 EXB3RV470J RESISTOR ARRAY 1 R9913 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9913 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9914 EXB2HV470JV RESISTOR ARRAY 1 R9915 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9914 EXB3V470J RESISTOR ARRAY 1 R9915 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9916 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9917 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9918 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9919 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9911 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9912 EXB2HV470JV RESISTOR ARRAY 1 R9913 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 RM2510 PNA4601M05TV REMOCO RECEIVER 1 RTL THPA3550 CIRCUIT BOARD DT 1 PAVCA   RTL THPA3551 CIRCUIT BOARD DT 1 PAVCA   RTL THPA3553 CIRCUIT BOARD DT 1   RTL THPA3554 CIRCUIT BOARD DT 1   RTL THPA3555 CIRCUIT BOARD DT 1   RTL THPA3556 CIRCUIT BOARD DT 1   RTL THPA3556 CIRCUIT BOARD DT 1   RTL THPA3556 CIRCUIT BOARD DT 1   RTL THPA3557 CIRCUIT BOARD DT 1   RTL THPA3558 CIRCUIT BOARD DT 1   RTL THPA3550 CIRCUIT BOARD DT 1   RTL THPA3551 CIRCUIT BOARD DT 1   RTL THPA3556 CIRCUIT BOARD DT 1   RTL THPA3556 CIRCUIT BOARD DT 1   RTL THPA3557 CIRCUIT BOARD DT 1   RTL THPA3558 CIRCUIT BOARD DT 1   RTL THPA3550 CIRCUIT BOARD DT 1   RTL THPA3557 CIRCUIT BOARD DT 1   RTL THPA3550 CIRCUIT BOARD DT 1   RTL THPA356	R9811	ERJ3GEYJ103		1	
R9814 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R9815 EBJ3GEYJ204 M 10OKOHM,J,1/16W 2 R9816,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R9819 EXB2HV470JV RESISTOR ARRAY 1 R9820,2 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 1 R9822,2 ERBJW470JV RESISTOR ARRAY 2 R9824,2 ERJ3GEYJ220 M 10KOHM,J,1/16W 1 R9830 EBBZHV470JV RESISTOR ARRAY 1 R9801 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R9902 ERJ3GEYJ303 M 10KOHM,J,1/16W 1 R9901 ERJ3GEYJ303 M 10KOHM,J,1/16W 1 R9902 ERJ3GEYJ304 M 10KOHM,J,1/16W 1 R9903 EBJ3GEYJ304 M 10KOHM,J,1/16W 1 R9904 ERJ3GEYJ303 M 10KOHM,J,1/16W 1 R9906 ERJ3GEYJ304 M 10KOHM,J,1/16W 1 R9907 ERJ3GEYJ20 M 10KOHM,J,1/16W 1 R9908 ERJ3GEYJ304 M 10KOHM,J,1/16W 1 R9909 ERJ3GEYJ304 M 10KOHM,J,1/16W 1 R9907 ERJ3GEYJ20 M 20HJ,1/16W 1 R9908,0 EXB3RV470JV RESISTOR ARRAY 2 S R9907 ERJ3GEYJ20 M 22 OHM,J,1/16W 1 R9918,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9919 ERBJGEYJ20 M 22 OHM,J,1/16W 1 R9916 EXBBRV470JV RESISTOR ARRAY 1 R9917 ERJ3GEYJ20 M 22 OHM,J,1/16W 1 R9918,1 ERJ3GEYJ20 M 22 OHM,J,1/16W 1 R9919 EXBBRV470JV RESISTOR ARRAY 1 R9913 ERJ3GEYJ20 M 22 OHM,J,1/16W 1 R9916,1 ERJ3GEYJ20 M 22 OHM,J,1/16W 1 R9917 EXBBRV470JV RESISTOR ARRAY 1 R9918 ERBSRV470JV RESISTOR ARRAY 1 R9919 EXBBRV470JV RESISTOR ARRAY 1 R9919 EXBBRV470JV RESISTOR ARRAY 1 R9917 EXBBRV470JV RESISTOR ARRAY 1 R9918,1 ERJ3GEYJ20 M 22 OHM,J,1/16W 1 RFS1GEYJ20 M 2	R9812	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9815 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R9816, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R8819 EKB2HV470JV RESISTOR ARRAY 1 R8822, 2 EKB2HV470JV RESISTOR ARRAY 2 R8822, 2 EKB2HV470JV RESISTOR ARRAY 1 R8823, 2 EKB2HV470JV RESISTOR ARRAY 1 R8823, 2 EKB2HV470JV RESISTOR ARRAY 1 R89300 EKJ3GEYJ103 M 10KOHM, J, 1/16W 1 R89900 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R89901 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R89902 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R89903 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R89905 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R89906 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R89907 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R89908 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R89908 ERJ3GEYJ104 M 20 OHM, J, 1/16W 1 R89909 ERJ3GEYJ104 M 20 OHM, J, 1/16W 1 R89908 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R89910 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R89911 ERJ3GEYJ20 M 22 OHM, J, 1/16W 2 R89911 ERJ3GEYJ20 M 22 OHM, J, 1/16W 2 R89911 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R89914 EXB3RV470JV RESISTOR ARRAY 1 R89915, 1 ERJ3GEYJ20 M 22 OHM, J, 1/16W 2 R89917 EXB2HV470JV RESISTOR ARRAY 1 R89918, 1 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R89918 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R89919 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R89918 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R89919 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R89914 EXB3RV470JV RESISTOR ARRAY 1 R89915, 1 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 RR5914 EXB3RV470JV RESISTOR ARRAY 1 R89915, 1 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 RR5914 EXB3RV470JV RESISTOR ARRAY 1 R89922 EKB2HV470JV RESISTOR ARRAY 1 R89923 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 RM2510 PNA4601M05TV REMOCO RECEIVER 1 RTL THPA3558AC CIRCUIT BOARD DT 1 PAVCA A RTL THPA3559AC CIRCUIT BOARD DT 1 A RTL THPA3559AC	R9813	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9816,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2   R9819 EXB2HV470JV RESISTOR ARRAY 1   R9820,2 ERJ3GEYJ220 M 22 OHM,J,1/16W 2   R8824   RJ3GEYJ230 M 10KOHM,J,1/16W 1   R8830 EKB2HV470JV RESISTOR ARRAY 2   R8824   RJ3GEYJ103 M 10KOHM,J,1/16W 1   R8930 EKB2HV470JV RESISTOR ARRAY 1   R8990 ERJ3GEYJ103 M 10KOHM,J,1/16W 1   R8990 ERJ3GEYJ103 M 10KOHM,J,1/16W 1   R8990 ERJ3GEYJ104 M 100KOHM,J,1/16W 1   R8990 ERJ3GEYJ104 M 100KOHM,J,1/16W 1   R8990 ERJ3GEYJ104 M 100KOHM,J,1/16W 1   R8990 ERJ3GEYJ104 M 10KOHM,J,1/16W 1   R8990 ERJ3GEYJ20 M 22 OHM,J,1/16W 1   R8990 ERJ3GEYJ20 M 22 OHM,J,1/16W 2   R89910,1 ERJ3GEYJ20 M 22 OHM,J,1/16W 2   R89910,1 ERJ3GEYJ20 M 22 OHM,J,1/16W 2   R89910,1 ERJ3GEYJ20 M 22 OHM,J,1/16W 1   R89914 EKB38V470J RESISTOR ARRAY 1   R89915,1 ERJ3GEYJ20 M 22 OHM,J,1/16W 2   R89917,1 ERJ3GEYJ20 M 22 OHM,J,1/16W 1   R8	R9814	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9819	R9815	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9820,2 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2  R9822,2 EXB2HV470JV RESISTOR ARRAY 2  R9824 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R9830 EXB2HV470JV RESISTOR ARRAY 1  R9900 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R9901 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R9902 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1  R9903 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1  R9904 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R9905 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1  R9906 EXB2HV470JV RESISTOR ARRAY 1  R9907 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1  R9908 EXB2HV470JV RESISTOR ARRAY 1  R9909 EXB2HV470JV RESISTOR ARRAY 2  PR9910, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1  R9911 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2  R9912 EXB2HV470JV RESISTOR ARRAY 1  R9915, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2  R9915, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2  R9917 EXB2HV470JV RESISTOR ARRAY 1  R9921 EXB2HV470JV RESISTOR ARRAY 1  R9922 EXB2HV470JV RESISTOR ARRAY 1  R9923 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2  R89917 EXB2HV470JV RESISTOR ARRAY 1  R9924 EXB2HV470JV RESISTOR ARRAY 1  R9925 EXB2HV470JV RESISTOR ARRAY 1  R7926 EXB2HV470JV RESISTOR ARRAY 1  R7927 EXB2HV470JV RESISTOR ARRAY 1  R7928 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  RM2510 PNA4601M05TV REMOCO RECEIVER 1  RTL TNRA3620 CIRCUIT BOARD DT 1 PAVCA A  RTL TNRA3621AB CIRCUIT BOARD DT 1 A  RTL TNRA3621AB CIRCUIT BOARD DT 1 A  RTL TNRA3625AC CIRCUIT BOARD DT 1 A  RTL TNRA3626 CIRCUIT BOARD DT 1 A  RTL TNRA3553 CIRCUIT BOARD DT 1 A  RTL TNRA3554 CIRCUIT BOARD DT 1 A  RTL TNRA3556 CIRCUIT BOARD DT 1 A  RTL TNRA3556 CIRCUIT BOARD DT 1 A  RTL TNRA3556 CIRCUIT BOARD DT 1 A  RTL TNRA3557 CIRCUIT BOARD DT 1 A  RTL TNRA3558 CIRCUIT BOARD DT 1 A  RTL TNRA3603 CIRCUIT BOARD ST 1 A  RTL TNRA3603 CIRCUIT BOARD ST 1 A  RTL TNRA3558 CIRCUIT BOARD ST 1 A  RTL TNRA3558 CIRCUIT BOARD ST 1 A  RTL TNRA3558 CIRCUIT BOARD ST 1 A  RTL TNRA35603 CIRCUIT BOARD ST 1 A  RTL TNRA35603 CIRCUIT BOARD ST 1 A  RTL TNRA35603 CIRCUIT BOARD ST 1 A  RTL TNRA3604 CIRCUIT BOARD ST 1 A  RTL TNRA3603 CIRCUIT BOARD ST 1 A  RTL TNRA3604 CIRCUIT BOARD ST 1 A  RTL TNRA3604 CIRCUIT BOARD ST 1 A  RTL TNRA3603 CIRCUIT BOARD ST 1 A	1	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
1	R9819	EXB2HV470JV	RESISTOR ARRAY	1	
R9824	R9820,2 1	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9830 EXB2HY470JV RESISTOR ARRAY 1 R9900 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R9901 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R9903 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R9904 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R9905 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R9906 EXB3GEYJ104 M 10KOHM, J, 1/16W 1 R9907 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R9908 EXB2HY470JV RESISTOR ARRAY 1 R9907 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9908, 0 EXB3RY070J RESISTOR ARRAY 2 R9910, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R9911 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9912 EXB2HY470JV RESISTOR ARRAY 1 R9913 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9914 EXB3RY070J RESISTOR ARRAY 1 R9915, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 6 R9917 EXB2HY470JV RESISTOR ARRAY 1 R9918 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9919 EXB2HY470JV RESISTOR ARRAY 1 R9919 EXB2HY470JV RESISTOR ARRAY 1 R9910 EXB2HY470JV RESISTOR ARRAY 1 R9922 EXB2HY470JV RESISTOR ARRAY 1 R9923 ERJ3GEYJ230 M 20 CHM, J, 1/16W 1 RM2510 PNA4601M05TV REMOCO RECEIVER 1 RTL TNA94621 CIRCUIT BOARD DT 1 PAVCA A RTL TNA94620 CIRCUIT BOARD DT 1 PAVCA A RTL TNPA3598AC CIRCUIT BOARD DT 1 A RTL TNPA3623AC CIRCUIT BOARD DT 1 A RTL TNPA3625AC CIRCUIT BOARD DT 1 A RTL TNPA3625AC CIRCUIT BOARD DT 1 A RTL TNPA3626 CIRCUIT BOARD DT 1 A RTL TNPA3625AC CIRCUIT BOARD DT 1 A RTL TNPA3626 CIRCUIT BOARD DT 1 A RTL TNPA3555 CIRCUIT BOARD DT 1 A RTL TNPA3556 CIRCUIT BOARD DT 1 A RTL TNPA3557 CIRCUIT BOARD DT 1 A RTL TNPA3558 CIRCUIT BOARD DT 1 A RTL TNPA3558 CIRCUIT BOARD DT 1 A RTL TNPA3559 CIRCUIT BOARD DT 1 A RTL TNPA3550 CIRCUIT BOARD	1	EXB2HV470JV	RESISTOR ARRAY	2	
R9900 ERJ3GEYJ472 M 4.7KCHM,J,1/16W 1 R9901 ERJ3GEYJ103 M 10KCHM,J,1/16W 1 R9903 ERJ3GEYJ104 M 10KCHM,J,1/16W 1 R9904 ERJ3GEYJ104 M 10KCHM,J,1/16W 1 R9905 ERJ3GEYJ104 M 10KCHM,J,1/16W 1 R9906 ERJ3GEYJ104 M 10KCHM,J,1/16W 1 R9907 ERJ3GEYJ104 M 10KCHM,J,1/16W 1 R9908 ERJ3GEYJ104 M 10KCHM,J,1/16W 1 R9908 ERJ3GEYJ104 M 10KCHM,J,1/16W 1 R9908,0 EXB3RV470J RESISTOR ARRAY 1 R9910,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 1 R9911 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9912 EXE2HV470JV RESISTOR ARRAY 1 R9913 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9914 EXB3RV470J RESISTOR ARRAY 1 R9915,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 6 R9917 EXB2HV470JV RESISTOR ARRAY 1 R9917 EXB2HV470JV RESISTOR ARRAY 3 19 R9922 EXB2HV470JV RESISTOR ARRAY 1 R9923 ERJ3GEYJ230 M 22 OHM,J,1/16W 1 RM2510 PNA4601M05TV REMOCO RECEIVER 1 RTL TNRA3620 CIRCUIT BOARD DT 1 RTL TNRA3620 CIRCUIT BOARD DT 1 RTL TNRA3621AB CIRCUIT BOARD DT 1 RTL TNRA3625AC CIRCUIT BOARD DT 1 RTL TNRA3625AC CIRCUIT BOARD DT 1 RTL TNRA3626 CIRCUIT BOARD DT 1 RTL TNRA3625AC CIRCUIT BOARD DT 1 RTL TNRA3655AC CIRCUIT BOARD DT 1 RTL TNRA3555 CIRCUIT BOARD DT 1 RTL TNRA3556 CIRCUIT BOARD DT 1 RTL TNRA3557 CIRCUIT BOARD DT 1 RTL TNRA3558 CIRCUIT BOARD DT 1 RTL TNRA3557 CIRCUIT BOARD DT 1 RTL TNRA3567 CIRCUIT BOARD DT 1 RTL TNRA3567 CIRCUIT BOARD DT 1 RTL TNRA3567 CIRCUIT BOARD DT 1 RTL TNRA3	R9824	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9901 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R9902 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R9903 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R9906 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R9907 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R9908 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R9908 EXB2HV470JV M RESISTOR ARRAY 1 R9908,0 EXB38V470J RESISTOR ARRAY 2 S R9910,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 1 R9911 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9912 EXB2HV470JV RESISTOR ARRAY 1 R9913 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9914 EXB38V470J RESISTOR ARRAY 1 R9915,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 6 R9917 EXB2HV470JV RESISTOR ARRAY 1 R9918 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 6 R9917 EXB2HV470JV RESISTOR ARRAY 1 R9920 EXB2HV470JV RESISTOR ARRAY 1 R9921 EXB2HV470JV RESISTOR ARRAY 1 R9921 EXB2HV470JV RESISTOR ARRAY 1 R9922 EXB2HV470JV RESISTOR ARRAY 1 R9923 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  RM2510 PNA4601M05TV REMOCO RECEIVER 1 RTL TNPA3598AC CIRCUIT BOARD DT 1 PAVCA ⚠ RTL TNPA3598AC CIRCUIT BOARD DT 1 ⚠ RTL TNPA3620 CIRCUIT BOARD DT 1 ⚠ RTL TNPA3621AB CIRCUIT BOARD DG 1 ⚠ RTL TNPA3625AC CIRCUIT BOARD DG 1	R9830	EXB2HV470JV	RESISTOR ARRAY	1	
R9902 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R9903 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R9906 EXB2HV470JV RESISTOR ARRAY 1 R9907 ERJ3GEYJ200 M 22 OHM, J, 1/16W 1 R9908, 0 EXB38V470J RESISTOR ARRAY 2 R9901, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9910, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9911, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9912 EXB2HV470JV RESISTOR ARRAY 1 R9913 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9914 EXB38V470J RESISTOR ARRAY 1 R9915, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9916, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9917 EXB2HV470JV RESISTOR ARRAY 1 R9917 EXB2HV470JV RESISTOR ARRAY 1 R9918, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 EXB2HV470JV RESISTOR ARRAY 1 R9919, 1 EXB2HV470JV RESISTOR ARRAY 1 R9922 EXB2HV470JV RESISTOR ARRAY 1 R9923 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 RM2510 PNA4601M05TV REMOCO RECEIVER 1 RTL TNPA3598AC CIRCUIT BOARD DT 1 PAVCA A RTL TNPA3621AB CIRCUIT BOARD DT 1 A RTL TNPA3621AB CIRCUIT BOARD DT 1 A RTL TNPA3625AC CIRCUIT BOARD DG 1 A RTL TNPA3553 CIRCUIT BOARD DG 1 A RTL TNPA3554 CIRCUIT BOARD DG 1 A RTL TNPA3555 CIRCUIT BOARD DG 1 A RTL TNPA3555 CIRCUIT BOARD DG 1 A RTL TNPA3556 CIRCUIT BOARD DG 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3556 CIRCUIT BOARD DG 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3556 CIRCUIT BOARD DG 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3558 CIRCUIT BOARD DG 1 A RTL TNPA3559 CIRCUIT BOARD DG 1 A RTL TNPA3559 CIRCUIT BOARD DG 1 A RTL TNPA3550 CIRCUIT BOARD DG 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3558 CIRCUIT BOARD DG 1 A RTL TNPA3560 CIRCUIT BOARD DG 1 A RTL TNPA3	R9900	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9903 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R9904 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R9905 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R9906 EXEZHV470JV RESISTOR ARRAY 1 R9907 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9910, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R9910, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9912 EXEZHV470JV RESISTOR ARRAY 1 R9913 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9914 EXB38V470J RESISTOR ARRAY 1 R9915, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 6 R9917 EXEZHV470JV RESISTOR ARRAY 1 R9917 EXEZHV470JV RESISTOR ARRAY 1 R9918 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 6 R9920 EXEZHV470JV RESISTOR ARRAY 3 19 RM2510 PNA4601M05TV REMCOC RECEIVER 1 RM2510 PNA4601M05TV REMCOC RECEIVER 1 RTL TNPA3598AC CIRCUIT BOARD DT 1 PAVCA A RTL TNPA3620 CIRCUIT BOARD DT 1 A RTL TNPA3621AB CIRCUIT BOARD DT 1 A RTL TNPA3625AC CIRCUIT BOARD DG 1 A RTL TNPA3626 CIRCUIT BOARD DG 1 A RTL TNPA3553 CIRCUIT BOARD DV 1 A RTL TNPA3553 CIRCUIT BOARD DC 1 A RTL TNPA3553 CIRCUIT BOARD DC 1 A RTL TNPA3553 CIRCUIT BOARD DC 1 A RTL TNPA3555 CIRCUIT BOARD C1 1 A RTL TNPA3555 CIRCUIT BOARD C1 1 A RTL TNPA3556 CIRCUIT BOARD C1 1 A RTL TNPA3557 CIRCUIT BOARD C2 1 A RTL TNPA3556 CIRCUIT BOARD C3 1 A RTL TNPA3557 CIRCUIT BOARD C3 1 A RTL TNPA3557 CIRCUIT BOARD C3 1 A RTL TNPA3558 CIRCUIT BOARD C4 1 A RTL TNPA3559 CIRCUIT BOARD C3 1 A RTL TNPA3550 CIRCUIT BOARD C3 1 A RTL TNPA3551 CIRCUIT BOARD C3 1 A RTL TNPA3551 CIRCUIT BOARD C3 1 A RTL TNPA3551 CIRCUIT BOARD C3 1 A RTL TNPA3556 CIRCUIT BOARD C3 1 A RTL TNPA3557 CIRCUIT BOARD C3 1 A RTL TNPA3558 CIRCUIT BOARD C4 1 A RTL TNPA3559 CIRCUIT BOARD C5 1 A RTL TNPA3559 CIRCUIT BOARD C5 1 A RTL TNPA3560 CIRCUIT BOARD C5 1 A RTL TNPA3560 CIRCUIT BOARD C5 1 A RTL TNPA3550 CIRCUIT BOARD C5 1 A RTL TNPA3560 CIRCUIT BOARD C5 1 A RTL TNPA3560 CIRCUIT BOARD C5 1 A RTL TNPA3660 CIRCUIT	R9901	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9904 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R9905 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R9906 EXB2HV470JV RESISTOR ARRAY 1 R9907 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9908,0 EXB38V470J RESISTOR ARRAY 2 S R9910,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 L R9912 EXB2HV470JV RESISTOR ARRAY 1 R9913 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9914 EXB38V470J RESISTOR ARRAY 1 R9915,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 6 R9917 EXB2HV470JV RESISTOR ARRAY 1 R9917,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 6 R9917 EXB2HV470JV RESISTOR ARRAY 1 R9922 EXB2HV470JV RESISTOR ARRAY 1 R9923 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 RM2510 PNA4601M05TV REMOCO RECEIVER 1 RTL TNA31646 CIRCUIT BOARD DT 1 PAVCA △ RTL TNPA3620 CIRCUIT BOARD DT 1 △ RTL TNPA3621AB CIRCUIT BOARD DA 1 △ RTL TNPA3621AB CIRCUIT BOARD DA 1 △ RTL TNPA3626 CIRCUIT BOARD DD 1 △ RTL TNPA3626 CIRCUIT BOARD DD 1 △ RTL TNPA3626 CIRCUIT BOARD DD 1 △ RTL TNPA3553 CIRCUIT BOARD DD 1 △ RTL TNPA3554 CIRCUIT BOARD DD 1 △ RTL TNPA3555 CIRCUIT BOARD DD 1 △ RTL TNPA3556 CIRCUIT BOARD C1 1 △ RTL TNPA3556 CIRCUIT BOARD C2 1 △ RTL TNPA3557 CIRCUIT BOARD C3 1 △ RTL TNPA3558 CIRCUIT BOARD C4 1 △ RTL TNPA3559 CIRCUIT BOARD D 1 △ RTL TNPA3550 CIRCUIT BOARD D 1 △ RTL TNPA3551 CIRCUIT BOARD D 1 △ RTL TNPA3550 CIRCUIT BOARD D 1 △ RTL TNPA3551 CIRCUIT BOARD D 1 △ RTL TNPA3550 CIRCUIT BOARD C3 1 △ RTL TNPA3551 CIRCUIT BOARD D 1 △ RTL TNPA3550 CIRCUIT BOARD D 1 △ RTL TNPA3551 CIRCUIT BOARD D 1 △ RTL TNPA3550 CIRCUIT BOARD SC 1 △ RTL TNPA3676 CIRCUIT BOARD SC 1 △ RTL TNPA3550 CIRCUIT BOARD SC 1 △ RTL TNPA3550 CIRCUIT BOARD SC 1 △ RTL TNPA3604 CIRCUIT BOAR	R9902	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9905         ERJ3GEYJ104         M 100KOMM,J,1/16W         1           R9906         EXEZHV470JV         RESISTOR ARRAY         1           R9907         ERJ3GEYJ220         M 22 OHM,J,1/16W         1           R9908,0         EXB38V470J         RESISTOR ARRAY         2           R9910,1         ERJ3GEYJ220         M 22 OHM,J,1/16W         2           R9912         EXB2HV470JV         RESISTOR ARRAY         1           R9914         EXB38V470J         RESISTOR ARRAY         1           R9915,1         ERJ3GEYJ220         M 22 OHM,J,1/16W         2           6         R9917-         EXB2HV470JV         RESISTOR ARRAY         1           R9922         EXB2HV470JV         RESISTOR ARRAY         1           R9923         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           RM2510         PNA4601M05TV         REMOCO RECEIVER         1           RTL         TNPA3598AC         CIRCUIT BOARD DT         1         A           RTL         TNPA3598AC         CIRCUIT BOARD DZ         1         A           RTL         TNPA3526         CIRCUIT BOARD DZ         1         A           RTL         TNPA3525A         CIRCUIT BOARD DZ         1         A	R9903	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9906 EXB2HV470JV RESISTOR ARRAY 1 R9907 ER33GEYJ220 M 22 OHM, J, 1/16W 1 R9908, 0 EXB38V470J RESISTOR ARRAY 2 R9910,1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 1 R9912 EXB2HV470JV RESISTOR ARRAY 1 R9913 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9914 EXB38V470J RESISTOR ARRAY 1 R9915,1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 6 R9917 EXB2HV470JV RESISTOR ARRAY 1 R9918 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 6 R9917 EXB2HV470JV RESISTOR ARRAY 3 19 R9922 EXB2HV470JV RESISTOR ARRAY 1 R9923 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 RM2510 PNA4601M05TV REMOCO RECEIVER 1 RTL TNPA3620 CIRCUIT BOARD DT 1 PAVCA A RTL TNPA3621AB CIRCUIT BOARD H 1 A RTL TNPA3621AB CIRCUIT BOARD DG 1 A RTL TNPA3625AC CIRCUIT BOARD DG 1 A RTL TNPA3625AC CIRCUIT BOARD DG 1 A RTL TNPA3626 CIRCUIT BOARD DG 1 A RTL TNPA3625 CIRCUIT BOARD DG 1 A RTL TNPA3555 CIRCUIT BOARD C1 1 A RTL TNPA3554 CIRCUIT BOARD C2 1 A RTL TNPA3555 CIRCUIT BOARD C2 1 A RTL TNPA3555 CIRCUIT BOARD C3 1 A RTL TNPA3556 CIRCUIT BOARD C4 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3558 CIRCUIT BOARD DG 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3558 CIRCUIT BOARD DG 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3558 CIRCUIT BOARD DG 1 A RTL TNPA3560 CIRCUIT BOARD DG 1 A RTL TNPA3601 CIRCUIT BOARD DG 1 A RTL TNPA3604 CIRCUIT BOARD DG 1 A RTL TN	R9904	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9907 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R9908, 0 EXB38V470J RESISTOR ARRAY 2 R9910, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R9911 EXB2HV470JV RESISTOR ARRAY 1 R9912 EXB2HV470JV RESISTOR ARRAY 1 R9915, 1 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 6 R9917 EXB2HV470JV RESISTOR ARRAY 1 R9917 EXB2HV470JV RESISTOR ARRAY 1 R9918, 1 ERJ3GEYJ20 M 22 OHM, J, 1/16W 2 6 R9919 EXB2HV470JV RESISTOR ARRAY 1 R9922 EXB2HV470JV RESISTOR ARRAY 1 R9923 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 RM2510 PNA4601M05TV REMOCO RECEIVER 1 RTL TNPA3620 CIRCUIT BOARD DT 1 PAVCA \( \lambda \) RTL TNPA3620 CIRCUIT BOARD DT 1 \( \lambda \) RTL TNPA3620 CIRCUIT BOARD D 1 \( \lambda \) RTL TNPA3620 CIRCUIT BOARD D 1 \( \lambda \) RTL TNPA3625AC CIRCUIT BOARD D 1 \( \lambda \) RTL TNPA3625AC CIRCUIT BOARD D 1 \( \lambda \) RTL TNPA3625AC CIRCUIT BOARD D 1 \( \lambda \) RTL TNPA3655 CIRCUIT BOARD C1 \( \lambda \) RTL TNPA3553 CIRCUIT BOARD C2 \( \lambda \) RTL TNPA3555 CIRCUIT BOARD C2 \( \lambda \) RTL TNPA3555 CIRCUIT BOARD C3 \( \lambda \) RTL TNPA3555 CIRCUIT BOARD C4 \( \lambda \) RTL TNPA3555 CIRCUIT BOARD D 1 \( \lambda \) RTL TNPA3556 CIRCUIT BOARD D 1 \( \lambda \) RTL TNPA3643AC CIRCUIT BOARD D 1 \( \lambda \) RTL TNPA3557 CIRCUIT BOARD D 1 \( \lambda \) RTL TNPA3558 CIRCUIT BOARD D 1 \( \lambda \) RTL TNPA3557 CIRCUIT BOARD SC 1 \( \lambda \) RTL TNPA3558 CIRCUIT BOARD SC 1 \( \lambda \) RTL TNPA3558 CIRCUIT BOARD SC 1 \( \lambda \) RTL TNPA3558 CIRCUIT BOARD SC 1 \( \lambda \) RTL TNPA3558 CIRCUIT BOARD SS 1 \( \lambda \) RTL TNPA3558 CIRCUIT BOARD SS 1 \( \lambda \) RTL TNPA3603 CIRCUIT BOARD SS 1 \( \lambda \) RTL TNPA3604 CIRCUIT BOARD SS 1 \( \lambda \) RTL TNPA3603 CIRCUIT BOARD SS 1 \( \lambda \) RTL TNPA3604 CIRCUIT BOARD SS 1 \( \lambda \) RTL TNPA3604 CIRCUIT BOARD SS 1 \( \lambda \) RTL TNPA3603 CIRCUIT BOARD SS 1 \( \lambda \) RTL TNPA3604 CIRCUIT BOARD SS 1 \( \lambda \) RTL TNPA3604 CIRCUIT BOARD SS 1 \( \lambda \) RTL TNPA3604 CIRCUIT BOARD SS 1 \( \lambda \) RTL TNPA3603 CIRCUIT BOARD S 1 \( \lambda \) RTL TNPA3604 CIRCUIT BOARD S 1 \( \lambda \	R9905	ERJ3GEYJ104		1	
R9908,0 EXB38V470J RESISTOR ARRAY 2 9 R9910,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 1 R9912 EXB2HV470JV RESISTOR ARRAY 1 R9913 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R9914 EXB38V470J RESISTOR ARRAY 1 R9915,1 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 6 R9917- EXB2HV470JV RESISTOR ARRAY 3 19 R9922 EXB2HV470JV RESISTOR ARRAY 1 R9923 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 RM2510 PNA4601M05TV REMOCO RECEIVER 1 RTL TNA3146 CIRCUIT BOARD DT 1 PAVCA A RTL TNPA3598AC CIRCUIT BOARD H 1 A RTL TNPA3620 CIRCUIT BOARD DG 1 A RTL TNPA3621AB CIRCUIT BOARD DG 1 A RTL TNPA3625AC CIRCUIT BOARD DG 1 A RTL TNPA3626 CIRCUIT BOARD DG 1 A RTL TNPA3555 CIRCUIT BOARD C1 1 A RTL TNPA3555 CIRCUIT BOARD C2 1 A RTL TNPA3555 CIRCUIT BOARD C2 1 A RTL TNPA3555 CIRCUIT BOARD C3 1 A RTL TNPA3555 CIRCUIT BOARD DG 1 A RTL TNPA3556 CIRCUIT BOARD DG 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3556 CIRCUIT BOARD DG 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3556 CIRCUIT BOARD C3 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3556 CIRCUIT BOARD DG 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3556 CIRCUIT BOARD C4 1 A RTL TNPA3557 CIRCUIT BOARD DG 1 A RTL TNPA3556 CIRCUIT BOARD DG 1 A RTL TNPA3557 CIRCUIT BOARD SD 1 A RTL TNPA3558 CIRCUIT BOARD SD 1 A RTL TNPA3556 CIRCUIT BOARD SD 1 A RTL TNPA3558 CIRCUIT BOARD SD 1 A RTL TNPA3559 CIRCUIT BOARD SD 1 A RTL TNPA3560 CIRCUIT BOARD SD 1 A RTL TNPA3603 CIRCUIT BOARD SD 1 A RTL TNPA3604 CIRCUIT BOARD SD	R9906	EXB2HV470JV	RESISTOR ARRAY	1	
9         R9910,1         ERJ3GEYJ220         M 22 OHM,J,1/16W         2           R9912         EXB2HV470JV         RESISTOR ARRAY         1           R9913         ERJ3GEYJ220         M 22 OHM,J,1/16W         1           R9914         ERB3GYJ220         M 22 OHM,J,1/16W         2           6         ERJ3GEYJ220         M 22 OHM,J,1/16W         2           7         ERJ3GEYJ220         M 22 OHM,J,1/16W         2           8         CERJ3GEYJ220         M 22 OHM,J,1/16W         2           8         P9917         EXB2HV470JV         RESISTOR ARRAY         1           19         RP34         A         1         1           RP922         EXB2HV470JV         RESISTOR ARRAY         1         1           RM2510         PNA4601M05TV         REMOCO RECEIVER         1         1           RTL	R9907	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9912	1 -	EXB38V470J	RESISTOR ARRAY	2	
R9913         ERJ3GEYJ220         M 22 OHM,J,1/16W         1           R9914         EXB38V470J         RESISTOR ARRAY         1           R9915,1         ERJ3GEYJ220         M 22 OHM,J,1/16W         2           6         6         6         6           R9917-         EXB2HV470JV         RESISTOR ARRAY         1           R9922         EXB2HV470JV         RESISTOR ARRAY         1           R9923         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           RTL         TNAG146         CIRCUIT BOARD DT         1           RTL         TNPA3598AC         CIRCUIT BOARD DT         1         A           RTL         TNPA3621AB         CIRCUIT BOARD DA         1         A           RTL         TNPA3621AC         CIRCUIT BOARD DA         1         A           RTL         TNPA3625AC         CIRCUIT BOARD DA         1         A           RTL         TNPA3621AC         CIRCUIT BOARD DA         1         A           RTL         TNPA3625AC         CIRCUIT BOARD DA         1         A           RTL         TNPA3655A         CIRCUIT BOARD DA         1         A           RTL         TNPA3555         CIRCUIT BOARD CA         1	R9910,1 1	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9914         EXB38V470J         RESISTOR ARRAY         1           R9915,1         ERJ3GEYJ220         M 22 OHM,J,1/16W         2           6         R9917-         EXB2HV470JV         RESISTOR ARRAY         3           19         R9917-         EXB2HV470JV         RESISTOR ARRAY         1           R9922         EXB2HV470JV         RESISTOR ARRAY         1           R9923         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           RML         TNAG146         CIRCUIT BOARD DT         1           RTL         TNPA3588AC         CIRCUIT BOARD DA         1         △           RTL         TNPA3620         CIRCUIT BOARD DA         1         △           RTL         TNPA3625AC         CIRCUIT BOARD DA         1         △           RTL         TNPA3625AC         CIRCUIT BOARD DA         1         △           RTL         TNPA3552         CIRCUIT BOARD DA         1         △           RTL         TNPA3553         CIRCUIT BOARD C2         1         △           RTL         TNPA3555         CIRCUIT BOARD C2         1         △           RTL         TNPA3643AC         CIRCUIT BOARD DA         1         △           RTL	R9912	EXB2HV470JV	RESISTOR ARRAY	1	
R9915,1         EXB2HV470JV         RESISTOR ARRAY         3           19         R9917-         EXB2HV470JV         RESISTOR ARRAY         1           R9922         EXB2HV470JV         RESISTOR ARRAY         1           R9923         ERJ3GEYJ103         M 10K0HM, J, 1/16W         1           RM2510         PNA4601M05TV         REMOCO RECEIVER         1           RTL         TNAG146         CIRCUIT BOARD DT         1         PAVCA ⚠           RTL         TNPA3598AC         CIRCUIT BOARD DT         1         ⚠           RTL         TNPA3621AB         CIRCUIT BOARD DG         1         ⚠           RTL         TNPA3621AB         CIRCUIT BOARD DG         1         ⚠           RTL         TNPA3625AC         CIRCUIT BOARD DG         1         ⚠           RTL         TNPA3621AB         CIRCUIT BOARD DG         1         ⚠           RTL         TNPA3625AC         CIRCUIT BOARD DG         1         ⚠           RTL         TNPA3625AC         CIRCUIT BOARD DG         1         ⚠           RTL         TNPA3625A         CIRCUIT BOARD DC         1         ⚠           RTL         TNPA3555         CIRCUIT BOARD CC         1         ⚠		ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
6         R9917 - EXB2HV470JV RESISTOR ARRAY         3           19         EXB2HV470JV RESISTOR ARRAY         1           R9922 EXB2HV470JV RESISTOR ARRAY         1           R9923 ERJ3GEYJ103 M 10K0HM, J, 1/16W         1           RM2510 PNA4601M05TV REMOCO RECEIVER         1           RTL TNAG146 CIRCUIT BOARD DT         1           RTL TNPA3598AC CIRCUIT BOARD H         1           RTL TNPA3620 CIRCUIT BOARD PA         1           RTL TNPA3621AB CIRCUIT BOARD DG         1           RTL TNPA3625AC CIRCUIT BOARD DG         1           RTL TNPA3626 CIRCUIT BOARD DU         1           RTL TNPA3553 CIRCUIT BOARD DU         1           RTL TNPA3554 CIRCUIT BOARD C2         1           RTL TNPA3555 CIRCUIT BOARD C2         1           RTL TNPA3556 CIRCUIT BOARD C3         1           RTL TSTNPO10VDS CIRCUIT BOARD C4         1           RTL TSTNPO10VDS CIRCUIT BOARD D         1           RTL TNPA3643AC CIRCUIT BOARD SC         1           RTL TNPA3657 CIRCUIT BOARD SC         1           RTL TNPA3675 CIRCUIT BOARD SC         1           RTL TNPA3676 CIRCUIT BOARD SS         1           RTL TNPA3676 CIRCUIT BOARD SS         1           RTL TNPA3676 CIRCUIT BOARD SS         1 <td< td=""><td>R9914</td><td>EXB38V470J</td><td>RESISTOR ARRAY</td><td>1</td><td></td></td<>	R9914	EXB38V470J	RESISTOR ARRAY	1	
19		ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9923 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  RM2510 PNA4601M05TV REMOCO RECEIVER 1  RTL TNAG146 CIRCUIT BOARD DT 1 PAVCA ⚠  RTL TNPA3598AC CIRCUIT BOARD H 1 ⚠  RTL TNPA3620 CIRCUIT BOARD PA 1 ⚠  RTL TNPA3621AB CIRCUIT BOARD DG 1 ⚠  RTL TNPA3625AC CIRCUIT BOARD DG 1 ⚠  RTL TNPA3625AC CIRCUIT BOARD DV 1 ⚠  RTL TNPA3553 CIRCUIT BOARD DV 1 ⚠  RTL TNPA3554 CIRCUIT BOARD C1 1 ⚠  RTL TNPA3555 CIRCUIT BOARD C2 1 ⚠  RTL TNPA3555 CIRCUIT BOARD C3 1 ⚠  RTL TNPA3556 CIRCUIT BOARD C4 1 ⚠  RTL TZTNP010YDS CIRCUIT BOARD D 1 ⚠  RTL TZTNP010YDS CIRCUIT BOARD D 1 ⚠  RTL EXMM563MDK CIRCUIT BOARD D 1 ⚠  RTL TNPA3557 CIRCUIT BOARD P 1 ⚠  RTL TNPA3557 CIRCUIT BOARD P 1 ⚠  RTL TNPA3558 CIRCUIT BOARD SC 1 ⚠  RTL TNPA3558 CIRCUIT BOARD SS 1 ⚠  RTL TNPA3675 CIRCUIT BOARD SS 1 ⚠  RTL TNPA3676 CIRCUIT BOARD SS 1 ⚠  RTL TNPA3676 CIRCUIT BOARD SS 1 ⚠  RTL TNPA3603 CIRCUIT BOARD SS 1 ⚠  RTL TNPA3604 CIRCUIT BOARD S 1 ⚠  RTL TNPA3604 CIRCUIT BOARD S 1 ⚠  RTL TNPA3604 CIRCUIT BOARD S 1  ᠓  RTL TNPA3603 CIRCUIT BOARD S 1	1	EXB2HV470JV	RESISTOR ARRAY	3	
RM2510       PNA4601M05TV       REMOCO RECEIVER       1         RTL       TNAG146       CIRCUIT BOARD DT       1       PAVCA ⚠         RTL       TNPA3598AC       CIRCUIT BOARD H       1       ⚠         RTL       TNPA3620       CIRCUIT BOARD PA       1       ⚠         RTL       TNPA3621AB       CIRCUIT BOARD DG       1       ⚠         RTL       TNPA3625AC       CIRCUIT BOARD DG       1       ⚠         RTL       TNPA3626       CIRCUIT BOARD DU       1       ⚠         RTL       TNPA3553       CIRCUIT BOARD C1       1       ⚠         RTL       TNPA3554       CIRCUIT BOARD C2       1       ⚠         RTL       TNPA3555       CIRCUIT BOARD C3       1       ⚠         RTL       TNPA3556       CIRCUIT BOARD C4       1       ⚠         RTL       TXTPD101VDS       CIRCUIT BOARD D       1       ⚠         RTL       TXPA3643AC       CIRCUIT BOARD P       1       ⚠         RTL       TNPA3643AC       CIRCUIT BOARD SC       1       ⚠         RTL       TNPA3557       CIRCUIT BOARD SC       1       ⚠         RTL       TNPA3675       CIRCUIT BOARD SS       1 <t< td=""><td>R9922</td><td>EXB2HV470JV</td><td></td><td>1</td><td></td></t<>	R9922	EXB2HV470JV		1	
RTL TNAG146 CIRCUIT BOARD DT 1 PAVCA ⚠  RTL TNPA3598AC CIRCUIT BOARD H 1	R9923	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
RTL         TNPA3598AC         CIRCUIT BOARD H         1         A           RTL         TNPA3620         CIRCUIT BOARD PA         1         A           RTL         TNPA3621AB         CIRCUIT BOARD Z         1         A           RTL         TNPA3625AC         CIRCUIT BOARD DG         1         A           RTL         TNPA3626         CIRCUIT BOARD DV         1         A           RTL         TNPA3553         CIRCUIT BOARD C1         1         A           RTL         TNPA3554         CIRCUIT BOARD C2         1         A           RTL         TNPA3555         CIRCUIT BOARD C3         1         A           RTL         TNPA3556         CIRCUIT BOARD C4         1         A           RTL         TXTPA3653MDK         CIRCUIT BOARD D         1         A           RTL         ETXMM563MDK         CIRCUIT BOARD PB         1         A           RTL         TNPA3643AC         CIRCUIT BOARD SC         1         A           RTL         TNPA3190AB         CIRCUIT BOARD SC         1         A           RTL         TNPA3675         CIRCUIT BOARD SS         1         A           RTL         TNPA3676         CIRCUIT BOARD SS	RM2510	PNA4601M05TV	REMOCO RECEIVER	1	
RTL         TNPA3598AC         CIRCUIT BOARD H         1         A           RTL         TNPA3620         CIRCUIT BOARD PA         1         A           RTL         TNPA3621AB         CIRCUIT BOARD Z         1         A           RTL         TNPA3625AC         CIRCUIT BOARD DG         1         A           RTL         TNPA3626         CIRCUIT BOARD DV         1         A           RTL         TNPA3553         CIRCUIT BOARD C1         1         A           RTL         TNPA3554         CIRCUIT BOARD C2         1         A           RTL         TNPA3555         CIRCUIT BOARD C3         1         A           RTL         TNPA3556         CIRCUIT BOARD C4         1         A           RTL         TXTPA3653MDK         CIRCUIT BOARD D         1         A           RTL         EXXMM563MDK         CIRCUIT BOARD PB         1         A           RTL         TNPA3643AC         CIRCUIT BOARD SC         1         A           RTL         TNPA3190AB         CIRCUIT BOARD SC         1         A           RTL         TNPA3675         CIRCUIT BOARD SS         1         A           RTL         TNPA3676         CIRCUIT BOARD SS					
RTL         TNPA3620         CIRCUIT BOARD PA         1         A           RTL         TNPA3621AB         CIRCUIT BOARD Z         1         A           RTL         TNPA3625AC         CIRCUIT BOARD DG         1         A           RTL         TNPA3626         CIRCUIT BOARD DV         1         A           RTL         TNPA3553         CIRCUIT BOARD C1         1         A           RTL         TNPA3554         CIRCUIT BOARD C2         1         A           RTL         TNPA3555         CIRCUIT BOARD C3         1         A           RTL         TNPA3556         CIRCUIT BOARD C4         1         A           RTL         TXTPRO10YDS         CIRCUIT BOARD D         1         A           RTL         EXXMM563MDK         CIRCUIT BOARD P         1         A           RTL         TNPA3643AC         CIRCUIT BOARD SC         1         A           RTL         TNPA3557         CIRCUIT BOARD SC         1         A           RTL         TNPA3675         CIRCUIT BOARD SS         1         A           RTL         TNPA3676         CIRCUIT BOARD SS         1         A           RTL         TNPA3603         CIRCUIT BOARD S         1<	RTL	TNAG146	CIRCUIT BOARD DT	1	PAVCA A
RTL	RTL	TNPA3598AC	CIRCUIT BOARD H	1	
RTL	RTL	TNPA3620	CIRCUIT BOARD PA	1	
RTL	RTL	TNPA3621AB	CIRCUIT BOARD Z	1	
RTL TNPA3553 CIRCUIT BOARD C1 1	RTL	TNPA3625AC	CIRCUIT BOARD DG	1	
RTL	RTL	TNPA3626	CIRCUIT BOARD DV	1	
RTL         TNPA3555         CIRCUIT BOARD C3         1         A           RTL         TNPA3556         CIRCUIT BOARD C4         1         A           RTL         TZTNP010YDS         CIRCUIT BOARD D         1         A           RTL         ETXMM563MDK         CIRCUIT BOARD P         1         A           RTL         TNPA3643AC         CIRCUIT BOARD PB         1         A           RTL         TNPA3557         CIRCUIT BOARD SC         1         A           RTL         TNPA3190AB         CIRCUIT BOARD SD         1         A           RTL         TNPA3675         CIRCUIT BOARD SS         1         A           RTL         TNPA3676         CIRCUIT BOARD SS         1         A           RTL         TNPA3189AB         CIRCUIT BOARD SU         1         A           RTL         TNPA3603         CIRCUIT BOARD S         1         A           RTL         TNPA3604         CIRCUIT BOARD S         1         A           RTL         TNPA3604         CIRCUIT BOARD S         1         A           RTL         TNPA3604         CIRCUIT BOARD S         1         A           S1         K1KA03AA0193         3P CONNECTOR         1 <td>RTL</td> <td>TNPA3553</td> <td></td> <td>1</td> <td></td>	RTL	TNPA3553		1	
RTL         TNPA3556         CIRCUIT BOARD C4         1         A           RTL         TZTNP010YDS         CIRCUIT BOARD D         1         A           RTL         ETXMM563MDK         CIRCUIT BOARD P         1         A           RTL         TNPA3643AC         CIRCUIT BOARD PB         1         A           RTL         TNPA3557         CIRCUIT BOARD SC         1         A           RTL         TNPA3190AB         CIRCUIT BOARD SD         1         A           RTL         TNPA3675         CIRCUIT BOARD SS         1         A           RTL         TNPA3558         CIRCUIT BOARD SS         1         A           RTL         TNPA3676         CIRCUIT BOARD SS         1         A           RTL         TNPA3189AB         CIRCUIT BOARD SU         1         A           RTL         TNPA3603         CIRCUIT BOARD S         1         A           RTL         TNPA3604         CIRCUIT BOARD S         1         A           RTL         TNPA3604         CIRCUIT BOARD S         1         A           S1         K1KA03AA0193         3P CONNECTOR         1           S2         K1KA02AA0193         2P CONNECTOR         1 <tr< td=""><td></td><td></td><td></td><td>1</td><td>· .</td></tr<>				1	· .
RTL         TZTNP010YDS         CIRCUIT BOARD D         1         A           RTL         ETXMM563MDK         CIRCUIT BOARD P         1         A           RTL         TNPA3643AC         CIRCUIT BOARD PB         1         A           RTL         TNPA3557         CIRCUIT BOARD SC         1         A           RTL         TNPA3190AB         CIRCUIT BOARD SD         1         A           RTL         TNPA3675         CIRCUIT BOARD SS2         1         A           RTL         TNPA3558         CIRCUIT BOARD SS         1         A           RTL         TNPA3676         CIRCUIT BOARD SS3         1         A           RTL         TNPA3189AB         CIRCUIT BOARD SU         1         A           RTL         TNPA3603         CIRCUIT BOARD S         1         A           RTL         TNPA3604         CIRCUIT BOARD S         1         A           RTL         TNPA3604         CIRCUIT BOARD S         1         A           S1         K1KA03AA0193         3P CONNECTOR         1           S2         K1KA02AA0193         2P CONNECTOR         1           SC2         K1KA06AA0192         6P CONNECTOR         1           SC2					
RTL         ETXMM563MDK         CIRCUIT BOARD P         1         A           RTL         TNPA3643AC         CIRCUIT BOARD PB         1         A           RTL         TNPA3557         CIRCUIT BOARD SC         1         A           RTL         TNPA3190AB         CIRCUIT BOARD SD         1         A           RTL         TNPA3675         CIRCUIT BOARD SS2         1         A           RTL         TNPA3558         CIRCUIT BOARD SS         1         A           RTL         TNPA3676         CIRCUIT BOARD SS3         1         A           RTL         TNPA3189AB         CIRCUIT BOARD SU         1         A           RTL         TNPA3603         CIRCUIT BOARD S         1         A           RTL         TNPA3604         CIRCUIT BOARD S         1         A           RTL         TNPA3604         CIRCUIT BOARD S         1         A           S1         K1KA03AA0193         3P CONNECTOR         1           S2         K1KA02AA0193         2P CONNECTOR         1           SC2         K1KA06AA0192         6P CONNECTOR         1           SC23         K1KA03AA0193         3P CONNECTOR         1           SC23         K				<del></del>	
RTL         TNPA3643AC         CIRCUIT BOARD PB         1         A           RTL         TNPA3557         CIRCUIT BOARD SC         1         A           RTL         TNPA3190AB         CIRCUIT BOARD SD         1         A           RTL         TNPA3675         CIRCUIT BOARD SS2         1         A           RTL         TNPA3558         CIRCUIT BOARD SS         1         A           RTL         TNPA3676         CIRCUIT BOARD SS3         1         A           RTL         TNPA3189AB         CIRCUIT BOARD SU         1         A           RTL         TNPA3603         CIRCUIT BOARD S         1         A           RTL         TNPA3604         CIRCUIT BOARD S         1         A           ST         K1KA03AA0193         3P CONNECTOR         1         A           S1         K1KA02AA0193         3P CONNECTOR         1         S           SC2         K1KA06AA0192         6P CONNECTOR         1         S           SC20         K1KA03AA0193         3P CONNECTOR         1         S           SC23         K1KA03AA0193         3P CONNECTOR         1         S           SC41,42         K1ML80B00001         80P CONNECTOR <td< td=""><td></td><td></td><td></td><td><u> </u></td><td></td></td<>				<u> </u>	
RTL         TNPA3557         CIRCUIT BOARD SC         1         A           RTL         TNPA3190AB         CIRCUIT BOARD SD         1         A           RTL         TNPA3675         CIRCUIT BOARD SS2         1         A           RTL         TNPA3558         CIRCUIT BOARD SS         1         A           RTL         TNPA3676         CIRCUIT BOARD SS3         1         A           RTL         TNPA3189AB         CIRCUIT BOARD SU         1         A           RTL         TNPA3603         CIRCUIT BOARD S         1         A           RTL         TNPA3604         CIRCUIT BOARD S         1         A           S1         K1KA03AA0193         3P CONNECTOR         1           S2         K1KA02AA0193         2P CONNECTOR         1           SC2         K1KA06AA0192         6P CONNECTOR         1           SC20         K1KA20AA0008         2OP CONNECTOR         1           SC23         K1KA03AA0193         3P CONNECTOR         1           SC41,42         K1ML80B00001         80P CONNECTOR         2		1			
RTL         TNPA3190AB         CIRCUIT BOARD SD         1         △           RTL         TNPA3675         CIRCUIT BOARD SS2         1         △           RTL         TNPA3558         CIRCUIT BOARD SS         1         △           RTL         TNPA3676         CIRCUIT BOARD SS3         1         △           RTL         TNPA3189AB         CIRCUIT BOARD SU         1         △           RTL         TNPA3603         CIRCUIT BOARD S         1         △           RTL         TNPA3604         CIRCUIT BOARD S         1         △           S1         K1KA03AA0193         3P CONNECTOR         1           S2         K1KA02AA0193         2P CONNECTOR         1           SC2         K1KA06AA0192         6P CONNECTOR         1           SC20         K1KA20AA0008         20P CONNECTOR         1           SC23         K1KA03AA0193         3P CONNECTOR         1           SC41,42         K1ML80B00001         80P CONNECTOR         2					
RTL         TNPA3675         CIRCUIT BOARD SS2         1         A           RTL         TNPA3558         CIRCUIT BOARD SS         1         A           RTL         TNPA3676         CIRCUIT BOARD SS3         1         A           RTL         TNPA3189AB         CIRCUIT BOARD SU         1         A           RTL         TNPA3603         CIRCUIT BOARD K         1         A           RTL         TNPA3604         CIRCUIT BOARD S         1         A           S1         K1KA03AA0193         3P CONNECTOR         1           S2         K1KA02AA0193         2P CONNECTOR         1           SC2         K1KA06AA0192         6P CONNECTOR         1           SC20         K1KA20AA0008         20P CONNECTOR         1           SC23         K1KA03AA0193         3P CONNECTOR         1           SC41,42         K1ML80B00001         80P CONNECTOR         2					
RTL         TNPA3558         CIRCUIT BOARD SS         1         △           RTL         TNPA3676         CIRCUIT BOARD SS3         1         △           RTL         TNPA3189AB         CIRCUIT BOARD SU         1         △           RTL         TNPA3603         CIRCUIT BOARD K         1         △           RTL         TNPA3604         CIRCUIT BOARD S         1         △           S1         K1KA03AA0193         3P CONNECTOR         1         S           S2         K1KA02AA0193         2P CONNECTOR         1           SC2         K1KA06AA0192         6P CONNECTOR         1           SC20         K1KA20AA0008         20P CONNECTOR         1           SC23         K1KA03AA0193         3P CONNECTOR         1           SC41,42         K1ML80B00001         80P CONNECTOR         2					t .
RTL         TNPA3676         CIRCUIT BOARD SS3         1         △           RTL         TNPA3189AB         CIRCUIT BOARD SU         1         △           RTL         TNPA3603         CIRCUIT BOARD K         1         △           RTL         TNPA3604         CIRCUIT BOARD S         1         △           S1         K1KA03AA0193         3P CONNECTOR         1           S2         K1KA02AA0193         2P CONNECTOR         1           SC2         K1KA06AA0192         6P CONNECTOR         1           SC20         K1KA20AA0008         20P CONNECTOR         1           SC23         K1KA03AA0193         3P CONNECTOR         1           SC41,42         K1ML80B00001         80P CONNECTOR         2				<u> </u>	
RTL         TNPA3189AB         CIRCUIT BOARD SU         1         △           RTL         TNPA3603         CIRCUIT BOARD K         1         △           RTL         TNPA3604         CIRCUIT BOARD S         1         △           S1         K1KA03AA0193         3P CONNECTOR         1           S2         K1KA02AA0193         2P CONNECTOR         1           SC2         K1KA06AA0192         6P CONNECTOR         1           SC20         K1KA20AA0008         20P CONNECTOR         1           SC23         K1KA03AA0193         3P CONNECTOR         1           SC41,42         K1ML80B00001         80P CONNECTOR         2				<b>-</b>	
RTL         TNPA3603         CIRCUIT BOARD K         1         △           RTL         TNPA3604         CIRCUIT BOARD S         1         △           S1         K1KA03AA0193         3P CONNECTOR         1           S2         K1KA02AA0193         2P CONNECTOR         1           SC2         K1KA06AA0192         6P CONNECTOR         1           SC20         K1KA20AA0008         20P CONNECTOR         1           SC23         K1KA03AA0193         3P CONNECTOR         1           SC41,42         K1ML80B00001         80P CONNECTOR         2				<u> </u>	
RTL TNPA3604 CIRCUIT BOARD S 1					
S2     K1KA02AA0193     2P CONNECTOR     1       SC2     K1KA06AA0192     6P CONNECTOR     1       SC20     K1KA20AA0008     20P CONNECTOR     1       SC23     K1KA03AA0193     3P CONNECTOR     1       SC41,42     K1ML80B00001     80P CONNECTOR     2					
S2     K1KA02AA0193     2P CONNECTOR     1       SC2     K1KA06AA0192     6P CONNECTOR     1       SC20     K1KA20AA0008     20P CONNECTOR     1       SC23     K1KA03AA0193     3P CONNECTOR     1       SC41,42     K1ML80B00001     80P CONNECTOR     2	G1	W1W2022222	3D GONDERGEOF	-	
SC2     K1KA06AA0192     6P CONNECTOR     1       SC20     K1KA20AA0008     20P CONNECTOR     1       SC23     K1KA03AA0193     3P CONNECTOR     1       SC41,42     K1ML80B00001     80P CONNECTOR     2			_	<del></del>	
SC20         K1KA20AA0008         20P CONNECTOR         1           SC23         K1KA03AA0193         3P CONNECTOR         1           SC41,42         K1ML80B00001         80P CONNECTOR         2	54	LTKAUZAAU193	ZF CONNECTOR	1	
SC23         K1KA03AA0193         3P CONNECTOR         1           SC41,42         K1ML80B00001         80P CONNECTOR         2	SC2	K1KA06AA0192	6P CONNECTOR	1	
SC41,42 K1ML80B00001 80P CONNECTOR 2	SC20	K1KA20AA0008	20P CONNECTOR	1	
			3P CONNECTOR	1	
SC45,46   K1KA10A00431   10P CONNECTOR   2	SC41,42	K1ML80B00001	80P CONNECTOR	2	
	SC45,46	K1KA10A00431	10P CONNECTOR	2	

Ref.	Part No.	Part Name &	Pcs	Remarks
No. SC90	K1KA06AA0192	Description 6P CONNECTOR	1	
BC30	RIGIGOTHIOTE	or connecton		
SD1-D4	K1MN96B00004	96P CONNECTOR	4	
SD46	K1KA10B00209	10P CONNECTOR	1	
SS11	K1KA07AA0192	7P CONNECTOR	1	
SS12	K1KA10AA0194	10P CONNECTOR	1	
	K1KA07A00170	7P CONNECTOR	2	
SS22,23	K1KB07AA0087	7P CONNECTOR	1	
SS24 SS32	K1KA04AA0193 K1KA12AA0194	4P CONNECTOR 12P CONNECTOR	1	
SS34	K1KA03AA0193	3P CONNECTOR	1	
SS52,53	K1MN13B00020	13P CONNECTOR	2	
SS55,56	K1MN13B00020	13P CONNECTOR	2	
SU1-U4	K1MN96B00004	96P CONNECTOR	4	
SU45	K1KA10B00209	10P CONNECTOR	1	
SW2500	K0F122A00172	SWITCREMOTE	1	
SW3751-	EVQ11G05R	CONTROLH	5	
55 55	~1303K			
T6431	ETS13TB139AP	SWITCHING TRANS	1	
T6471	ETS22AE2F9AC	SWITCHING TRANS	1	
TU8200	ENGD6302DF	TUNER	1	Δ
VDC145	EVENTA CA CODIA	COMMINGE 10VOINED	+ -	
VR6145	EVMEASA00B14	CONTROL 10KOHMB	1	
VR6477	EVMEASA00B13	CONTROL 1KOHMB	1	
		0.3W		
VR6523	EVMEASA00B53	CONTROL 5KOHMB	1	
VDCEE7	EVENTA CA CODIA	0.3W	-	
VR6557	EVMEASA00B14	CONTROL 10KOHMB	1	
X4001	TSSA101	CRYSTAL	1	
X4002	H0J400400017	CRYSTAL	1	
X4004	ној270500087	CRYSTAL	1	
X8005	ној270500061	CRYSTAL	1	
X8200	ној250500050	CRYSTAL	1	
X9000	H2D2705A0004	CRYSTAL	1	
X9200	H0J200500038	CRYSTAL	1	
XF8200	J0C4405B0004	LC FILTER	1	
XF8201	J0C4405B0006	LC FILTER	1	
XF8202	J0C4405B0005	LC FILTER	1	
				İ
Z2				
	K1KA05AA0192	5P CONNECTOR	1	
Z50	K1KA05AA0192 K1MN35A00013	5P CONNECTOR 35P CONNECTOR	1	
	K1MN35A00013	35P CONNECTOR	1	
ZA5001	K1MN35A00013 K4CD01000011	35P CONNECTOR TERMINAL	1	
ZA5001 ZA5003	K1MN35A00013 K4CD01000011 TESA169	35P CONNECTOR TERMINAL SHIELD CLIP	1 1 1	
ZA5001	K1MN35A00013 K4CD01000011	35P CONNECTOR TERMINAL	1	
ZA5001 ZA5003 ZA5601-	K1MN35A00013 K4CD01000011 TESA169	35P CONNECTOR TERMINAL SHIELD CLIP	1 1 1	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 04	K1MN35A00013  K4CD01000011  TESA169  K9ZZ00000424  K9ZZ00000424	35P CONNECTOR TERMINAL SHIELD CLIP CONNECTOR	1 1 4 4	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 04 ZA6101-	K1MN35A00013 K4CD01000011 TESA169 K9ZZ00000424	35P CONNECTOR TERMINAL SHIELD CLIP CONNECTOR	1 1 4	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 04 ZA6101- 03	K1MN35A00013  K4CD01000011 TESA169 K9ZZ00000424 K9ZZ00000424 K4CD01000013	35P CONNECTOR TERMINAL SHIELD CLIP CONNECTOR CONNECTOR TERMINAL	1 1 4 4 3	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 04 ZA6101- 03	K1MN35A00013  K4CD01000011  TESA169  K9ZZ00000424  K9ZZ00000424	35P CONNECTOR TERMINAL SHIELD CLIP CONNECTOR CONNECTOR	1 1 4 4	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 04 ZA6101- 03 ZA6401- 03 ZA6401-	K1MN35A00013  K4CD01000011 TESA169 K9ZZ00000424 K9ZZ00000424 K4CD01000013	35P CONNECTOR TERMINAL SHIELD CLIP CONNECTOR CONNECTOR TERMINAL	1 1 4 4 3	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 04 ZA6101- 03 ZA6401- 03 ZA7101- 03	K1MN35A00013  K4CD01000011  TESA169  K9ZZ00000424  K9ZZ000000424  K4CD01000013  K4CD01000013	35P CONNECTOR  TERMINAL SHIELD CLIP CONNECTOR  CONNECTOR  TERMINAL  TERMINAL	1 1 4 4 3 3 3 3	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 04 ZA6101- 03 ZA6401- 03 ZA7101- 03 ZA7201-	K1MN35A00013  K4CD01000011  TESA169  K9ZZ00000424  K9ZZ000000424  K4CD01000013	35P CONNECTOR  TERMINAL SHIELD CLIP CONNECTOR  CONNECTOR  TERMINAL	1 1 4 4 3 3 3	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 04 ZA6101- 03 ZA6401- 03 ZA7101- 03	K1MN35A00013  K4CD01000011  TESA169  K9ZZ00000424  K9ZZ000000424  K4CD01000013  K4CD01000013	35P CONNECTOR  TERMINAL SHIELD CLIP CONNECTOR  CONNECTOR  TERMINAL  TERMINAL	1 1 4 4 3 3 3 3	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 04 ZA6101- 03 ZA6401- 03 ZA7101- 03 ZA7201- 03	K1MN35A00013  K4CD01000011  TESA169  K9ZZ00000424  K4CD01000013  K4CD01000013  K4CD01000013	35P CONNECTOR  TERMINAL SHIELD CLIP CONNECTOR  CONNECTOR  TERMINAL  TERMINAL  TERMINAL  TERMINAL	1 1 4 4 3 3 3 3 3 3 3 3	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 04 ZA6101- 03 ZA6101- 03 ZA7101- 03 ZA7201- 03 ZA7201- 03 ZA7301-	K1MN35A00013  K4CD01000011  TESA169  K9ZZ00000424  K4CD01000013  K4CD01000013  K4CD01000013	35P CONNECTOR  TERMINAL SHIELD CLIP CONNECTOR  CONNECTOR  TERMINAL  TERMINAL  TERMINAL  TERMINAL	1 1 4 4 3 3 3 3 3 3 3 3	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 03 ZA6101- 03 ZA7101- 03 ZA7201- 03 ZA7201- 03 ZA7401- 03	K1MN35A00013  K4CD01000011  TESA169  K9ZZ00000424  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	35P CONNECTOR  TERMINAL SHIELD CLIP CONNECTOR  CONNECTOR  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL	1 1 1 4 4 3 3 3 3 3 3 3 3 3 3 3 3	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 03 ZA6101- 03 ZA7101- 03 ZA7201- 03 ZA7201- 03 ZA7401- 03 ZA7401- 03	K1MN35A00013  K4CD01000011 TESA169 K9ZZ00000424  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	35P CONNECTOR  TERMINAL SHIELD CLIP CONNECTOR  CONNECTOR  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL	1 1 1 4 4 3 3 3 3 3 3 3 3 1 1	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 03 ZA6101- 03 ZA7101- 03 ZA7201- 03 ZA7201- 03 ZA7401- 03	K1MN35A00013  K4CD01000011  TESA169  K9ZZ00000424  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	35P CONNECTOR  TERMINAL SHIELD CLIP CONNECTOR  CONNECTOR  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL	1 1 1 4 4 3 3 3 3 3 3 3 3 3 3 3 3	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 04 ZA6101- 03 ZA6401- 03 ZA7201- 03 ZA7201- 03 ZA7301- 03 ZA7301- 03 ZA7401- 03 ZA9001 ZA9002-	K1MN35A00013  K4CD01000011 TESA169 K9ZZ00000424  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	35P CONNECTOR  TERMINAL SHIELD CLIP CONNECTOR  CONNECTOR  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL	1 1 1 4 4 3 3 3 3 3 3 3 3 1 1	
ZA5001 ZA5003 ZA5601- 04 ZA5801- 04 ZA6101- 03 ZA6401- 03 ZA7201- 03 ZA7201- 03 ZA7301- 03 ZA7301- 03 ZA7401- 03 ZA9001 ZA9002-	K1MN35A00013  K4CD01000011 TESA169 K9ZZ00000424  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	35P CONNECTOR  TERMINAL SHIELD CLIP CONNECTOR  CONNECTOR  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL  TERMINAL	1 1 1 4 4 3 3 3 3 3 3 3 3 1 1	

A601,02 RA362MSVT ARRESTOR 2	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C301	1601 00	D3.2.6034G34FFF	1 D D D G MO D		A
C302	A601,02	RA362MSV7T	ARRESTOR	2	
C302   ECJUEBHA72K   C 4700FF, K, 50V   1	C301	RR3AD681KP	CERAMIC CAPACITOR	1	
CAPACITOR				1	
C305	C303	KZE1E470P		1	
C307	G2.0.F	BG T0 VG1 II 1 0 1 T	1	-	
CAPACITOR				<del>                                     </del>	
CAPACITOR	2307	IDDEE INS		-	
C335 TEB104K5 CERAMIC CHIP CAPACITOR 1  C341 RR3AD332K CERAMIC CAPACITOR 1  C352 TCR474K2A CERAMIC CHIP 1  C354 TEB104K5 CERAMIC CHIP 1  C355 TCR474K2A CERAMIC CHIP 1  C356 TAB473K2E CERAMIC CHIP 1  C357 CERAMIC CHIP 1  C358 CAPACITOR 1  C359 KEELE470 ELECTROLYTIC 2  C360,61 KMQ220901Z ELECTROLYTIC 2  C363 RR3DD22LK CERAMIC CAPACITOR 1  C366,67 KZE2A331L ELECTROLYTIC 2  C369 TAB473K2E CERAMIC CHIP 1  C369 CAPACITOR 1  C369 TAB473K2E CERAMIC CHIP 1  C360,61 KMQ220901Z ELECTROLYTIC 2  C361 RR3DD22LK CERAMIC CHIP 1  C362 CAPACITOR 1  C364 CAPACITOR 1  C365 TAB473K2E CERAMIC CHIP 1  C366 CAPACITOR 1  C367 KZE2A331L ELECTROLYTIC 2  C368 TAB473K2E CERAMIC CHIP 1  C369 TAB473K2E CERAMIC CHIP 1  C360 CAPACITOR 1  C401 KZE1E470 ELECTROLYTIC 1  C401 KZE1E470 ELECTROLYTIC 1  C401 ECWH8183HVB PLASTIC FILM 1  C401 ECWH8183HVB PLASTIC FILM 1  C401 ECWH8183HVB PLASTIC FILM 1  C401 ECMH8183HVB PLASTIC FILM 1  C401 ECMH8183HVB PLASTIC FILM 1  C402 TBB105K1 CERAMIC CHIP 1  C404C TBB105K1 CERAMIC CHIP 1  C404C ECJ3FB1E475K C 4.7UF, K, 25V 1  C452 KZE1E821L ELECTROLYTIC 1  C47ACITOR 1  C454,55 ECJ3YB1E475K C 4.7UF, K, 25V 2  C457 KZE1E821L ELECTROLYTIC 1  C47ACITOR 1  C458 ECJ3YB1E475K C 4.7UF, K, 25V 1  C459 KZE1E821L ELECTROLYTIC 1  C460 ECJ2FB1H104K C 0.1UF, K, 50V 1  C461 KZE1E471L ELECTROLYTIC 1  C462 ECJ2FB1H104K C 0.1UF, K, 50V 1  C463 KZE1E471 ELECTROLYTIC 1  C464 ECJ2FB1H104K C 0.1UF, K, 50V 1  C465 KZE1E101 ELECTROLYTIC 1  C47ACITOR 1  C466 ECJ2FB1H104K C 0.1UF, K, 50V 1  C47ACITOR 1	C332	KZE1E470		1	
CAPACITOR   CRAMIC CAPACITOR	C335	TED104E		1	
C352	C333	TEBIOTRS		-	
CAPACITOR	C341	RR3AD332K	CERAMIC CAPACITOR	1	
C354   TEB104K5   CERAMIC CHIP   CAPACITOR   CAPACIT	C352	TCR474K2A		1	
CAPACITOR	C354	TER104K5		1	
CAPACITOR   1	C331	I I I I I I I I I I I I I I I I I I I		-	
C356	C355	TCR474K2A		1	
CAPACITOR	C356	TAB473K2E		1	
CAPACITOR   CAPA					
C360,61	C359	KZE1E470		1	
C366,67   KZE2A331L   ELECTROLYTIC   2   CAPACITOR   1   CAPACITOR   2   CAPACITOR   3   CAPACITOR   4   CAPACITOR   4   CAPACITOR   1   CAP	C360,61	KMQ220901Z		2	
C366,67   KZE2A331L   ELECTROLYTIC   CAPACITOR   CAP			CAPACITOR		
CAPACITOR  C369 TAB473K2E CERAMIC CHIP CAPACITOR  C374 RR3DD221K CERAMIC CAPACITOR  C401 KZE1E470 ELECTROLYTIC C410 ECWH8183HVB PLASTIC FILM CAPACITOR  C411 ECJ3YB1E475K C 4.7UF, K, 25V 1  C412 TBB105K1 CERAMIC CHIP CAPACITOR  C451 KZE1E272 ELECTROLYTIC CAPACITOR  C452 KZE1E821L ELECTROLYTIC CAPACITOR  C454,55 ECJ3YB1E475K C 4.7UF, K, 25V 2  C457 KZE1E821L ELECTROLYTIC CAPACITOR  C458 ECJ3YB1E475K C 4.7UF, K, 25V 1  C459 KZE1E821L ELECTROLYTIC CAPACITOR  C450 ECJ2FB1H104K C 0.1UF, K, 50V 1  C461 KZE1E471L ELECTROLYTIC CAPACITOR  C462 ECJ2FB1H104K C 0.1UF, K, 50V 1  C463 KZE1E101 ELECTROLYTIC CAPACITOR  C464 ECJ2FB1H04K C 0.1UF, K, 50V 1  C465 KZE1E101 ELECTROLYTIC CAPACITOR  C466 ECJ2FB1H04K C 0.1UF, K, 50V 1  C467 ECJ2FB1H04K C 0.1UF, K, 50V 1  C466 ECJ2FB1H04K C 0.1UF, K, 50V 1  C467 KZE1E101 ELECTROLYTIC CAPACITOR  C466 ECJ2FB1H04K C 0.1UF, K, 50V 1  C467 KZE1E101 ELECTROLYTIC CAPACITOR  C466 ECJ2FB1H04K C 0.1UF, K, 50V 1  C471 ECJ2FB1H04K C 0.1UF, K, 50V 1  C471 ECJ2FB1H04K C 0.1UF, K, 50V 1  C472 KZE1E101 ELECTROLYTIC CAPACITOR  C501 KMQ2W161K ELECTROLYTIC CAPACITOR  C501 KMQ2W161K ELECTROLYTIC CAPACITOR  C502 ECJ2FB1H04K C 0.1UF, K, 50V 1  C503 TBB106K1A CERAMIC CHIP CAPACITOR  C504 KZE1E101 ELECTROLYTIC CAPACITOR  C507 KZE1E101 ELECTROLYTIC CAPACITOR  C508 ECJ2FB1H04K C 0.1UF, K, 50V 1  C509 KZE1E101 ELECTROLYTIC CAPACITOR  C501 KMQ2W161K ELECTROLYTIC CAPACITOR  C502 ECJ2FB1H04K C 0.1UF, K, 50V 1  C503 TBB106K1A CERAMIC CHIP CAPACITOR  C504 KZE1E101 ELECTROLYTIC CAPACITOR  C505 KZE1E101 ELECTROLYTIC CAPACITOR  C506 KZE1E101 ELECTROLYTIC CAPACITOR  C512 KZE1E101 ELECTROLYTIC CAPACITOR  C512 KZE1E101 ELECTROLYTIC CAPACITOR  C511 KZE1E471L ELECTROLYTIC CAPACITOR  C512 KZE1E101 ELECTROLYTIC CAPACITOR  C511 KZE1E471L ELECTROLYTIC CAPACITOR  C512 KZE1E101 ELECTROLYTIC CAPACITOR  C511 KZE1E471L ELECTROLYTIC CAPACITOR  C511 KZE1E471L ELECTROLYTIC CAPACITOR  C512 KZE1E101 ELECTROLYTIC CAPACITOR  C511 KZE1E471L ELECTROLYTIC CAPACITOR  C512 KZE1E471L ELECTROLYTIC CAPACITOR  C511 KZE1E471L ELECTROLYTIC CAPACITOR  C5				<del>                                     </del>	
CAPACITOR	C366,67	KZE2A331L		2	
C374 RR3DD221K CERAMIC CAPACITOR 1 C401 KZE1E470 ELECTROLYTIC 1 CAPACITOR 1 C410 ECWH8183HVB PLASTIC FILM 1 CAPACITOR 1 C411 ECJ3YB1E475K C 4.7UF, K, 25V 1 C412 TBB105K1 CERAMIC CHIP 1 CAPACITOR 1 C451 KZE1E272 ELECTROLYTIC 1 CAPACITOR 1 C452 KZE1E821L ELECTROLYTIC 1 CAPACITOR 1 C454,55 ECJ3YB1E475K C 4.7UF, K, 25V 2 C457 KZE1E821L ELECTROLYTIC 1 CAPACITOR 1 C458 ECJ3YB1E475K C 4.7UF, K, 25V 1 C459 KZE1E821L ELECTROLYTIC 1 CAPACITOR 1 C460 ECJ2FB1H104K C 0.1UF, K, 50V 1 C461 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 C462 ECJ2FB1H104K C 0.1UF, K, 50V 1 C463 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C464 ECJ2FB1H104K C 0.1UF, K, 50V 1 C465 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C466-69 ECJ2FB1H104K C 0.1UF, K, 50V 1 C471 ECJ2FB1H04K C 0.1UF, K, 50V 1 C472 KZE1E470 ELECTROLYTIC 1 CAPACITOR 1 C501 KMQ2W161K ELECTROLYTIC 1 CAPACITOR 1 C502 ECJ2FB1H104K C 0.1UF, K, 50V 1 C503 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1 C512 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C512 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C5515 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1 C5511 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 C5512 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C5514 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 C5515 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1 C5511 KZE1E471L ELECTROLYTIC 1 CAPACITOR	C369	TAB473K2E	CERAMIC CHIP	1	
C410			1	<u> </u>	
C410 ECWH8183HVB PLASTIC FILM CAPACITOR  C411 ECJ3YB1E475K C 4.7UF, K, 25V 1  C412 TBB105K1 CERAMIC CHIP CAPACITOR  C451 KZE1E272 ELECTROLYTIC 1  CAPACITOR  C452 KZE1E821L ELECTROLYTIC 1  CAPACITOR  C454,55 ECJ3YB1E475K C 4.7UF, K, 25V 2  C457 KZE1E821L ELECTROLYTIC 1  CAPACITOR  C458 ECJ3YB1E475K C 4.7UF, K, 25V 1  C459 KZE1E821L ELECTROLYTIC 1  CAPACITOR  C460 ECJ2FB1H104K C 0.1UF, K, 50V 1  C461 KZE1E471L ELECTROLYTIC 1  CAPACITOR  C462 ECJ2FB1H104K C 0.1UF, K, 50V 1  C463 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C464 ECJ2FB1H104K C 0.1UF, K, 50V 1  C465 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C466-69 ECJ2FB1H104K C 0.1UF, K, 50V 1  C466-69 ECJ2FB1H104K C 0.1UF, K, 50V 1  C471 ECJ2FB1H104K C 0.1UF, K, 50V 1  C472 KZE1E470 ELECTROLYTIC 1  CAPACITOR  C501 KMQ2W161K ELECTROLYTIC 1  CAPACITOR  C502 ECJ2FB1H04K C 0.1UF, K, 50V 1  C503 TBB106K1A CERAMIC CHIP 1  CAPACITOR  C507 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C507 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C508 ECJ2FB1H04K C 0.1UF, K, 50V 1  C509 ECJ2FB1H04K C 0.1UF, K, 50V 1  C500 ECJ2FB1H05K C 0.1UF, K, 50V 1  C501 KMQ2W161K ELECTROLYTIC 1  CAPACITOR  C502 ECJ2FB1H06K C CAPACITOR  C503 TBB106K1A CERAMIC CHIP 1  CAPACITOR  C504 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C505 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C507 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C508 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C509 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C511 KZE1E471L ELECTROLYTIC 1  CAPACITOR  C512 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C512 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C512 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C511 KZE1E471L ELECTROLYTIC 1  CAPACITOR  C512 KZE1E471L ELECTROLYTIC 1  CAPACITOR  C511 KZE1E471L ELECTROLYTIC 1  CAPACITOR  C512 KZE1E471L ELECTROLYTIC 1  CAPACITOR  C513 KZE1E471L ELECTROLYTIC 1  CAPACITOR		<u> </u>		<del>-</del> -	
CAPACITOR   C411   ECJ3YB1E475K   C 4.7UF, K, 25V   1	C401	KZBIB470		_	
C412         TBB105K1         CERAMIC CHIP CAPACITOR         1           C451         KZE1E272         ELECTROLYTIC CAPACITOR         1           C452         KZE1E821L         ELECTROLYTIC CAPACITOR         1           C454,55         ECJ3YB1E475K         C 4.7UF, K, 25V         2           C457         KZE1E821L         ELECTROLYTIC CAPACITOR         1           C458         ECJ3YB1E475K         C 4.7UF, K, 25V         1           C459         KZE1E821L         ELECTROLYTIC CAPACITOR         1           C460         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C461         KZE1E471L         ELECTROLYTIC CAPACITOR         1           C462         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C463         KZE1E101         ELECTROLYTIC CAPACITOR         1           C464         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C465         KZE1E101         ELECTROLYTIC CAPACITOR         1           C466-69         ECJ2FB1H104K         C 0.1UF, K, 50V         4           C471         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C472         KZE1E470         ELECTROLYTIC CAPACITOR         1           C501	C410	ECWH8183HVB		1	
CAPACITOR  C451	C411	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C451         KZE1E272         ELECTROLYTIC         1           C452         KZE1E821L         ELECTROLYTIC         1           C452         KZE1E821L         ELECTROLYTIC         1           C454,55         ECJ3YB1E475K         C 4.7UF, K, 25V         2           C457         KZE1E821L         ELECTROLYTIC         1           C458         ECJ3YB1E475K         C 4.7UF, K, 25V         1           C459         KZE1E821L         ELECTROLYTIC         1           C460         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C461         KZE1E471L         ELECTROLYTIC         1           C462         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C463         KZE1E101         ELECTROLYTIC         1           C464         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C465         KZE1E101         ELECTROLYTIC         1           C466-69         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C471         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C472         KZE1E470         ELECTROLYTIC         1           C501         KMQ2W161K         ELECTROLYTIC         1	C412	TBB105K1		1	
C452         KZE1E821L         ELECTROLYTIC         1           C454,55         ECJ3YB1E475K         C 4.7UF, K, 25V         2           C457         KZE1E821L         ELECTROLYTIC         1           C458         ECJ3YB1E475K         C 4.7UF, K, 25V         1           C459         KZE1E821L         ELECTROLYTIC         1           C460         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C461         KZE1E471L         ELECTROLYTIC         1           C462         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C463         KZE1E101         ELECTROLYTIC         1           C464         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C465         KZE1E101         ELECTROLYTIC         1           C466-69         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C471         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C472         KZE1E470         ELECTROLYTIC         1           C501         KMQ2W161K         ELECTROLYTIC         1           C502         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C503         TBB106K1a         CERAMIC CHIP         1	C451	KZE1E272	ELECTROLYTIC	1	
C454,55         ECJ3YB1E475K         C 4.7UF, K, 25V         2           C457         KZE1E821L         ELECTROLYTIC         1           C458         ECJ3YB1E475K         C 4.7UF, K, 25V         1           C459         KZE1E821L         ELECTROLYTIC         1           C460         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C461         KZE1E471L         ELECTROLYTIC         1           C462         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C463         KZE1E101         ELECTROLYTIC         1           C464         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C465         KZE1E101         ELECTROLYTIC         1           C466-69         ECJ2FB1H104K         C 0.1UF, K, 50V         4           C471         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C472         KZE1E470         ELECTROLYTIC         1           C501         KMQ2W161K         ELECTROLYTIC         1           C502         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C503         TBB106K1A         CERAMIC CHIP         1           C507         KZE1E101         ELECTROLYTIC         1      <	C452	KZE1E821L		1	
C457 KZE1E821L ELECTROLYTIC 1 CAPACITOR 1 C458 ECJ3YB1E475K C 4.7UF, K, 25V 1 C459 KZE1E821L ELECTROLYTIC 1 CAPACITOR 1 C460 ECJ2FB1H104K C 0.1UF, K, 50V 1 C461 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 C462 ECJ2FB1H104K C 0.1UF, K, 50V 1 C463 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C464 ECJ2FB1H104K C 0.1UF, K, 50V 1 C465 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C466-69 ECJ2FB1H104K C 0.1UF, K, 50V 4 C471 ECJ2FB1H104K C 0.1UF, K, 50V 1 C472 KZE1E470 ELECTROLYTIC 1 CAPACITOR 1 C501 KMQ2W161K ELECTROLYTIC 1 CAPACITOR 1 C502 ECJ2FB1H104K C 0.1UF, K, 50V 1 C503 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1 C507 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C512 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C5515 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1 C5516 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 C5517 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 C5518 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 C5511 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 C5511 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 C5511 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 CAPACIT				_	
CAPACITOR  C458 ECJ3YB1E475K C 4.7UF, K, 25V 1  C459 KZE1E821L ELECTROLYTIC 1  CAPACITOR  C460 ECJ2FB1H104K C 0.1UF, K, 50V 1  C461 KZE1E471L ELECTROLYTIC 1  CAPACITOR  C462 ECJ2FB1H104K C 0.1UF, K, 50V 1  C463 KZE1E101 ELECTROLYTIC 1  CAPACITOR 1  C464 ECJ2FB1H104K C 0.1UF, K, 50V 1  C465 KZE1E101 ELECTROLYTIC 1  CAPACITOR 1  C466-69 ECJ2FB1H104K C 0.1UF, K, 50V 4  C471 ECJ2FB1H104K C 0.1UF, K, 50V 1  C472 KZE1E470 ELECTROLYTIC 1  CAPACITOR 1  C501 KMQ2W161K ELECTROLYTIC 1  CAPACITOR 1  C502 ECJ2FB1H104K C 0.1UF, K, 50V 1  C503 TBB106K1A CERAMIC CHIP 1  CAPACITOR 1  C507 KZE1E101 ELECTROLYTIC 1  CAPACITOR 1  C512 KZE1E101 ELECTROLYTIC 1  CAPACITOR 1  C5515 TBB106K1A CERAMIC CHIP 1  CAPACITOR 1  C5516 KZE1E471L ELECTROLYTIC 1  CAPACITOR 1  C5511 KZE1E471L ELECTROLYTIC 1  CAPACITOR 1  C5512 KZE1E471L ELECTROLYTIC 1  CAPA		<del> </del>		<del>                                     </del>	
C459         KZE1E821L         ELECTROLYTIC CAPACITOR         1           C460         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C461         KZE1E471L         ELECTROLYTIC CAPACITOR         1           C462         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C463         KZE1E101         ELECTROLYTIC CAPACITOR         1           C464         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C465         KZE1E101         ELECTROLYTIC CAPACITOR         1           C466-69         ECJ2FB1H104K         C 0.1UF, K, 50V         4           C471         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C472         KZE1E470         ELECTROLYTIC CAPACITOR         1           C501         KMQ2W161K         ELECTROLYTIC CAPACITOR         1           C502         ECJ2FB1H104K         C 0.1UF, K, 50V         1           C503         TBB106K1A         CERAMIC CHIP CAPACITOR         1           C507         KZE1E101         ELECTROLYTIC CAPACITOR         1           C512         KZE1E101         ELECTROLYTIC CAPACITOR         1           C515         TBB106K1A         CERAMIC CHIP CAPACITOR         1           C551	C437	KZBIBOZIE		-	
CAPACITOR   C460	C458	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C460 ECJ2FB1H104K C 0.1UF, K, 50V 1  C461 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1  C462 ECJ2FB1H104K C 0.1UF, K, 50V 1  C463 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1  C464 ECJ2FB1H104K C 0.1UF, K, 50V 1  C465 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1  C466-69 ECJ2FB1H104K C 0.1UF, K, 50V 4  C471 ECJ2FB1H104K C 0.1UF, K, 50V 1  C472 KZE1E470 ELECTROLYTIC 1 CAPACITOR 1  C501 KMQ2W161K ELECTROLYTIC 1 CAPACITOR 1  C502 ECJ2FB1H104K C 0.1UF, K, 50V 1  C503 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1  C507 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1  C512 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1  C515 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1  C551 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1  C551 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1  C551 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1  C551 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1  C551 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1	C459	KZE1E821L		1	
C461 KZE1E471L ELECTROLYTIC CAPACITOR  C462 ECJ2FB1H104K C 0.1UF, K, 50V 1  C463 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C464 ECJ2FB1H104K C 0.1UF, K, 50V 1  C465 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C466-69 ECJ2FB1H104K C 0.1UF, K, 50V 4  C471 ECJ2FB1H104K C 0.1UF, K, 50V 1  C472 KZE1E470 ELECTROLYTIC 1  CAPACITOR  C501 KMQ2W161K ELECTROLYTIC 1  CAPACITOR  C502 ECJ2FB1H104K C 0.1UF, K, 50V 1  C503 TBB106K1A CERAMIC CHIP 1  CAPACITOR  C507 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C512 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C512 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C515 TBB106K1A CERAMIC CHIP 1  CAPACITOR  C516 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C517 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C518 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C519 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C510 KZE1E101 ELECTROLYTIC 1  CAPACITOR  C511 KZE1E471L ELECTROLYTIC 1  CAPACITOR	C460	ECJ2FB1H104K		1	
C462 ECJ2FB1H104K C 0.1UF, K, 50V 1  C463 KZE1E101 ELECTROLYTIC 1  CAPACITOR 1  C464 ECJ2FB1H104K C 0.1UF, K, 50V 1  C465 KZE1E101 ELECTROLYTIC 1  CAPACITOR 1  C466-69 ECJ2FB1H104K C 0.1UF, K, 50V 4  C471 ECJ2FB1H104K C 0.1UF, K, 50V 1  C472 KZE1E470 ELECTROLYTIC 1  CAPACITOR 1  C501 KMQ2W161K ELECTROLYTIC 1  CAPACITOR 1  C502 ECJ2FB1H104K C 0.1UF, K, 50V 1  C503 TBB106K1A CERAMIC CHIP 1  CAPACITOR 1  C507 KZE1E101 ELECTROLYTIC 1  CAPACITOR 1  C512 KZE1E101 ELECTROLYTIC 1  CAPACITOR 1  C515 TBB106K1A CERAMIC CHIP 1  CAPACITOR 1  C5515 KZE1E471L ELECTROLYTIC 1  CAPACITOR 1  C551 KZE1E471L ELECTROLYTIC 1  CAPACITOR 1  C551 KZE1E471L ELECTROLYTIC 1  CAPACITOR 1  C551 KZE1E471L ELECTROLYTIC 1					
C463			CAPACITOR		
CAPACITOR   C464		<u> </u>	<u> </u>	<del></del>	
C464 ECJ2FB1H104K C 0.1UF, K, 50V 1 C465 KZE1E101 ELECTROLYTIC 1 CAPACITOR C466-69 ECJ2FB1H104K C 0.1UF, K, 50V 4 C471 ECJ2FB1H104K C 0.1UF, K, 50V 1 C472 KZE1E470 ELECTROLYTIC 1 CAPACITOR C501 KMQ2W161K ELECTROLYTIC 1 CAPACITOR C502 ECJ2FB1H104K C 0.1UF, K, 50V 1 C503 TBB106K1A CERAMIC CHIP 1 CAPACITOR C507 KZE1E101 ELECTROLYTIC 1 CAPACITOR C512 KZE1E101 ELECTROLYTIC 1 CAPACITOR C515 TBB106K1A CERAMIC CHIP 1 CAPACITOR C516 KZE1E101 ELECTROLYTIC 1 CAPACITOR C517 KZE1E101 ELECTROLYTIC 1 CAPACITOR C518 KZE1E101 ELECTROLYTIC 1 CAPACITOR C519 KZE1E101 ELECTROLYTIC 1 CAPACITOR C510 KZE1E101 ELECTROLYTIC 1 CAPACITOR C511 KZE1E471L ELECTROLYTIC 1 CAPACITOR	C463	KZETETOT		1	
CAPACITOR   CAPA	C464	ECJ2FB1H104K		1	
C466-69 ECJ2FB1H104K C 0.1UF, K, 50V 4 C471 ECJ2FB1H104K C 0.1UF, K, 50V 1 C472 KZE1E470 ELECTROLYTIC 1 CAPACITOR 1 C501 KMQ2W161K ELECTROLYTIC 1 CAPACITOR 1 C502 ECJ2FB1H104K C 0.1UF, K, 50V 1 C503 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1 C507 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C512 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C5515 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1 C5516 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 C551 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 C551 KZE1E471L ELECTROLYTIC 1	C465	KZE1E101		1	
C471 ECJ2FB1H104K C 0.1UF, K, 50V 1 C472 KZE1E470 ELECTROLYTIC 1 CAPACITOR 1 C501 KMQ2W161K ELECTROLYTIC 1 CAPACITOR 1 C502 ECJ2FB1H104K C 0.1UF, K, 50V 1 C503 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1 C507 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C512 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1 C515 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1 C5515 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1 C551 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1	C466-60	FC.T2FD1U1047		1	
C472 KZE1E470 ELECTROLYTIC 1 CAPACITOR 1  C501 KMQ2W161K ELECTROLYTIC 1 CAPACITOR 1  C502 ECJ2FB1H104K C 0.1UF, K, 50V 1  C503 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1  C507 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1  C512 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1  C515 TBB106K1A CERAMIC CHIP 1 CAPACITOR 1  C516 KZE1E101 ELECTROLYTIC 1 CAPACITOR 1  C517 KZE1E101 CAPACITOR 1  C518 CERAMIC CHIP 1 CAPACITOR 1  C519 CAPACITOR 1  C510 KZE1E471L ELECTROLYTIC 1 CAPACITOR 1		<u> </u>		<del></del>	
CAPACITOR   CAPA		-		_	
CAPACITOR   C502   ECJ2FB1H104K   C 0.1UF, K, 50V   1   C503   TBB106K1A   CERAMIC CHIP   CAPACITOR   C507   KZE1E101   ELECTROLYTIC   CAPACITOR   C512   KZE1E101   ELECTROLYTIC   CAPACITOR   C515   TBB106K1A   CERAMIC CHIP   CAPACITOR   C551   KZE1E471L   ELECTROLYTIC   CAPACITOR   C551   KZE1E471L   ELECTROLYTIC   CAPACITOR   C551   KZE1E471L   ELECTROLYTIC   CAPACITOR			CAPACITOR		
C502   ECJ2FB1H104K   C 0.1UF, K, 50V   1	C501	KMQ2W161K		1	
CAPACITOR   CAPA	C502	ECJ2FB1H104K		1	
C507   KZE1E101   ELECTROLYTIC   1   CAPACITOR	C503	TBB106K1A		1	
CAPACITOR	C507	KZE1E101		1	
CAPACITOR  C515 TBB106K1A CERAMIC CHIP 1 CAPACITOR  C551 KZE1E471L ELECTROLYTIC 1 CAPACITOR		V7010101		1	
CAPACITOR  C551 KZE1E471L ELECTROLYTIC 1 CAPACITOR	C312	VVETETAT			
C551 KZE1E471L ELECTROLYTIC 1 CAPACITOR	C515	TBB106K1A		1	
	C551	KZE1E471L	ELECTROLYTIC	1	
	C553	TBB475K1		1	
CAPACITOR			CAPACITOR		

(50U / TH-42I	PX50U / TH-50PX50U	<u> </u>		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C555	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C556	KZE1A471	ELECTROLYTIC CAPACITOR	1	
C557,58	ECJ2FB1H104K	C 0.1UF, K, 50V	2	
C559	CD221K	CERAMIC CAPACITOR	1	Δ
C560	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
		C 0.1UF, K, 50V	1	
C562	ECJ2FB1H104K		-	
C563	TBB475K1	CERAMIC CHIP CAPACITOR	1	
C601	ECQU2A105ML	PLASTIC FILM CAPACITOR	1	<u> </u>
C603,04	CD221K	CERAMIC CAPACITOR	2	$\triangle$
C606	ECQU2A224ML	PLASTIC FILM CAPACITOR	1	$\triangle$
C610,11	MMXC2W105K	PLASTIC FILM CAPACITOR	2	
C620,21	ECKD3A102KBP	C 1000PF, K, 1KV	2	
C622	ECQE6104KF	P 0.1UF, K,630V	1	
C623,24	KMQ2W161K	ELECTROLYTIC CAPACITOR	2	
C625	TBB474K2	CERAMIC CHIP CAPACITOR	1	
C626	KMQ2W161K	ELECTROLYTIC CAPACITOR	1	
C627	ECQE6472B45	PLASTIC FILM CAPACITOR	1	
C628	CD331K	CERAMIC CAPACITOR	1	Δ
C629	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C630	ECQU2A473MN	P 0.047UF, M,250V	1	Δ
				<del></del>
C633	ECUX1H102KBN	C 1000PF, K, 50V	1	
C634	ECJ2FB1E224K	C 22UF, K, 25V	1	
C701	TBB475K1	CERAMIC CHIP CAPACITOR	1	
C703	TEB104K5	CERAMIC CHIP CAPACITOR	1	
C706	ECQV1H104JL	P 0.1UF, J, 50V	1	
C711	TEB104K2	CERAMIC CHIP CAPACITOR	1	
CNPFC	B2P3-VH-B	CONNECTOR	1	
ZD301,0	MA8360	ZENER DIOED	2	
2				
D302	RU1P	DIODE	1	
ZD202	M3 0 2 6 0	ZENED DIOED	1	
ZD303	MA8360	ZENER DIOED	1	
D303	RB550VA-30	DIODE	1	
ZD304-	MA8360	ZENER DIOED	3	
06 ZD307	MA8330	ZENER DIODE	1	
D307	RB550VA-30	DIODE	1	
D308	ERA91-02	DIODE	1	
ZD308	MA8330	ZENER DIODE	1	
ZD309	MA4051N	ZENER DIODE	1	
ZD309	MA4020	ZENER DIODE	1	
	MA4270N	ZENER DIODE	2	
ZD311,1 2	MATZ/UN	ZZNEK DIODE		
D332	RB550VA-30	DIODE	1	
D335	RU1P	DIODE	1	
D351	FCF06A40	DIODE	1	
TH351	DDFCDD471	POSTSTOP	1	
	PRFCBB471	POSISTOR	_	
D374	MA2C16500H	DIODE	1	
D401	RB550VA-30	DIODE	1	
D402	M1FS6	DIODE	1	
ZD402	PTZ24B	ZENER DIODE	1	
	•	•		

No.   Part No.   Part Name & Pos   Remarks   No.			T	-	
D403 M1FS6 DIODE 1  ZD403 MAS056 ZENER DIODE 1  ZD404 MAS360 ZENER DIODE 1  ZD405 M1FS6 DIODE 1  ZD405 M1FS6 DIODE 1  ZD405 MAS360 ZENER DIODE 1  ZD407 MAS360 ZENER DIODE 1  ZD408 MAS360 ZENER DIODE 1  ZD408 MAS360 ZENER DIODE 1  ZD413 MA4270N ZENER DIODE 1  ZD413 MA4270N ZENER DIODE 1  ZD451 LZ18 ZENER DIODE 1  ZD451 LZ18 ZENER DIODE 1  ZD451 MAS270 DIODE 1  ZD501 ERZVGAD471 VARISTOR 1  ZD501 ERZVGAD471 VARISTOR 1  ZD501 ERZVGAD471 DIODE 1  ZD510 MAS270 ZENER DIODE 1  D511 ERA91-02 DIODE 1  D511 MA25111 DIODE 1  D516 MA25111 DIODE 1  D516 MA25111 DIODE 1  ZD510 MA25111 DIODE 1  ZD510 MA25111 DIODE 1  ZD510 MA25111 DIODE 1  ZD510 MA25111 DIODE 1  ZD601 MA2111 DIODE 1  ZD601 MA2111 DIODE 1  ZD601 MA2111 DIODE 1  ZD601 MA220N ZENER DIODE 1  ZD602 SIMBA60 DIODE 1  ZD603 M111 DIODE 1  ZD603 M111 DIODE 1  ZD604 MA220N ZENER DIODE 1  ZD605 M1F60 DIODE 1  ZD607 S3960 DIODE 1  ZD608, 9 R550VA-30 DIODE 1  ZD608, 9 R550VA-30 DIODE 2  ZD668, 6 MA220 ZENER DIODE 2  ZD668, 6 MA220 ZENER DIODE 2  ZD668, 6 MA220 ZENER DIODE 2  ZD668, 6 MA2211 DIODE 1  ZD601 M193E30MP INTEGRATED CIRCUIT 1  AM 111 DIODE 1  ZD601 M193E30MP INTEGRATED CIRCUIT 1  AM 111 DIODE 1  ZD601 M193E30MP INTEGRATED CIRCUIT 1  AM 111 DIODE 1  ZD604 M25111 DIODE 1  ZD605 M1F60 DIODE 2  ZD668, 6 MA220 ZENER DIODE 2  ZD668, 6 MA220 ZENER DIODE 2  ZD668, 6 MA220 ZENER DIODE 2  ZD668, 6 MA2511 DIODE 1  ZD601 M193E30MP INTEGRATED CIRCUIT 1  AM 110 M193E30MP INTEGRATED CIRCUIT 1  AM 1	Ref.	Part No.	Part Name & Description	Pcs	Remarks
ZEMAND   ZEMER DIODE			Description		
ZEMAND   ZEMER DIODE	D403	M1FS6	DIODE	1	
DA05	D403	MILDO	DIODE		
DA05	ZD403	MA8056	ZENER DIODE	1	
D405 M1FS6 DIODE 1  ZD405- MA8360 ZENER DIODE 1  ZD410 MA4220N ZENER DIODE 1  ZD411 MA4270N ZENER DIODE 1  ZD413 MA4270N ZENER DIODE 1  ZD451 LZB18 ZENER DIODE 1  ZD451 LZB18 ZENER DIODE 1  ZD451 LZB18 ZENER DIODE 1  ZD451 M1FS6 DIODE 1  ZD455 M1FS6 DIODE 1  ZD510 M1FS6 DIODE 1  ZD510 ERZVGAD471 VARISTOR 1  ZD511 ERZVGAD471 VARISTOR 1  ZD510 MA8270 ZENER DIODE 1  ZD511 BA3111 DIODE 1  ZD511 BA3111 DIODE 1  ZD511 MA2511 DIODE 1  ZD511 MA2511 DIODE 1  ZD511 MA2511 DIODE 1  ZD511 RX49 DIODE 1  ZD511 RX49 DIODE 1  ZD601 MA111 DIODE 1  ZE601 ERZVGAD751 VARISTOR 1  ZE601 MA4220N ZENER DIODE 1  ZD601 M4220N ZENER DIODE 1  ZD603 M111 DIODE 1  ZD603 M1860 DIODE 1  ZD604 BR550VA-30 DIODE 1  ZD607 S3V60 DIODE 1  ZD608,09 RE550VA-30 DIODE 1  ZD609 M28111 DIODE 1  ZD601 M4020F2 INTEGRATED CIRCUIT 1  ZD601 M28211 DIODE 1  ZD602 ZENER DIODE 2  ZENER DIODE 1  ZD608,09 RE550VA-30 DIODE 1  ZD608,09 RE550VA-30 DIODE 1  ZD609 M28111 DIODE 1  ZD601 M74020F2 INTEGRATED CIRCUIT 1  ZD601 M74020F2 INTEGRATED CIRCUIT 1  ZD601 M74020F2 INTEGRATED CIRCUIT 1  ZD604 M28211 DIODE 1  ZD608,09 RE550VA-30 DIODE 1  ZD609 M28111 DIODE 1  ZD609 M28111 DIODE 1  ZD600 M380 DIODE 1  ZD600 M380 DIODE 1  ZD601 M74020F2 INTEGRATED CIRCUIT 1  ZD601 M74020F2 INT		t			
ZD405-   MA8360   ZENER DIOED   5   5   5   5   5   5   5   5   5	20101	MAGSOO	ZENER DIOED		
ZD405-   MA8360   ZENER DIOED   5   5   5   5   5   5   5   5   5	D40E	M1 EC6	DIODE	-	
2D410	D405	MIFSO	DIODE	-	
2D410	ED 405	252.02.60		_	
ZD410		MA8360	ZENER DIOED	5	
ZD413		MA4220N	ZENED DIODE	1	
ZENER DIODE		ļ		-	
D451-54 RB085760 DIODE 4 4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		<b>.</b>		_	
D455 M1FS6 DIODE 1	ZD451	12010	ZENER DIODE		
D455 M1FS6 DIODE 1	D4E1 E4	DD00EEC0	DIODE	_	
D456,57 MA111 DIODE 2  Z501 ERZVGAD471 VARISTOR 1  D504 ERA91-02 DIODE 1  ZD510 MA8270 ZENER DIODE 1  D511 ERA91-02 DIODE 1  D511 MA2S111 DIODE 1  D515 ERA91-02 DIODE 1  D515 ERA91-02 DIODE 1  D516 MA2S111 DIODE 1  D517 ERA91-02 DIODE 1  D518 ERA91-02 DIODE 1  D519 ERA91-02 DIODE 1  D510 MA2S111 DIODE 1  D510 MA2S111 DIODE 1  D510 ERZVGAD751 VARISTOR 1  D601 MA111 DIODE 1  ZD601 MA4220N ZENER DIODE 1  ZD601 MA4220N ZENER DIODE 1  ZD602 SIWBA80 DIODE 1  D602 SIWBA80 DIODE 1  D603 MA111 DIODE 1  D603 MA111 DIODE 1  D604 DIODE 1  D605 MIF60 DIODE 1  D607 S3060 DIODE 1  D608,09 RB550VA-30 DIODE 2  D612 EPO1C DIODE 1  D613,14 ERA22-10 DIODE 2  ZD668,6 MA8220 ZENER DIODE 2  D796 MA2S111 DIODE 1  ICC301 MR4020F2 INTEGRATED CIRCUIT 1  ICC301 MR4020F2		ł	+	_	
Z501		1	+	-	
D504 ERA91-02 DIODE 1  D501 MA8270 ZENER DIODE 1  D511 ERA91-02 DIODE 1  D511 MA2S111 DIODE 1  D515 ERA91-02 DIODE 1  D516 MA2S111 DIODE 1  D517 K49 DIODE 1  D518 R49 DIODE 1  D510 MA111 DIODE 1  D601 MA111 DIODE 1  D601 MA120N ZENER DIODE 1  D602 SIWBA80 DIODE 1  D602 SIWBA80 DIODE 1  D603 MA111 DIODE 1  D603 MA111 DIODE 1  D604 MA111 DIODE 1  D605 MIF60 DIODE 1  D6060, 09 RB550VA-30 DIODE 1  D613,144 ERA22-10 DIODE 1  D613,144 ERA22-10 DIODE 1  D796 MA2S111 DIODE 2  D796 MA2S111 DIODE 1  L301,02 EXCELSR35 PERRITE BEAD 1  L301,02 EXCELSR35 PERRITE BEAD 1  L401,02 EXCELDR35 PERRITE BEAD 1  L454,55 EXCELDR35 PERRITE BEAD 1  L501 EXCELDR35 PERRITE BEAD 1  L502 EXCELDR35 PERR	D456,5/	MAIII	DIODE		
D504 ERA91-02 DIODE 1  D501 MA8270 ZENER DIODE 1  D511 ERA91-02 DIODE 1  D511 MA2S111 DIODE 1  D515 ERA91-02 DIODE 1  D516 MA2S111 DIODE 1  D517 K49 DIODE 1  D518 R49 DIODE 1  D510 MA111 DIODE 1  D601 MA111 DIODE 1  D601 MA120N ZENER DIODE 1  D602 SIWBA80 DIODE 1  D602 SIWBA80 DIODE 1  D603 MA111 DIODE 1  D603 MA111 DIODE 1  D604 MA111 DIODE 1  D605 MIF60 DIODE 1  D6060, 09 RB550VA-30 DIODE 1  D613,144 ERA22-10 DIODE 1  D613,144 ERA22-10 DIODE 1  D796 MA2S111 DIODE 2  D796 MA2S111 DIODE 1  L301,02 EXCELSR35 PERRITE BEAD 1  L301,02 EXCELSR35 PERRITE BEAD 1  L401,02 EXCELDR35 PERRITE BEAD 1  L454,55 EXCELDR35 PERRITE BEAD 1  L501 EXCELDR35 PERRITE BEAD 1  L502 EXCELDR35 PERR				_	
Description	2501	ERZVGAD471	VARISTOR	1	
Description					
D511 ERA91-02 DIODE 1 1   DIO	D504	ERA91-02	DIODE	1	
D511 ERA91-02 DIODE 1 1   DIO			<del> </del>		
D511   Ma2S111	ZD510	MA8270	ZENER DIODE	1	
D511   Ma2S111		ļ			
D515		<del> </del>	DIODE	1	
D516 MA2S111 DIODE 1 D551 RK49 DIODE 1  Z601 ERZVGAD751 VARISTOR 1  Z601 MA111 DIODE 1  ZD601 MA4220N ZENER DIODE 1  ZD601 MA4220N ZENER DIODE 1  ZD602 SIWBA80 DIODE 1  Z603 ERZVGAD471 VARISTOR 1  D603 MA111 DIODE 1  D605 MIF60 DIODE 1  D607 S3V60 DIODE 1  D608,09 RB550VA-30 DIODE 2  D612 EP01C DIODE 1  D613,14 ERA22-10 DIODE 2  ZD668,6 MA8220 ZENER DIODE 2  ZD668,6 MA8221 INTEGRATED CIRCUIT 1  IC401 F9222L INTEGRATED CIRCUIT 1  IC401 F9222L INTEGRATED CIRCUIT 1  L301,02 EXCELSR35 FERRITE BEAD 1  L401,02 EXCELSR35 FERRITE BEAD 1  L454,55 EXCELDR35 FERRITE BEAD 1  L503 EXCELDR35 FERRITE BEAD 1  L503 EXCELDR35 FERRITE BEAD 1  L504 S3783106Z CHOKE 1  L604 S3783106Z CHOKE 1  L607,08 EXCELDR35 FERRITE BEAD 2  INDUCTOR 1  L612 EXCELDR35 FERRITE BEAD 1  L607,08 EXCELDR35 FERRITE BEAD 1  L607,08 EXCELDR35 FERRITE BEAD 1  L612 EXCELDR35 FERRITE BEAD 1  L607,08 EXCELDR35 FERRITE BEAD 1  L607,08 EXCELDR35 FERRITE BEAD 1  L612 EXCELDR35 FERRITE BEAD 1  INDUCTOR 1  L614 EXCELDR35 FERRITE BEAD 1  L617 FERRITE BEAD 1  L618 EXCELDR35 FERRITE BEAD 1  INDUCTOR 1  L614 EXCELDR35 FERRITE BEAD 1	D511	MA2S111	DIODE	1	
D551 RK49 DIODE 1  Z601 ERZVGAD751 VARISTOR 1  D601 MA111 DIODE 1  D601 MA4220N ZENER DIODE 1  D602 SIWBA80 DIODE 1  Z603 ERZVGAD471 VARISTOR 1  D603 MA111 DIODE 1  D605 MIF60 DIODE 1  D607 S3V60 DIODE 1  D608,09 RB550VA-30 DIODE 2  D613,14 ERA22-10 DIODE 1  D613,14 ERA22-10 DIODE 2  ZD668,6 MA8220 ZENER DIODE 2  D796 MA2S111 DIODE 2  D796 MA2S111 DIODE 1  IC301 MR4020F2 INTEGRATED CIRCUIT 1  IC401 F9222L INTEGRATED CIRCUIT 1  IC401 F9222L INTEGRATED CIRCUIT 1  L301,02 EXCELSR35 FERRITE BEAD 1  L452 EXCELDR35 FERRITE BEAD 1  L454,55 EXCELDR35 FERRITE BEAD 1  L503 EXCELDR35 FERRITE BEAD 1  L503 EXCELDR35 FERRITE BEAD 1  L504 STREET SEAD 1  L504 STREET SEAD 1  L505 EXCELDR35 FERRITE BEAD 1  L506 EXCELDR35 FERRITE BEAD 1  L507 REXCELDR35 FERRITE BEAD 1  L508 EXCELDR35 FERRITE BEAD 1  L509 EXCELDR35 FERRITE BEAD 1  L500 EXCELDR35 FERRITE BEAD 1  L501 EXCELDR35 FERRITE BEAD 1  L503 EXCELDR35 FERRITE BEAD 1  L504 STREET SEAD 1  L505 EXCELDR35 FERRITE BEAD 1  L507 REXCELDR35 FERRITE BEAD 1  L508 EXCELDR35 FERRITE BEAD 1  L509 EXCELDR35 FERRITE BEAD 1  L500 EXCELDR35 FERRITE BEAD 1  L501 EXCELDR35 FERRITE BEAD 1  L502 EXCELDR35 FERRITE BEAD 1  L503 EXCELDR35 FERRITE BEAD 1  L504 EXCELDR35 FERRITE BEAD 1  L607,08 EXCELDR35 FERRITE BEAD 1  L607,08 EXCELDR35 FERRITE BEAD 1  L607,08 EXCELDR35 FERRITE BEAD 1  L614 EXCELDR35 FERRITE BEAD 1  L614 EXCELDR35 FERRITE BEAD 1  L614 EXCELDR35 FERRITE BEAD 1	D515	ERA91-02	DIODE	1	
Z601 ERZVGAD751 VARISTOR 1	D516	MA2S111	DIODE	1	
D601 MA111 DIODE 1  ZD601 MA4220N ZENER DIODE 1  D602 SIWBA80 DIODE 1  Z603 ERZVGAD471 VARISTOR 1  D605 MIF60 DIODE 1  D6067 SIVEN DIODE 1  D607 SIVEN DIODE 1  D608,09 RB550VA-30 DIODE 1  D612 EPO1C DIODE 1  D613,14 ERA22-10 DIODE 2  ZD668,6 MA8220 ZENER DIODE 2  ZD668,6 MA8220 ZENER DIODE 2  D79 ZENER DIODE 1  IC301 MR4020F2 INTEGRATED CIRCUIT 1  IC401 F9222L INTEGRATED CIRCUIT 1  L301,02 EXCELSR35 FERRITE BEAD 1  L401,02 EXCELSR35 FERRITE BEAD 1  L452 EXCELDR35 FERRITE BEAD 1  L503 EXCELDR35 FERRITE BEAD 1  L504 EXCELSR35 FERRITE BEAD 1  L505 EXCELDR35 FERRITE BEAD 1  L501 EXCELSR35 FERRITE BEAD 1  L503 EXCELDR35 FERRITE BEAD 1  L504 EXCELDR35 FERRITE BEAD 1  L505 EXCELDR35 FERRITE BEAD 1  L506 EXCELDR35 FERRITE BEAD 1  L507 EXCELDR35 FERRITE BEAD 1  L508 EXCELDR35 FERRITE BEAD 1  L509 EXCELDR35 FERRITE BEAD 1  L500 EXCELDR35 FERRITE BEAD 1  L501 EXCELSR35 FERRITE BEAD 1  L503 EXCELDR35 FERRITE BEAD 1  L504 EXCELDR35 FERRITE BEAD 1  L505 EXCELDR35 FERRITE BEAD 1  L506 ELFISNO4A FILTER CHOKE 1  A  L607,08 EXCELDR35 FERRITE BEAD 2  L612 EXCELDR35 FERRITE BEAD 1  L614 EXCELDR35 FERRITE BEAD 1  L614 EXCELDR35 FERRITE BEAD 1  L614 EXCELDR35 FERRITE BEAD 1	D551	RK49	DIODE	1	
D601 MA111 DIODE 1  ZD601 MA4220N ZENER DIODE 1  D602 SIWBA80 DIODE 1  Z603 ERZVGAD471 VARISTOR 1  D605 MIF60 DIODE 1  D6067 SIVEN DIODE 1  D607 SIVEN DIODE 1  D608,09 RB550VA-30 DIODE 1  D612 EPO1C DIODE 1  D613,14 ERA22-10 DIODE 2  ZD668,6 MA8220 ZENER DIODE 2  ZD668,6 MA8220 ZENER DIODE 2  D79 ZENER DIODE 1  IC301 MR4020F2 INTEGRATED CIRCUIT 1  IC401 F9222L INTEGRATED CIRCUIT 1  L301,02 EXCELSR35 FERRITE BEAD 1  L401,02 EXCELSR35 FERRITE BEAD 1  L452 EXCELDR35 FERRITE BEAD 1  L503 EXCELDR35 FERRITE BEAD 1  L504 EXCELSR35 FERRITE BEAD 1  L505 EXCELDR35 FERRITE BEAD 1  L501 EXCELSR35 FERRITE BEAD 1  L503 EXCELDR35 FERRITE BEAD 1  L504 EXCELDR35 FERRITE BEAD 1  L505 EXCELDR35 FERRITE BEAD 1  L506 EXCELDR35 FERRITE BEAD 1  L507 EXCELDR35 FERRITE BEAD 1  L508 EXCELDR35 FERRITE BEAD 1  L509 EXCELDR35 FERRITE BEAD 1  L500 EXCELDR35 FERRITE BEAD 1  L501 EXCELSR35 FERRITE BEAD 1  L503 EXCELDR35 FERRITE BEAD 1  L504 EXCELDR35 FERRITE BEAD 1  L505 EXCELDR35 FERRITE BEAD 1  L506 ELFISNO4A FILTER CHOKE 1  A  L607,08 EXCELDR35 FERRITE BEAD 2  L612 EXCELDR35 FERRITE BEAD 1  L614 EXCELDR35 FERRITE BEAD 1  L614 EXCELDR35 FERRITE BEAD 1  L614 EXCELDR35 FERRITE BEAD 1					
ZD601   MA4220N   ZENER DIODE	Z601	ERZVGAD751	VARISTOR	1	$\triangle$
ZD601   MA4220N   ZENER DIODE					
D602 SIWBA80 DIODE 1	D601	MA111	DIODE	1	
D602 SIWBA80 DIODE 1					
Z603 ERZVGAD471 VARISTOR 1	ZD601	MA4220N	ZENER DIODE	1	
Z603 ERZVGAD471 VARISTOR 1					
D603 MA111 DIODE 1 D605 MIF60 DIODE 1 D607 S3V60 DIODE 1 D608,09 RB550VA-30 DIODE 2 D612 EPO1C DIODE 1 D613,14 ERA22-10 DIODE 2  ZD668,6 MA8220 ZENER DIODE 2 D796 MA2S111 DIODE 1 IC301 MR4020F2 INTEGRATED CIRCUIT 1 IC401 F9222L INTEGRATED CIRCUIT 1 IC501 MIP3E30MP INTEGRATED CIRCUIT 1 IC501 MIP3E30MP INTEGRATED CIRCUIT 1 L301,02 EXCELSR35 FERRITE BEAD 2 INDUCTOR 1 L452 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L501 EXCELSA35 BEAD CHOKE 2 L450 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L501 EXCELSA35 BEAD CHOKE 1 L501 EXCELSA35 BEAD CHOKE 1 L501 EXCELSA35 FERRITE BEAD 1 INDUCTOR 1 L601,02 P2570205Z FILTER CHOKE 2 L604 S3783106Z CHOKE 1 L606 ELF15N004A FILTER CHOKE 1 L607,08 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L612 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L614 EXCELDR35 FERRITE BEAD 1	D602	S1WBA80	DIODE	1	Δ
D603 MA111 DIODE 1 D605 MIF60 DIODE 1 D607 S3V60 DIODE 1 D608,09 RB550VA-30 DIODE 2 D612 EPO1C DIODE 1 D613,14 ERA22-10 DIODE 2  ZD668,6 MA8220 ZENER DIODE 2 D796 MA2S111 DIODE 1 IC301 MR4020F2 INTEGRATED CIRCUIT 1 IC401 F9222L INTEGRATED CIRCUIT 1 IC501 MIP3E30MP INTEGRATED CIRCUIT 1 IC501 MIP3E30MP INTEGRATED CIRCUIT 1 L301,02 EXCELSR35 FERRITE BEAD 2 INDUCTOR 1 L452 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L501 EXCELSA35 BEAD CHOKE 2 L450 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L501 EXCELSA35 BEAD CHOKE 1 L501 EXCELSA35 BEAD CHOKE 1 L501 EXCELSA35 FERRITE BEAD 1 INDUCTOR 1 L601,02 P2570205Z FILTER CHOKE 2 L604 S3783106Z CHOKE 1 L606 ELF15N004A FILTER CHOKE 1 L607,08 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L612 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L614 EXCELDR35 FERRITE BEAD 1					
D605 M1F60 DIODE 1 D607 S3V60 DIODE 1 D608,09 RB550VA-30 DIODE 2 D612 EP01C DIODE 1 D613,14 ERA22-10 DIODE 2  ZD668,6 MA8220 ZENER DIODE 2 D796 MA2S111 DIODE 1 IC301 MR4020F2 INTEGRATED CIRCUIT 1 IC401 F9222L INTEGRATED CIRCUIT 1 IC501 MIF3E30MP INTEGRATED CIRCUIT 1 L301,02 EXCELSR35 FERRITE BEAD 1 INDUCTOR 2 L401,02 EXCELSR35 FERRITE BEAD 1 INDUCTOR 1 L454,55 EXCELDR35 FERRITE BEAD 2 INDUCTOR 1 L501 EXCELSA35 BEAD CHOKE 1 INDUCTOR 1 L601,02 P2570205Z FILTER CHOKE 1 L604 S3783106Z CHOKE 1 L607,08 EXCELDR35 FERRITE BEAD 2 INDUCTOR 1 L612 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L614 EXCELDR35 FERRITE BEAD 1	Z603	ERZVGAD471	VARISTOR	1	Δ
D605 M1F60 DIODE 1 D607 S3V60 DIODE 1 D608,09 RB550VA-30 DIODE 2 D612 EP01C DIODE 1 D613,14 ERA22-10 DIODE 2  ZD668,6 MA8220 ZENER DIODE 2 D796 MA2S111 DIODE 1 IC301 MR4020F2 INTEGRATED CIRCUIT 1 IC401 F9222L INTEGRATED CIRCUIT 1 IC501 MIF3E30MP INTEGRATED CIRCUIT 1 L301,02 EXCELSR35 FERRITE BEAD 1 INDUCTOR 2 L401,02 EXCELSR35 FERRITE BEAD 1 INDUCTOR 1 L454,55 EXCELDR35 FERRITE BEAD 2 INDUCTOR 1 L501 EXCELSA35 BEAD CHOKE 1 INDUCTOR 1 L601,02 P2570205Z FILTER CHOKE 1 L604 S3783106Z CHOKE 1 L607,08 EXCELDR35 FERRITE BEAD 2 INDUCTOR 1 L612 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L614 EXCELDR35 FERRITE BEAD 1					
D607 S3V60 DIODE 1 D608,09 RB550VA-30 DIODE 2 D612 EPO1C DIODE 1 D613,14 ERA22-10 DIODE 2  ZD668,6 MA8220 ZENER DIODE 2 D796 MA2S111 DIODE 1  IC301 MR4020F2 INTEGRATED CIRCUIT 1 IC401 F9222L INTEGRATED CIRCUIT 1 IC501 MIP3E30MP INTEGRATED CIRCUIT 1  L301,02 EXCELSR35 FERRITE BEAD 2 INDUCTOR 2 L452 EXCELDR35 FERRITE BEAD 1 INDUCTOR 2 L454,55 EXCELDR35 FERRITE BEAD 1 INDUCTOR 2 L501 EXCELSA35 BEAD CHOKE 1 L601,02 P2570205Z FILTER CHOKE 1 L601,02 P2570205Z FILTER CHOKE 2 L604 S3783106Z CHOKE 1 L606 ELF15N004A FILTER CHOKE 1 L607,08 EXCELDR35 FERRITE BEAD 2 INDUCTOR 1 L612 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L614 EXCELDR35 FERRITE BEAD 1	D603	MA111	DIODE	1	
D608,09 RB550VA-30 DIODE 2 D612 EP01C DIODE 1 D613,14 ERA22-10 DIODE 2  ZD668,6 MA8220 ZENER DIODE 2 D796 MA2S111 DIODE 1  IC301 MR4020F2 INTEGRATED CIRCUIT 1 IC401 F9222L INTEGRATED CIRCUIT 1 IC501 MIP3E30MP INTEGRATED CIRCUIT 1  L301,02 EXCELSR35 FERRITE BEAD 2 INDUCTOR 2 L401,02 EXCELSA35 BEAD CHOKE 2 L452 EXCELDR35 FERRITE BEAD 1 INDUCTOR 2 L501 EXCELSA35 BEAD CHOKE 1 L503 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L500 EXCELSA35 BEAD CHOKE 1 L501 EXCELSA35 FERRITE BEAD 1 INDUCTOR 2 L601,02 P2570205Z FILTER CHOKE 2 L604 S3783106Z CHOKE 1 L607,08 EXCELDR35 FERRITE BEAD 1 L607,08 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L601,02 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L601,02 P2570205Z FILTER CHOKE 1 L604 S3783106Z CHOKE 1 L607,08 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L612 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L614 EXCELDR35 FERRITE BEAD 1	D605	M1F60	DIODE	1	
D612       EP01C       DIODE       1         D613,14       ERA22-10       DIODE       2         ZD668,6       MA8220       ZENER DIODE       2         9       D796       MA2S111       DIODE       1         IC301       MR4020F2       INTEGRATED CIRCUIT       1         IC401       F9222L       INTEGRATED CIRCUIT       1         LT501       MIP3E30MP       INTEGRATED CIRCUIT       1         L301,02       EXCELSR35       FERRITE BEAD       2         INDUCTOR       2       INDUCTOR       2         L451       EXCELDR35       FERRITE BEAD       1       1         L454       EXCELDR35       FERRITE BEAD       2       1         L501       EXCELDR35       FERRITE BEAD       1       1         L503       EXCELDR35       FERRITE BEAD       1       1         L601,02       P2570205Z       FILTER CHOKE       2       △         L604       S3783106Z       CHOKE       1       △         L606       ELF15N004A       FILTER CHOKE       1       △         L607,08       EXCELDR35       FERRITE BEAD       2       INDUCTOR         L612	D607	S3V60	DIODE	1	
D612       EP01C       DIODE       1         D613,14       ERA22-10       DIODE       2         ZD668,6       MA8220       ZENER DIODE       2         9       D796       MA2S111       DIODE       1         IC301       MR4020F2       INTEGRATED CIRCUIT       1         IC401       F9222L       INTEGRATED CIRCUIT       1         LT501       MIP3E30MP       INTEGRATED CIRCUIT       1         L301,02       EXCELSR35       FERRITE BEAD       2         INDUCTOR       2       INDUCTOR       2         L451       EXCELDR35       FERRITE BEAD       1       1         L454       EXCELDR35       FERRITE BEAD       2       1         L501       EXCELDR35       FERRITE BEAD       1       1         L503       EXCELDR35       FERRITE BEAD       1       1         L601,02       P2570205Z       FILTER CHOKE       2       △         L604       S3783106Z       CHOKE       1       △         L606       ELF15N004A       FILTER CHOKE       1       △         L607,08       EXCELDR35       FERRITE BEAD       2       INDUCTOR         L612	D608.09	RB550VA-30	DIODE	2	
D613,14 ERA22-10 DIODE 2  ZD668,6 MA8220 ZENER DIODE 2  D796 MA2S111 DIODE 1  IC301 MR4020F2 INTEGRATED CIRCUIT 1  IC401 F9222L INTEGRATED CIRCUIT 1  IC501 MIP3E30MP INTEGRATED CIRCUIT 1  L301,02 EXCELSR35 FERRITE BEAD 2  INDUCTOR 2  L401,02 EXCELSA35 BEAD CHOKE 2  L452 EXCELDR35 FERRITE BEAD 1  INDUCTOR 2  L454,55 EXCELDR35 FERRITE BEAD 2  INDUCTOR 1  L501 EXCELSA35 BEAD CHOKE 1  L503 EXCELDR35 FERRITE BEAD 1  L504 EXCELDR35 FERRITE BEAD 1  L601,02 P2570205Z FILTER CHOKE 2  L604 S3783106Z CHOKE 1		1		<b>-</b>	
ZD668,6   MA8220   ZENER DIODE   2		t			
9					
9	ZD668.6	MA8220	ZENER DIODE	2	
IC301   MR4020F2   INTEGRATED CIRCUIT   1   1   1   1   1   1   1   1   1		1210220	DINDR DIODE	~	
IC301   MR4020F2   INTEGRATED CIRCUIT   1   1   1   1   1   1   1   1   1					
IC301   MR4020F2   INTEGRATED CIRCUIT   1   1   1   1   1   1   1   1   1	D796	MA2S111	DIODE	1	
IC401       F9222L       INTEGRATED CIRCUIT       1         IC501       MIP3E30MP       INTEGRATED CIRCUIT       1         L301,02       EXCELSR35       FERRITE BEAD INDUCTOR       2         L401,02       EXCELSA35       BEAD CHOKE       2         L452       EXCELDR35       FERRITE BEAD INDUCTOR       1         L454,55       EXCELDR35       FERRITE BEAD INDUCTOR       1         L501       EXCELSA35       BEAD CHOKE       1         L503       EXCELDR35       FERRITE BEAD INDUCTOR       1         L601,02       P2570205Z       FILTER CHOKE       2       △         L604       S3783106Z       CHOKE       1       △         L606       ELF15N004A       FILTER CHOKE       1       △         L607,08       EXCELDR35       FERRITE BEAD INDUCTOR       2       INDUCTOR         L612       EXCELDR35       FERRITE BEAD INDUCTOR       1       INDUCTOR         L614       EXCELDR35       FERRITE BEAD INDUCTOR       1					
IC401       F9222L       INTEGRATED CIRCUIT       1         IC501       MIP3E30MP       INTEGRATED CIRCUIT       1         L301,02       EXCELSR35       FERRITE BEAD INDUCTOR       2         L401,02       EXCELSA35       BEAD CHOKE       2         L452       EXCELDR35       FERRITE BEAD INDUCTOR       1         L454,55       EXCELDR35       FERRITE BEAD INDUCTOR       1         L501       EXCELSA35       BEAD CHOKE       1         L503       EXCELDR35       FERRITE BEAD INDUCTOR       1         L601,02       P2570205Z       FILTER CHOKE       2       △         L604       S3783106Z       CHOKE       1       △         L606       ELF15N004A       FILTER CHOKE       1       △         L607,08       EXCELDR35       FERRITE BEAD INDUCTOR       2       INDUCTOR         L612       EXCELDR35       FERRITE BEAD INDUCTOR       1       INDUCTOR         L614       EXCELDR35       FERRITE BEAD INDUCTOR       1	IC301	MR4020F2	INTEGRATED CIRCUIT	1	
Integrated Circuit   1		†	+		A
L301,02 EXCELSR35 FERRITE BEAD 2 INDUCTOR 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		<del> </del>		-	
INDUCTOR	10301	MII SESOM	INTEGRATED CIRCUIT		
INDUCTOR	T 2 0 1 0 2	EACEL GD3 E	מגמם שתומפשם	2	
L401,02       EXCELSA35       BEAD CHOKE       2         L452       EXCELDR35       FERRITE BEAD INDUCTOR       1         L454,55       EXCELDR35       FERRITE BEAD INDUCTOR       2         L501       EXCELSA35       BEAD CHOKE       1         L503       EXCELDR35       FERRITE BEAD INDUCTOR       1         L601,02       P2570205Z       FILTER CHOKE       2       △         L604       S3783106Z       CHOKE       1       △         L606       ELF15N004A       FILTER CHOKE       1       △         L607,08       EXCELDR35       FERRITE BEAD INDUCTOR       2         L612       EXCELDR35       FERRITE BEAD INDUCTOR       1         L614       EXCELDR35       FERRITE BEAD INDUCTOR       1	1301,02	EVCETPK22			
L452 EXCELDR35 FERRITE BEAD 1 L454,55 EXCELDR35 FERRITE BEAD 2 INDUCTOR 2 L501 EXCELSA35 BEAD CHOKE 1 L503 EXCELDR35 FERRITE BEAD 1 INDUCTOR 2 L601,02 P2570205Z FILTER CHOKE 2 △ L604 S3783106Z CHOKE 1 △ L606 ELF15N004A FILTER CHOKE 1 △ L607,08 EXCELDR35 FERRITE BEAD 1 INDUCTOR 2 L612 EXCELDR35 FERRITE BEAD 1 INDUCTOR 1 L614 EXCELDR35 FERRITE BEAD 1	T.4 01 . 02	EXCELSA35		2	
INDUCTOR		†			
L454,55 EXCELDR35 FERRITE BEAD 2 L501 EXCELSA35 BEAD CHOKE 1 L503 EXCELDR35 FERRITE BEAD 1 L601,02 P2570205Z FILTER CHOKE 2 △ L604 S3783106Z CHOKE 1 △ L606 ELF15N004A FILTER CHOKE 1 △ L607,08 EXCELDR35 FERRITE BEAD 2 INDUCTOR 2 L612 EXCELDR35 FERRITE BEAD 1 L614 EXCELDR35 FERRITE BEAD 1 L614 EXCELDR35 FERRITE BEAD 1	1172	EXCELLERS		*	
INDUCTOR	L454,55	EXCELDR35	†	2	
L501 EXCELSA35 BEAD CHOKE 1  L503 EXCELDR35 FERRITE BEAD 1  L601,02 P2570205Z FILTER CHOKE 2 A  L604 S3783106Z CHOKE 1 A  L606 ELF15N004A FILTER CHOKE 1 A  L607,08 EXCELDR35 FERRITE BEAD 2  INDUCTOR 2  L612 EXCELDR35 FERRITE BEAD 1  L614 EXCELDR35 FERRITE BEAD 1				-	
L503 EXCELDR35 FERRITE BEAD 1	L501	EXCELSA35		1	
INDUCTOR		t	+	1	
L604 S3783106Z CHOKE 1	<u></u>	<u></u>			
L604 S3783106Z CHOKE 1	L601,02	P2570205Z	FILTER CHOKE	2	$\triangle$
L606 ELF15N004A FILTER CHOKE 1 A  L607,08 EXCELDR35 FERRITE BEAD 2 INDUCTOR  L612 EXCELDR35 FERRITE BEAD 1 INDUCTOR  L614 EXCELDR35 FERRITE BEAD 1		1	1	1	
L607,08 EXCELDR35 FERRITE BEAD 2 INDUCTOR  L612 EXCELDR35 FERRITE BEAD 1 INDUCTOR  L614 EXCELDR35 FERRITE BEAD 1		†		1	
L612 EXCELDR35 FERRITE BEAD 1 INDUCTOR L614 EXCELDR35 FERRITE BEAD 1		<del> </del>	+	2	
L614 EXCELDR35 FERRITE BEAD 1				<u> </u>	
L614 EXCELDR35 FERRITE BEAD 1	L612	EXCELDR35	FERRITE BEAD	1	
			INDUCTOR		
INDUCTOR	L614	EXCELDR35		1	
		L	INDUCTOR		

	1	T		T
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
P2	B6B-EH-A	CONNECTOR	1	
P5	B11B-PH-KS	CONNECTOR	1	
P9	B3P4VH-B-L	CONNECTOR	1	Δ
P10	B6B-PH-KS	CONNECTOR	1	7.12
P11	B7B-EH-A	CONNECTOR	1	
P12			1	
	B10B-PH-KS	CONNECTOR	<del>-</del> -	
P23	B3B-PH-KS	CONNECTOR	1	
P25	B20B-PHDSS	CONNECTOR	1	
P30	B5B-PH-KS	CONNECTOR	1	
0222	2002000	TRANSISTOR	1	
Q332	2SD2098		1	
Q333	2SB1386	TRANSISTOR	1	
Q402	2SB766A	TRANSISTOR	1	
Q451-53	HAT1130R	FIELD EFFECT TRANSISTOR	3	
Q551	HAT1130R	FIELD EFFECT	1	
		TRANSISTOR		
Q553,54	HAT1130R	FIELD EFFECT	2	
		TRANSISTOR		
Q555	2SB709A	TRANSISTOR	1	
Q601	2SK3302	FIELD EFFECT	1	Δ
		TRANSISTOR	ļ	
Q602	2SD2098	TRANSISTOR	1	
Q603	2SB1386	TRANSISTOR	1	
Q605	2SB709A	TRANSISTOR	1	
Q606	2SD601A	TRANSISTOR	1	
R301	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R308	MPC5WR27KS	METAL PLATE	1	
		RESISTOR		
R311	ERJ6GEYJ2R2	M 2.2 OHM,J,1/10W	1	
R312	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R313	ERJ14YJ100	M 10 OHM, J,1/4W	1	
R314	ERJ6GEYJ2R2	M 2.2 OHM,J,1/10W	1	
R321	MPC5WR47KS	METAL PLATE	1	
		RESISTOR		
R323	MPC5WR47KS	METAL PLATE	1	
		RESISTOR	<b>-</b>	
R325	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R326,27	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R336	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R339	ERJ12YJ330	M 33 OHM,J, 1/2W	1	
R340,41	ERJ12YJ333	M 33KOHM,J, 1/2W	2	
R342	ERJ6ENF1650	M 165 OHM, 1/10W	1	
R343	ERJ12YJ333	M 33KOHM,J, 1/2W	1	
R345	ERJ12YJ333	M 33KOHM,J, 1/2W	1	
R346,47	ERJ12YJ220	M 22 OHM,J, 1/2W	2	
R350,51	ERJ6ENF6192	M61.9KOHM, 1/10W	2	
VR351	EVMEASA01B54	VARIABLE RESISTOR	1	
	ļ			
R352	ERJ6ENF6192	M61.9KOHM, 1/10W	1	
			1	
VR352	EVMEASA01B54	VARIABLE RESISTOR	1	
	ļ			
R353	ERJ6ENF6192	M61.9KOHM, 1/10W	1	
R354,55	ERJ6ENF1303	M 130KOHM, 1/10W	2	
R356	ERJ14YJ753	M 75KOHM,J, 1/2W	1	
R358	ERG2SJ150	M 15 OHM, J, 2W	1	
R359	ERJ14YJ753	M 75KOHM,J, 1/2W	1	
R364	ERG2SJ683	M 68KOHM, J, 2W	1	
R365	ERJ3GSYJ332	M 3.3KOHM,J,1/16W	1	
R366,67	ERJ6GEYJ682	M 6.8KOHM,J,1/10W	2	
R368	ERJ6ENF7502	M 75KOHM, 1/10W	1	
R369-71	ERJ6GEYJ823	M 82KOHM,J,1/10W	3	
R373,74	ERJ14YJ753	M 75KOHM,J, 1/2W	2	
R379	ERJ12YJ473	M 47KOHM,J, 1/2W	1	
R381	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R382,83	ERJ6GEYJ333	M 33KOHM,J,1/10W	2	
R384	ERJ6GEYJ393	M 39KOHM, J, 1/10W	1	
		M10.5KOHM, 1/10W	4	
R386-89	ERJ6ENF1052			
R386-89 R394	ERJ6ENF1052 ERJ6ENF1052	M10.5KOHM, 1/10W	1	
R394			<b>†</b>	

Ref.	Part No.	Part Name & Description	Pcs	Remarks
-	ERJ14YJ753	M 75KOHM,J, 1/2W	2	
R401	ERJ3GSYJ103	M 10KOHM,J,1/16W	1	
R405	MPC5WR39KS	METAL PLATE RESISTOR	1	
R406	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R407	ERJ14YJ334	M 330KOHM, 1/2W	1	
R408	SG734K271	CHIP RESISTOR	1	
R410	ERJ14YJ332	M 33KOHM, J,1/4W	1	
R411	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R412	ERJ14YJ472	M 4.7KOHM,J, 1/2W	1	
R413,14	ERJ14YJ334	M 330KOHM, 1/2W	2	
R415,16	ERJ6GEYJ563	M 56KOHM, J, 1/10W	2	
R426	ERJ14YJ470	M 47 OHM,J, 1/2W	1	
R429-31	ERJ6GEYJ563	M 56KOHM, J, 1/10W	3	
R432	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
VR451	EVMEASA01B53	VARIABLE RESISTOR	1	
R456	ERJ6ENF4302	M 43KOHM, 1/10W	1	
	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R459	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R460	ERG2SJ331	METAL OXIDE RESISTOR	1	
R473	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R480	ERG2SJ561	M 560 OHM, J, 2W	1	
R481	ERJ6ENF4302	M 43KOHM, 1/10W	1	
R482	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
	ERJ12YJ100	M 10 OHM, J, 1/2W	2	
R510	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R558	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R559	ERJ12YJ151	M 150 OHM, J, 1/2W	1	
R561	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R562	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R563	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R564,65	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
		,		
RF601	HUF5K100J14	THERMAL CUTOFF WITH RESISTOR	1	Δ
R602,03	5K150JA	WIREWOUND RESISTOR	2	
R604,05		C 4.7KOHM, J,1/2W	2	
R606	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R607	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R608	ERG3FJS820D	M 82 OHM, J, 3W	1	
R609-12	ERJ6ENF1213	M 121KOHM, 1/10W	4	
R613,14	ERJ6GEYJ154	M 150KOHM,J,1/10W	2	
R615-17	MPC5WR27KS	METAL PLATE	3	
		RESISTOR		
R618	ERG3FJS820D	M 82 OHM, J, 3W	1	
R620	ERJ12YJ680	M 68 OHM,J, 1/2W	1	
R621	ERJ12YJ151	M 150 OHM,J, 1/2W	1	
R623	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R624	ERJ6GEYJ183	M 18KOHM, J, 1/10W	1	
R625	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R626	ERJ12YJ680	M 68 OHM, J, 1/2W	1	
R627	ERJ12YJ151	M 150 OHM, J, 1/2W	1	
R628	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R629	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R630	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R632,33	ERJ6GEYJ154	M 150KOHM, J, 1/10W	2	
R634-37	ERJ6ENF2553	M 255KOHM, 1/10W	4	
R638	ERJ6ENF2493	M 249KOHM, 1/10W	1	
R640,41	ERJ6ENF5493	M 549KOHM, 1/10W	2	
R642	ERJ6ENF2493	M 249KOHM, 1/10W	1	
R644	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R646	ERJ6GEYJ154	M 150KOHM, J, 1/10W	1	
R649	ERJ6ENF5493	M 549KOHM, 1/10W	1	
R653-55	ERJ6GEYJ183	M 18KOHM, J, 1/10W	3	
R656-59	ERJ6GEYJ824	M 820KOHM, J, 1/10W	2	
R681,82 R683	ERJ6GEYJ824 ERC12GK185	M 820KOHM, J, 1/10W S 1.8MOHM, K, 1/2W	1	
R717	ERC12GK185 ERJ3GSY0R00	M 0 OHM, 1/16W	1	
<u>~'+'</u>	PYOPEDIOKOO	11 0 OHH, 1/10W		

## TH-37PX50U / TH-42PX50U / TH-50PX50U

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1301,0	ERJ12YJ333	M 33KOHM,J, 1/2W	2	
R1738	ERJ3GSYJ103	M 10KOHM,J,1/16W	1	
MC301	MP44S1	MODULE	1	Δ
MC303	IXMM564M-B-9	MODULE	1	Δ
MC401	IXMM564M-F-9	MODULE	1	Δ
MC501	IXMM564M-C-9	MODULE	1	$\triangle$
MC601	MP00P3	MODULE	1	Δ
MC602	IXMM564M-G-9	MODULE	1	Δ
MC603	IXMM564M-E-9	MODULE	1	Δ
MC604	MP00P5	MODULE	1	$\triangle$
MC701	IXMM564M-D-9	MODULE	1	Δ
K601	DG12D1-0	RELAY	1	Δ
K602	DJ12D2-0	RELAY	1	Δ
T301	ETB28BF1Z1AH	TRANSFORMER	1	Δ
T401	ETB57LZ135AD	TRANSFORMER	1	$\triangle$
T501	ETB25KA1A8AD	TRANSFORMER	1	Δ

## 15.4. Electrical Replacement Parts List (TH-50PX50U)

## Note:

All parts except parts mentioned [PAVCA] in the Remarks column are supplied by AVC-SPC.

Parts mentioned [PAVCA] are supplied by PAVCA.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F603	K5D102BNA007	TIME LAG FUSE	1	Δ
	K5D103BMA001	HIGH(F603) TIME LAG FUSE	2	Δ
2		HIGH (F601		
		50P CONNECTOR	1	
		6P CONNECTOR 50P CONNECTOR	2	
	K1KA06BA0107		2	
C24,25		55P CONNECTOR	2	
C31	K1MN50BA0076 K1KA06BA0107	50P CONNECTOR	1	
C35		10P CONNECTOR	1	
C41	K1MN55BA0076	55P CONNECTOR	1	
C42		10P CONNECTOR	1	
C43		6P CONNECTOR 20P CONNECTOR	1	
C50		50P CONNECTOR	1	
C51		55P CONNECTOR	1	
-	K1KA06BA0107		2	
C54,55	K1MN68BA0076 K1MN50BA0076	50P CONNECTOR	1	
C61	K1KA06BA0107		1	
C2300		C 0.1UF, Z, 50V	1	
		C 1UF, Z, 10V	1	
	ERJ8GEY0R00	E 100UF, 16V M 0 OHM, 1/8W	2	
C2335	ECJ3YB1A106M	C 10UF, M,6.3V	1	
C2337		C 0.047UF, K, 16V	1	
C2338		C 0.10UF, K, 25V C 0.27UF, Z, 16V	1	
		C 220PF, J, 50V	1	
C2342		C 1500PF, K, 50V	1	
C2343		C 5600PF, K, 50V	1	
C2344 C2346	ECJ1VF1A105Z	C 1000PF, J, 50V C 1UF, Z, 10V	1	
C2347	ECA1VHG470	E 47UF, 35V	1	
C2348		C 220PF, J, 50V	1	
C2349 C2350		C 1500PF, K, 50V C 5600PF, K, 50V	1	
C2351	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C2352	ECJ1VB1C473K	C 0.047UF, K, 16V	1	
C2353	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2355 C2356	ECJ2FB1C274K ECJ3YB1A106M	C 0.27UF, Z, 16V C 10UF, M,6.3V	1	
C2372	ECA1HHG100	E 10UF, 50V	1	
C2374	ECA1HHG100	E 10UF, 50V	1	
C2376- 79	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2384- 87	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2428,2 9		C 0.1UF, K, 25V	2	
C2430 C2433,3 4	ECJ1VF1A105Z ECJ2FB1A225K	C 1UF, Z, 10V C 2.2UF, K, 10V	2	
	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
2	ECJ1XC1H221J	C 220PF, J, 50V	2	
6		C 1UF, K, 25V	2	
C2449,5	ECA1EHG331	E 330UF, 25V	2	

	T		F X300	/ TH-42PX50U / TH-5
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ECJ2FB1E105K	C 1UF, K, 25V	2	
4		0 2017 117 201	_	
C2457,5	ECJ2FB0J335K	C 3.3UF, K, 16V	2	
8				
1	ECJ2XB1H332K	C 3300PF, K, 50V	2	
2	PC.T2PD1P105V	C 1UF, K, 25V	2	
6	EC02FBIE103K	C 10F, R, 25V		
C2469,7	ECJ2FB1E105K	C 1UF, K, 25V	2	
0				
	ECJ2FB1E105K	C 1UF, K, 25V	2	
4	EG 10ED1 E10EV	G 1177 7 257	2	
8	EC02FB1E105K	C 1UF, K, 25V	4	
	ECJ2FB1E224K	C 22UF, K, 25V	4	
84				
	ECJ2XB1H332K	C 3300PF, K, 50V	2	
0		G 1777 77 0577		
8	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2512	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C2515		C 0.001UF, K, 50V	1	
C2602	ECA1CHG101	E 100UF, 16V	1	
C2603	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2606	ECJ1VB1H332K		1	
C2607	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C2608	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2609	ECJ1XB1C104K		1	
C2610-	ECJ1VF1A105Z	C 1UF, Z, 10V	5	
14				
C2615	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C2616	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C2617	ECJ1VB1H332K	C 3300PF, K, 50V	1	
1.	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
1 C2625 2	ECTSVELCATER	C 0.047UF, K, 16V	2	
6	ECUSIBICATOR	C 0.04/0F, R, 10V		
C2633,3	TCUY1C225ZFN	C 2.2UF, 16V	2	
4				
C2637	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2644-	ECJ1VF1A105Z	C 1UF, Z, 10V	7	
50			_	
	ECJ1XF1C104Z	†	1	
C2652	ECJ1VF1A105Z ECJ1XF1C104Z	C 1UF, Z, 10V C 0.1UF, Z, 16V	1	
5	ECUIXFICIU4Z	C 0.10F, Z, 16V	2	
C2656	ECA1CHG101	E 100UF, 16V	1	
C2657	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2660,6	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
1				
C2662	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2663	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2664	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2665- 68	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C2670	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2672	ECA1CHG470	E 47UF, 16V	1	
C2673	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2675	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2676	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2678	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2684-	ECJ1VF1A105Z	C 1UF, Z, 10V	6	
89				
C2701	ECA1CHG101	E 100UF, 16V	1	
C2702	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2703	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2705	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2708	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2710	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2712	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2715	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2717	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2718 C2723	ECJ1XF1C104Z	C 1UF Z 10V	1	
C2725	ECJ1VF1A105Z ECJ1XF1C104Z	C 1UF, Z, 10V C 0.1UF, Z, 16V	1	
C2729,3	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
0			L	

Ref.	PX50U / TH-50PX50U	Part Name &	Pcs	Remarks
No.	Part No.	Description	PCS	Remarks
C2733,3 4	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2736- 44	ECJ1VF1A105Z	C 1UF, Z, 10V	9	
C2747	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2750	ECA1HHG220	E 22UF, 50V	1	
C2775	ECA1EHG471	E 470UF, 25V	1	
C2776,7	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C2779,8 0	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2783	ECA1HHG220	E 22UF, 50V	1	
C4001	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C4002	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4005,0	ECJ1XC1H180J	C 18PF, J, 50V	2	
C4008- 11		C 0.1UF, Z, 16V	4	
C4012		M 68 OHM,J,1/16W	1	
C4013- 15	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4016	ECJ1XC1H101J		1	
8	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4020	ECJ1XB0J105K	+	1	
C4021	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4023	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4024	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4025	ECJ1XC1H220J	C 22PF, J, 50V	1	
C4030	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4032	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4033	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4034	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4035	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4038	ECJ1XC1H101J	C 100PF, J, 50V	1	
3		C 0.01UF, K, 16V	2	
C4051	ECJ1VB1A224K	C 0.22UF, Z, 50V	1	
C4053	ECJ1VB1A224K	C 0.22UF, Z, 50V	1	
C4054		C 2.2UF, K, 6.3V	1	
C4055 C4057	ECJ1VB1A105K ECJ1XC1H471J	C 0.01UF, Z, 50V	1	
C4057		C 470PF, J, 50V	1	
C4063	ECJ1XC1H561J	C 33UF, J, 25V	1	
C4067	ECJ1VB1C105K	C 560PF, J, 50V C 0.01UF, K, 16V	1	
C4007	EEEHPOJ470P	C 47PF, J,6.3V	1	
			1	
		C 0.1UF, Z, 16V E 33UF, 25V	1	
C4098	ECJ1XB1C104K		1	
	ECJ1VC1H120J	C 12PF, J, 50V	2	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4104	ECJ1XC1H680J	C 68PF, J, 50V	1	
C4107	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4120	EEFCD0G560R	56UF,	1	
C4121	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4123	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C4124	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4126	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C4127	ECJ1VB1H153K	C 0.015UF, K, 50V	1	
C4129	EEVHB0J470R	E 47UF, 6.3V	1	
C4130	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4131,3 2	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C4133	EEEHB1C100R	C 10PF, J, 16V	1	
C4134	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4135- 37	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4141	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4142	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4143	EEVHB0J470R	E 47UF, 6.3V	1	
C4144	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4145- 47	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4148	ECJ1VB1H102K	C 1000PF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4149	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4153,5	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
4				
C4155		C 0.001UF, K, 50V	1	
C4160	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4161		C 0.1UF, Z, 16V	1	
C4164	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
C4165	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4172 C4181,8		C 0.1UF, Z, 16V C 0.1UF, Z, 16V	2	
2				
C4184		C 1UF, K, 16V	1	
C4186		C 0.1UF, Z, 16V	1	
C4191		C 0.1UF, Z, 16V	1	
C4203 C4205	EEVHB0J470R	E 47UF, 6.3V C 0.1UF, Z, 16V	1	
C4208-			3	
10	ECUIABICIOTA	C 0.1UF, Z, 16V	,	
C4215	EEVHB1C470P	E 47UF, 16V	1	
C4216		C 0.001UF, K, 50V	1	
C4217,1	ECJ1XC1H181J	C 180PF, J, 50V	2	
C4219,2	ECJ1XC1H330J	C 33PF, J, 50V	2	
C4221	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4222	EEVHB1C470P	E 47UF, 16V	1	
C4224	EEEHB1C100R	C 10PF, J, 16V	1	
C4225	F1J0J1060004	C 0.010UF, K, 16V	1	
C4227	F1J0J1060004	C 0.010UF, K, 16V	1	
C4229,3	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4231	EEVHB1C470P	E 47UF, 16V	1	
C4232,3	EEEHP1C100R	C 10PF, J, 16V	2	
	ECJ1VB1H272K	C 2700PF, K, 50V	2	
C4236	EEVHB0J470R	E 47UF, 6.3V	1	
C4237- 48	ECJ1XB1C104K	C 0.1UF, Z, 16V	12	
C4249	EEVHB0J470R	E 47UF, 6.3V	1	
C4250- 54	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4257,5 8	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
		C 1UF, K, 16V	1	
C4260	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4261	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4262	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4263- 65	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4267- 69	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4270	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4271	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4272	EEVHB0J470R	E 47UF, 6.3V	1	
C4273- 78	ECJ1XB1C104K	C 0.1UF, Z, 16V	6	
C4279	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4280	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4295	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4296	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4297	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4298	EEEHB0J330R	C 33PF, J, 6.3V	1	
C4299,0 0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4301	EEEHB0J220R	C 22PF, J, 6.3V	1	
C4302	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4304	EEVHB0J470R	E 47UF, 6.3V	1	
C4305- 15	ECJ1XB1C104K	C 0.1UF, Z, 16V	11	
C4316	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4317- 21	<b>†</b>	C 0.1UF, Z, 16V	5	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4326	EEVHB0G221P	E 220UF, 4V	1	
•	•	•		

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
		C 15PF, J, 50V	1	
C4328 C4329		C 18PF, J, 50V C 0.1UF, Z, 16V	1	
C4330	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4331	EEVHB0J470R	E 47UF, 6.3V	1	
C4332-	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
35		G 1777 G 1077	-	
C4336 C4338	ECJ1VF1A105Z ECJ1XB1C104K	C 1UF, Z, 10V C 0.1UF, Z, 16V	1	
C4339	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4456		C 0.001UF, K, 50V	1	
C4457	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4459	ECJ1XB0J105K	C 1UF, K, 16V	1	
		C 0.1UF, Z, 16V	1	
C4463,6	F1K1A1060010	C 0.010UF, K,6.3V	2	
	ECJ1XC1H102J	C 1000PF, J, 50V	2	
	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C4470- 73	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4478- 81	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4482- 84	ECJ1XC1H102J	C 1000PF, J, 50V	3	
C4486- 90	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4492	ECJ1XB0J105K	C 1UF, K, 16V	1	
I .	ECJ1VB1H103K	C 0.001UF, K, 50V	2	
4 C4495- 97	ECJ1XB0J105K	C 1UF, K, 16V	3	
	ECJ1XC1H102J	C 1000PF, J, 50V	16	
	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4515	EEFCD0G560R	56UF,	1	
C4516- 27	ECJ1VB1H103K	C 0.001UF, K, 50V	12	
C4528	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4534- 37	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4587	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C4588	EEEHB0G221P	C 220PF, J, 4V	1	
C4589 C4590	ECJ1XB1C104K ECJ2FB0J225K	C 0.1UF, Z, 16V C 2.2UF, Z, 16V	1	
C4591		C 470PF, J, 50V	1	
C4780	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4781- 84	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4785	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4787	EEVHB0J470R	E 47UF, 6.3V	1	
C4788	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4789	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4790 C4791	ECJ1XB0J105K ECJ1XC1H101J	C 1UF, K, 16V C 100PF, J, 50V	1	
C4792- 96	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
C4797	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4798	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4799	EEEHB1C100R	C 10PF, J, 16V	1	<u>-</u>
C4800	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4802	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4803 C5601	ECJ2FB0J225K ECA1HM220	C 2.2UF, Z, 16V	1	
C5601	ECA1HHG100	E 22UF, 50V E 10UF, 50V	1	
C5605	EEUFC1E102	E 1000UF, 25V	1	
C5606	EEUFC1C821	E 820UF, 16V	1	
C5608	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5609	ECA1HM220	E 22UF, 50V	1	
C5611	EEUFC1E102	E 1000UF, 25V	1	
C5612 C5613		E 820UF, 16V C 0.1UF, K, 25V	1	
C5616	ECJ2XB1E104K	C 0.1UF, K, 25V	1	

			-	_ ,
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C5617	EEUFC1C821SB	E 820UF, 16V	1	
C5618,1	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
9				
C5622	EEUFC1C821	E 820UF, 16V	1	
C5623	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5626	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C5631			1	
	1	E 1000UF, 16V		
C5637	ECJ2VF1C474Z	C 0.47UF, Z, 16V	1	
C5641-	ECJ2VF1C104Z	C 0.1UF, Z, 16V	4	
44				
C5670	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5672	ECA1HM220	E 22UF, 50V	1	
C5673	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5685	ECA1HHG100	E 10UF, 50V	1	
C5686	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5801,0 2	EEUFC1E471	E 470UF, 25V	2	
		n 45770 0577	_	
C5803		E 47UF, 25V	1	
C5805	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C5809	ECJ3XF1E105Z	C 1UF, Z, 25V	1	
C5810	ECA1EHG470	E 47UF, 25V	1	
C5813	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5818		E 470UF, 16V	1	
C5820		E 1000UF, 16V	1	
C5821		C 0.1UF, K, 25V	1	
C5823		E 2200UF, 16V	1	
C6015	TCUY1C105ZFN	C 1UF, 16V	1	
C6016,1	F1L1E4750004	C 4.7UF, 25V	2	
7				
C6019	F1L1E4750004	C 4.7UF, 25V	1	
C6035	TCUY1C105ZFN	C 1UF, 16V	1	
C6036.3	F1L1E4750004	C 4.7UF, 25V	2	
7				
C6039	F1L1E4750004	C 4.7UF, 25V	1	
C6060	ECJ3YB1E105K	C 1UF, K, 25V	1	
		E 220UF, 25V	2	
2		22001, 231	~	
C6063	ECA1EM101	E 100UF, 25V	1	
C6064,6			2	
5		201 / 201	-	
C6066-	ECJ2XB1H103K	C 0.01UF, K, 50V	4	
69			-	
C6080-	ECQE2255JF	P 2.5UF, K,250V	3	
82	~	, , ,		
C6085-	ECQE2255JF	P 2.5UF, K,250V	3	
87				
C6100	F1L2J562A022	C 5600UF, K,6.3V	1	
C6130	TCUY1C105ZFN	C 1UF, 16V	1	
C6131,3		C 4.7UF, 25V	2	
2	111111111111111111111111111111111111111	/OF, ZJV		
	F1T.1F4750004	C 4 7HF 257	1	
C6134	F1L1E4750004	C 4.7UF, 25V	1	
C6140	F1L2J562A022	C 5600UF, K,6.3V	1	
C6170-	F2A2D221A022	E 220UF, 200V	6	
75				
	ECQE2255JF	P 2.5UF, K,250V	1	
C6200,0	ECA2CM101	E 100UF, 160V	2	
1				
C6202	EEUFC1E221	E 220UF, 25V	1	
C6206	ECA2CM101	E 100UF, 160V	1	
C6209	ECA2CM101	E 100UF, 160V	1	
C6210-	ECQE2255JF	P 2.5UF, K,250V	3	
12				
C6214	F1L1E4750004	C 4.7UF, 25V	1	
C6215	EEUFC1E221	E 220UF, 25V	1	
C6217,1	F1L1E4750004	C 4.7UF, 25V	2	
8				
C6221	F1L1E4750004	C 4.7UF, 25V	1	
C6223	F1L1E4750004	C 4.7UF, 25V	1	
C6224	EEUFC1E221	E 220UF, 25V	1	
C6225	F1L1E4750004	C 4.7UF, 25V	1	
	<b>+</b>			
C6226	TCUY1C105ZFN	C 1UF, 16V	1	
C6233	F1L1E4750004	C 4.7UF, 25V	1	
C6234	EEUFC1E221	E 220UF, 25V	1	
C6235	F1L1E4750004	C 4.7UF, 25V	1	
C6240	ECA2AHG101	E 100UF, 100V	1	
C6255	ECA2EHG470	E 47UF, 250V	1	

(50U / TH-42I	PX50U / TH-50PX50U	<u>1</u> ]		
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C6257	F1L1E4750004	C 4.7UF, 25V	1	
C6258	TCUY1C105ZFN	C 1UF, 16V	1	
C6260	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6262	F1L1E4750004	C 4.7UF, 25V	1	
C6264	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6265	F1L1E4750004	C 4.7UF, 25V	1	
C6266	EEUFC1E102	E 1000UF, 25V	1	
C6269	F2A2D221A022	E 220UF, 200V	1	
C6273	F1L1E4750004	C 4.7UF, 25V	1	
C6275	F1L1E4750004	C 4.7UF, 25V	1	
C6401-	F2A2D221A022	E 220UF, 200V	6	
	ECQE2255JF	P 2.5UF, K,250V	2	
4		g 1 o	-	
		C 1UF, K, 25V	1	
C6422	EEUFC1E221	E 220UF, 25V	1	
6	EEUFC1E470	E 47UF, 25V	2	
C6433- 35		C 1UF, 16V	3	
C6436	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6437	TCUY1C105ZFN	C 1UF, 16V	1	
C6440	TCUY1C105ZFN		1	
C6442	TCUY1C105ZFN		1	
C6444	TCUY1C105ZFN	C 1UF, 16V	1	
C6453	EEUFC1E221	E 220UF, 25V	1	
C6501- 06	ECQE2255JF	P 2.5UF, K,250V	6	
C6513	F1L2J222A022	C 2200UF, K,6.3V	1	
C6515,1 6	F1L2J222A022	C 2200UF, K,6.3V	2	
C6531	F1L2J222A022	C 2200UF, K,6.3V	1	
C6533,3 4	F1L2J222A022	C 2200UF, K,6.3V	2	
C6536	F1L2J222A022	C 2200UF, K,6.3V	1	
C6559,6	F1L1E4750004	C 4.7UF, 25V	2	
1~				
C6562	F1L1E4750004	C 4.7UF, 25V	1	
	F1L1E4750004 TCUY1C105ZFN	C 4.7UF, 25V C 1UF, 16V	1 1	
C6562			+ +	
C6562 C6563 C6582	TCUY1C105ZFN	C 1UF, 16V	1	
C6562 C6563 C6582 C6584,8	TCUY1C105ZFN F1L1E4750004 F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V	1	
C6562 C6563 C6582 C6584,8	TCUY1C105ZFN F1L1E4750004 F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V	1 1 2	
C6562 C6563 C6582 C6584,8 5 C6586	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V	1 1 2	
C6562 C6563 C6582 C6584,8 5 C6586	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V	1 1 2 1 1	
C6562 C6563 C6582 C6584,8 5 C6586 C6587	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V	1 1 2 1 1	
C6562 C6563 C6582 C6584,8 5 C6586 C6587	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V	1 1 2 1 1 2	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V	1 1 2 1 1 2	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V	1 1 2 1 1 2 1 1 2	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1000PF,	1 1 2 1 1 2 1 1 2	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1K2J102A014 ECA2EHG470	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1000PF, E 47UF, 250V	1 1 2 1 1 2 1 1 2	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1K2J102A014 ECA2EHG470 ECA1VM470	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1000PF, E 47UF, 250V E 47UF, 35V	1 1 2 1 1 2 1 1 2	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L2J102A014 ECA2EHG470 ECA1VM470 F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1.000PF, E 47UF, 25V C 4.7UF, 25V E 47UF, 25V C 4.7UF, 25V	1 1 2 1 1 2 1 1 2 1 1 2	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1K2J102A014 ECA2EHG470 ECA1VM470 F1L1E4750004 TCUY1C105ZFN	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1.7UF, 25V	1 1 2 1 1 2 1 1 2 1 1 2 1 1 2	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L2J102A014 ECA2EHG470 ECA1VM470 F1L1E4750004 TCUY1C105ZFN ECJ3YB1E105K	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1.7UF, 25V	1 1 2 1 1 2 1 1 2 1 1 2 1 1 2	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN ECJ3YB1E105K TCUY1C105ZFN	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1000PF, E 47UF, 250V E 47UF, 35V C 4.7UF, 25V C 1UF, 16V C 1UF, 16V C 1UF, 16V C 1UF, 16V	1 1 2 1 1 2 1 1 1 2 1 1 1 1 1 1 1 1 1 1	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7 C6618 C6619 C6620 C6621	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1K2J102A014 ECA2EHG470 ECA1VM470 F1L1E4750004 TCUY1C105ZFN ECJ3YB1E105K TCUY1C105ZFN F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1.7UF, 25V C 4.7UF, 25V C 1.7UF, 25V	1 1 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7 C6618 C6619 C6620 C6621 C6623	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN ECA1VM470 F1L1E4750004 TCUY1C105ZFN ECJ3YB1E105K TCUY1C105ZFN F1L1E4750004 ECQE2105RKB	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1.7UF, 25V C 4.7UF, 25V C 1.7UF, 25V	1 1 2 1 1 2 1 1 2 1 1 2 1 1 2 1 1 1 2 1 1 1 1 2	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7 C6618 C6619 C6620 C6621 C6623 C6624	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN ECA1VM470 F1L1E4750004 TCUY1C105ZFN ECJ3YB1E105K TCUY1C105ZFN F1L1E4750004 ECQE2105RKB F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1.7UF, 25V C 4.7UF, 25V C 1.7UF, 25V	1 1 2 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6611 C6612,1 3 C6614 C6615 C6616,1 7 C6618 C6619 C6620 C6621 C6623 C6624 C6626 C6627,2	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN ECJ3YB1E105K TCUY1C105ZFN F1L1E4750004 ECQE2105RKB F1L1E4750004 F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1.7UF, 25V C 4.7UF, 25V C 1.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V	1 1 2 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C6562 C6583 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7 C6618 C6620 C6620 C6621 C6623 C6624 C6624 C6626 C6627,2 8 C6630-32	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1K2J102A014 ECA2EHG470 ECA1VM470 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1000PF, E 47UF, 250V E 47UF, 25V C 1UF, 16V C 1UF, 16V C 4.7UF, 25V C 1UF, 25V C 1UF, 16V C 1UF, 16V C 4.7UF, 25V P 1UF, 25V C 4.7UF, 25V C 1UF, 16V	1 1 2 1 1 2 1 1 2 1 1 2 1 1 1 2 1 1 1 2 1 1 1 2 1	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7 C6618 C6620 C6621 C6623 C6624 C6626 C6627,2 8 C6630-32 C6634,3 5	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L2J102A014 ECA2EHG470 ECA1VM470 F1L1E4750004 TCUY1C105ZFN ECJ3YB1E105K TCUY1C105ZFN F1L1E4750004 ECQE2105RKB F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 1.000PF, E 47UF, 25V C 1.000PF, E 47UF, 25V C 1.000PF,	1 1 1 2 1 1 2 1 1 2 1 1 1 2 1 1 1 1 2 1 1 1 1 2 1	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7 C6618 C6620 C6621 C6623 C6624 C6623 C6624 C6627,2 8 C6630-32 C6634,3 5 C6636,3	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN ECA1VM470 F1L1E4750004 TCUY1C105ZFN ECJ3YB1E105K TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1000PF,  E 47UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 1UF, 16V C 1UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V	1 1 2 1 1 1 2 1 1 1 1 1 1 1 1 2 3 3 2 2	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7 C6618 C6620 C6621 C6623 C6624 C6627,2 8 C6630-32 C6634,3 5 C6634,3 7	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1K2J102A014 ECA2EHG470 ECA1VM470 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 FCUY1C105ZFN F1L1E4750004 FCQE2105RKB F1L1E4750004 FTL1E4750004 FTL1E4750004 FTL1E4750004 FTL1E4750004 FTL1E4750004 FTL1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1000PF, E 47UF, 25V C 10TF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 1UF, 16V C 1UF, 16V C 1UF, 25V P 1UF, 25V C 1UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V	1 1 2 1 1 1 2 1 1 1 1 1 1 1 2 2 3 3 2 2 2	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6588,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7 C6618 C6620 C6621 C6623 C6624 C6626 C6627,2 8 C6630-32 C6634,3 5 C6636,3 7 C6638	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1K2J102A014 ECA2EHG470 ECA1VM470 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1000PF, E 47UF, 25V C 10TF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 1UF, 16V C 1UF, 16V C 1UF, 16V C 1UF, 25V P 1UF, 25V C 1UF, 25V C 1UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 1000PF, C 4.7UF, 25V E 100UF, 160V C 4.7UF, 25V	1 1 1 2 1 1 1 1 1 1 1 1 2 2 3 2 2 1 1	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6588,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7 C6618 C6619 C6620 C6621 C6623 C6624 C6626 C6627,2 8 C6634,3 5 C6634,3 5 C6634,3 7 C6638 C6639	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1K2J102A014 ECA2EHG470 ECA1VM470 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 ECQ22105RKB F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1000PF, E 47UF, 25V C 107, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 1000PF, C 4.7UF, 25V E 100UF, 160V C 4.7UF, 25V C 1UF, 16V	1 1 1 2 1 1 1 1 1 1 1 1 2 2 3 3 2 2 2 1 1 1 1	
C6562 C6563 C6582 C6584,8 5 C6586 C6587 C6588,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7 C6618 C6620 C6621 C6620 C6621 C6623 C6624 C6626 C6627,2 8 C6634,3 5 C6634,3 7 C6638 C6639 C6639	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L2J102A014 ECA2EHG470 ECA1VM470 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 ECQ22105RKB F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004	C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 4.7UF, 25V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1000PF, E 47UF, 25V C 107, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 1UF, 16V C 1UF, 16V C 4.7UF, 25V P 1UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 1000PF, C 4.7UF, 25V E 100UF, 160V C 4.7UF, 25V C 1UF, 16V C 1000PF, C 4.7UF, 25V C 1UF, 16V C 100UF, 160V C 10F, 16V	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
C6562 C6583 C6584,8 5 C6586 C6587 C6589,9 0 C6591 C6611 C6612,1 3 C6614 C6615 C6616,1 7 C6618 C6620 C6620 C6621 C6623 C6624 C6626 C6627,2 8 C6630-32 C6634,3 5 C6634,3 7 C6638 C6639 C6651 C6653 C6655,5	TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L2J102A014 ECA2EHG470 ECA1VM470 F1L1E4750004 TCUY1C105ZFN ECJ3YB1E105K TCUY1C105ZFN ECJ3YB1E105K TCUY1C105ZFN F1L1E4750004 ECQE2105RKB F1L1E4750004 TCUY1C105ZFN F1L1E4750004 F1L1E4750004 F1L1E4750004 F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN F1L1E4750004 TCUY1C105ZFN TCUY1C105ZFN TCUY1C105ZFN TCUY1C105ZFN TCUY1C105ZFN TCUY1C105ZFN TCUY1C105ZFN TCUY1C105ZFN	C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1000PF,  E 47UF, 25V C 107, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 1UF, 16V C 1UF, 16V C 1UF, 25V P 1UF, 25V C 1UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 4.7UF, 25V C 1UF, 16V C 1000PF,  C 4.7UF, 25V E 100UF, 160V C 4.7UF, 25V C 1UF, 16V	1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

Ref.	Part No.		Part Name &	Pcs	Remarks
No.			Description		
C6658	ECA1HM101	E	100UF, 50V	1	
C6659-	F1L1E4750004			4	
62					
C6801	ECA2CM101	Е	100UF, 160V	1	
C6806	ECA2EHG470	E	47UF, 250V	1	
C6807	ECA1HM221		220UF, 50V	1	
	ECA2CM101		100UF, 160V	2	
9	BCAZCMIOI	"	10001, 1000	*	
	F1K2J332A014	<u>_</u>	3300UF, K,6.3V	3	
14		ľ	.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		
C6816	F2A2G100A017	R	100UF, 400V	1	
C6818		_	0.01UF, K, 50V	1	
C6819	TCUY1C105ZFN			1	
		1	1UF, 16V	<b>-</b>	
C6820	ECJ2XB1H472K	_	4700PF, K, 50V	1	
C6821	EEUFC1E221	_	220UF, 25V	1	
C6822	ECJ2XB1H104K	C	0.1UF, K, 50V	1	
C6823	F1K2J222A014	С	2200UF, K,6.3V	1	
C6824	ECA2EHG470	E	47UF, 250V	1	
C6825	ECQE6223KF	P	0.022UF, K,400V	1	
C6826	ECJ2XB1H104K	С	0.1UF, K, 50V	1	
C6828	EEUFC1V151	_	150UF, 35V	1	
C6829	ECA2DHG330	_	33UF, 200V	1	
C6830	F1L1E4750004	+		1	
<b>—</b>			4.7UF, 25V		
C6831	EEUFC1E470	_	47UF, 25V	1	
C6833		+	4.7UF, 25V	1	
C6834	ECJ2XC1H102J	_	1000PF, J, 50V	1	
C6835	ECJ2XC1H471J	C	470PF, J, 50V	1	
C6836	ECKD3D221KBP	C	220PF, K, 2KV	1	
C6900	ECJ2XB1H222K	C	2200PF, K, 50V	1	
C6901-	TCUY1C105ZFN	_	1UF, 16V	6	
06			•		
C6908	ECJ2XB1H222K	С	2200PF, K, 50V	1	
C6909.1	F1L2E1040002	_	1000UF, 25V	2	
0					
C6917,1	F1L2E1040002	E	1000UF, 25V	2	
8					
C6920	ECJ2XB1H222K	С	2200PF, K, 50V	1	
1	TCUY1C105ZFN		1UF, 16V	6	
26			,	-	
C6927.2	F1L2E1040002	E	1000UF, 25V	2	
8		-		_	
C6930	ECJ2XB1H222K	С	2200PF, K, 50V	1	
	<b>+</b>	-	1000UF, 25V	2	
8		Ι_	100001, 10.	-	
C7101.0	TCUY1C105ZFN	c	1UF, 16V	2	
2			,	_	
C7103,0	ECJ3XB2A474K	С	0.47UF, 6.3V	2	
4			,	_	
C7107	ECJ3XB2A474K	С	0.47UF, 6.3V	1	
C7111	ECJ1XC1H101J	-	100PF, J, 50V	1	
C7111	TCUY1C105ZFN		1UF, 16V	1	
		1		1	
C7130	ECJ1XB1C104K		0.1UF, Z, 16V		
C7136- 38	ECJ1XB1C104K	٦	0.1UF, Z, 16V	3	
C7139	TCUY1C105ZFN	_	1IIF 16V	1	
		-	10F, 16V		
C7150	ECJ1XC1H101J		100PF, J, 50V	1	
C7152	ECJ1XC1H101J		100PF, J, 50V	1	
C7201	TCUY1C105ZFN	-	1UF, 16V	1	
C7203,0	TCUY1C105ZFN	C	1UF, 16V	2	
4		1			
C7208	ECJ1XB1C104K	_	0.1UF, Z, 16V	1	
C7212	TCUY1C105ZFN	C	1UF, 16V	1	
C7216	ECJ1XB1C104K	С	0.1UF, Z, 16V	1	
C7221	ECJ1XC1H101J	С	100PF, J, 50V	1	
C7224	TCUY1C105ZFN	-	1UF, 16V	1	
C7225	ECJ1XB1C104K	-	0.1UF, Z, 16V	1	
C7231	ECJ1XB1C104K	-	0.1UF, Z, 16V	1	
C7232-	ECJ3XB2A474K	_	0.47UF, 6.3V	4	
35		ľ	, 0., 0.54	•	
C7238	ECJ1XC1H101J	С	100PF, J, 50V	1	
C7240	ECJ1XC1H101J	-		1	
		1	100PF, J, 50V	1	
C7250	ECJ1XC1H101J	-	100PF, J, 50V	<u> </u>	
C7274	ECJ1XB1C104K	+	0.1UF, Z, 16V	1	
C7301	TCUY1C105ZFN	-	1UF, 16V	1	
C7304	ECJ1XB1C104K	C	0.1UF, Z, 16V	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C7308,0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
2				
l _	TCUY1C105ZFN	C 1UF, 16V	2	
6	TG T1 WG1 W1 A1 T	G 100DD 7 50W		
		C 100PF, J, 50V C 100PF, J, 50V	1	
C7326 C7329		C 100PF, J, 50V	1	
C7339,4		C 1UF, 16V	2	
0		,		
C7351	ECJ1XC1H101J	C 100PF, J, 50V	1	
	ECJ3XB2A474K	C 0.47UF, 6.3V	4	
62 C7401	TCUY1C105ZFN	C 1UF, 16V	1	
		C 0.1UF, Z, 16V	1	
C7412-		C 0.1UF, Z, 16V	4	
15		, , , , , , , , , , , , , , , , , , , ,		
	TCUY1C105ZFN	C 1UF, 16V	2	
9	TG T2 WD0 3 4 F 4 W	G 0 45777 6 277		
C7420- 23	ECJ3XB2A474K	C 0.47UF, 6.3V	4	
	ECJ1XC1H101J	C 100PF, J, 50V	2	
9				
C7440,4	TCUY1C105ZFN	C 1UF, 16V	2	
C7452 5	EC.T1 VC1 U1 01 -	C 100PE T 507	,	
C7452,5	ECJ1XC1H101J	C 100PF, J, 50V	2	
C7502	TCUY1C105ZFN	C 1UF, 16V	1	
C7511	TCUY1C105ZFN	C 1UF, 16V	1	
C7513	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7519	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7520	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7521	TCUY1C105ZFN	C 1UF, 16V	1	
C7522	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7527	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7530	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7538	TCUY1C105ZFN ECJ1XC1H101J	C 1UF, 16V C 100PF, J, 50V	2	
1	ECUIACIHIUIU	C 100FF, 0, 50V		
C7543	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7546	ECJ1XC1H101J	C 100PF, J, 50V	1	
	ECJ3XB2A474K	C 0.47UF, 6.3V	4	
64	TCUY1C105ZFN	C 111E 1637	2	
2	TCUTTCTU5ZFN	C 10F, 16V	4	
C7611-	ECJ1XC1H101J	C 100PF, J, 50V	3	
13				
C7624	TCUY1C105ZFN	C 1UF, 16V	1	
C7630	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7635- 37	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C7640	TCUY1C105ZFN	C 1UF, 16V	1	
C7653-	ECJ3XB2A474K	C 0.47UF, 6.3V	3	
55				
	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
0 C8101,0	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
2			<u></u> _	
C8103,0	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
4		g 100pg - :	+_+	
C8105	EEEHBOG101R	C 100PF, J, 4V	2	
7	ECJ1VB0J105K	C 1UF, K, 6.3V	4	
C8108	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8109	EEEHB0G101R	C 100PF, J, 4V	1	
	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
20112	EG 113700 11 057	C 111E 7 C 27		
C8112	ECJ1VB0J105K	C 1UF, K, 6.3V C 0.1UF, K, 10V	6	
C8113-	ECJ0EB1A104K	C 0.10r, K, 10V	"	
1 + 0	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
			1	
C8120,2 1				
C8120,2 1 C8128,2	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8120,2 1 C8128,2 9				
C8120,2 1 C8128,2 9 C8144	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8120,2 1 C8128,2 9				

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C8164	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8200	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8201	ECJ0EF1H103Z	C 0.01UF, Z, 50V	1	
C8202,0	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
3				
C8204	EEEHB0J221P	C 220PF, J, 6.3V	1	
C8205	EEEHB1H220P	C 22PF, J, 50V	1	
1	EEEHB0J221P	C 220PF, J, 6.3V	2	
7		GO 010777 77 1677	-	
C8208	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8209	ECJ0EB1A104K		1	
C8210	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8211		C 270PF, K, 50V	1	
		C 270PF, K, 50V	1	
C8215	ECJ0EC1H200J	C 200PF, K, 50V	1	
C8216	ECJ0EB1H271K	C 270PF, D, 50V	1	
C8217		C 560PF, K, 50V	1	
1	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
9	ECTOER1H102K	C 1000DE W E0W	1	
C8220	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8221	ECJ0EC1H270J	+		
C8222	ECJ0EB1H102K ECJ0EC1H220J	C 1000PF, K, 50V	1	
C8223			1	
C8224,2	ECJUEFIH103Z	C 0.01UF, Z, 50V	2	
	EEEHB1C470P	C 47PF, J, 16V	1	
C8227	ECJ0EC1H101J	C 100PF, K, 50V	1	
C8228,2	<del> </del>	C 0.01UF, Z, 50V	2	
9	ECOUEFIHIUSZ	C 0.010F, Z, 30V		
C8230	ECJ0EC1H120J	C 120PF, K, 50V	1	
		C 0.10UF, Z, 16V	1	
C8233	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8234,3	<del> </del>	C 0.10UF, Z, 16V	2	
5		0 011001, 1, 101	_	
C8237	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
	ECJ0EB1C103K	C0.010UF, K, 16V	2	
9				
C8240	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8241-	ECJ0EB1H102K	C 1000PF, K, 50V	3	
43				
C8244	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8245	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8246	EEEHB0G470R	C 47PF, J, 4V	1	
C8247		C 0.1UF, K, 10V	1	
C8248	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8249-	ECJ0EB1H102K	C 1000PF, K, 50V	3	
51				
C8252	ECJ0EB1H222K	C 2200UF, Z, 50V	1	
C8253-	ECJ0EB1C103K	CO.010UF, K, 16V	3	
55	ECTOER12100	C 1000PE W 50W	1	
C8256	ECJ0EB1H102K	C 1000PF, K, 50V		
C8257	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8258,5	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C8262	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8263	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8264,6	ECJ0EB1H102K	C 1000PF, K, 50V	2	
5			-	
C8266	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8267	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8270	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8271	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8272	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8273	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8275,7	ECJ0EB1C103K	C0.010UF, K, 16V	2	
6				
C8277	ECJ0EC1H220J	C 220PF, K, 50V	1	
C8278,7	ECJ0EB1C103K	C0.010UF, K, 16V	2	
9				
C8280,8	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
1	EG TOPP 1 W 1 CO	G 1000FF # 50	-	
C8282	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8286- 88	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C8289	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8299	ECJ0EC1H101J	C 100PF, K, 50V	1	
20270	1_0000000000000000000000000000000000000	10 10012, K, 30V		

	PX50U / TH-50PX50U	_		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
		C 0.1UF, K, 10V	2	
3				
C8294- 97	ECJ0EB1H102K	C 1000PF, K, 50V	4	
C8298-	ECJ0EB1A104K	C 0.1UF, K, 10V	4	
01				
	ECJ0EF1H103Z	C 0.01UF, Z, 50V	1	
C8303	EEEHB1C470P	C 47PF, J, 16V	1	
C8304,0	ECJ0EC1H150J	C 150PF, K, 50V	2	
C8306	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8308-	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
10		G 1777 F 1077		
2	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C8313-	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
15				
C8316	EEEHB1C100R	C 10PF, J, 16V	1	
C8317- 19	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
C8320	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8321-	ECJ0EF1C104Z	C 0.10UF, Z, 16V	6	
26		G 10DB 7 55		
C8327	EEEHB1C100R	C 10PF, J, 16V C 0.10UF, Z, 16V	1 4	
31	ECJ0EF1C104Z	C U.1UUF, Z, 16V	4	
C8332	ECJ1XB1C153K	C 0.015UF, Z, 16V	1	
C8333-	ECJ0EF1C104Z	C 0.10UF, Z, 16V	4	
36		G 1000 T 1611	-	
C8337	EEEHB1C100R ECJ0EF1C104Z	C 10PF, J, 16V C 0.10UF, Z, 16V	16	
53	ECOUEFICIU4Z	C 0.100F, Z, 16V	10	
C8355,5	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8360	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8362	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8365	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8368- 74	ECJ0EF1C104Z	C 0.10UF, Z, 16V	7	
C8375	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8377	ECGRL0G680R	C 68PF, J, 4V	1	
C8378	EEEHB0G101R	C 100PF, J, 4V	1	
C8379	EEEHB0J101P	C 100PF, J, 6.3V	1	
C8380- 84	ECJ0EF1C104Z	C 0.10UF, Z, 16V	5	
	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
1				
C8408	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8410	ECJ0EB1C103K ECJ0EF1C104Z	CO.010UF, K, 16V	1	
C8413	ECJ0EF1C104Z	C 0.10UF, Z, 16V C 0.10UF, Z, 16V	1	
C8414	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8415		C 68PF, J, 4V	1	
	ECGRL0G680R	C 00FF, U, 4V		
C8416	EEFUD0J101R	E 100UF	1	
C8416 C8417	EEFUD0J101R EEEHB1C470P	E 100UF C 47PF, J, 16V	1	
C8416 C8417 C8418	EEFUD0J101R EEEHB1C470P ECJ0EF1C104Z	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V	1	
C8416 C8417 C8418 C8425	EEFUD0J101R EEEHB1C470P ECJ0EF1C104Z ECJ2FF1A106Z	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V C 0.001UF, Z, 10V	1 1 1	
C8416 C8417 C8418	EEFUD0J101R EEEHB1C470P ECJ0EF1C104Z	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V C 0.001UF, Z, 10V C 0.10UF, Z, 16V	1	
C8416 C8417 C8418 C8425 C8426	EEFUDOJ101R EEEHB1C470P ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V C 0.001UF, Z, 10V	1 1 1	
C8416 C8417 C8418 C8425 C8426 C8427	EEFUDOJ101R EEEHB1C470P ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ2FF1A106Z	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V C 0.001UF, Z, 10V C 0.10UF, Z, 16V C 0.001UF, Z, 16V	1 1 1 1	
C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437	EEFUDOJ101R EEEHB1C470P ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V C 0.001UF, Z, 10V C 0.10UF, Z, 16V C 0.001UF, Z, 10V C 0.10UF, Z, 16V	1 1 1 1 1	
C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437 C8440,4	EEFUDOJ101R EEEHB1C470P ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ0EB1A104X ECJ0EB1A104K	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V C 0.001UF, Z, 10V C 0.10UF, Z, 16V C 0.001UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, X, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V	1 1 1 1 1 1	
C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437 C8440,4 1 C8445 C8446	EEFUDOJ101R EEEHB1C470P ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ0EB1A104X ECJ0EB1A104K ECJ0EB1A104K ECJ1VB1C683K	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V C 0.001UF, Z, 10V C 0.10UF, Z, 16V C 0.001UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, X, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.068UF, K, 16V	1 1 1 1 1 1 1 2	
C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437 C8440,4 1 C8445 C8446 C8449	EEFUDOJ101R EEEHB1C470P ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ0EB1A104X ECJ0EB1A104K ECJ0EB1A104K ECJ1VB1C683K ECJ0EB1H102K	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V C 0.001UF, Z, 10V C 0.10UF, Z, 16V C 0.001UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, X, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.068UF, K, 16V C 1000PF, K, 50V	1 1 1 1 1 1 2 1 1	
C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437 C8440,4 1 C8445 C8446	EEFUDOJ101R EEEHB1C470P ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ0EB1A104X ECJ0EB1A104K ECJ0EB1A104K ECJ1VB1C683K	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V C 0.001UF, Z, 10V C 0.10UF, Z, 16V C 0.001UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, X, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.068UF, K, 16V	1 1 1 1 1 1 1 2	
C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437 C8440,4 1 C8445 C8446 C8449	EEFUDOJ101R EEEHB1C470P ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ0EB1A104X ECJ0EB1A104K ECJ0EB1A104K ECJ1VB1C683K ECJ0EB1H102K	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V C 0.001UF, Z, 10V C 0.10UF, Z, 16V C 0.001UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, X, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.068UF, K, 16V C 1000PF, K, 50V	1 1 1 1 1 1 2 1 1	
C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437 C84440,4 1 C8445 C8446 C8449 C8450 52 C8453	EEFUDOJ101R EEEHB1C470P ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ2FF1A106Z ECJ0EB1A104Z ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1A104K ECJ1VB1C683K ECJ0EB1H102K ECJ2FF1A475Z	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V C 0.001UF, Z, 10V C 0.10UF, Z, 16V C 0.001UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, X, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.068UF, K, 16V C 1000PF, K, 50V C 4.7UF, Z, 10V	1 1 1 1 1 1 1 2 1 1 1 3	
C8416 C8417 C8418 C8425 C8426 C8427 C8428 C8437 C8440,4 1 C8445 C8446 C8449 C8450-52 C8453 C8456,5	EEFUDOJ101R EEEHB1C470P ECJ0EF1C104Z ECJ2FF1A106Z ECJ2FF1A106Z ECJ0EF1C104Z ECJ0EB1A104X ECJ0EB1A104K ECJ0EB1A104K ECJ0EB1A104K ECJ1VB1C683K ECJ0EB1H102K ECJ2FF1A475Z	E 100UF C 47PF, J, 16V C 0.10UF, Z, 16V C 0.001UF, Z, 16V C 0.001UF, Z, 16V C 0.001UF, Z, 16V C 0.10UF, Z, 16V C 0.10UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.1UF, K, 10V C 0.068UF, K, 16V C 1000PF, K, 50V C 4.7UF, Z, 10V	1 1 1 1 1 1 1 2 1 1 1 1 3	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
C8467	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8468	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8469	ECJ1VB0J334K	C 0.33UF, K,6.3V	1	
C8474	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8475,7	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
6	ECOTVEOUTOSK	C 101, R, 0.5V	-	
C8477	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8478	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8479,8	ECJ0EB1C103K	C0.010UF, K, 16V	2	
0				
C8482	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8484-	EEEHB1C470P	C 47PF, J, 16V	3	
86				
C8492	ECJ0EB1H471K	C 470PF, K, 50V	1	
C8496	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8500	ECJ2FF1A475Z	C 4.7UF, Z, 10V	1	
C8501	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8503,0	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
4				
C8507,0	ECJ2FF1A475Z	C 4.7UF, Z, 10V	2	
8				
C8509	EEEHB1C470P	C 47PF, J, 16V	1	
C8511	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8515			_	
C8516	EEEHB1C470P	C 47PF, J, 16V	1	
C8518	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8520,2	ECJ0EC1H181J	C 180PF, K, 50V	2	
1				
C8522,2	ECJ0EC1H390J	C 390PF, K, 50V	2	
3				
C8529	ECJ0EC1H080C	C 8PF, D, 50V	1	
C8530	ECJ0EC1H221J	C 220PF, K, 50V	1	
C8531	ECJ1VB1H123K	C 0.012UF, K, 50V	1	
C8532	ECJ0EB1H182K	C 1800UF, Z, 50V	1	
C8533	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
			1	
C8534	ECJ1XB1C104K	C 0.1UF, Z, 16V	_	
C8535	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8536	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8537	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8542	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8546,4	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
7				
C8551	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8552	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C8554	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
			<b>—</b>	
C8555	ECJ0EC1H390J	C 390PF, K, 50V	1	
C8556	ECJ0EB1H821K	C 820PF, D, 50V	1	
C8557	ECJ1VB1H123K	C 0.012UF, K, 50V	1	
C8558	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8559	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8561	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8562	F1J1A106A043	C 0.010UF, K, 16V	1	
C8563	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8564	F1J1A106A043	1	1	
		C 60DF T 4V		
C8567	ECGRL0G680R	C 68PF, J, 4V	1	
C8568	ECJ2FB0J106M	C 10UF, Z,6.3V	1	
C8572	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8573	ECJ2FB0J106M	C 10UF, Z,6.3V	1	
C8578	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8584	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8590	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8592	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8594	ECGRL0G680R	C 68PF, J, 4V	1	
	<b>+</b>			
C8595,9	ECJ0EB1C103K	C0.010UF, K, 16V	2	
6	EGT0ED13104-	G 0 1775 77 1077	-	
C8597	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8598	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8600	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8601	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8602-	ECJ0EB1C103K	C0.010UF, K, 16V	3	
04			<u> </u>	
C8605	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8606	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8607	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8608	ECJ0EB1C103K	CO.010UF, K, 16V	1	
	ITCCCCTCTCTCTCTCTCTCTCTCTCTCTCTCTCTCTCT	CO. O. C. O. F. K. T. O. V		l

Ref.		1	_	
NT-	Part No.	Part Name &	Pcs	Remarks
No. C8609	EC.T0EB13104K	Description C 0.1UF, K, 10V	1	
C8610		C0.010UF, K, 16V	1	
		C 0.1UF, K, 10V	2	
2		,		
C8613	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8614	ECJ0EB1C103K	CO.010UF, K, 16V	1	
C8615,1	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
6			_	
C8617	ECJ0EB1C103K ECJ0EB1A104K	C0.010UF, K, 16V	1	
C8620 C8621	ECJ0EB1A104K	C 0.1UF, K, 10V C0.010UF, K, 16V	1	
C8622	ECGRL0G680R	C 68PF, J, 4V	1	
		C 0.10UF, Z, 16V	2	
0		, , , , , , , , , , , , , , , , , , , ,		
	ECJ0EC1H820J	C 820PF, K, 50V	2	
4				
C8638	1	M 10KOHM, J, 1/16W	1	
C8640,4	ECJ0EC1H150J	C 150PF, K, 50V	2	
C9000	EEEHB1C470P	C 47PF, J, 16V	1	
C9001	<del> </del>	C 0.1UF, Z, 16V	1	
C9004,0	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
5				
C9006	F1J0J1060004	C 0.010UF, K, 16V	1	
C9007	EEEHB1C470P	C 47PF, J, 16V	1	
C9008	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9009		C 0.010UF, K, 16V	1	
C9010- 12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9014	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9015-	ECJ1XF1C104Z	C 0.1UF, Z, 16V	8	
22				
C9023	EEEHB1C470P	C 47PF, J, 16V	1	
C9024		C 270PF, J, 50V	1	
C9025	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9026,2 7	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C9028-	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
31		0 011017 17 101	_	
C9033	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
_	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
6				
C9201,0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9203				
	ECJ1XC1H150J	C 15PF, J, 50V	1	
C9204		C 15PF, J, 50V C 8PF, C, 50V	1	
	ECJ1VC1H080C			
C9204 C9205	ECJ1VC1H080C F1J0J1060004	C 8PF, C, 50V	1	
C9204 C9205 C9206,0	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V	1 1 2	
C9204 C9205 C9206,0 7 C9303	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V	1 1 2	
C9204 C9205 C9206,0 7 C9303 C9304-	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V	1 1 2	
C9204 C9205 C9206,0 7 C9303 C9304- 57	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V	1 1 2 1 54	
C9204 C9205 C9206,0 7 C9303 C9304- 57	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V	1 1 2	
C9204 C9205 C9206,0 7 C9303 C9304- 57	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V	1 2 1 54	
C9204 C9205 C9206,0 7 C9303 C9304- 57 C9358 C9359	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 0.1UF, Z, 16V C 220PF, J, 4V C 0.1UF, Z, 16V	1 2 1 54 1	
C9204 C9205 C9206,0 7 C9303 C9304- 57 C9358 C9359 C9360 C9500- 02	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V	1 2 1 54 1 1	
C9204 C9205 C9206,0 7 C9303 C9304- 57 C9358 C9359 C9360 C9500- 02 C9503-	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V	1 2 1 54 1 1	
C9204 C9205 C9206,0 7 C9303 C9304- 57 C9358 C9359 C9360 C9500- 02 C9503- 12	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ2VF1C105Z ECJ1XB1C104K	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V	1 1 2 1 54 1 1 1 3	
C9204 C9205 C9206,0 7 C9303 C9304-57 C9358 C9359 C9360 C9500-02 C9503-12 C9513	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ2VF1C105Z ECJ1XB1C104K	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V	1 1 2 1 54 1 1 1 3	
C9204 C9205 C9206,0 7 C9303 C9304- 57 C9358 C9359 C9360 C9500- 02 C9503- 12 C9513	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ2VF1C105Z ECJ1XB1C104K	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V	1 1 2 1 54 1 1 1 3	
C9204 C9205 C9206,0 7 C9303 C9304-57 C9358 C9359 C9360 C9500-02 C9503-12 C9513 C9514-	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ2VF1C105Z ECJ1XB1C104K	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V	1 1 2 1 54 1 1 1 3	
C9204 C9205 C9206,0 7 C9303 C9304-57 C9358 C9359 C9360 C9500-02 C9503-12 C9513 C9514-17	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ2VF1C105Z ECJ1XB1C104K EEEHB1C470P ECJ1XB1C104K	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 47PF, J, 16V C 0.1UF, Z, 16V	1 1 2 1 54 1 1 1 3 10	
C9204 C9205 C9206,0 7 C9303 C9304- 57 C9358 C9359 C9360 C9500- 02 C9503- 12 C9514- 17 C9518 C9519 C9701,0	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ2VF1C105Z ECJ1XB1C104K EEEHB1C470P ECJ1XB1C104K	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 47PF, J, 16V C 47PF, J, 16V	1 1 2 1 54 1 1 1 3 10 1	
C9204 C9205 C9206,0 7 C9303 C9304- 57 C9358 C9359 C9360 C9500- 02 C9503- 12 C9513 C9514- 17 C9518 C9519 C9701,0 2	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XB1C104K EEEHB1C470P ECJ1XB1C104K EEEHB1C470P ECJ1XC1H101K ECJ1XF1C104Z	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 47PF, J, 16V C 47PF, J, 16V C 47PF, J, 16V C 100PF, K, 50V C 0.1UF, Z, 16V	1 1 2 1 54 1 1 1 3 10 1 4	
C9204 C9205 C9206,0 7 C9303 C9304- 57 C9358 C9359 C9360 C9500- 02 C9503- 12 C9513 C9514- 17 C9518 C9519 C9701,0 2 C9703	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XB1C104K EEEHB1C470P ECJ1XB1C104K EEEHB1C470P ECJ1XC1H101K ECJ1XF1C104Z F1J0J1060004	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 47PF, J, 16V C 47PF, J, 16V C 47PF, J, 16V C 100PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V	1 1 2 1 54 1 1 1 3 10 1 4 1 1 1 2	
C9204 C9205 C9206,0 7 C9303 C9304- 57 C9358 C9359 C9360 C9500- 02 C9503- 12 C9513 C9514- 17 C9518 C9519 C9701,0 2 C9703 C9705,0	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XB1C104K EEEHB1C470P ECJ1XB1C104K EEEHB1C470P ECJ1XC1H101K ECJ1XF1C104Z	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 47PF, J, 16V C 47PF, J, 16V C 47PF, J, 16V C 100PF, K, 50V C 0.1UF, Z, 16V	1 1 2 1 54 1 1 1 3 10 1 4	
C9204 C9205 C9206,0 7 C9303 C9304-57 C9358 C9359 C9360 C9500-02 C9503-12 C9513 C9514-17 C9518 C9519 C9701,0 2 C9703 C9705,0 6	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XB1C104K EEEHB1C470P ECJ1XB1C104K EEEHB1C470P ECJ1XC1H101K ECJ1XF1C104Z F1J0J1060004	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 47PF, J, 16V C 47PF, J, 16V C 47PF, J, 16V C 100PF, K, 50V C 0.1UF, Z, 16V C 0.010UF, K, 16V C 0.010UF, K, 16V C 0.010UF, K, 16V	1 1 2 1 54 1 1 1 1 3 10 1 1 4 1 1 2	
C9204 C9205 C9206,0 7 C9303 C9304-57 C9358 C9359 C9360 C9500-02 C9503-12 C9513 C9514-17 C9518 C9519 C9701,0 2 C9703 C9705,0 6 C9707	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XB1C104K EEEHB1C470P ECJ1XB1C104K EEEHB1C470P ECJ1XC1H101K ECJ1XF1C104Z F1J0J1060004	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 47PF, J, 16V C 47PF, J, 16V C 47PF, J, 16V C 100PF, K, 50V C 0.1UF, Z, 16V C 0.1UF, Z, 16V	1 1 2 1 54 1 1 1 3 10 1 4 1 1 1 2	
C9204 C9205 C9206,0 7 C9303 C9304-57 C9358 C9359 C9360 C9500-02 C9503-12 C9513 C9514-17 C9518 C9519 C9701,0 2 C9703 C9705,0 6 C9707	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104X EEEHB1C470P ECJ1XC1H101K ECJ1XF1C104Z F1J0J1060004 F1J0J1060004 EEEHB1C470P	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 47PF, J, 16V C 47PF, J, 16V C 100PF, K, 50V C 0.1UF, Z, 16V C 0.010UF, K, 16V C 0.010UF, K, 16V C 47PF, J, 16V	1 1 2 1 54 1 1 1 1 3 10 1 4 1 1 2	
C9204 C9205 C9206,0 7 C9303 C9304- 57 C9358 C9359 C9360 C9500- 02 C9503- 12 C9513 C9514- 17 C9518 C9519 C9701,0 2 C9703 C9705,0 6 C9707 C9712,1 3 C9714,1	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104X EEEHB1C470P ECJ1XC1H101K ECJ1XF1C104Z F1J0J1060004 F1J0J1060004 EEEHB1C470P	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 47PF, J, 16V C 47PF, J, 16V C 100PF, K, 50V C 0.1UF, Z, 16V C 0.010UF, K, 16V C 0.010UF, K, 16V C 47PF, J, 16V	1 1 2 1 54 1 1 1 1 3 10 1 4 1 1 2	
C9204 C9205 C9206,0 7 C9303 C9304- 57 C9358 C9359 C9360 C9500- 02 C9503- 12 C9513 C9514- 17 C9518 C9519 C9701,0 2 C9703 C9705,0 6 C9707 C9712,1 3 C9714,1 5	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104K ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C105Z ECJ1XB1C104K EEEHB1C470P ECJ1XB1C104K EEEHB1C470P ECJ1XC1H101K ECJ1XF1C104Z F1J0J1060004 F1J0J1060004 EEEHB1C470P ECJ1XG1C1H01K ECJ1XF1C104Z	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 47PF, J, 16V C 47PF, J, 16V C 100PF, K, 50V C 0.1UF, Z, 16V C 0.010UF, K, 16V C 47PF, J, 16V C 0.010UF, K, 16V C 0.010UF, K, 16V C 47PF, J, 16V C 0.010UF, K, 16V C 47PF, J, 16V	1 1 2 1 54 1 1 1 1 3 10 1 1 2 1 2 1 2	
C9204 C9205 C9206,0 7 C9303 C9304- 57 C9358 C9359 C9360 C9500- 02 C9503- 12 C9513 C9514- 17 C9518 C9519 C9701,0 2 C9703 C9705,0 6 C9707 C9712,1 3 C9714,1	ECJ1VC1H080C F1J0J1060004 ECJ1XB1C104X ECJ1XF1C104Z ECJ1XB1C104K EEEHB0G221P ECJ1XB1C104K ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104Z ECJ1XF1C104X EEEHB1C470P ECJ1XB1C104K EEEHB1C470P ECJ1XC1H101K ECJ1XF1C104Z F1J0J1060004 F1J0J1060004 EEEHB1C470P F1J0J1060004 ECGRL0G680R ECJ1XC1H220J	C 8PF, C, 50V C 0.010UF, K, 16V C 0.1UF, Z, 16V C 47PF, J, 16V C 47PF, J, 16V C 100PF, K, 50V C 0.1UF, Z, 16V C 0.010UF, K, 16V C 47PF, J, 16V C 0.010UF, K, 16V C 47PF, J, 16V	1 1 2 1 54 1 1 1 1 3 10 1 1 4 1 1 2 1 1 2 1 2 1 2 1 2 1 2 1 2 1	

				/ In-42F X300 / In-
	Part No.	Part Name &	Pcs	Remarks
No.	TG T1 WG1 W1 00 T	Description		
0	ECJ1XC1H102J	C 1000PF, J, 50V	2	
	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
2				
1	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
4				
		C 1000PF, J, 50V	1	
		C 1000PF, J, 50V	1	
9	ECUSAFIC4/52	C 4.7UF, Z, 16V	2	
	EEEHB1C470P	C 47PF, J, 16V	2	
1				
C9732	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9733	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
1	EEEHB1C470P	C 47PF, J, 16V	2	
5	BG T1 VB1 G1 0 4 F	G 0 1775 F 1677	1	
	ECJ1XF1C104Z ECJ1XB1C104K	C 0.1UF, Z, 16V C 0.1UF, Z, 16V	2	
0	ECUIABICIOTA	C 0.10F, Z, 10V	*	
	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9742	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9743,4	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
4				
	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
1 C9900 0	EC.T1VE1E1027	C 0.010UF, Z, 50V	2	
1	TC01ALTHI03Z	0.0100F, 4, 50V		
CA1-11	K1MN68BA0002	68P CONNECTOR	11	
CB1-11	K1MN68BA0002	68P CONNECTOR	11	
D3	K1KA30AA0009	30P CONNECTOR	1	
D4		14P CONNECTOR	1	
D5	K1KA31A00007	31P CONNECTOR	1	
D6	<b>+</b>	20P CONNECTOR	1	
D8	K1KA08AA0104		1	
D20	K1KA20AA0008		1	
D25	K1KA20AA0009	20P CONNECTOR	1	
D25 D31,32	K1KA20AA0009 K1MN55BA0076	20P CONNECTOR 55P CONNECTOR	1 2	
D25 D31,32 D33,34	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR	1 2 2	
D25 D31,32 D33,34 D2300,0	K1KA20AA0009 K1MN55BA0076	20P CONNECTOR 55P CONNECTOR	1 2	
D25 D31,32 D33,34 D2300,0	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2	
D25 D31,32 D33,34 D2300,0 1 D2303,0	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE DIODE	1 2 2 2 2	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE DIODE DIODE	1 2 2 2 2 2	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE DIODE DIODE DIODE DIODE	1 2 2 2 2	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE ZENER DIODE	1 2 2 2 2 2 2	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE DIODE DIODE DIODE DIODE	1 2 2 2 2 2 2 2 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE ZENER DIODE	1 2 2 2 2 2 2 2 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 2 1 1 2	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AAA0000770	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 2 1 1 2	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2523 D2524 D2615	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AAA0000770 MA152K MA8056M B0BC01100001	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 1 1 1 2 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2523 D2524 D2615 D2617	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AAA0000770 MA152K MA8056M B0BC01100001 MA152	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 2 1 1 1 2 1 1 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AAA0000770 MA152K MA8056M B0BC01100001	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 1 1 1 2 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K MA8056M B0BC01100001 MA152 MA8140M	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE ZENER DIODE DIODE DIODE DIODE ZENER DIODE DIODE DIODE DIODE DIODE	1 2 2 2 2 2 2 2 1 1 1 2 1 1 1 1 1 1 6	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AAA0000770 MA152K MA8056M B0BC01100001 MA152	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 2 1 1 1 2 1 1 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619- 24 D2640- 60	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K MA8056M B0BC01100001 MA152 MA8140M	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE ZENER DIODE DIODE DIODE DIODE ZENER DIODE DIODE DIODE DIODE DIODE	1 2 2 2 2 2 2 2 1 1 1 2 1 1 1 1 1 1 6	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2617 D2619-24 D2640-60	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K B3AA666M MA152K B3AA40000770 MA152C MA8056M MA8056M MA8056M MA8056M MA8056M MA8056M	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE ZENER DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE DIODE ZENER DIODE	1 2 2 2 2 2 2 2 1 1 2 1 1 1 1 1 1 6	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619- 24 D2640- 60 D4012- 14 D4016	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K B3AA666M MA152K B3AA40000770 MA152C MA8056M MA8056M MA8056M MA8056M MA8056M MA8056M	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE ZENER DIODE DIODE DIODE ZENER DIODE DIODE ZENER DIODE DIODE ZENER DIODE	1 2 2 2 2 2 2 2 1 1 2 1 1 1 1 1 1 6	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619- 24 D2640- 60 D4012- 14 D4016 D4025-	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AAA0000770 MA152K MA8056M B0BC01100001 MA152 MA8140M MA8140M MA729	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE ZENER DIODE DIODE ZENER DIODE	1 2 2 2 2 2 2 1 1 1 2 1 1 1 1 6	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619- 24 D2640- 60 D4012- 14 D4016 D4025- 27	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD0000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K MA8056M B0BC01100001 MA152 MA8140M MA729 MA728 MA111	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 2 1 1 1 1 1 1 1 1 6 2 1 3 3 1 3 3 1 3 3 1 3 3 1 3 1 3 3 1 3 3 1 3	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24 D2640-60 D4012-14 D4016 D4025-27 D4029	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD0000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K MA8056M B0BC01100001 MA152 MA8140M MA729 MA728 MA111 MA3036L	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 2 1 1 1 2 1 1 1 1 1 1 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24 D2640-60 D4012-14 D4016 D4025-27 D4029 D5610	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K MA8056M B0BC01100001 MA152 MA8140M MA729 MA728 MA111 MA3036L MA3036L MA3036L MA3000L	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 2 1 1 1 2 1 1 1 1 1 1 1 3 3 1 1 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24 D2640-60 D4012-14 D4016 D4025-27 D4029 D5610 D5614	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K MA8056M B0BC01100001 MA152 MA8140M MA729 MA728 MA111 MA3036L MA3X78900L B0BC3R700006	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 2 1 1 1 2 1 1 1 1 1 1 1 3 3 1 1 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24 D2640-60 D4012-14 D4016 D4025-27 D4029 D5610 D5614 D5615	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K B3AA0000770 MA152E MA8056M B0BC01100001 MA152 MA8140M MA729 MA728 MA111 MA3036L MA3X78900L B0BC3R700006 B0BC4R700007	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 2 1 1 1 2 1 1 1 1 1 1 1 3 1 1 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24 D2640-60 D4012-14 D4016 D4025-27 D4029 D5610 D5614 D5615 D5616	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K B3AA0000770 MA152K MA8056M B0BC01100001 MA152 MA8140M MA729 MA728 MA111 MA3036L MA3X78900L B0BC3R700006 B0BC4R700007 B0BC6R600005	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 2 1 1 1 1 1 1 1 1 1 3 1 3	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24 D2640-60 D4012-14 D4016 D4025-27 D4029 D5610 D5614 D5615	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K B3AA0000770 MA152E MA8056M B0BC01100001 MA152 MA8140M MA729 MA728 MA111 MA3036L MA3X78900L B0BC3R700006 B0BC4R700007	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 2 1 1 1 2 1 1 1 1 1 1 1 3 1 1 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619-24 D2640-60 D4012-14 D4016 D4025-27 D4029 D5610 D5614 D5615 D5616 D5617 D5618	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AAA0000770 MA152K MA8056M MA152K B3AA40000770 MA152C MA152 MA8140M MA729 MA729 MA728 MA111 MA3036L MA3X78900L B0BC3R700006 B0BC4R700007 B0BC6R600005 B0BC01100001	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 1 1 2 1 1 1 1 1 1 1 3 1 1 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2625 D2617 D2619-24 D2640-60 D4012-14 D4016 D4025-27 D4029 D5610 D5614 D5615 D5616 D5617 D5618	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K MA8056M MA152K B3AA40000770 MA152C MA8140M MA729 MA729 MA728 MA111 MA3036L MA3X78900L B0BC3R700006 B0BC4R700007 B0BC6R600005 B0BC01100001 B0BC03900015	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 1 1 1 2 1 1 1 1 1 1 1 1 1	
D25 D31,32 D33,34 D2300,0 1 D2303,0 4 D2315,1 6 D2319,2 0 D2332 D2512 D2513,1 4 D2520 D2523 D2524 D2615 D2617 D2619- 24 D2640- 60 D4012- 14 D4016 D4025- 27 D4029 D5610 D5614 D5615 D5616 D5617 D5618 D5637,3	K1KA20AA0009 K1MN55BA0076 K1MN68BA0076 MA111 MA111 B0JCDD000002 B0JCDD000002 MA111 MA8056M MA152K B3AA0000770 MA152K MA8056M MA152K B3AA40000770 MA152C MA8140M MA729 MA729 MA728 MA111 MA3036L MA3X78900L B0BC3R700006 B0BC4R700007 B0BC6R600005 B0BC01100001 B0BC03900015	20P CONNECTOR 55P CONNECTOR 68P CONNECTOR DIODE	1 2 2 2 2 2 2 1 1 1 2 1 1 1 1 1 1 1 1 1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D5640	ма3039н	ZENER DIODE	1	
D5641	MA152	DIODE	1	
D5642	MA3100H	ZENER DIODE	1	
D5643	MA152	DIODE	1	
D5644	MA3068M	ZENER DIODE	1	
D5645- 47	MA152	DIODE	3	
D5649	MA111	DIODE	1	
D5801	B0JCME000037	DIODE	1	
D5804	MA3120M	ZENER DIODE	1	
D5805,0 6	MA152	DIODE	2	
D5807	MA111	DIODE	1	
D6000,0 1	B0HBSN000008	DIODE	2	
D6002	B0HDSM000005	DIODE	1	
D6010,1 1	B0HBSN000008	DIODE	2	
D6012	B0ECHP000003	DIODE	1	
D6013,1 4	B0HCMM000014	DIODE	2	
D6015	B0ECHP000003	DIODE	1	
D6016	B0HBSN000008	DIODE	1	
D6020,2 1	B0HBSN000008	DIODE	2	
D6030,3 1	B0HBSN000008	DIODE	2	
D6035,3 6	B0ECHP000003	DIODE	2	
D6060	MA111	DIODE	1	
D6061,6 2	MA8330M	ZENER DIODE	2	
D6063	LNJ301MPUJA	LED	1	
D6064	MA8051L	ZENER DIODE	1	
D6065,6 6	MA152	DIODE	2	
D6145- 47	B0HBSN000008	DIODE	3	
D6190	B0ECHP000003	DIODE	1	
D6200	B0HDSM000005	DIODE	1	
D6203	B0HDSM000005	DIODE	1	
D6206-		DIODE	4	
D6210- 12		DIODE	3	
D6215	B0HDSM000005	DIODE	1	
D6221	B0JCME000037	DIODE	1	
	B0JCME000037 B0ECHP000003	DIODE	2	
7	DUDGWOOOG	DIODE	-	
D6228		DIODE	1	
D6240 D6241,4 2	B0HDSM000005 B0ECHP000003	DIODE	2	
	B0JCME000037	DIODE	2	
D6257- 59	B0ECHP000003	DIODE	3	
	B0JCME000037	DIODE	1	
<b>-</b>	MA111	DIODE	2	
D6271	MA111	DIODE	1	
D6411	MA111	DIODE	1	
D6412	MA8051L	ZENER DIODE	1	
D6413,1 4	MA8330M	ZENER DIODE	2	
D6415	LNJ301MPUJA	LED	1	
D6416	MA111	DIODE	1	
D6417,1 8	MA8330M	ZENER DIODE	2	
D6419- 21	MA111	DIODE	3	
D6422,2	MA8200M	ZENER DIODE	2	
3				
3 D6501- 04	B0HBSN000008	DIODE	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6506	B0ECHP000003	DIODE	1	
	B0HBSN000008	DIODE	2	
2				
D6517	MA8330M	ZENER DIODE	1	
D6518,1	MA111	DIODE	2	
9 D6521,2	BOHBSN000008	DIODE	2	
2	BORBSNOOOOO	DIODE		
D6525-	B0HBSN000008	DIODE	3	
27				
D6561,6	B0ECHP000003	DIODE	2	
D6563	B0HBSN000008	DIODE	1	
D6564,6	B0ECHP000003	DIODE	2	
5				
1	B0ECHP000003	DIODE	2	
2	W3 0240W	ZENED DIODE	+ -	
D6613 D6615,1	MA8240M MA111	ZENER DIODE DIODE	1 2	
6		21022	-	
D6617	MA8051L	ZENER DIODE	1	
D6618	B0HCMM000014	DIODE	1	
D6619	MA111	DIODE	1	
D6620	B0ECHP000003	DIODE	1	
D6622	MA8240M	ZENER DIODE	1	
D6623 D6624	B0JCME000037 MA111	DIODE	1	
D6625	BOHCKS000002	DIODE	1	
D6627	MA111	DIODE	1	
D6629,3	B0HCKS000002	DIODE	2	
0				
D6631	MA111	DIODE	1	
D6632	B0JCME000037	DIODE	1	
D6633 D6634	MA111 MA8051L	DIODE ZENER DIODE	1	
D6634 D6635-	MA8330M	ZENER DIODE	3	
37				
D6638	MA111	DIODE	1	
D6639	B0HCMM000014	DIODE	1	
D6640- 42	MA111	DIODE	3	
D6643	B0HCMM000014	DIODE	1	
D6644-	MA8056H	ZENER DIODE	8	
51				
D6652	MA111	DIODE	1	
D6653 D6654-	MA8056H	ZENER DIODE	1	
57	B0JCME000037	DIODE	4	
57 D6658	B0HCKS000002	DIODE	1	
D6658 D6813,1 4	B0HCKS000002 B0ECHP000003	DIODE	1 2	
D6658 D6813,1 4 D6815	B0HCKS000002 B0ECHP000003 MA111	DIODE DIODE	1 2	
D6658 D6813,1 4 D6815 D6817	B0HCKS000002 B0ECHP000003 MA111 MA111	DIODE DIODE	1 2 1 1	
D6658 D6813,1 4 D6815 D6817 D6818	B0HCKS000002 B0ECHP000003 MA111 MA111 B0JCKG000002	DIODE DIODE DIODE	1 2 1 1	
D6658 D6813,1 4 D6815 D6817	B0HCKS000002 B0ECHP000003 MA111 MA111	DIODE DIODE	1 2 1 1	
D6658 D6813,1 4 D6815 D6817 D6818 D6819	B0HCKS000002 B0ECHP000003 MA111 MA111 B0JCKG000002 B0ECHP000003	DIODE DIODE DIODE DIODE	1 2 1 1 1	
D6658 D6813,1 4 D6815 D6817 D6818 D6819 D6820 D6821 D6822,2	B0HCKS000002 B0ECHP000003 MA111 MA111 B0JCKG000002 B0ECHP000003 MA111	DIODE DIODE DIODE DIODE DIODE DIODE	1 2 1 1 1 1	
D6658 D6813,1 4 D6815 D6817 D6818 D6819 D6820 D6821 D6822,2 3	BOHCKS000002 BOECHP000003 MA111 MA111 BOJCKG000002 BOECHP000003 MA111 BOJCME000037 BOHCKS000002	DIODE DIODE DIODE DIODE DIODE DIODE DIODE	1 2 1 1 1 1 1 1 1 2 2	
D6658 D6813,1 4 D6815 D6817 D6818 D6819 D6820 D6821 D6822,2 3 D6824	BOHCKS000002 BOECHP000003 MA111 MA111 BOJCKG000002 BOECHP000003 MA111 BOJCME000037 BOHCKS000002	DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE	1 2 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1	
D6658 D6813,1 4 D6815 D6817 D6818 D6819 D6820 D6821 D6822,2 3 D6824 D6825	BOHCKS000002 BOECHP000003 MA111 MA111 BOJCKG000002 BOECHP000003 MA111 BOJCME000037 BOHCKS000002 BOHCMM000014 BOBCO1000044	DIODE	1 2 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1	
D6658 D6813,1 4 D6815 D6817 D6818 D6819 D6820 D6821 D6822,2 3 D6824	BOHCKS000002 BOECHP000003 MA111 MA111 BOJCKG000002 BOECHP000003 MA111 BOJCME000037 BOHCKS000002	DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE DIODE	1 2 1 1 1 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1	
D6658 D6813,1 4 D6815 D6817 D6818 D6819 D6820 D6821 D6822,2 3 D6824 D6825 D6826	B0HCKS000002 B0ECHP000003 MA111 B0JCKG000002 B0ECHP000003 MA111 B0JCME000037 B0HCKS000002 B0HCMM000014 B0BC01000044 B0ECHP000003	DIODE	1 2 1 1 1 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1	
D6658 D6813,1 4 D6815 D6817 D6818 D6819 D6820 D6821 D6822,2 3 D6824 D6825 D6826 D6827	B0HCKS000002 B0ECHP000003 MA111 B0JCKG000002 B0ECHP000003 MA111 B0JCKG000002 B0HCKS000002 B0HCKS000002 B0HCMM000014 B0BC01000044 B0ECHP000003 MA111	DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6658 D6813,1 4 D6815 D6817 D6818 D6819 D6820 D6821 D6822,2 3 D6824 D6825 D6826 D6827 D6828	B0HCKS000002 B0ECHP000003 MA111 B0JCKG000002 B0ECHP000003 MA111 B0JCME000037 B0HCKS000002 B0HCMM000014 B0BC01000044 B0ECHP000003 MA111 B0HCKS000002	DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6658 D6813,1 4 D6815 D6817 D6818 D6820 D6821 D6822,2 3 D6824 D6825 D6826 D6827 D6828 D6829 D6830 D6831,3	B0HCKS000002 B0ECHP000003 MA111 B0JCKG000002 B0ECHP000003 MA111 B0JCME000037 B0HCKS000002 B0HCMM000014 B0BC01000044 B0ECHP000003 MA111 B0HCKS000002 MA111	DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6658 D6813,1 4 D6815 D6817 D6818 D6820 D6821 D6822,2 3 D6824 D6825 D6826 D6827 D6828 D6829 D6830 D6831,3 2	BOHCKS000002 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 MA111 BOJCME000037 BOHCKS000002 BOHCMM000014 BOBCO1000044 BOECHP000003 MA111 BOHCKS000002 MA111 BOHCKS000002 MA111	DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 2 2 2 2 2 2	
D6658 D6813,1 4 D6815 D6817 D6818 D6820 D6821 D6822,2 3 D6824 D6825 D6826 D6827 D6828 D6829 D6830 D6831,3	B0HCKS000002 B0ECHP000003 MA111 B0JCKG000002 B0ECHP000003 MA111 B0JCME000037 B0HCKS000002 B0HCMM000014 B0BC01000044 B0ECHP000003 MA111 B0HCKS000002 MA111 B0HCKS000002	DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
D6658 D6813,1 4 D6815 D6817 D6818 D6820 D6821 D6822,2 3 D6824 D6825 D6826 D6827 D6828 D6829 D6830 D6831,3 2 D6833-	BOHCKS000002 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 MA111 BOJCME000037 BOHCKS000002 BOHCMM000014 BOBCO1000044 BOECHP000003 MA111 BOHCKS000002 MA111 BOHCKS000002 MA111	DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 2 2 2 2 2 2	
D6658 D6813,1 4 D6815 D6817 D6818 D6819 D6820 D6821 D6822,2 3 D6824 D6825 D6826 D6827 D6828 D6829 D6830 D6831,3 2 D6833-35 D6840 D6901,0	BOHCKS000002 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 MA111 BOJCME000037 BOHCKS000002 BOHCMM000014 BOBC01000044 BOECHP000003 MA111 BOHCKS000002 MA111 BOHCKS000002 MA111 BOHCKS000002	DIODE	1 2 1 1 1 1 1 1 1 1 1 1 1 1 2 2 3 3	
D6658 D6813,1 4 D6815 D6817 D6818 D6819 D6820 D6821 D6822,2 3 D6824 D6825 D6826 D6827 D6828 D6829 D6830 D6831,3 2 D6833-35 D6840 D6901,0	BOHCKS000002 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 MA111 BOJCME000002 BOHCKS000002 BOHCKS000002 BOHCKS000002 MA111 BOHCKS000003 MA111 BOHCKS000002 MA111 BOHCKS000002 MA111 BOHCKS000002 MA111 BOHCKS000002 MA111 BOHCKS000002 MA111 BOHCKS000002 MA111	DIODE	1 2 1 1 1 1 1 1 1 1 1 1 2 3 3 1 1 2 2	
D6658 D6813,1 4 D6815 D6817 D6818 D6819 D6820 D6821 D6822,2 3 D6824 D6825 D6826 D6827 D6828 D6829 D6830 D6831,3 2 D6833-35 D6840 D6901,0	B0HCKS000002 B0ECHP000003 MA111 MA111 B0JCKG000002 B0ECHP000003 MA111 B0JCME000037 B0HCKS000002 B0HCMM000014 B0BC01000044 B0ECHP000003 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 B0HCKS000002 MA111 B0HCKS000002	DIODE   1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 2 2 3 3 1 1		
D6658 D6813,1 4 D6815 D6817 D6818 D6819 D6820 D6821 D6822,2 3 D6824 D6825 D6826 D6827 D6828 D6829 D6830 D6831,3 2 D6833- 35 D6840 D6901,0 2 D6908,0	BOHCKS000002 BOECHP000003 MA111 BOJCKG000002 BOECHP000003 MA111 BOJCME000037 BOHCKS000002 BOHCMM000014 BOBCO1000044 BOECHP000003 MA111 BOHCKS000002 MA111 BOHCKS000002 MA111 BOHCKS000002 MA111 BOHCKS000002 MA111 BOHCKS000003 MA111 BOHCKS000003 MA111 BOHCKS0000003 MA111 BOHCKS0000003 MA111 BOHCKS0000003 MA111 BOHCMM000014	DIODE	1 2 1 1 1 1 1 1 1 1 1 1 2 3 3 1 1 2 2	MAZ80560H

No.	Part No.	Part Name & Description	Pcs	Remarks
D6918,1	B0ECHP000003	DIODE	2	
D7101- 04	B0HCMM000014	DIODE	4	
D7107,0	B0HCMM000014	DIODE	2	
D7201- 08	B0HCMM000014	DIODE	8	
D7209	B0HDSM000005	DIODE	1	
D7301- 08	B0HCMM000014	DIODE	8	
D7405- 12	B0HCMM000014	DIODE	8	
D7501- 08	B0HCMM000014	DIODE	8	
D7509	B0HDSM000005	DIODE	1	
D7601- 06	B0HCMM000014	DIODE	6	
D8200	B0DDBG000002	DIODE	1	
D8203,0 4	LNJ208R8ARA	LED	2	
D8207	MA728	DIODE	1	
D8208	K7JAAAA00001	DIODE	1	
D8210	MA728	DIODE	1	
D8215	MA8039L	ZENER DIODE	1	
D8217	B0JCDD000002	DIODE	1	
D8219	B0JCDD000002	DIODE	1	
D8221	MA8024LTX	ZENER DIODE	1	
D9000- 02	MA3033	ZENER DIODE	3	
D9011,1 2	MA728	DIODE	2	
D9015,1 6	MA152K	DIODE	2	
D9700,0 1	MA728	DIODE	2	
D9800,0 1	MA152K	DIODE	2	
D9900,0 1	MA152K	DIODE	2	
DG1,G2	K1MN40A00024	40P CONNECTOR	2	
DG3	K1KA20B00155	20P CONNECTOR	1	
DG3 DG5	K1KA20B00155 K1KA21B00008	20P CONNECTOR 21P CONNECTOR	1	
DG3 DG5 DG15	K1KA20B00155 K1KA21B00008 K1KA60A00156	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR	1 1 1	
DG3 DG5 DG15 DG20	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR	1 1 1	
DG3 DG5 DG15	K1KA20B00155 K1KA21B00008 K1KA60A00156	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR	1 1 1	
DG3 DG5 DG15 DG20	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR	1 1 1	
DG3 DG5 DG15 DG20 DG22	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR	1 1 1 1	
DG3 DG5 DG15 DG20 DG22 DT04	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR	1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22 DT04 DT07	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR 68P CONNECTOR 4P CONNECTOR	1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22 DT04 DT07 DT09	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR 68P CONNECTOR 4P CONNECTOR 9P CONNECTOR	1 1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22 DT04 DT07 DT09 DT12 FL4003-	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A00011	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR 68P CONNECTOR 4P CONNECTOR 9P CONNECTOR CONNECTOR	1 1 1 1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22 DT04 DT07 DT09 DT12 FL4003-	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A00011 J0HABH000012	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR 68P CONNECTOR 4P CONNECTOR 9P CONNECTOR CONNECTOR LC FILTER	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22  DT04 DT07 DT09 DT12  FL4003- 10 FL4014- 17	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A00011 J0HABH000012	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR 4P CONNECTOR 9P CONNECTOR CONNECTOR LC FILTER	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22  DT04 DT07 DT09 DT12  FL4003- 10 FL4012 FL4018-	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A00011  J0HABH000012 J0HABH000004 EXB38VR000	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR 68P CONNECTOR 4P CONNECTOR 9P CONNECTOR CONNECTOR LC FILTER LC FILTER LC FILTER	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22 DT04 DT07 DT09 DT12 FL4003- 10 FL4014- 17 FL4018- 20 FL4021-	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A00011  J0HABH000012 J0HABH000012  J0HABH000004 EXB38VR000 J0HABH000012	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR 4P CONNECTOR 9P CONNECTOR CONNECTOR LC FILTER LC FILTER LC FILTER RESISTOR ARRAY	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22 DT04 DT07 DT09 DT12 FL4003- 10 FL4014- 17 FL4018- 20 FL4021- 23 FL7201,	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A00011  J0HABH000012 J0HABH000012 J0HABH000012 J0HABH000012 J0HABH000012 J0HABH000012	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR 4P CONNECTOR 9P CONNECTOR CONNECTOR LC FILTER LC FILTER RESISTOR ARRAY LC FILTER	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22  DT04 DT07 DT09 DT12  FL4003- 10 FL4014- 17 FL4018- 20 FL4021- 23 FL7501, 02 FL7501,	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A000011  J0HABH000012 J0HABH000012 J0HABH000012 J0HABH000012 J0HABH000013 J0HABH000013	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR 4P CONNECTOR 9P CONNECTOR CONNECTOR LC FILTER	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22  DT04 DT07 DT09 DT12  FL4003- 10 FL4014- 17 FL4018- 20 FL4021- 23 FL7201, 02 FL7501, 02 FL8202,	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A000011  J0HABH000012 J0HABH000012 J0HABH000012 J0HABH000012 J0HABH000013 J0HABH000013	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR 68P CONNECTOR 4P CONNECTOR 9P CONNECTOR CONNECTOR LC FILTER	1 1 1 1 1 1 1 1 1 1 1 1 1 1 4 4 3 3 3 2 2 2 2	
DG3 DG5 DG15 DG20 DG22  DT04 DT07 DT09 DT12  FL4003- 10 FL4014- 17 FL4018- 20 FL4021- 23 FL7201, 02 FL7501, 02 FL8202, 03	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A00011  J0HABH000012 J0HABH000012 J0HABH000012 J0HABH000013 J0HABH000013 J0HABH000013 J0HABH000013	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR 4P CONNECTOR 9P CONNECTOR CONNECTOR LC FILTER LC FILTER RESISTOR ARRAY LC FILTER LC FILTER LC FILTER LC FILTER	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22  DT04 DT07 DT09 DT12  FL4003- 10 FL4014- 17 FL4018- 20 FL4021- 23 FL7201, 02 FL7501, 02 FL8202, 03 FL8215 FL8224- 40	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A00011  J0HABH000012  J0HABH000012  J0HABH000013  J0HABH000013  J0HABH000013  J0HABH000013  J0HABH000013  J0HABH000013	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR 4P CONNECTOR 9P CONNECTOR CONNECTOR LC FILTER	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22  DT04 DT07 DT09 DT12  FL4003- 10 FL4014- 17 FL4018- 20 FL4021- 23 FL7201, 02 FL7501, 02 FL8202, 03 FL8215 FL8224- 40 FL8258	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A00011  J0HABH000012  J0HABH000012  J0HABH000013  J0HABH000013  J0HABH000013  J0HABH000013  J0HABH000013  J0HABH000013  J0HABH000013	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR 4P CONNECTOR 9P CONNECTOR CONNECTOR LC FILTER	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22  DT04 DT07 DT09 DT12  FL4003- 10 FL4014- 17 FL4018- 20 FL4021- 23 FL7201, 02 FL7501, 02 FL8202, 03 FL8215 FL8224- 40	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A00011  J0HABH000012  J0HABH000012  J0HABH000013  J0HABH000013  J0HABH000013  J0HABH000013  J0HABH000013  J0HABH000013	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR CONNECTOR 4P CONNECTOR 9P CONNECTOR CONNECTOR LC FILTER	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
DG3 DG5 DG15 DG20 DG22  DT04 DT07 DT09 DT12  FL4003- 10 FL4014- 17 FL4018- 20 FL4021- 23 FL7501, 02 FL7501, 02 FL8202, 03 FL8215 FL824- 40 FL8258 FL8260 FL8262, 63	K1KA20B00155 K1KA21B00008 K1KA60A00156 K1MN30A00068 K1KBB0A00006 K1NA68B00037 K1KA04BA0050 K1NA09D00004 K1KAB0A00011  J0HABH000012 J0HABH000012 J0HABH000013 J0HABH000013 J0HABH000013 J0HABH000013 J0HABH000014 J0HABH000014 J0HABH000014 J0HABH000014 J0HABH000004 J0HABH000004 J0HABH000004 J0HABH000004 J0HABH000004	20P CONNECTOR 21P CONNECTOR 60P CONNECTOR 30P CONNECTOR 68P CONNECTOR 4P CONNECTOR 9P CONNECTOR LC FILTER	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description	_	
FL9300-	J0HABH000013	LC FILTER	3	
FL9701,	J0HABH000012	LC FILTER	2	
FL9703,	J0HABH000013	LC FILTER	2	
04 FL9800,	J0HABH000013	LC FILTER	2	
01 FL9900,	J0HABH000013	LC FILTER	2	
01				
H1,H2	K1MN40B00045	40P CONNECTOR	2	
н7	K1KA12AA0178	12P CONNECTOR	1	
H21	K1KA10AA0194	10P CONNECTOR	1	
H22	K1KA11AA0194	11P CONNECTOR	1	
н30	K1MN30A00068	30P CONNECTOR	1	
H50	K1MN35A00013	35P CONNECTOR	1	
HMM1-M4	TMM25401	CLAMPER	4	
IC2301	C1BB00000969	IC	1	
IC2305,	C1BB00000909	IC	2	
06		-		
IC2602	C1AB00002123	IC	1	
IC2605	AN15861A-VT	IC	1	
IC2608	C1BB00001017	IC	1	
IC4001	C0ABBB000289	IC	1	
IC4002	C0FBBK000038	IC	1	
IC4004	TC74HC4066TL	IC	1	
IC4005	MN102H90MTZ1	IC	1	
IC4006	TVRN467	IC	1	
IC4008	TVRN471	IC	1	
IC4010	C0EBF0000431	IC	1	
IC4011	COCBCAC00275	IC	1	
IC4012	COCBCBF00009	IC	1	
IC4015	C0EBE0000336	IC	1	
IC4016	COCBCAC00275	IC	1	
IC4018	C1AB00002298	IC	1	
IC4020	COCBCAC00136	IC	1	
IC4022	CODBEJG00001	IC	1	
IC4024	C1ZBZ0002790	IC	1	
IC4025	C0JBAP000020	IC	1	
IC4026	C1AB00002234	IC	1	
IC4027	C3ABQJ000040	IC	1	
IC4028	C0DBZFG00055	IC	1	
IC4030	C0EBF0000335	IC	1	
IC4031	COCBCAC00136	IC	1	
IC5601, 02	N0BF2DE00001	DC-DC CONVERTER	2	
IC5603	CODBAJB00004	IC	1	
IC5801	CODBACGOOOG4	IC	1	
IC5801	CODBAZGO0034 CODAEZH00017	IC	1	
IC6000	AN16016A-VF	IC	1	
IC6020	AN16016A-VF	IC	1	
IC6060	C0JBAZ000005	IC	1	
IC6061,	NJM2903M	INTEGRATED CIRCUIT	2	
	AN160163-VP	IC	1	
IC6100	AN16016A-VF C0ZBZ0000895	IC	2	
01 IC6220,	C0ZBZ0000895	IC	2	
21 IC6240	C0JBAZ000005	IC	1	
IC6250	AN16016A-VF	IC	1	
IC6251	C0ZBZ0001033	IC	1	
IC6252	AN1431M	LINEAR IC	1	
IC6411,	C0JBAZ000005	IC	2	
IC6413	C0JBAA000174	IC	1	
IC6421	NJM2903M	INTEGRATED CIRCUIT	1	
IC6501-	AN16016A-VF	IC CIRCUIT	3	
03 IC6610	C0ZBZ0001033	IC	1	
IC6611	C0CBADC00075	IC	1	
IC6620	C0ZBZ0001033	IC	1	
100020	C07770001033		_	

Ref.   Part No.   Part Name & Pos   Remarks   No.   Doscription   1		PX50U / TH-50PX50U			
IC6521   COCRADCO075   IC	Ref.	Part No.	Part Name &	Pcs	Remarks
ICG650	No.		Description		
IC6600   COJBAZ001033   CC	IC6621	C0CBADC00075	IC	1	
ICC6500	IC6630	C0ZBZ0001033	IC	1	
ST	IC6640	C0ZBZ0001033	IC	1	
COCRALCOUOLD   C		C0JBAZ000994	IC	2	
CC6653,   COCBADC00075   IC	51				
1					
106801		COCBADC00075	IC	2	
106812		CODANGIOCOCE	TO	-	
C16814,   AN1431M					
15					
CC6816   COCBALCOUO10   IC   IC   IC   IC   IC   IC   IC   I		AN1431M	LINEAR IC	2	
IC6817,   AN1431M		COCRAT COOOLO	TC	1	
18         COHBCO000007         IC         6         6           1C6901- COHBCO000007         IC         6         6           1C7102 COJBAZ001120         IC         1         1           IC7104- COJBAZ001120         IC         1         1           IC7201- COJBAZ001120         IC         5         5           IC7301- COJBAZ001120         IC         5         5           IC7401- COJBAZ001120         IC         5         5           IC7501- COJBAZ001120         IC         5         5           IC7502- COJBAZ001120         IC         3         6           IC7502- COJBAZ001120         IC         3         6           IC7506- COJBAZ001120         IC         3         6           IC7506- COJBAZ001120         IC         3         6           IC7501- COJBAZ001120         IC         1         1           IC7602- COJBAZ001120         IC         1         1           IC8009- CAJBAZ000120         IC         1         1           IC8020         COJBAZ0001120         IC         1         1           IC8020         COJBAZ000123         IC         1         1           IC8220					
TC6901-   COHBC0000007   TC		ANIIJIM	DINBAR IC		
TC6911-   COHBC0000007   IC		С0НВС0000007	IC	6	
16	06				
107102	IC6911-	С0НВС0000007	IC	6	
ICT104-   COJBAZ001120   IC	16				
06         COJBAZO01120         IC         5           1C7301-         COJBAZ001120         IC         5           1C7301-         COJBAZ001120         IC         5           05         COJBAZ001120         IC         5           1C7501-         COJBAZ001120         IC         5           1C7602-         COJBAZ001120         IC         1           1C7606         COJBAZ001120         IC         1           1C8002         COZBZ0001052         IC         1           1C8020         COFBBK000038         IC         1           1C8201         COABBB000190         IC         1           1C8202         COJBAS000223         IC         1           1C8203         COJBAS000223         IC         1           1C8204         NAM2904V         INTEGRATED CIRCUIT         1           1C8205         NAM2904V         INTEGRATED CIRCUIT         1           1C8206         C1AB00001860         IC         1           1C8211         MN884321A         IC         1           1C82212         COZBEZ0002437         IC         1           1C82220         COZBEZ000014         IC         1	IC7102	C0JBAZ001120	IC	1	
ICT201-   COJBAZ001120   IC		C0JBAZ001120	IC	3	
10   10   10   10   10   10   10   10					
IC7301-   COJBAZ001120   IC		C0JBAZ001120	IC	5	
OS		G0 TD3 = 00	T.G.		
IC7401-   COJBAZO01120   IC		C0JBAZ001120	IC	5	
OS		CO.TRAZO01100	TC	_	
IC7501-   C0JBAZ001120   IC		COJBAZOO1120	10	5	
05         COJBAZO01120         IC         3           04         COJBAZO01120         IC         1           1C7606         COJBAZO01120         IC         1           IC8009,         C3ABRG000061         IC         2           1C8022         COZBZ0001052         IC         1           IC8200         COFBBRO00038         IC         1           IC8201         COABBE000190         IC         1           IC8202         COJBASO00245         IC         1           IC8203         COJBASO00223         IC         2           04         IC         2         2           IC8205         NJM2904V         INTEGRATED CIRCUIT         1           IC8206,         C1AB00001860         IC         1           IC8210         C1AB00001860         IC         1           IC8211         MN884321A         IC         1           IC82216         C1ZBZ0002437         IC         1           IC82219         COZBZ00000782         IC         1           IC82229         COSBACO00161         IC         1           IC82220         COSBACO00019         IC         1           IC82220		C0JBAZ001120	IC	5	
IC7602-   C0JBAZ001120   IC				٦	
04         COJBAZO01120         IC         1           IC7606         COJBAZ001120         IC         1           IC8009, C3ABRG000061         IC         2           IC8022         COZBZ0001052         IC         1           IC8200         COFBBR000038         IC         1           IC8201         COJBAS000245         IC         1           IC8202         COJBAS000223         IC         1           IC8203         COJBAS000223         IC         2           04         INM2904V         INTEGRATED CIRCUIT         1           IC8205         NJM2904V         INTEGRATED CIRCUIT         1           IC8206         C1AB00002221         IC         2           07         IC8209         C1AB00001860         IC         1           IC8211         M884321A         IC         1           IC8216         C1ZEZ0002437         IC         1           IC8219         C0ZBZ0000782         IC         1           IC8220         C0CBCAC00161         IC         1           IC8222         C3FBRG00004         IC         1           IC8222         C3FBKC000012         IC         1	IC7602-	C0JBAZ001120	IC	3	
TC8009	04				
10   CR0222   COZBZ0001052   IC	IC7606	C0JBAZ001120	IC	1	
TC8022	IC8009,	C3ABRG000061	IC	2	
IC8200	10				
TC8201	IC8022	C0ZBZ0001052	IC	1	
IC8202	IC8200	C0FBBK000038	IC	1	
IC8205	IC8201	C0ABBB000190	IC	1	
04         IC8205         NJM2904V         INTEGRATED CIRCUIT         1           IC8206, C1AB00002221         IC         2           07         IC8209         C1AB00001860         IC         1           IC8209         C1AB00001860         IC         1           IC8211         MN884321A         IC         1           IC8216         C1ZBZ0002437         IC         1           IC8219         C0ZEZ0000782         IC         1           IC8220         C0CBCAC00161         IC         1           IC8222         C3FBRG00004         IC         1           IC8223         C3ZBP0000019         IC         1           IC8224         C0EBE0000336         IC         1           IC8228         C0EBM000027         IC         1           IC8229         C3EBKC000014         IC         1           IC8229         C3EBKC000014         IC         1           IC8232         MC14066F         MOS IC (LOGIC)         1           IC8235         C0DEZFF00004         IC         1           IC8240         MN2WS0025A-A         IC         1           IC8244         C0FBAK000019         IC         1	IC8202	C0JBAS000245	IC	1	
IC8205   NJM2904V	IC8203,	C0JBAS000223	IC	2	
IC8206	04				
07       IC8209       C1AB00001860       IC       1         IC8211       MN884321A       IC       1         IC8216       C1ZBZ0002437       IC       1         IC8219       C0ZBZ0000782       IC       1         IC8220       C0CBCAC00161       IC       1         IC8222       C3FBRG000004       IC       1         IC8223       C3ZBP0000019       IC       1         IC8224       C0EBE0000336       IC       1         IC8228       C0EBM0000027       IC       1         IC8229       C3EBKC000014       IC       1         IC8229       C3EBKC000014       IC       1         IC8230       C0JBAZ002183       IC       1         IC8232       MC14066BF       MOS IC (LOGIC)       1         IC8235       C0DBZFF00004       IC       1         IC8240       MN2WS0025A-A       IC       1         IC8241,       C0FBAK000019       IC       1         IC8244       C0FBAK000019       IC       1         IC9001       TVRN571       IC       1         IC9005,       C0BE00000120       IC       1         IC9007	IC8205	NJM2904V	INTEGRATED CIRCUIT	1	
TC8209		C1AB00002221	IC	2	
IC8211         MN884321A         IC         1           IC8216         C1ZBZ0002437         IC         1           IC8219         C0ZBZ0000782         IC         1           IC8220         C0CBCAC00161         IC         1           IC8222         C3FBRG000004         IC         1           IC8223         C3ZBP0000019         IC         1           IC8224         C0EBE0000336         IC         1           IC8228         C0EBM0000027         IC         1           IC8229         C3EBKC000014         IC         1           IC8230         C0JBAZ002183         IC         1           IC8232         MC14066BF         MOS IC (LOGIC)         1           IC8235         C0DEZFF00004         IC         1           IC8240         MN2WS0025A-A         IC         1           IC8241,         C0DBAZZ00122         IC         2           42         IC8244         C0FBAK000019         IC         1           IC8245         C1AB00002221         IC         1           IC9001         TVRN568         IC         1           IC9005,         C0JBAZ000856         IC         2      <					
TC8216				_	
TC8219	IC8209				
IC8220         COCBCAC00161         IC         1           IC8222         C3FBRG000004         IC         1           IC8223         C3ZBP0000019         IC         1           IC8227         C0EBE0000336         IC         1           IC8228         C0EBM0000027         IC         1           IC8229         C3EBKC000014         IC         1           IC8230         C0JBAZ002183         IC         1           IC8232         MC14066BF         MOS IC (LOGIC)         1           IC8235         C0DBZFF00004         IC         1           IC8240         MN2WS0025A-A         IC         1           IC8241,         C0DBAZZ00122         IC         2           42         1         1         1           IC8244         C0FBAK000019         IC         1         1           IC8245         C1AB00002221         IC         1         1           IC9001         TVRN571         IC         1         1           IC99004         C0EBE0000120         IC         1         1           IC9007         TVRN466         IC         1         1           IC99008         C0DBEJG00001 </td <td>IC8209 IC8211</td> <td>MN884321A</td> <td>IC</td> <td>1</td> <td></td>	IC8209 IC8211	MN884321A	IC	1	
IC8222         C3FBRG000004         IC         1           IC8223         C3ZBP0000019         IC         1           IC8227         C0EBE0000336         IC         1           IC8228         C0EBM0000027         IC         1           IC8229         C3EBKC000014         IC         1           IC8230         C0JBAZ002183         IC         1           IC8232         MC14066BF         MOS IC (LOGIC)         1           IC8235         C0DBZFF00004         IC         1           IC8240         MN2WS0025A-A         IC         1           IC8241,         C0DBAZZ00122         IC         2           42         C1AB00002221         IC         1           IC8244         C0FBAK000019         IC         1           IC9001         TVRN571         IC         1           IC9003         TVRN568         IC         1           IC9004         C0EBE0000120         IC         1           IC9005,         C0JBAZ000856         IC         2           06         IC         1           IC9008         C0DBEJG00001         IC         1           IC9300         MN84512-A	IC8209 IC8211 IC8216	MN884321A C1ZBZ0002437	IC	1	
IC8223         C3ZBP0000019         IC         1           IC8227         C0EBE0000336         IC         1           IC8228         C0EBM0000027         IC         1           IC8229         C3EBKC000014         IC         1           IC8230         C0JBAZ002183         IC         1           IC8232         MC14066BF         MOS IC (LOGIC)         1           IC8235         C0DBZFF00004         IC         1           IC8240         MN2WS0025A-A         IC         1           IC8241,         C0DBAZZ00122         IC         2           42         C1AB00002221         IC         1           IC8244         C0FBAK000019         IC         1           IC9001         TVRN571         IC         1           IC9003         TVRN568         IC         1           IC9004         C0EBE0000120         IC         1           IC9005,         C0JBAZ000856         IC         2           06         IC         1           IC9008         C0DBEJG00001         IC         1           IC9300         MN84512-A         IC         1           IC9302         C3ABQJ00031	IC8209 IC8211 IC8216	MN884321A C1ZBZ0002437	IC	1	
IC8227         COEBEO000336         IC         1           IC8228         COEBM0000027         IC         1           IC8229         C3EBKC000014         IC         1           IC8230         C0JBAZ002183         IC         1           IC8232         MC14066BF         MOS IC (LOGIC)         1           IC8235         CODBZFF00004         IC         1           IC8240         MN2WS0025A-A         IC         1           IC8241,         C0DBAZZ00122         IC         2           42         C1AB00002221         IC         1           IC8244         C0FBAK000019         IC         1           IC9001         TVRN571         IC         1           IC9003         TVRN571         IC         1           IC9004         C0EBE0000120         IC         1           IC9005,         C0JBAZ000856         IC         2           06         IC         1           IC9007         TVRN466         IC         1           IC9200         C1ZBZ0002769         IC         1           IC9300         MN84512-A         IC         1           IC9302         C3ABQJ000031 <t< td=""><td>IC8209 IC8211 IC8216 IC8219 IC8220</td><td>MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161</td><td>IC IC IC</td><td>1 1 1</td><td></td></t<>	IC8209 IC8211 IC8216 IC8219 IC8220	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161	IC IC IC	1 1 1	
IC8228         COEBMO000027         IC         1           IC8229         C3EBKC000014         IC         1           IC8230         COJBAZ002183         IC         1           IC8232         MC14066BF         MOS IC (LOGIC)         1           IC8235         CODBZFF00004         IC         1           IC8240         MN2WS0025A-A         IC         1           IC8241,         C0DBAZZ00122         IC         2           42         C1AB00002221         IC         1           IC9001         TVRN571         IC         1           IC9003         TVRN568         IC         1           IC9004         C0EBE0000120         IC         1           IC9005,         C0JBAZ000856         IC         2           06         IC         2           IC9007         TVRN466         IC         1           IC9200         C1ZBZ0002769         IC         1           IC9300         MN84512-A         IC         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004	IC IC IC IC	1 1 1 1	
IC8229         C3EBKC000014         IC         1           IC8230         C0JBAZ002183         IC         1           IC8232         MC14066BF         MOS IC (LOGIC)         1           IC8235         C0DBZFF00004         IC         1           IC8240         MN2WS0025A-A         IC         1           IC8241,         C0DBAZZ00122         IC         2           42         C1AB00002221         IC         1           IC9001         TVRN571         IC         1           IC9003         TVRN568         IC         1           IC9004         C0EBE0000120         IC         1           IC9005,         C0JBAZ000856         IC         2           06         IC         1           IC9007         TVRN466         IC         1           IC9008         C0DBEJG00001         IC         1           IC9200         C1ZBZ0002769         IC         1           IC9301         PST9128NR         IC (LOGIC)         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019	IC IC IC IC IC	1 1 1 1 1	
TC8230	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336	IC IC IC IC IC IC IC	1 1 1 1 1	
IC8232         MC14066BF         MOS IC (LOGIC)         1           IC8235         CODBZFF00004         IC         1           IC8240         MN2WS0025A-A         IC         1           IC8241,         CODBAZZ00122         IC         2           42         COFBAK000019         IC         1           IC8244         COFBAK000019         IC         1           IC9001         TVRN571         IC         1           IC9003         TVRN568         IC         1           IC9004         COEBE0000120         IC         1           IC9005,         COJBAZ000856         IC         2           06         IC         2           IC9007         TVRN466         IC         1           IC9008         CODBEJG00001         IC         1           IC9200         C1ZBZ0002769         IC         1           IC9301         PST9128NR         IC (LOGIC)         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027	1C 1C 1C 1C 1C 1C 1C	1 1 1 1 1 1 1	
IC8235         CODBZFF00004         IC         1           IC8240         MN2WS0025A-A         IC         1           IC8241,         CODBAZZ00122         IC         2           42         COFBAK000019         IC         1           IC8244         COFBAK000019         IC         1           IC9001         TVRN571         IC         1           IC9003         TVRN568         IC         1           IC9004         COBBE0000120         IC         1           IC9005,         COJBAZ000856         IC         2           06         IC         2           IC9007         TVRN466         IC         1           IC9008         CODBEJG00001         IC         1           IC9200         C1ZBZ0002769         IC         1           IC9300         MN84512-A         IC         1           IC9301         PST9128NR         IC (LOGIC)         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014	1C 1C 1C 1C 1C 1C 1C 1C	1 1 1 1 1 1 1	
IC8240         MN2WS0025A-A         IC         1           IC8241,         CODBAZZ00122         IC         2           42         IC8244         COFBAK000019         IC         1           IC8245         C1AB00002221         IC         1           IC9001         TVRN571         IC         1           IC9003         TVRN568         IC         1           IC9004         COEBE0000120         IC         1           IC9005,         COJBAZ000856         IC         2           06         IC         2           IC9007         TVRN466         IC         1           IC9008         CODBEJG00001         IC         1           IC9200         C1ZBZ0002769         IC         1           IC9300         MN84512-A         IC         1           IC9301         PST9128NR         IC (LOGIC)         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183	1C	1 1 1 1 1 1 1 1	
IC8241,     CODBAZZ00122     IC     2       42     1     1     1       IC8244     COFBAK000019     IC     1       IC8245     C1AB00002221     IC     1       IC9001     TVRN571     IC     1       IC9003     TVRN568     IC     1       IC9004     C0EBE0000120     IC     1       IC9005,     C0JBAZ000856     IC     2       06     C0DBAZ000856     IC     1       IC9007     TVRN466     IC     1       IC9208     C0DBBJG00001     IC     1       IC9200     C1ZBZ0002769     IC     1       IC9301     PST9128NR     IC     1       IC9302     C3ABQJ000031     IC     1       IC9303     TVRN513     IC     1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF	IC I	1 1 1 1 1 1 1 1 1	
42  IC8244	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF	IC I	1 1 1 1 1 1 1 1 1	
IC8244         COFBAKO00019         IC         1           IC8245         C1AB00002221         IC         1           IC9001         TVRN571         IC         1           IC9003         TVRN568         IC         1           IC9004         C0EBE0000120         IC         1           IC9005, 06         C0JBAZ000856         IC         2           06         IC9007         TVRN466         IC         1           IC9008         C0DBEJG00001         IC         1           IC9200         C1ZBZ0002769         IC         1           IC9300         MN84512-A         IC         1           IC9301         PST9128NR         IC (LOGIC)         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004	IC I	1 1 1 1 1 1 1 1 1 1	
IC8245         C1AB00002221         IC         1           IC9001         TVRN571         IC         1           IC9003         TVRN568         IC         1           IC9004         C0EBE0000120         IC         1           IC9005, 06         C0JBAZ000856         IC         2           06         IC         1         1           IC9007         TVRN466         IC         1         1           IC9008         C0DBEJG00001         IC         1         1           IC9200         C1ZBZ0002769         IC         1         1           IC9300         MN84512-A         IC         1         1           IC9301         PST9128NR         IC (LOGIC)         1         1           IC9302         C3ABQJ000031         IC         1         1           IC9303         TVRN513         IC         1         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8232 IC82340	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A	IC I	1 1 1 1 1 1 1 1 1 1 1	
IC9001         TVRN571         IC         1           IC9003         TVRN568         IC         1           IC9004         C0EBE0000120         IC         1           IC9005,         C0JBAZ000856         IC         2           06         C0DBEJG00001         IC         1           IC9008         C0DBEJG00001         IC         1           IC9200         C1ZBZ0002769         IC         1           IC9300         MN84512-A         IC         1           IC9301         PST9128NR         IC (LOGIC)         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8235 IC8240 IC8241,	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122	IC I	1 1 1 1 1 1 1 1 1 1 1 2	
IC9003         TVRN568         IC         1           IC9004         C0EBE0000120         IC         1           IC9005,         C0JBAZ000856         IC         2           06         IC9007         TVRN466         IC         1           IC9008         C0DBEJG00001         IC         1           IC9200         C1ZBZ0002769         IC         1           IC9300         MN84512-A         IC         1           IC9301         PST9128NR         IC (LOGIC)         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8231 IC8244	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019	IC I	1 1 1 1 1 1 1 1 1 1 1 2	
IC9004	TC8209 TC8211 TC8216 TC8219 TC8220 TC8222 TC8223 TC8227 TC8228 TC8229 TC8230 TC8232 TC8235 TC8240 TC8241, 42 TC8244 TC8245	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019 C1AB00002221	IC I	1 1 1 1 1 1 1 1 1 1 1 2	
IC9005,     C0JBAZ000856     IC     2       06     IC9007     TVRN466     IC     1       IC9008     C0DBEJG00001     IC     1       IC9200     C1ZBZ0002769     IC     1       IC9300     MN84512-A     IC     1       IC9301     PST9128NR     IC (LOGIC)     1       IC9302     C3ABQJ000031     IC     1       IC9303     TVRN513     IC     1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8230 IC8232 IC8240 IC8244 IC8244 IC8245 IC9001	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019 C1AB00002221 TVRN571	IC I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
06 IC9007 TVRN466 IC 1 IC9008 C0DBEJG00001 IC 1 IC9200 C1ZBZ0002769 IC 1 IC9300 MN84512-A IC 1 IC9301 PST9128NR IC (LOGIC) 1 IC9302 C3ABQJ000031 IC 1 IC9303 TVRN513 IC 1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8230 IC8232 IC8240 IC8244 IC8245 IC9001 IC9003	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019 C1AB00002221 TVRN571 TVRN568	IC I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
IC9007         TVRN466         IC         1           IC9008         CODBEJG00001         IC         1           IC9200         C1ZBZ0002769         IC         1           IC9300         MN84512-A         IC         1           IC9301         PST9128NR         IC (LOGIC)         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8235 IC8241 IC8244 IC8244 IC8245 IC9001 IC9003 IC9004	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019 C1AB00002221 TVRN571 TVRN568 C0EBE0000120	IC I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
IC9008         CODBEJG00001         IC         1           IC9200         C1ZBZ0002769         IC         1           IC9300         MN84512-A         IC         1           IC9301         PST9128NR         IC (LOGIC)         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8235 IC8240 IC8241, 42 IC8244 IC8245 IC9001 IC9003 IC9004	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019 C1AB00002221 TVRN571 TVRN568 C0EBE0000120	IC I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
IC9200         C1ZBZ0002769         IC         1           IC9300         MN84512-A         IC         1           IC9301         PST9128NR         IC (LOGIC)         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8235 IC8241 IC8244 IC8244 IC8245 IC9001 IC9003 IC9004	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019 C1AB00002221 TVRN571 TVRN568 C0EBE0000120 C0JBAZ000856	IC I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
IC9300         MN84512-A         IC         1           IC9301         PST9128NR         IC (LOGIC)         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8235 IC8241 IC8244 IC8244 IC8245 IC9001 IC9003 IC9004 IC9005, 06 IC9007	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019 C1AB00002221 TVRN571 TVRN568 C0EBE0000120 C0JBAZ000856	IC I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
IC9301         PST9128NR         IC (LOGIC)         1           IC9302         C3ABQJ000031         IC         1           IC9303         TVRN513         IC         1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8235 IC8240 IC8241, 42 IC8244 IC8245 IC9001 IC9003 IC9004 IC9005, 06 IC9007 IC9008	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZ200122 C0FBAK000019 C1AB00002221 TVRN571 TVRN568 C0EBE0000120 C0JBAZ000856 TVRN466 C0DBEJG00001	IC I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
IC9302 C3ABQJ000031 IC 1 IC9303 TVRN513 IC 1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8235 IC8241 IC8244 IC8245 IC9001 IC9003 IC9004 IC9005, 06 IC9007 IC9008 IC9200	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019 C1AB00002221 TVRN571 TVRN568 C0EBE0000120 C0JBAZ000856 TVRN466 C0DBEJG00001 C1ZBZ0002769	IC I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
IC9303 TVRN513 IC 1	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8235 IC8240 IC8241, 42 IC8244 IC8245 IC9001 IC9003 IC9004 IC9007 IC9008 IC9000 IC9000	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019 C1AB00002221 TVRN571 TVRN568 C0EBE0000120 C0JBAZ000856 TVRN466 C0DBEJG00001 C1ZBZ0002769 MN84512-A	IC I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8235 IC8240 IC8241, 42 IC8244 IC9001 IC9003 IC9004 IC9007 IC9008 IC9200 IC9300 IC9301	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019 C1AB00002221 TVRN571 TVRN568 C0EBE0000120 C0JBAZ000856 TVRN466 C0DBEJG00001 C1ZBZ0002769 MN84512-A PST9128NR	IC I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
1C9500	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8235 IC8240 IC8241, 42 IC8244 IC8244 IC8245 IC9001 IC9003 IC9004 IC9007 IC9008 IC9200 IC9300 IC9300 IC9300 IC9300	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019 C1AB00002221 TVRN571 TVRN568 C0EBE0000120 C0JBAZ000856 TVRN466 C0DBEJG00001 C1ZBZ0002769 MN84512-A PST9128NR C3ABQJ000031	IC I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
	IC8209 IC8211 IC8216 IC8219 IC8220 IC8222 IC8223 IC8227 IC8228 IC8229 IC8230 IC8232 IC8235 IC8240 IC8241, 42 IC8244 IC8245 IC9001 IC9005, 06 IC9007 IC9008 IC9200 IC9300 IC9301 IC9302 IC9303	MN884321A C1ZBZ0002437 C0ZBZ0000782 C0CBCAC00161 C3FBRG000004 C3ZBP0000019 C0EBE0000336 C0EBM0000027 C3EBKC000014 C0JBAZ002183 MC14066BF C0DBZFF00004 MN2WS0025A-A C0DBAZZ00122 C0FBAK000019 C1AB00002221 TVRN571 TVRN568 C0EBE0000120 C0JBAZ000856 TVRN466 C0DBEJG00001 C1ZBZ0002769 MN84512-A PST9128NR C3ABQJ000031 TVRN513	IC I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	G0 TD3 G000056	Description	_	
IC9502- 04	C0JBAZ000856	IC	3	
IC9700	C0DBEJG00001	IC	1	
IC9702	CODBAZHO0020	IC	1	
JK2601	K1U939A00001	CONNECTOR	1	
JK2605	K2HA204A0041	JACK	1	
JS2304- 11	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS2312	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2317-	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
24				
JS2329-	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
32 JS2606,	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
032000,	EKOUGETUKUU	M 0 OHM, 1/10W	*	
JS2614-	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
17				
JS2620, 21	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2624	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2627,	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
28		, ,		
JS2630-	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
37	TD T2 GT*** 0 D 0 0	* 0 0ms 1/1cm	-	
JS2645 JS2652-	ERJ3GEY0R00 ERJ6GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/10W	12	
63	EROUGETUROU	M 0 0MM, 1/10W		
JS2672-	ERJ6GEY0R00	M 0 OHM, 1/10W	16	
87				
JS2692- 03	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
JS2705-	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
12		, ,		
JS2714-	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
25 JS2726	ED TO CEVODOO	M O OHM 1/16W	1	
JS2729	ERJ3GEY0R00 ERJ3GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/16W	1	
JS2737.	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
38		·		
JS2740- 42	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS2744-	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
49				
	ERJ6GEY0R00	M 0 OHM, 1/10W	9	
68 JS4003	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4013-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
15	TD 72 GTW0 D00	1 /1 CT	_	
JS4019- 21	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4023-	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
26				
JS4033- 35	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4038,	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
39				
JS4041	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4044- 50	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
JS4053	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4059-	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
63				
JS4067	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5601 JS5609-	ERJ3GEY0R00 ERJ6GEY0R00	M 0 OHM, 1/16W M 0 OHM, 1/10W	4	
12	LICOGETORO	0 01121, 1/10W	_ <b>-</b>	<u> </u>
JS5801,	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
02 JS5805-	ED.TECEPOPO	м о онм 1/10т	4	
08	ERJ6GEY0R00	M 0 OHM, 1/10W	*	
JS5810-	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
17	ED TCCTTCT	M. O. OTTE . 7./7.0	-	
JS5819 JS6200	ERJ6GEY0R00 ERD25V0T	M 0 OHM, 1/10W M OHM, 1/10W	1	
JS6402	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS6801	ERD25V0T	M OHM, 1/10W	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description	$\perp$	
K1	K1KA12BA0053	12P CONNECTOR	1	
K2	K1KA02BA0061	2P CONNECTOR	1	
L2305,0	G0A100ZA0033	CHOKE COIL	2	
6	GUATUUZAUUSS	CHOKE COIL	*	
L2312,1	G0A100ZA0033	CHOKE COIL	2	
3				
L2316-	J0JJC0000011	CHIP INDUCTOR	4	
19			+ + +	
L2615	J0JHC0000078	CHIP INDUCTOR	1	
L2617 L4002,0	J0JHC0000078 J0JHC0000078	CHIP INDUCTOR CHIP INDUCTOR	2	
3	303AC0000078	CHIP INDUCTOR	4	
L4006	J0JHC0000078	CHIP INDUCTOR	1	
L4008	J0JHC0000078	CHIP INDUCTOR	1	
L4012	J0JCC0000241	CHIP INDUCTOR	1	
L4013	J0JHC0000078	CHIP INDUCTOR	1	
L4019	J0JHC0000078	CHIP INDUCTOR	1	
L4021,2	J0JHC0000045	CHIP INDUCTOR	2	
2				
L4024,2	J0JHC0000078	CHIP INDUCTOR	2	
5 L4027	J0JHC0000078	CHIP INDUCTOR	1	
L4027	J0JCC0000241	CHIP INDUCTOR	1	
L4028	J0JHC0000078	CHIP INDUCTOR	1	
L4035	J0JHC0000078	CHIP INDUCTOR	1 1	
L4036	J0JCC0000241	CHIP INDUCTOR	1	
L4037-	J0JHC0000078	CHIP INDUCTOR	3	
39				
L4040,4	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
1			+ +	
L4043	J0JCC0000241	CHIP INDUCTOR	1	
L4044	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L4047,4 8	J0JHC0000078	CHIP INDUCTOR	2	
L5604	G0A470GA0002	CHOKE COIL	1	
L5605	G1C1R0MA0072	CHOKE COIL	1	
L5606	G0A220GA0002	CHOKE COIL	1	
L5607	G0C101K00023	PEAKING COIL	1	
L5608	G1C100MA0072	CHOKE COIL	1	
L5609	TALL08N120KA	INDUCTION COIL	1	
L5610	G1C470MA0077	INDUCTION COIL	1	
L5611	G1A150ZA0007	CHOKE COIL	1	
L5612	G0A220GA0002	CHOKE COIL	1	
L5613,1	G1A150ZA0007	CHOKE COIL	2	
4			+ - +	
L5615	G0A220GA0002	CHOKE COIL	1	
L5616	G1A150ZA0007	CHOKE COIL	1	
L5801	G0C101K00023	PEAKING COIL	1	
L5802	TALL08N101KA G0A220GA0002	INDUCTION COIL	1 1	
L5803		CHOKE COIL	1	
L5808 L5810	G0A100GA0013 G0A100GA0013	CHOKE COIL	1	
L6000,0	J0JJC0000021	CHIP INDUCTOR	2	
1			-	
L6010-	G0AR60MA0003	CHOKE COIL	3	
12			+	
L6014	G0ZZ00002183	PEAKING COIL	1	
L6020	J0JJC0000021	CHIP INDUCTOR	1	
L6030-	G0A1R4MA0003	CHOKE COIL	4	
33 L6040	G0ZZ00002183	PEAKING COIL	1	
L6040	G0ZZ00002183	PEAKING COIL	1	
L6042	G0ZZ00002183	PEAKING COIL	1	
L6044	G0ZZ00002183	PEAKING COIL	1 1	
L6068	J0JJC00002103	CHIP INDUCTOR	1	
L6070	G0ZZ00002183	PEAKING COIL	1	
L6072	G0ZZ00002183	PEAKING COIL	1	
L6074	G0ZZ00002183	PEAKING COIL	1	
L6076	G0ZZ00002183	PEAKING COIL	1	
L6098	J0JJC0000021	CHIP INDUCTOR	1	
L6180-	G0ZZ00002183	PEAKING COIL	3	
82				
T C1 00 -	.T0.T.TC00000021	CHIP INDUCTOR	2	
L6183,8 4	00000000021			

No.   Description   10   10   10   10   10   10   10   1	Ref.	Part No.	Part Name &	Pcs	Remarks
L6190		Fait No.		FCS	Remains
L6210-   JOJC0000021   CHIP INDUCTOR   10   19   19   10   19   19   19   19		.T0.T.TC0000021		1	
04					
L6210-   JOJUCO000021   CHIP INDUCTOR   1   1   1   1   1   1   1   1   1		GOARGOMAGGG	CHOKE COIL		
19		T0.TJC0000021	CHIP INDUCTOR	10	
L6223-   JOJUC0000021   CHIP INDUCTOR   4	l			- "	
26         CHIP INDUCTOR         3           33         JOJJC0000021         CHIP INDUCTOR         3           16235-3         JOJJC0000021         CHIP INDUCTOR         2           16235-3         JOJJC0000021         CHIP INDUCTOR         2           16235-5         JOJJC0000021         CHIP INDUCTOR         2           16251-5         JOJJC0000021         CHIP INDUCTOR         2           16411-1         GOZZ00002183         PEAKING COIL         2           16501-0         GARGOMA0003         CHOKE COIL         4           16507-1         GOAIR4MA0003         CHOKE COIL         4           16522         GOZZ00002183         PEAKING COIL         1           16524         GOZZ00002183         PEAKING COIL         1           165254         GOZZ00002183         PEAKING COIL         1           16534         GOZZ00002183         PEAKING COIL         1           165350         GOZZ00002183         PEAKING COIL         1           165551         GOZZ00002183         PEAKING COIL         1           16693         JOJJC0000021         CHIP INDUCTOR         2           9         JOJJC0000021         CHIP INDUCTOR         8 <tr< td=""><td>L6223-</td><td>J0JJC0000021</td><td>CHIP INDUCTOR</td><td>4</td><td></td></tr<>	L6223-	J0JJC0000021	CHIP INDUCTOR	4	
1					
L6235.3   GOZZO000218   PERKING COIL   1	L6231-	J0JJC0000021	CHIP INDUCTOR	3	
S	33				
L6239	L6235,3	J0JJC0000021	CHIP INDUCTOR	2	
1	6				
L6250 G0Z20000218 PEAKING COIL 1 L6251,5 JOJJC0000021 CHIP INDUCTOR 2 L6411,1 G0Z20000218 PEAKING COIL 2 L6501- G0AR60MA0003 CHOKE COIL 3 L6507- G0ALRAMA0003 CHOKE COIL 4 L6522 G0Z200002183 PEAKING COIL 1 L6524 G0Z200002183 PEAKING COIL 1 L6525 G0Z200002183 PEAKING COIL 1 L6526 G0Z200002183 PEAKING COIL 1 L6546 G0Z200002183 PEAKING COIL 1 L6550 G0Z200002183 PEAKING COIL 1 L6550 G0Z200002183 PEAKING COIL 1 L6551 G0Z200002183 PEAKING COIL 1 L6552 G0Z200002183 PEAKING COIL 1 L6553 G0Z200002183 PEAKING COIL 1 L6554 G0Z200002183 PEAKING COIL 1 L6550 G0Z200002183 PEAKING COIL 1 L6551 G0Z200002183 PEAKING COIL 1 L6679- J0JJC0000021 CHIP INDUCTOR 3 L6681 J0JJC0000021 CHIP INDUCTOR 2 L6812,1 G0Z20002183 PEAKING COIL 2 L6814- J0JJC0000021 CHIP INDUCTOR 2 L6814- J0JJC0000021 CHIP INDUCTOR 8 L6814- J0JJC0000011 CHIP INDUCTOR 8 L6814- J0JJC0000011 CHIP INDUCTOR 8 L6814- J0JJC0000011 CHIP INDUCTOR 8 L7701- J0JJC0000011 CHIP INDUCTOR 1 L68096 J0JHC0000045 CHIP INDUCTOR 1 L68141- ELJNAS2NMB INDUCTION COIL 1 L6200- ELJNA57NMB INDUCTION COIL 1 L6201- ELJNA57NMB INDUCTION COIL 1 L6202- ELJNA57NMB INDUCTION COIL 1 L6203- ELJNA57NMB INDUCTION COIL 1 L6204- ELJNA55NF INDUCTION COIL 1 L6207- ELJNA57NB INDUCTION COIL 1 L6208- ELJNA57NB INDUCTION COIL 1 L6211- ELJNA57NB INDUCTION COIL 1 L6211- ELJNA57NB INDUCTION COIL 1 L6212- ELJNA57NB INDUCTION COIL 1 L6213- J0JC00000045 CHIP INDUCTOR 2 L6213- J0JHC0000045 CHIP INDUCTOR 2 L6213- J0JHC0000045 CHIP INDUCTOR 2		G0ZZ00002183	PEAKING COIL	3	
L6251,5   JOJJC0000021   CHIP INDUCTOR   2   2   2   2   3   3   3   3   3   3	41				
2	L6250	G0ZZ00002183	PEAKING COIL	1	
L6411,1 GOZZO0002183 PEARING COIL 2   1   1   1   1   1   1   1   1   1	L6251,5	J0JJC0000021	CHIP INDUCTOR	2	
2					
L6501- GOAR6OMA0003 CHOKE COIL 3  03 CHOKE COIL 4  L6507- GOALRAMA0003 CHOKE COIL 4  L6522 GOZZO0002183 PEAKING COIL 1  L6526 GOZZO0002183 PEAKING COIL 1  L6526 GOZZO0002183 PEAKING COIL 1  L6526 GOZZO0002183 PEAKING COIL 1  L6546 GOZZO0002183 PEAKING COIL 1  L6546 GOZZO0002183 PEAKING COIL 1  L6546 GOZZO0002183 PEAKING COIL 1  L65548 GOZZO0002183 PEAKING COIL 1  L65550 GOZZO0002183 PEAKING COIL 1  L6550 GOZZO0002183 PEAKING COIL 1  L66570- J0JJC0000021 CHIP INDUCTOR 3  PARKING COIL 1  L6693 J0JJC0000021 CHIP INDUCTOR 2  PARKING COIL 2  GOZZO0002183 PEAKING COIL 1  L6693 J0JJC0000021 CHIP INDUCTOR 2  PARKING COIL 2  GOZZO0002183 PEAKING COIL 2  GOZZO000011 CHIP INDUCTOR 3  L6814- J0JJC0000011 CHIP INDUCTOR 6  L7101- J0JJC0000011 CHIP INDUCTOR 8  BUT J0JJC0000011 CHIP INDUCTOR 1  BUT J0JC0000011 CHIP INDUCTOR 1  BUT J0JJC0000011 CHIP INDUCTOR 1  BUT J0JC0000011 CHIP INDUCT		G0ZZ00002183	PEAKING COIL	2	
03					
L6507- G0A1R4MA0003 CHOKE COIL 4	l	GOAR60MA0003	CHOKE COIL	3	
10		G03 1 D 4343 0 0 0 0	G	_	
L6522 GOZZOOO02183 PEAKING COIL 1 L6524 GOZZOOO02183 PEAKING COIL 1 L6526 GOZZOOO02183 PEAKING COIL 1 L6526 GOZZOOO02183 PEAKING COIL 1 L6528 GOZZOOO02183 PEAKING COIL 1 L6546 GOZZOOO02183 PEAKING COIL 1 L6546 GOZZOOO02183 PEAKING COIL 1 L6550 GOZZOOO02183 PEAKING COIL 1 L6550 GOZZOOO02183 PEAKING COIL 1 L6551 GOZZOOO02183 PEAKING COIL 1 L6552 GOZZOOO02183 PEAKING COIL 1 L6552 GOZZOOO02183 PEAKING COIL 1 L66551 GOZZOOO02183 PEAKING COIL 1 L66693 JOJJCOOO0021 CHIP INDUCTOR 3 PEAKING COIL 1 L6693 JOJJCOOO0021 CHIP INDUCTOR 2 PEAKING COIL 2 SEARING COIL 2 SEARING COIL 3 L6694 JOJJCOOO0021 CHIP INDUCTOR 3 L6812-1 GOZZOOO02183 PEAKING COIL 2 SEARING COIL 2 SEARING COIL 3 L6814- JOJJCOOO0021 CHIP INDUCTOR 3 L6814- JOJJCOOO0011 CHIP INDUCTOR 8 L77101- JOJJCOO00011 CHIP INDUCTOR 8 L77301- JOJJCOO00011 CHIP INDUCTOR 8 L77401- JOJJCOO00011 CHIP INDUCTOR 8 L77401- JOJJCOO00011 CHIP INDUCTOR 8 L77501- JOJJCOO00011 CHIP INDUCTOR 8 L77601- JOJJCOO00011 CHIP INDUCTOR 6 L8096 JOJHCOO00045 CHIP INDUCTOR 1 L8141- ERJJGEYOROO M O OHM, 1/16W 3 L8200 ELJNASONMB INDUCTION COIL 1 L8200- BLJNASONMB INDUCTION COIL 1 L8200- BLJNASONMB INDUCTION COIL 1 L8201- ELJNASONF INDUCTION COIL 1 L8202- ELJNASONF INDUCTION COIL 1 L8203- JOJHCOOO0045 CHIP INDUCTOR 1 L8211 ELJNASOFF INDUCTION COIL 1 L8212- ELJNARSOFF INDUCTION COIL 1 L8213-1 ELJNARSOFF INDUCTION COIL 1 L8213-1 ELJNARSOF INDUCTION COIL 1 L8217- ELJNASONB INDUCTION COIL 1 L8218 JOJHCOOO0045 CHIP INDUCTOR 5 L8217- JOJHCOOO0045 CHIP INDUCTOR 5 L8218 JOJHCOOO0045 CHIP INDUCTOR 5 L8219- ZEJJAROMB INDUCTION COIL 1 L8219- ZEJJAROMB INDUCTION COIL 1 L8213- JOJHCOOO0045 CHIP INDUCTOR 5 L8231- JOJHCOOO0045 CHIP INDUCTOR 1 L8235 JOJHCOOO0045 CHIP INDUCTOR 1 L8236 SLJAROO00035 CHIP INDUCTOR 1		GUALK4MAUUU3	CHOKE COIL	4	
L6524 GOZZOOO2183 PEAKING COIL 1 L6526 GOZZOOO2183 PEAKING COIL 1 L6528 GOZZOOO2183 PEAKING COIL 1 L6546 GOZZOOO2183 PEAKING COIL 1 L6546 GOZZOOO2183 PEAKING COIL 1 L6548 GOZZOOO2183 PEAKING COIL 1 L6552 GOZZOOO2183 PEAKING COIL 1 L6555 GOZZOOO2183 PEAKING COIL 1 L6555 GOZZOOO2183 PEAKING COIL 1 L6657- JOJJCOOO021 PEAKING COIL 1 L66697- JOJJCOO00021 CHIP INDUCTOR 3 PEAKING COIL 1 L6698,9 JOJJCOO00021 CHIP INDUCTOR 2 S L6693 JOJJCOO00021 CHIP INDUCTOR 2 S L6812,1 GOZZOOO2183 PEAKING COIL 2 S L6814- JOJJCOO00021 CHIP INDUCTOR 3 L6816- JOJJCOO00011 CHIP INDUCTOR 6 L6701- JOJJCOO00011 CHIP INDUCTOR 8 UT7301- JOJJCOO00011 CHIP INDUCTOR 8 L7301- JOJJCOO00011 CHIP INDUCTOR 8 L7301- JOJJCOO00011 CHIP INDUCTOR 8 L7401- JOJJCOO00011 CHIP INDUCTOR 8 L7501- JOJJCOO00011 CHIP INDUCTOR 8 L7501- JOJJCOO00011 CHIP INDUCTOR 8 L808- JOJHCOO00045 CHIP INDUCTOR 1 L8141- ERJJGEYOROO MOOMM, 1/16W 3 43 L8200- ELJPA270KB INDUCTION COIL 4 US204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA15MP INDUCTION COIL 1 L8209 JOJHCOO0045 CHIP INDUCTOR 1 L8201 ELJNA15FF INDUCTION COIL 1 L8202 ELJNA15FF INDUCTION COIL 1 L8213,1 ELJPA1ROMB INDUCTION COIL 1 L8213 JOJHCOO0045 CHIP INDUCTOR 1 L8214 ELJNARSFF INDUCTION COIL 1 L8215 ELJNA15FF INDUCTION COIL 1 L8217 ELJNA15FF INDUCTION COIL 1 L8218 JOJHCOO0045 CHIP INDUCTOR 5 L8211 ELJNARSFF INDUCTION COIL 1 L8213,1 GLJPA1ROMB INDUCTION COIL 1 L8214 ELJNARSFF INDUCTION COIL 1 L8215 JOJHCOO0045 CHIP INDUCTOR 5 L8216 LBJA17 GUDTON COIL 1 L8217 JOJHCOO0045 CHIP INDUCTOR 5 L8218 JOJHCOO0045 CHIP INDUCTOR 5 L8218 JOJHCOO0045 CHIP INDUCTOR COIL 1 L8219 JOJHCOO0045 CHIP INDUCTOR 5 L8211 JOJHCOO0045 CHIP INDUCTOR 1 L8233,3 JOJHCOO00045 CHIP INDUCTOR 2 L8231,3 JOJHCOO00045 CHIP INDUCTOR 2 L8233,3 JOJHCOO00045 CHIP INDUCTOR 1		G07700002192	DEAKING COIL	1	
L6526 GOZZOOO2183 PEAKING COIL 1 L6548 GOZZOOO2183 PEAKING COIL 1 L6548 GOZZOOO2183 PEAKING COIL 1 L6550 GOZZOOO2183 PEAKING COIL 1 L6550 GOZZOOO2183 PEAKING COIL 1 L6557 GOZZOOO2183 PEAKING COIL 1 L6577 JOJJCOOO021 CHIP INDUCTOR 3 PAKING COIL 1 L6677- JOJJCOOO021 CHIP INDUCTOR 1 L6693 JOJJCOOO021 CHIP INDUCTOR 1 L6698,9 JOJJCOO0021 CHIP INDUCTOR 2 S L6812-1 GOZZOOO2183 PEAKING COIL 2 3 L6812-1 JOJJCOO00021 CHIP INDUCTOR 3 L6814- JOJJCOO00021 CHIP INDUCTOR 3 L6814- JOJJCOO00011 CHIP INDUCTOR 8 L77101- JOJJCOO00011 CHIP INDUCTOR 8 L77301- JOJJCOO00011 CHIP INDUCTOR 8 L77401- JOJJCOO00011 CHIP INDUCTOR 8 L78501- JOJJCOO00011 CHIP INDUCTOR 8 L78696 JOJHCOO00045 CHIP INDUCTOR 6 L8096 JOJHCOO00045 CHIP INDUCTOR 1 L8200- ELJPA270KB INDUCTION COIL 1 L8200- ELJPA270KB INDUCTION COIL 1 L8200- ELJNASANMB INDUCTION COIL 1 L8201- ELJNASANMB INDUCTION COIL 1 L8202- ELJNASANMB INDUCTION COIL 1 L8203- JOJHCOO00045 CHIP INDUCTOR 1 L8213-1 ELJNARSJF INDUCTION COIL 1 L8213-1 ELJNARSJF INDUCTION COIL 1 L8213-1 ELJNARSJF INDUCTION COIL 1 L8213-1 ELJNARSSF INDUCTION COIL 1 L8213-1 GJGCOO0045 CHIP INDUCTOR 2 L8231-3 JOJHCOO00045 CHIP INDUCTOR 2		<b>†</b>		_	
L6528 G0ZZ00002183 PEAKING COIL 1 L6546 G0ZZ00002183 PEAKING COIL 1 L6548 G0ZZ00002183 PEAKING COIL 1 L6550 G0ZZ00002183 PEAKING COIL 1 L6552 G0ZZ00002183 PEAKING COIL 1 L6552 G0ZZ00002183 PEAKING COIL 1 L66552 G0ZZ00002183 PEAKING COIL 1 L6677 J0JJC0000021 CHIP INDUCTOR 3 79 L6693 J0JJC0000021 CHIP INDUCTOR 2 9 L6812,1 G0ZZ00002183 PEAKING COIL 2 3 L6814- J0JJC0000021 CHIP INDUCTOR 3 16 L7101- J0JJC0000011 CHIP INDUCTOR 6 L7201- J0JJC0000011 CHIP INDUCTOR 8 U7301- J0JJC0000011 CHIP INDUCTOR 8 U7401- J0JJC0000011 CHIP INDUCTOR 1 U7501- J0JJC00000015 CHIP INDUCTOR 1 U7501- J0JJC00000015 CHIP INDUCTOR COIL 1 U7501- ELJNA47NMB INDUCTION COIL 1 U7501- ELJNA47NMB				-	
L6546 G0ZZ00002183 PEAKING COIL 1 L6550 G0ZZ00002183 PEAKING COIL 1 L6551 G0ZZ00002183 PEAKING COIL 1 L657- J0JJC0000021 CHIP INDUCTOR 3 79 J0JJC0000021 CHIP INDUCTOR 1 L6693 J0JJC0000021 CHIP INDUCTOR 2 9 L6891, G0ZZ00002183 PEAKING COIL 2 1 L6698, J0JJC0000021 CHIP INDUCTOR 2 9 L6812, G0ZZ00002183 PEAKING COIL 2 1 L6814- J0JJC0000021 CHIP INDUCTOR 3 16 L7101- J0JJC0000011 CHIP INDUCTOR 6 16 L77101- J0JJC0000011 CHIP INDUCTOR 8 18 L7301- J0JJC0000011 CHIP INDUCTOR 8 18 L7301- J0JJC0000011 CHIP INDUCTOR 8 18 L7401- J0JJC0000011 CHIP INDUCTOR 8 18 L7501- J0JJC0000011 CHIP INDUCTOR 6 18 L7501- J0JJC0000011 CHIP INDUCTOR 1 18 L8141- ERJ3GEYOROO M 0 OHM, 1/16W 3 43 L8204 ELJNA270KB INDUCTION COIL 1 L8200 ELJNA47NMB INDUCTION COIL 1 L8201 ELJNA47NMB INDUCTION COIL 1 L8202 ELJNA47NMB INDUCTION COIL 1 L8203 ELJNA47NMB INDUCTION COIL 1 L8204 ELJNA47NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA47NMB INDUCTION COIL 1 L8211 ELJNA1ROMF INDUCTION COIL 1 L8212 ELJNA1ROMF INDUCTION COIL 1 L8213 J0JHC0000045 CHIP INDUCTOR 1 L8214 ELJNA1ROMF INDUCTION COIL 1 L8215 ELJNA1ROMF INDUCTION COIL 1 L8216 ELJNA1ROMF INDUCTION COIL 1 L8217 ELJNA1ROMF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 5 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231, J0JHC0000045 CHIP INDUCTOR 5 L8231, J0JHC0000045 CHIP INDUCTOR 5 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236 J0JHC0000045 CHIP INDUCTOR 2 L8231 J0JHC0000045 CHIP INDUCTOR 1 L8233 J0JHC0000045 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 2					
L65548 G0ZZ00002183 PEAKING COIL 1 L6555 G0ZZ00002183 PEAKING COIL 1 L6555 G0ZZ00002183 PEAKING COIL 1 L6577- J0JJC0000021 CHIP INDUCTOR 3 79 L6693 J0JJC0000021 CHIP INDUCTOR 1 L6698,9 J0JJC0000021 CHIP INDUCTOR 2 9 L6812,1 G0ZZ00002183 PEAKING COIL 2 3 L6814- J0JJC0000021 CHIP INDUCTOR 3 L6814- J0JJC0000021 CHIP INDUCTOR 6 L77101- J0JJC0000011 CHIP INDUCTOR 8 L77201- J0JJC0000011 CHIP INDUCTOR 8 U7401- J0JJC0000011 CHIP INDUCTOR 8 U7401- J0JJC0000011 CHIP INDUCTOR 8 U7401- J0JJC0000011 CHIP INDUCTOR 8 U8 L7501- J0JJC0000011 CHIP INDUCTOR 8 U8 L7501- J0JJC0000011 CHIP INDUCTOR 8 U8 L7501- J0JJC0000011 CHIP INDUCTOR 1 U8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 43 L8200- ELJPA270KB INDUCTION COIL 4 U8200- ELJPA270KB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA180MF INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8201 ELJNA180MF INDUCTION COIL 1 L8202 ELJNA180MF INDUCTION COIL 1 L8203 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R0JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213 J0JHC0000045 CHIP INDUCTOR 1 L8214 ELJNA1R0JF INDUCTION COIL 1 L8215 J0JHC0000045 CHIP INDUCTOR 5 L8217 ELJNAS6KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 5 L8219 J0JHC0000045 CHIP INDUCTOR 5 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8235 J0JHC0000045 CHIP INDUCTOR 2 L8231,3 J0JHC0000045 CHIP INDUCTOR 1 L82325 J0JHC0000045 CHIP INDUCTOR 2 L8233 J0JHC0000045 CHIP INDUCTOR 1 L8233 J0JHC0000045 CHIP INDUCTOR 2					
L6550 G0ZZ00002183 PEAKING COIL 1 L6557 G0ZZ00002183 PEAKING COIL 1 L6677- J0JJC0000021 CHIP INDUCTOR 3 79 L6693 J0JJC0000021 CHIP INDUCTOR 1 L6698,9 J0JJC0000021 CHIP INDUCTOR 2 9 L6812,1 G0ZZ00002183 PEAKING COIL 2 3 L6814- J0JJC0000021 CHIP INDUCTOR 3 166 L7101- J0JJC0000011 CHIP INDUCTOR 6 06 L7201- J0JJC0000011 CHIP INDUCTOR 8 8 L7401- J0JJC0000011 CHIP INDUCTOR 8 108 L7501- G06 L8096 J0JHC0000011 CHIP INDUCTOR 1 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 43 L8200- ELJPA270KB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA47NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1ROF INDUCTION COIL 1 L8212 ELJNA1ROF INDUCTION COIL 1 L8213 J0JHC0000045 CHIP INDUCTOR 1 L8214 ELJNA1ROF INDUCTION COIL 1 L8215 ELJNA1ROF INDUCTION COIL 1 L8216 ELJNA1ROF INDUCTION COIL 1 L8217 ELJNA1ROF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 ELJNA1ROF INDUCTION COIL 1 L8211 ELJNA1ROF INDUCTION COIL 1 L8212 ELJNA1ROF INDUCTION COIL 1 L8213 J0JHC0000045 CHIP INDUCTOR 5 L8214 ELJNA1ROF INDUCTION COIL 1 L8215 J0JHC0000045 CHIP INDUCTOR 5 L8216 ELJNA766F INDUCTION COIL 1 L8217 ELJNA766F INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 2 L8231 J0JHC0000045 CHIP INDUCTOR 1 L8233 J0JHC0000045 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236 J0JHC0000045 CHIP INDUCTOR 2					
L6552 G0ZZ00002183 PEAKING COIL 1 L6677- J0JJC0000021 CHIP INDUCTOR 3 79 L6693 J0JJC0000021 CHIP INDUCTOR 1 L6698,9 J0JJC0000021 CHIP INDUCTOR 2 9 L6812-1 G0ZZ00002183 PEAKING COIL 2 3 L6814- J0JJC0000021 CHIP INDUCTOR 6 L7201- J0JJC0000011 CHIP INDUCTOR 6 L7201- J0JJC0000011 CHIP INDUCTOR 8 L7301- J0JJC0000011 CHIP INDUCTOR 8 L7401- J0JJC0000011 CHIP INDUCTOR 8 L7501- J0JJC0000011 CHIP INDUCTOR 8 L7501- J0JJC0000011 CHIP INDUCTOR 8 L7501- G08 J0JHC0000011 CHIP INDUCTOR 8 L7501- J0JJC0000011 CHIP INDUCTOR 8 L7501- J0JJC0000011 CHIP INDUCTOR 8 L7501- J0JJC0000011 CHIP INDUCTOR 1 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 L8200- ELJPA270KB INDUCTION COIL 4 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56MMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA1NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8208 ELJNA1NBFJF INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR COIL 1 L8208 ELJNA1RSJF INDUCTION COIL 1 L8211 ELJNA1RSJF INDUCTION COIL 1 L8212 ELJNA1RSJF INDUCTION COIL 1 L8213 ELJNA1RSJF INDUCTION COIL 1 L8214 ELJNA1RSJF INDUCTION COIL 1 L8215 ELJNA1ROJF INDUCTION COIL 1 L8216 ELJNA1RSJF INDUCTION COIL 1 L8217 ELJNA1RSJF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 5 L8219 ELJPA1ROMB INDUCTION COIL 1 L8211 ELJNA1RSJF INDUCTION COIL 1 L8212 ELJNA1ROJF INDUCTION COIL 1 L8213 J0JHC0000045 CHIP INDUCTOR 5 L8214 ELJNA1RSJF INDUCTION COIL 1 L8215 J0JHC0000045 CHIP INDUCTOR 5 L8216 SJDJHC0000045 CHIP INDUCTOR 2 L8217 ELJPA1ROMB INDUCTION COIL 1 L8228 SLJPA1ROMB INDUCTION COIL 1 L8229 J0JHC0000045 CHIP INDUCTOR 2 L8231 J0JHC0000045 CHIP INDUCTOR 2 L8231 J0JHC0000045 CHIP INDUCTOR 2	L6548			1	
L6677- J0JJC0000021 CHIP INDUCTOR 3  L6693 J0JJC0000021 CHIP INDUCTOR 1  L6698,9 J0JJC0000021 CHIP INDUCTOR 2  S  L6814- J0JJC0000021 CHIP INDUCTOR 3  L6814- J0JJC0000011 CHIP INDUCTOR 6  L7201- J0JJC0000011 CHIP INDUCTOR 8  L7301- J0JJC0000011 CHIP INDUCTOR 8  L7301- J0JJC0000011 CHIP INDUCTOR 8  L7501- J0JJC0000011 CHIP INDUCTOR 8  L7501- J0JJC0000011 CHIP INDUCTOR 8  L7501- J0JJC0000011 CHIP INDUCTOR 8  L8141- ERJ3GEYORO	L6550	G0ZZ00002183	PEAKING COIL	1	
Total		G0ZZ00002183	PEAKING COIL	1	
L6693 J0JJC0000021 CHIP INDUCTOR 1 L6698,9 J0JJC0000021 CHIP INDUCTOR 2 L6612,1 G0ZZ00002183 PEAKING COIL 2 3 L6814- J0JJC0000021 CHIP INDUCTOR 3 L6814- J0JJC0000011 CHIP INDUCTOR 6 L77201- J0JJC0000011 CHIP INDUCTOR 8 L77301- J0JJC0000011 CHIP INDUCTOR 8 L77301- J0JJC0000011 CHIP INDUCTOR 8 L77401- J0JJC0000011 CHIP INDUCTOR 8 L77501- J0JJC0000011 CHIP INDUCTOR 8 L7601- J0JJC0000011 CHIP INDUCTOR 8 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 L8200- ELJPA270KB INDUCTION COIL 1 L8200 ELJNA82NMB INDUCTION COIL 1 L8201 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R0JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8214 ELJNAR5JF INDUCTION COIL 1 L8215 ELJNAR5KF INDUCTION COIL 1 L8216 ELJNAR5KF INDUCTION COIL 1 L8217 ELJNAR5KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 2 CB221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000035 CHIP INDUCTOR 1 L8233 J0JHC0000035 CHIP INDUCTOR 1 L8233 J0JHC0000035 CHIP INDUCTOR 1		J0JJC0000021	CHIP INDUCTOR	3	
L6698,9 JOJJC0000021 CHIP INDUCTOR 2  L6812,1 GOZZ00002183 PEAKING COIL 2  L6814- JOJJC0000021 CHIP INDUCTOR 3  L6814- JOJJC0000011 CHIP INDUCTOR 6  L7101- JOJJC0000011 CHIP INDUCTOR 8  L7201- JOJJC0000011 CHIP INDUCTOR 8  R8 L7301- JOJJC0000011 CHIP INDUCTOR 8  R8 L7301- JOJJC0000011 CHIP INDUCTOR 8  L8 L7501- JOJJC0000011 CHIP INDUCTOR 8  L8 L7501- JOJJC0000011 CHIP INDUCTOR 8  L8 L7601- JOJJC0000011 CHIP INDUCTOR 10  L8 L8 L7 L8 L8 L9 L8	79				
9   GOZZO0002183   PEAKING COIL   2   3   1   1   1   1   1   1   1   1   1	L6693	J0JJC0000021	CHIP INDUCTOR	1	
L6812,1 GOZZO0002183 PEAKING COIL 2  L6814- J0JJC0000021 CHIP INDUCTOR 3  L7201- J0JJC0000011 CHIP INDUCTOR 6  L7201- J0JJC0000011 CHIP INDUCTOR 8  L7301- J0JJC0000011 CHIP INDUCTOR 8  L7301- J0JJC0000011 CHIP INDUCTOR 8  L7401- J0JJC0000011 CHIP INDUCTOR 8  L7501- J0JJC0000011 CHIP INDUCTOR 8  L7601- J0JJC0000011 CHIP INDUCTOR 6  L8096 J0JHC0000045 CHIP INDUCTOR 1  L8141- ERJ3GEYOROO M 0 OHM, 1/16W 3  L8200- ELJPA270KB INDUCTION COIL 4  L8205 ELJNA47NMB INDUCTION COIL 1  L8206 ELJNA47NMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNA47NMB INDUCTION COIL 1  L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213, 1 ELJPA1R0MB INDUCTION COIL 1  L8214 ELJNA1R5JF INDUCTION COIL 1  L8215 ELJNA1R0JF INDUCTION COIL 1  L8216 ELJNA1R0JF INDUCTION COIL 1  L8217 ELJNA1R0MB INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219, 2 ELJPA1R0MB INDUCTION COIL 2  0 L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231, 3 J0JHC0000045 CHIP INDUCTOR 2  L8231, 3 J0JHC0000045 CHIP INDUCTOR 1  L8236, 3 J0JHC0000045 CHIP INDUCTOR 1  L8237, 3 J0JHC0000045 CHIP INDUCTOR 1  L8236, 3 J0JHC0000045 CHIP INDUCTOR 1  L8236, 3 J0JHC0000045 CHIP INDUCTOR 1  L8236, 3 J0JHC0000045 CHIP INDUCTOR 1		J0JJC0000021	CHIP INDUCTOR	2	
16814-   10JJC0000021   CHIP INDUCTOR   3   6   6   6   6   6   6   6   6   6					
L6814- 16	I .	G0ZZ00002183	PEAKING COIL	2	
16   C17101- J0JJC0000011   CHIP INDUCTOR   6   6   6   6   6   6   6   6   6					
L7101- 06  L7201- 06  L7201- 08  L7301- 08  L7301- 08  L7401- 08  L7401- 09  CHIP INDUCTOR  8  L7401- 09  CHIP INDUCTOR  8  L7501- 08  L7501- 09  L8096  L7601- 06  L8096  L7601- 06  L8096  L7601- 06  L8096  L7601- 07  L8141- ERJ3GEY0R00  M 0 OHM, 1/16W  3  L8200- ELJPA270KB  INDUCTION COIL  L8205  ELJNA82NMB  INDUCTION COIL  L8206  ELJNA56NMB  INDUCTION COIL  L8206  ELJNA47NMB  INDUCTION COIL  L8207  ELJNA47NMB  INDUCTION COIL  L8208  ELJNA47NMB  INDUCTION COIL  L8209  J0JHC0000045  CHIP INDUCTOR  1  L8211  ELJNA1R5JF  INDUCTION COIL  L8212  ELJNA1R0JF  INDUCTION COIL  L8211  ELJNA1R5JF  INDUCTION COIL  L8211  ELJNA1R0JF  INDUCTION COIL  L8211  ELJNA1R0JF  INDUCTION COIL  L8211  ELJNA1R5FKF  INDUCTION COIL  L8213,1  ELJPA1R0MB  INDUCTION COIL  L8218  J0JHC0000045  CHIP INDUCTOR  1  L8219,2  ELJPA1ROMB  INDUCTION COIL  L8219,2  ELJPA1ROMB  INDUCTION COIL  L8219,2  ELJPA1ROMB  INDUCTION COIL  L8218  J0JHC0000045  CHIP INDUCTOR  5  L8231,3  J0JHC0000045  CHIP INDUCTOR  2  L8235  J0JHC0000045  CHIP INDUCTOR  2  L8235  J0JHC0000045  CHIP INDUCTOR  1  L8236,3  J0JHC0000045  CHIP INDUCTOR  2  L8235  J0JHC0000045  CHIP INDUCTOR  1  L8236,3  J0JHC0000035  CHIP INDUCTOR  2  L8236,3  J0JHC0000035  CHIP INDUCTOR  1		J0JJC0000021	CHIP INDUCTOR	3	
06   C17201- J0JJC0000011   CHIP INDUCTOR   8   8   8   8   8   8   8   8   8		TO T TG0000011	GUITD TATDUGEOD	_	
L7201-   J0JJC0000011   CHIP INDUCTOR   8   8   8   8   8   8   8   8   8		50550000011	CHIP INDUCTOR	"	
08		T0.TJC0000011	CHIP INDUCTOR	8	
08 L7401- 08 L7501- 08 L7501- 08 L7601- 06 L8096 L9096					
08 L7401- 08 L7501- 08 L7501- 08 L7601- 06 L8096 L9096	L7301-	J0JJC0000011	CHIP INDUCTOR	8	
08 L7501- J0JJC0000011 CHIP INDUCTOR  8 L7601- J0JJC0000011 CHIP INDUCTOR  6 L8096 J0JHC0000045 CHIP INDUCTOR  1 L8141- ERJ3GEYOR00 M 0 OHM, 1/16W  3 L8200- ELJPA270KB INDUCTION COIL  4 US205 ELJNA47NMB INDUCTION COIL  L8206 ELJNA56NMB INDUCTION COIL  L8207 ELJNA47NMB INDUCTION COIL  L8208 ELJNA10MF INDUCTION COIL  L8209 J0JHC0000045 CHIP INDUCTOR  L8211 ELJNA1R5JF INDUCTION COIL  L8212 ELJNA1R0JF INDUCTION COIL  L8213,1 ELJPA1R0MB INDUCTION COIL  L8217 ELJNA56KF INDUCTION COIL  L8218 J0JHC0000045 CHIP INDUCTOR  L8219,2 ELJPA1R0MB INDUCTION COIL  L8219,2 ELJPA1R0MB INDUCTION COIL  L8219,2 ELJPA1R0MB INDUCTION COIL  L8219,2 ELJPA1R0MB INDUCTION COIL  L8211 J0JHC0000045 CHIP INDUCTOR  2 L8221- J0JHC0000045 CHIP INDUCTOR  5 L8235 J0JHC0000045 CHIP INDUCTOR  2 L8235 J0JHC0000045 CHIP INDUCTOR  1 L8236,3 J0JHC0000045 CHIP INDUCTOR  1 L8236,3 J0JHC0000045 CHIP INDUCTOR  2 L8235 J0JHC0000045 CHIP INDUCTOR  1 L8236,3 J0JHC0000045 CHIP INDUCTOR  2 L8235 J0JHC0000045 CHIP INDUCTOR  1 L8236,3 J0JHC0000045 CHIP INDUCTOR  2 L8235 J0JHC0000045 CHIP INDUCTOR  2	08				
L7501- 08  L7601- J0JJC0000011 CHIP INDUCTOR 6  L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEYORO0 M 0 OHM, 1/16W 3  L8200- ELJPA270KB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA10MF INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 4 L8217 ELJNA1R5JF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 CHIP INDUCTOR 1 L8211 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8213,1 L8214 CHIP INDUCTOR 1 L8215 J0JHC0000045 CHIP INDUCTOR 1 L8216 L8217 CHIP INDUCTOR 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 CHIP INDUCTOR 2 L8231,3 J0JHC0000045 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000045 CHIP INDUCTOR 1	L7401-	J0JJC0000011	CHIP INDUCTOR	8	
08 L7601- J0JJC0000011 CHIP INDUCTOR 6 L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEYOROO M 0 OHM, 1/16W 3 43 L8200- ELJPA270KB INDUCTION COIL 4 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNAR10MF INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8217 ELJNA56KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 2 0 L821- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8235 J0JHC0000045 CHIP INDUCTOR 2 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000045 CHIP INDUCTOR 1	08				
L7601- 06 L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 L8200- ELJPA270KB INDUCTION COIL 4 URB205 ELJNA82NMB INDUCTION COIL 1 L8206 ELJNA47NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 ELJNAF56KF INDUCTION COIL 1 L8219,2 ELJNAF56KF INDUCTION COIL 2 L8211 J0JHC0000045 CHIP INDUCTOR 5 L8212 ELJNAR55KF INDUCTION COIL 2 L8218 J0JHC0000045 CHIP INDUCTOR 5 L8219,2 ELJPA1R0MB INDUCTION COIL 2 0 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000045 CHIP INDUCTOR 1	L7501-	J0JJC0000011	CHIP INDUCTOR	8	
06 L8096 J0JHC0000045 CHIP INDUCTOR 1 L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3 L8200- ELJPA270KB INDUCTION COIL 4 03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNA47NMB INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8219,2 ELJNAF56KF INDUCTION COIL 1 L8219,2 ELJNAR56KF INDUCTION COIL 2 0 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 5 L8235 J0JHC0000045 CHIP INDUCTOR 2 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000045 CHIP INDUCTOR 1	08				
L8096 J0JHC0000045 CHIP INDUCTOR 1  L8141- ERJ3GEY0R00 M 0 OHM, 1/16W 3  L8200- ELJPA270KB INDUCTION COIL 4  L8204 ELJNA82NMB INDUCTION COIL 1  L8205 ELJNA47NMB INDUCTION COIL 1  L8206 ELJNA56NMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNAR10MF INDUCTION COIL 1  L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 1  L8217 ELJNAR56KF INDUCTION COIL 2  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  L8219,2 ELJPA1R0MB INDUCTION COIL 2  L8231,3 J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000045 CHIP INDUCTOR 2  L8235 J0JHC0000045 CHIP INDUCTOR 1  L8235 J0JHC0000045 CHIP INDUCTOR 1  L8236,3 J0JHC0000045 CHIP INDUCTOR 1	L7601-	J0JJC0000011	CHIP INDUCTOR	6	
L8141- 43  L8200- ELJPA270KB INDUCTION COIL 4  L8204 ELJNA82NMB INDUCTION COIL L8205 ELJNA47NMB INDUCTION COIL L8206 ELJNA56NMB INDUCTION COIL L8207 ELJNA47NMB INDUCTION COIL L8208 ELJNA10MF INDUCTION COIL L8209 J0JHC0000045 CHIP INDUCTOR L8211 ELJNA1R5JF INDUCTION COIL L8212 ELJNA1R0JF INDUCTION COIL L8213,1 ELJPA1R0MB INDUCTION COIL L8213,1 ELJPA1R0MB INDUCTION COIL L8217 ELJNA56KF INDUCTION COIL L8218 J0JHC0000045 CHIP INDUCTOR L8219,2 ELJPA1R0MB INDUCTION COIL L8219,2 ELJPA1R0MB INDUCTION COIL L8213,3 J0JHC0000045 CHIP INDUCTOR L825 L8231,3 J0JHC0000045 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000045 CHIP INDUCTOR 2 CHIP INDUCTOR 2 CHIP INDUCTOR 2	06				
43 L8200- ELJPA270KB INDUCTION COIL 4  L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNAR10MF INDUCTION COIL 1 L8209 J0JHC0000045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 2 4 L8217 ELJNAF56KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 2  L8219,2 ELJPA1R0MB INDUCTION COIL 5 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000045 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000045 CHIP INDUCTOR 2	L8096	J0JHC0000045	CHIP INDUCTOR	1	
L8200- ELJPA270KB INDUCTION COIL 4  03  L8204 ELJNA82NMB INDUCTION COIL 1  L8205 ELJNA47NMB INDUCTION COIL 1  L8206 ELJNA56NMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNAR10MF INDUCTION COIL 1  L8209 JOJHCO000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 1  L8218 JOJHCO000045 CHIP INDUCTOR 1  L8218 JOJHCO000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- JOJHCO000045 CHIP INDUCTOR 5  L8231,3 JOJHCO000035 CHIP INDUCTOR 2  L8235 JOJHCO000045 CHIP INDUCTOR 1  L8236,3 JOJHCO000045 CHIP INDUCTOR 1  L8236,3 JOJHCO000045 CHIP INDUCTOR 2		ERJ3GEY0R00	M 0 OHM, 1/16W	3	
03 L8204 ELJNA82NMB INDUCTION COIL 1 L8205 ELJNA47NMB INDUCTION COIL 1 L8206 ELJNA56NMB INDUCTION COIL 1 L8207 ELJNA47NMB INDUCTION COIL 1 L8208 ELJNAR10MF INDUCTION COIL 1 L8209 JOJHCOO00045 CHIP INDUCTOR 1 L8211 ELJNA1R5JF INDUCTION COIL 1 L8212 ELJNA1R0JF INDUCTION COIL 1 L8213,1 ELJPA1R0MB INDUCTION COIL 1 L8217 ELJNAF56KF INDUCTION COIL 2 L8218 JOJHCOO00045 CHIP INDUCTOR 1 L8218 JOJHCOO00045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 2 C821,3 JOJHCOO00045 CHIP INDUCTOR 5 L8231,3 JOJHCOO00045 CHIP INDUCTOR 5 L8235 JOJHCOO00045 CHIP INDUCTOR 1 L8235 JOJHCOO00045 CHIP INDUCTOR 1 L8235 JOJHCOO00045 CHIP INDUCTOR 2 CHIP INDUCTOR 1 L8236,3 JOJHCOO00045 CHIP INDUCTOR 2					
L8204 ELJNA82NMB INDUCTION COIL 1  L8205 ELJNA47NMB INDUCTION COIL 1  L8206 ELJNA56NMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNAR10MF INDUCTION COIL 1  L8209 JOJHCOO00045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 2  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 JOJHCOO00045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- JOJHCOO00045 CHIP INDUCTOR 5  L8231,3 JOJHCOO00045 CHIP INDUCTOR 2  L8235 JOJHCOO00045 CHIP INDUCTOR 1  L8236,3 JOJHCOO00045 CHIP INDUCTOR 1  L8236,3 JOJHCOO00035 CHIP INDUCTOR 2  CHIP INDUCTOR 2		ELJPA270KB	INDUCTION COIL	4	
L8205 ELJNA47NMB INDUCTION COIL 1  L8206 ELJNA56NMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNAR10MF INDUCTION COIL 1  L8209 JOJHCOO00045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 2  4  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 JOJHCOO00045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- JOJHCOO00045 CHIP INDUCTOR 5  L8231,3 JOJHCOO00045 CHIP INDUCTOR 2  L8231,3 JOJHCOO00045 CHIP INDUCTOR 2  L8235 JOJHCOO00045 CHIP INDUCTOR 1  L8236,3 JOJHCOO000045 CHIP INDUCTOR 2  CHIP INDUCTOR 2					
L8206 ELJNA56NMB INDUCTION COIL 1  L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNAR10MF INDUCTION COIL 1  L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 2  4  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000045 CHIP INDUCTOR 2  L8231,3 J0JHC0000045 CHIP INDUCTOR 2  L8235 J0JHC0000045 CHIP INDUCTOR 1  L8236,3 J0JHC0000035 CHIP INDUCTOR 2  CHIP INDUCTOR 2					
L8207 ELJNA47NMB INDUCTION COIL 1  L8208 ELJNAR10MF INDUCTION COIL 1  L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNALR5JF INDUCTION COIL 1  L8212 ELJNALR0JF INDUCTION COIL 1  L8213,1 ELJPALR0MB INDUCTION COIL 2  4 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPALR0MB INDUCTION COIL 2  0 ELJPALR0MB INDUCTION COIL 2  1 ELS21- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000045 CHIP INDUCTOR 2  L8235 J0JHC0000045 CHIP INDUCTOR 1  L8236,3 J0JHC0000035 CHIP INDUCTOR 1  L8236,3 J0JHC0000035 CHIP INDUCTOR 2					
L8208 ELJNAR10MF INDUCTION COIL 1  L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 2  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000035 CHIP INDUCTOR 2  L8235 J0JHC0000045 CHIP INDUCTOR 1  L8236,3 J0JHC0000035 CHIP INDUCTOR 2  CHIP INDUCTOR 1					
L8209 J0JHC0000045 CHIP INDUCTOR 1  L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 2  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000035 CHIP INDUCTOR 2  L8235 J0JHC0000045 CHIP INDUCTOR 1  L8236,3 J0JHC0000035 CHIP INDUCTOR 2  CHIP INDUCTOR 1  L8236,3 J0JHC00000035 CHIP INDUCTOR 2		ELJNA47NMB		-	
L8211 ELJNA1R5JF INDUCTION COIL 1  L8212 ELJNA1R0JF INDUCTION COIL 1  L8213,1 ELJPA1R0MB INDUCTION COIL 2  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1R0MB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000035 CHIP INDUCTOR 2  L8235 J0JHC0000045 CHIP INDUCTOR 1  L8236,3 J0JHC0000035 CHIP INDUCTOR 2  CHIP INDUCTOR 1  L8236,3 J0JHC0000035 CHIP INDUCTOR 2	L8208	ELJNAR10MF	INDUCTION COIL	1	
L8212 ELJNA1ROJF INDUCTION COIL 1  L8213,1 ELJPA1ROMB INDUCTION COIL 2  L8217 ELJNAR56KF INDUCTION COIL 1  L8218 JOJHCO000045 CHIP INDUCTOR 1  L8219,2 ELJPA1ROMB INDUCTION COIL 2  0  L8221- JOJHCO000045 CHIP INDUCTOR 5  L8231,3 JOJHCO000035 CHIP INDUCTOR 2  L8235 JOJHCO000045 CHIP INDUCTOR 1  L8236,3 JOJHCO000035 CHIP INDUCTOR 2  CHIP INDUCTOR 1  L8236,3 JOJHCO000035 CHIP INDUCTOR 2	L8209	J0JHC0000045	CHIP INDUCTOR	1	
L8213,1 ELJPA1ROMB INDUCTION COIL 2 L8217 ELJNAR56KF INDUCTION COIL 1 L8218 JOJHCO000045 CHIP INDUCTOR 1 L8219,2 ELJPA1ROMB INDUCTION COIL 2 0	L8211	ELJNA1R5JF	INDUCTION COIL	1	
4 L8217 ELJNAR56KF INDUCTION COIL 1 L8218 J0JHC0000045 CHIP INDUCTOR 1 L8219,2 ELJPA1R0MB INDUCTION COIL 2 CHIP INDUCTOR 5 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000035 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000035 CHIP INDUCTOR 2 7	L8212	ELJNA1R0JF	INDUCTION COIL	1	
L8217 ELJNAR56KF INDUCTION COIL 1  L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1ROMB INDUCTION COIL 2  0  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000035 CHIP INDUCTOR 2  L8235 J0JHC0000045 CHIP INDUCTOR 1  L8236,3 J0JHC0000035 CHIP INDUCTOR 2  7	L8213,1	ELJPA1R0MB	INDUCTION COIL	2	
L8218 J0JHC0000045 CHIP INDUCTOR 1  L8219,2 ELJPA1ROMB INDUCTION COIL 2  L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000035 CHIP INDUCTOR 2  L8235 J0JHC0000045 CHIP INDUCTOR 1  L8236,3 J0JHC0000035 CHIP INDUCTOR 2  7					
L8219,2 ELJPA1ROMB INDUCTION COIL 2 0 L8221- J0JHC0000045 CHIP INDUCTOR 5 L8231,3 J0JHC0000035 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000035 CHIP INDUCTOR 2 7	L8217	ELJNAR56KF	INDUCTION COIL	1	
0	L8218	J0JHC0000045	CHIP INDUCTOR	1	
L8221- J0JHC0000045 CHIP INDUCTOR 5  L8231,3 J0JHC0000035 CHIP INDUCTOR 2  L8235 J0JHC0000045 CHIP INDUCTOR 1  L8236,3 J0JHC0000035 CHIP INDUCTOR 2  7	L8219,2	ELJPA1R0MB	INDUCTION COIL	2	
25 L8231,3 J0JHC0000035 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000035 CHIP INDUCTOR 2 7					
L8231,3 J0JHC0000035 CHIP INDUCTOR 2 L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000035 CHIP INDUCTOR 2 7		J0JHC0000045	CHIP INDUCTOR	5	
2					
L8235 J0JHC0000045 CHIP INDUCTOR 1 L8236,3 J0JHC0000035 CHIP INDUCTOR 2 7	I .	J0JHC0000035	CHIP INDUCTOR	2	
L8236,3 J0JHC0000035 CHIP INDUCTOR 2					
7					
		J0JHC0000035	CHIP INDUCTOR	2	
L6239   UUUCCUUUUZ41   CHIP INDUCTOR   1		TO TOGO 0 0 0 0 4 5	CHIED INDUCTOR	-	
	по733	JUUCCUUU0241	CUIL INDUCTOR	_ т	

50U / TH-42I	PX50U / TH-50PX50L	J		
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
L8240	J0JHC0000045	CHIP INDUCTOR	1	
L8242	J0JCC0000078	CHIP INDUCTOR	1	
4	J0JHC0000045	CHIP INDUCTOR	2	
L8252	ELJPA1R0MB	INDUCTION COIL	1	
L8253-	EXC3BB221H	BEAD CHOKE	4	
56				
L8258	J0JHC0000045	CHIP INDUCTOR	1	
L8264- 68	J0JHC0000045	CHIP INDUCTOR	5	
L8269	J0JGC0000036	CHIP INDUCTOR	1	
L8270	G1C100MA0078	INDUCTION COIL	1	
L8271	G1C6R8MA0078	INDUCTION COIL	1	
L8273	G1C100MA0077	INDUCTION COIL	1	
L8274	ELJNA2R7JB	INDUCTION COIL	1	
L8276	J0JBC0000080	CHIP INDUCTOR	1	
<b>L8277</b>	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L9200	G1C150KA0038	INDUCTION COIL	1	
L9500,0	J0JHC0000078	CHIP INDUCTOR	2	
L9700	G1C4R3M00003	CHIP INDUCTOR	1	
L9701	G1C6R8M00009	CHIP INDUCTOR	1	
PA7	K1KA08AA0192	8P CONNECTOR	1	
PA10	K1KA06A00452	6P CONNECTOR	1	
PA20	K1MN30A00068	30P CONNECTOR	1	
PA30	K1MN30A00068	30P CONNECTOR	1	
PA5601,	K5H4022A0023	FUSE	2	
02				
PB5	K1KA11AA0194	11P CONNECTOR	1	
PB7	K1KA08AA0192	8P CONNECTOR	1	
PB30	K1KA05AA0150	5P CONNECTOR	1	
PB31-34	K1KA03AA0192	3P CONNECTOR	4	
PC6422- 25	B3PBA0000223	IC	4	
PC6601	B3PBA0000234	IC	1	
PC6602	B3PBA0000233	IC	1	
PC6604	B3PBA0000234	IC	1	
PC6605	B3PBA0000233	IC	1	
PC6607	B3PBA0000233	IC	1	
PC6813 PC6819	B3PBA0000223 B3PBA0000223	IC	1	
10017	DSF DA0000223			
Q2300	2SC584500L	TRANSISTOR	1	
Q2301	2SD601A	TRANSISTOR	1	
Q2302	2SC584500L	TRANSISTOR	1	
Q2314- 17	2SC584500L	TRANSISTOR	4	
Q2323	2SA207700L	TRANSISTOR	1	
Q2510,1	2SD601A	TRANSISTOR	2	
ĩ				
Q2519	2SB709A	TRANSISTOR	1	
Q2609	2SD601A	TRANSISTOR	1	
Q2611	2SD601A	TRANSISTOR	1	
Q2612 02618 1	2SB709A 2SD601A	TRANSISTOR	2	
Q2618,1 9	ZODOUTA	NOIGIGIANI		
Q4001	2SA207700L	TRANSISTOR	1	
Q4004	2SD601A	TRANSISTOR	1	
Q4006-	2SD601A	TRANSISTOR	4	
09	2000017	MD ANGTONOD		
Q4012	2SD601A	TRANSISTOR	3	
Q4015- 17	2SD601A	TRANSISTOR	3	
Q4019- 21	2SD601A	TRANSISTOR	3	
04022	2SC584500L	TRANSISTOR	1	
Q4022		TRANSISTOR	1	
Q4024	2SC584500L		<del>                                     </del>	
Q4024 Q4026	2SC584500L	TRANSISTOR	1	
Q4024 Q4026 Q4039	2SC584500L 2SD0601A	TRANSISTOR TRANSISTOR	1	
Q4024 Q4026 Q4039 Q4043,4	2SC584500L 2SD0601A 2SD0601A	TRANSISTOR TRANSISTOR TRANSISTOR	2	
Q4024 Q4026 Q4039 Q4043,4	2SC584500L 2SD0601A	TRANSISTOR TRANSISTOR	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	0.000	Description	<del>  .    </del>	
Q4051- 54	2SD601A	TRANSISTOR	4	
-	2072077007	TD ANGT CHOD	1	
Q4055 Q4056-	2SA207700L 2SD601A	TRANSISTOR	4	
Q4056- 59	ZSD60IA	TRANSISTOR	*	
Q4062	2SD601A	TRANSISTOR	1	
Q4066,6	2SK2731T146	TRANSISTOR	2	
7	25127511140	TRANSISTOR	*	
Q4068	2SD601A	TRANSISTOR	1	
Q5601	B1DHDC000028	TRANSISTOR	1	
Q5602	2SC584500L	TRANSISTOR	1	
Q5603	B1DHDC000028	TRANSISTOR	1	
Q5604,0	2SC584500L	TRANSISTOR	2	
5	2503043001	TRANSISTOR	*	
Q5606	B1DHDC000028	TRANSISTOR	1	
Q5607	2SC584500L	TRANSISTOR	1	
Q5610	2SC584500L	TRANSISTOR	1	
Q5613	2SC584500L	TRANSISTOR	1	
Q5614	2SK3065T100	FET	1	
Q5641-	2SA207700L	TRANSISTOR	3	
43	25A207700H	TRANSISTOR		
Q5644	2SC584500L	TRANSISTOR	1	
Q6000,0	2SK3997000VE	TRANSISTOR	2	
1			-	
Q6010	B1ABNF000006	TRANSISTOR	1	
Q6011	B1ADNF00006	TRANSISTOR	1	
Q6020	2SK3997000VE	TRANSISTOR	1	
Q6030	B1ABNF000006	TRANSISTOR	1	
Q6031	B1ADNF000006	TRANSISTOR	1	
Q6060	2SD601A	TRANSISTOR	1	
Q6100-	B1JADN00001	TRANSISTOR	3	
02				
Q6120	B1ABNF000006	TRANSISTOR	1	
Q6121	B1ADNF000006	TRANSISTOR	1	
Q6140-	B1JADN000001	TRANSISTOR	3	
42			•	
Q6160	B1ABNF000006	TRANSISTOR	1	
Q6161	B1ADNF000006	TRANSISTOR	1	
Q6200	2SK326900L	FET	1	
Q6202	2SK326900L	FET	1	
Q6210	B1ABNF000006	TRANSISTOR	1	
Q6211	B1ADNF000006	TRANSISTOR	1	
Q6212	B1ABNF000006	TRANSISTOR	1	
Q6213	B1ADNF000006	TRANSISTOR	1	
Q6221	B1DFKL000001	TRANSISTOR	1	
Q6223	B1DFKL000001	TRANSISTOR	1	
Q6225	B1DFKL000001	TRANSISTOR	1	
Q6230	B1ABNF000006	TRANSISTOR	1	
Q6231	B1ADNF00006	TRANSISTOR	1	
Q6232	B1ABNF000006	TRANSISTOR	1	
Q6232	B1ADNF000006	TRANSISTOR	1	
Q6240	2SB1193000LB	TRANSISTOR	1	
Q6250,5	B1DFKM000002	TRANSISTOR	2	
1				
Q6256	2SD1263A	TRANSISTOR	1	
Q6257	2SC1473A	TRANSISTOR	1	
Q6259	2SK326800L	FET	1	
Q6260	B1DFKM000002	TRANSISTOR	1	
Q6261	2SK620	FET	1	
Q6411	2SD601A	TRANSISTOR	1	
Q6412,1	2SK620	FET	2	
3	ZBROZO	121	*	
Q6501-	B1JADN00001	TRANSISTOR	3	
03			<u></u>	
Q6513-	B1JADN000001	TRANSISTOR	3	
15				
Q6531,3	2SK3997000VE	TRANSISTOR	2	
2				
Q6537	2SK3997000VE	TRANSISTOR	1	
Q6551	B1ABNF000006	TRANSISTOR	1	
Q6552	B1ADNF000006	TRANSISTOR	1	
Q6559	B1ABNF000006	TRANSISTOR	1	
Q6560	B1ADNF000006	TRANSISTOR	1	
Q6567	B1ABNF000006	TRANSISTOR	1	
Q6568	B1ADNF000006	TRANSISTOR	1	
Q6571	B1ABNF000006	TRANSISTOR	1	
	_			

Ref. No. Q6572				
	Part No.	Part Name &	Pcs	Remarks
06572		Description		
~/-	B1ADNF000006	TRANSISTOR	1	
Q6577	2SD601A	TRANSISTOR	1	
Q6601	B1DEDS000001	TRANSISTOR	1	
Q6602	B1DEET000002	TRANSISTOR	1	
Q6604	B1DFFM000003	TRANSISTOR	1	
Q6611- 18	B1DFJM000003	TRANSISTOR	8	
Q6630- 35	B1DFKM000001	TRANSISTOR	6	
Q6650- 52	B1DEDS000001	TRANSISTOR	3	
Q6654	B1DFFM000003	TRANSISTOR	1	
Q6655	2SD601A	TRANSISTOR	1	
Q6656	B1ADNF000006	TRANSISTOR	1	
Q6658,5	2SK620	FET	2	
9				
Q6660	B1ABNF000006	TRANSISTOR	1	
Q6661	B1ADNF000006	TRANSISTOR	1	
Q6664	2SD601A	TRANSISTOR	1	
Q6665	B1ABNF000006	TRANSISTOR	1	
Q6666,6 7	2SK620	FET	2	
Q6668	B1ABNF000006	TRANSISTOR	1	
Q6669	B1ADNF000006	TRANSISTOR	1	
Q6670	2SK620	FET	1	
Q6814	2SD1263A	TRANSISTOR	1	
Q6815	2SC1473A	TRANSISTOR	1	
Q6816	B1BBCJ00004	TRANSISTOR	1	
Q6817	2SD601A	TRANSISTOR	1	
Q6818	2SB0709A	TRANSISTOR	1	
Q6819	2SD1263A	TRANSISTOR	1	
Q6820	2SC1473A	TRANSISTOR	1	
Q6821	2SD814A	TRANSISTOR	1	
Q6822,2	2SD601A	TRANSISTOR	2	
Q8200	B1BBAB000039	TRANSISTOR	1	
Q8201	2SD601A	TRANSISTOR	1	
Q8201 Q8203	B1BBAB00039	TRANSISTOR	1	
Q8209	2SA207700L	TRANSISTOR	1	
Q8216	2SC584500L	TRANSISTOR	1	
20210	ZDC304300H	IRANDIDIOR		
08217-	2SD601A	TRANSTSTOR	1 4 1	
Q8217- 20	2SD601A	TRANSISTOR	4	
20 Q8221,2 2	B1MBDDA00003	TRANSISTOR	2	
20 Q8221,2 2 Q9000,0	B1MBDDA00003 2SD601A	TRANSISTOR TRANSISTOR	2 2	
Q8221,2 2 Q9000,0 1 Q9003	B1MBDDA00003	TRANSISTOR	2	
20 Q8221,2 2 Q9000,0	B1MBDDA00003 2SD601A	TRANSISTOR TRANSISTOR	2 2	
Q8221,2 2 Q9000,0 1 Q9003	B1MBDDA00003 2SD601A B1DHCC000034	TRANSISTOR TRANSISTOR TRANSISTOR	2 2	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0	B1MBDDA00003 2SD601A B1DHCC000034 2SB709A	TRANSISTOR TRANSISTOR TRANSISTOR TRANSISTOR	2 2 1 1 1	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9	B1MBDDA00003  2SD601A  B1DHCC000034  2SB709A  2SK2731T146	TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR	2 2 1 1 2	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1	B1MBDDA00003  2SD601A  B1DHCC000034  2SB709A  2SK2731T146  2SD601A	TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR	2 2 1 1 1 2 2 2	
20 Q8221,2 2 Q90000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020-	B1MBDDA00003 2SD601A B1DHCC000034 2SB709A 2SK2731T146 2SD601A 2SK2731T146	TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR	2 2 1 1 1 2 2 2 2 2 2	
20 Q8221,2 2 Q90000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020- 23	B1MBDDA00003 2SD601A B1DHCC000034 2SB709A 2SK2731T146 2SD601A 2SK2731T146	TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR	2 2 1 1 1 2 2 2 2 4	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020- 23 Q9500 Q9700 Q9701,0	B1MBDDA00003 2SD601A B1DHCC000034 2SB709A 2SK2731T146 2SD601A 2SK2731T146 2SD601A	TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR  TRANSISTOR	2 2 1 1 2 2 2 4 1 1	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020- 23 Q9500 Q9700 Q9701,0 2	B1MBDDA00003 2SD601A B1DHCC000034 2SB709A 2SK2731T146 2SD601A 2SK2731T146 2SD601A	TRANSISTOR	2 2 1 1 2 2 2 4 1 1 1 1	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020- 23 Q9700 Q9700 Q9701,0 2 Q9703,0 4 Q9800,0	B1MBDDA00003  2SD601A  B1DHCC000034  2SB709A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  2SK2731T146  B1MBCDA00002	TRANSISTOR	2 2 1 1 2 2 2 2 4 1 1 1 2 2 2 1 1 1 2 2 1 1 1 1	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020- 23 Q9500 Q9700 Q9701,0 2 Q9703,0 4 Q9800,0 1 Q9900,0	B1MBDDA00003  2SD601A  B1DHCC000034  2SB709A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  B1MBCDA000002  2SD601A	TRANSISTOR	2 2 1 1 2 2 2 4 1 1 2 2 2 2 2 2 2 2 2 2	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020- 23 Q9500 Q9700 Q9701,0 2 Q9703,0 4 Q9800,0 1	B1MBDDA00003 2SD601A B1DHCC000034 2SB709A 2SK2731T146 2SD601A 2SK2731T146 2SD601A 2SK2731T146 2SD601A B1MBCDA00002 2SD601A	TRANSISTOR	2 2 1 1 2 2 2 4 1 1 2 2 2 2 2 2 2 2 2 2	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020-23 Q9700 Q9701,0 2 Q9703,0 4 Q9800,0 1 Q9900,0 1	B1MBDDA00003  2SD601A  B1DHCC000034  2SB709A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  2SD601A  2SD601A  2SD601A  2SD601A  2SD601A	TRANSISTOR	2 2 1 1 2 2 2 4 1 1 2 2 2 2 2 2 2 2 2 2	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020-23 Q9500 Q9700 Q9701,0 2 Q9703,0 4 Q9800,0 1 Q9900,0 1	B1MBDDA00003  2SD601A  B1DHCC000034  2SB709A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  2SD601A  2SD601A  2SD601A  2SD601A  ENJ3GEYJ223	TRANSISTOR  M 22KOHM, J, 1/16W	2 2 1 1 2 2 2 4 1 1 2 2 2 2 2 1 1	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020-23 Q9700 Q9701,0 2 Q9703,0 4 Q9800,0 1 Q9900,0 1	B1MBDDA00003  2SD601A  B1DHCC000034  2SB709A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  2SD601A  2SD601A  2SD601A  2SD601A  2SD601A  2SD601A  2SD601A	TRANSISTOR  M 22KOHM, J, 1/16W  M 5.6KOHM, J, 1/16W	2 2 1 1 1 2 2 2 2 2 2 1 1 1 1 1	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020-23 Q9700 Q9701,0 2 Q9703,0 4 Q9800,0 1 Q9900,0 1 R2302 R2303 R2304	B1MBDDA00003  2SD601A  B1DHCC000034  2SB709A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  B1MBCDA00002  2SD601A  2SD601A  2SD601A  ERJ3GEYJ223  ERJ3GEYJ223  ERJ3GEYJ104	TRANSISTOR  M 22KOHM, J, 1/16W M 5.6KOHM, J, 1/16W M 100KOHM, J, 1/16W	2 2 1 1 1 2 2 2 2 2 2 2 1 1 1 1 1 1 1	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020-23 Q9700 Q9701,0 2 Q9703,0 4 Q9800,0 1 Q9900,0 1 R2302 R2302 R2304 R2305	B1MBDDA00003  2SD601A  B1DHCC000034  2SB709A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  B1MBCDA00002  2SD601A  2SD601A  2SD601A  2SD601A  ERJ3GEYJ223  ERJ3GEYJ223  ERJ3GEYJ104  ERJ3GEYJ471	TRANSISTOR  M 22KOHM, J, 1/16W M 5.6KOHM, J, 1/16W M 100KOHM, J, 1/16W M 470 OHM, J, 1/16W	2 2 2 2 4 1 1 2 2 2 2 2 1 1 1 1 1 1 1 1	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020-23 Q9700 Q9701,0 2 Q9703,0 4 Q9800,0 1 Q9900,0 1 R2302 R2302 R2303 R2304 R2305 R2306	B1MBDDA00003  2SD601A  B1DHCC000034  2SB709A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  B1MBCDA00002  2SD601A  2SD601A  2SD601A  2SD601A  ERJ3GEYJ223  ERJ3GEYJ562  ERJ3GEYJ104  ERJ3GEYJ821  ERJ6GEYJ821	TRANSISTOR  M 22KOHM, J, 1/16W M 5.6KOHM, J, 1/16W M 100KOHM, J, 1/16W M 470 OHM, J, 1/16W M 820 OHM, J, 1/10W	2 2 1 1 1 2 2 2 2 2 2 2 1 1 1 1 1 1 1 1	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020- 23 Q9700 Q9701,0 2 Q9703,0 4 Q9800,0 1 Q9900,0 1 R2302 R2302 R2304 R2305	B1MBDDA00003  2SD601A  B1DHCC000034  2SB709A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  B1MBCDA00002  2SD601A  2SD601A  2SD601A  2SD601A  ERJ3GEYJ223  ERJ3GEYJ223  ERJ3GEYJ104  ERJ3GEYJ471	TRANSISTOR  M 22KOHM, J, 1/16W M 5.6KOHM, J, 1/16W M 100KOHM, J, 1/16W M 470 OHM, J, 1/16W	2 2 2 2 4 1 1 2 2 2 2 2 1 1 1 1 1 1 1 1	
20 Q8221,2 2 Q9000,0 1 Q9003 Q9004 Q9008,0 9 Q9010,1 1 Q9012,1 3 Q9020-23 Q9700 Q9701,0 2 Q9703,0 4 Q9900,0 1 R2302 R2302 R2303 R2304 R2305 R2306 R2307	B1MBDDA00003  2SD601A  B1DHCC000034  2SB709A  2SK2731T146  2SD601A  2SK2731T146  2SD601A  2SM2731T146  2SD601A  2SD601A  2SD601A  2SD601A  2SD601A  2SD601A  2SD601A  2SD601A  ERJ3GEYJ223  ERJ3GEYJ562  ERJ3GEYJ104  ERJ3GEYJ104  ERJ3GEYJ104  ERJ3GEYJ104  ERJ3GEYJ104	TRANSISTOR  M 22KOHM, J, 1/16W M 5.6KOHM, J, 1/16W M 100KOHM, J, 1/16W M 470 OHM, J, 1/16W M 470 OHM, J, 1/10W M 820 OHM, J, 1/10W M 100KOHM, J, 1/16W	2 2 2 2 4 1 1 2 2 2 2 2 2 1 1 1 1 1 1 1	

Ref.	Part No.	Part Name & Description	Pcs	Remarks
R2311	ERJ12YJ821	M 820 OHM,J, 1/2W	1	
R2312,1	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2316- 19	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R2320	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2322	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2324	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R2331	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2338	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2342,4 3	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2349	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2350	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2351	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R2352,5	ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
R2357	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R2358,5	ERJ3GEYJ683	M 68KOHM,J,1/16W	2	
9				
R2360	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2363	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2364	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2365,6	ERJ3GEYJ683	M 68KOHM, J, 1/16W	2	
R2367	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2368	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R2369,7	ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
R2388,8	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R2390	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	
R2391	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2392	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2393	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2394	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	
R2395,9 6	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2397,9 8	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R2436	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2437,3	ERDS2TJ103	C 10KOHM, J,1/4W	2	
R2444,4 5	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R2448,4 9	ERJ6GEYJ510	M 51 OHM,J,1/10W	2	
R2450	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2451,5 2	ERJ6GEYJ510	M 51 OHM,J,1/10W	2	
R2453	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2460	ERJ6ENF1373	M 137KOHM, 1/10W	1	
R2461	ERJ6ENF1103	M 110KOHM, 1/10W	1	
R2464,6 5	ERJ6GEYJ120	M 12 OHM,J,1/10W	2	
R2468,6 9	ERJ6GEYJ331	M 330 OHM,J,1/10W	2	
R2488,8 9	ERJ6GEYJ120	M 12 OHM,J,1/10W	2	
R2499	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2501	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2516	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2517	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R2520	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R2524	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2525	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R2526	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	1	
R2542	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2545	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2550	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2553	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2557	ERJ6ENF8200	M 820 OHM, 1/10W	1	
R2640,4	ERJ6GEY0R00 ERJ3GEYJ220	M 0 OHM, 1/10W M 22 OHM, J, 1/16W	2	
1 R2645	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
-	•	•		

(50U / TH-42I	PX50U / TH-50PX50L			
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2646	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2647	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R2648	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2649	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R2650	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2651	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R2652	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2655	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R2659,6	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2673	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2680,8	ERJ3GEYJ184	M 180KOHM, J, 1/16W	2	
R2682	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2686	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2687	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2690	ERJ3GEYJ182	M 1.8KOHM, J, 1/16W	1	
R2693	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2695	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2696	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R2698	ERJ3GEYJ182	M 1.8KOHM, J, 1/16W	1	
R2699	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2700	ERJ3GEYJ274	M 270KOHM, J, 1/16W	1	
R2700	ERJ3GEYJ473		1	
		M 47KOHM,J,1/16W	-	
R2708	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R2723,2 4	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2725	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2726,2	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2729- 31	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R2733- 36	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2737	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2738	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2739	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2741	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2744	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2746	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2747	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2751	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2753	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2754	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2755	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2756	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2758	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2759	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2761-	ERJ3GEYJ221	M 220 OHM, J, 1/16W	4	
64 P2767	ED.T3CEV TOO1	M 220 OUM T 1/1CT		
R2767 R2769,7	ERJ3GEYJ221 ERJ3GEYJ221	M 220 OHM,J,1/16W M 220 OHM,J,1/16W	2	
0 R2772	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2775	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2777-	ERJ6ENF75R0	M 75 OHM, 1/10W	3	
79				
R2793- 95	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R2797- 00	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2801,0 2	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2804	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2807,0	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2810,1	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2814,1 5	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2817,1 8	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2820	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2821	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
	EKOOGETOTOS		_	
R2822- 25	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R2830	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R2832,3	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
3			_	
R2835	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R2837	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R2838	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2848-	ERJ6GEYJ393	M 39KOHM, J, 1/10W	4	
51				
R2854,5	ERJ6GEYJ393	M 39KOHM,J,1/10W	2	
R2856	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2858				
	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2859- 61	ERJ6GEYJ393	M 39KOHM,J,1/10W	3	
R2863	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2864	ERJ6GEYJ393		1	
	<u> </u>	M 39KOHM, J, 1/10W		
R2866	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2868,6	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R2881	ED TO CEVODOO	M 0 OUM 1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W		
R2883	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2887	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2891- 94	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R2896	ED.T3CEVODOO	M 0 OUM 1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2899	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3751	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
R3753	ERJ6ENF3161	M3.16KOHM, 1/10W	1	
R3755	ERJ6ENF2321	M2.32KOHM, 1/10W	1	
R3756	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R3758	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
R4001,0	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
2				
R4003	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4004	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4005	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4006	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4007	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4008	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4010	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4015	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4016	ERJ3GEYJ273	M 27KOHM,J,1/16W	1	
R4017	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R4018	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R4020	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4021	ERJ3GEYJ273	M 27KOHM,J,1/16W	1	
R4022	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R4023	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R4023	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
5	_103310220			
R4026	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4028,2	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
9				
R4035	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4039	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4040	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4045	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4047	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R4048	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4050	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R4052	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4053	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4055	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4056	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4059	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4063	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4064-	TAJAAH0101JV		3	
66	TAUAAHUIUIUV	M 100 OHM,J,1/16W		
R4068,6	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
9			_	
R4070	ERJ3GEYJ154	M 150KOHM,J,1/16W	1	
R4071-	TAJAAH0101JV	M 100 OHM,J,1/16W	6	
76				
		M 0 OUM 1/16W	1	
R4077	ERJ3GEY0R00	M 0 OHM, 1/16W		

	T		_	_ ,
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4078,7	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
9 R4082	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4082	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4086	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4088-	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
90		,,,,,		
R4091	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R4092	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4094	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4095	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4098,9	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
9 R4101	TAJAAH0101JV	M 100 OUM T 1/16W	1	
R4101	ERJ3GEYJ220	M 100 OHM,J,1/16W M 22 OHM,J,1/16W	1	
R4104	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4105	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4106	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4108	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4109	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4110,1	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
1 p4114	FD.T3@FV.T473	м 47корм т 1/1сы	1	
R4114 R4118	ERJ3GEYJ473 ERJ3GEYJ104	M 47KOHM,J,1/16W M 100KOHM,J,1/16W	1	
R4118 R4119	ERJ3GEYJ104 ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4113	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4122	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4123	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4124	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4125	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4126	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4128	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4129	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R4130	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4134	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4135	ERJ3EKF1801	M 1.8KOHM, 1/16W	1	
R4138	ERJ3GEYJ682	M 6.8KOHM, J, 1/16W	1	
R4139 R4141,4 2	ERJ3GEYJ333 TAJAAH0101JV	M 33KOHM,J,1/16W M 100 OHM,J,1/16W	2	
R4144	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R4145	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4146	ERJ3GEYJ681	M 680 OHM, J, 1/16W	1	
R4148,4	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R4151- 53	ERJ3GEYJ102	м 1конм, J, 1/16W	3	
R4155	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4158	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4162	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R4169	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4171- 73	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4174	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4175	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4176	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4177	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4179	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4181	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4182,8	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
3				
R4184	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4185	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R4188	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4192 R4193	TAJAAH0101JV ERJ3GEYJ102	M 100 OHM,J,1/16W M 1KOHM,J,1/16W	1	
	ERJ3GEYJ102 ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4197		M 22 OHM, J, 1/16W	2	
R4197 R4199,0	ERJ3GEYJ220			
R4199,0 0			-	
R4199,0 0 R4201	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4199,0 0 R4201 R4202	ERJ3GEYJ102 ERJ3EKF7151	M 1KOHM, J, 1/16W M7.15KOHM, 1/16W	1	
R4199,0 0 R4201 R4202 R4203	ERJ3GEYJ102 ERJ3EKF7151 ERJ3GEYJ272	M 1KOHM,J,1/16W M7.15KOHM, 1/16W M 2.7KOHM,J,1/16W	1	
R4199,0 0 R4201 R4202 R4203 R4205	ERJ3GEYJ102 ERJ3EKF7151 ERJ3GEYJ272 ERJ3GEYJ272	M 1KOHM, J, 1/16W M7.15KOHM, 1/16W M 2.7KOHM, J, 1/16W M 2.7KOHM, J, 1/16W	1 1 1	
R4199,0 0 R4201 R4202 R4203	ERJ3GEYJ102 ERJ3EKF7151 ERJ3GEYJ272	M 1KOHM,J,1/16W M7.15KOHM, 1/16W M 2.7KOHM,J,1/16W	1	

## ## ## ## ## ## ## ## ## ## ## ## ##	Ref.	Part No.	Part Name &	Pcs	Remarks
MAIL	No.	ED.T3GEVODOO	Description	1	
RA219					
R4223					
R4224				-	
R4225				_	
R4226 ERJ3GEY0100 M 0 OHM, 1/16W 1 R4237 ERJ3GEY0102 M 12 OHM, J,1/16W 1 R4237 ERJ3GEY0102 M 1KOHM, J,1/16W 1 R4252,5 ERJ3GEY1033 M 1OKOHM, J,1/16W 1 R4252,5 ERJ3GEYJ103 M 1OKOHM, J,1/16W 1 R4255 ERJ3GEYJ103 M 1OKOHM, J,1/16W 1 R4256 ERJ3GEYJ100 M 1OOHM, J,1/16W 2 1 R4266 ERJ3GEYJ103 M 1OKOHM, J,1/16W 2 1 R4266 ERJ3GEYJ103 M 1OKOHM, J,1/16W 1 R4267,6 ERJ3GEYJ103 M 1OKOHM, J,1/16W 1 R4266 ERJ3GEYJ103 M 1OKOHM, J,1/16W 1 R4261 ERJ3GEYJ173 M 47KOHM, J,1/16W 1 R4261 ERJ3GEYJ173 M 1OKOHM, J,1/16W 1 R4281 ERJ3GEYJ173 M 10HOHM, J,1/16W 1 R4281 ERJ3GEYJ173 M 10HOHM, J,1/16W 1 R4286 ERJ3GEYJ173 M 10HOHM, J,1/16W 1 R4286 ERJ3GEYJ173 M 10HOHM, J,1/16W 1 R4287 ERJ3GEYJ173 M 10HOHM, J,1/16W 1 R4288 ERJ3GEYJ102 M 10HOHM, J,1/16W 1 R4298 ERJ3GEYJ123 M 12KOHM, J,1/16W 1 R4298 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4298 ERJ3GEYJ103 M 10HOHM, J,1/16W 1 R4329 ERJ3GEYJ103 M 10HOHM, J,1/16W 1 R4339 ERJ3GEYJ103 M 10HOHM, J,1/16W 1 R4340 ERJ3EKF1301 M 1.SKOHM, J,1/16W 1 R4351 ERJ3EKF1801 M 1.SKOHM, J,1/16W 1 R4352 ERJ3GEYJ103 M 10HOHM, J,1/16W 1 R4364 ERJ3GEYJ20 M 2.ZKOHM, J,1/16W 1 R4370 ERJ3GEYJ103 M 10HOHM, J,1/16W 1 R4371 ERJ3GEYJ20 M 2.ZKOHM, J,1/16W 1 R4411 ERJ3GEYJ20 M 2.ZKOHM, J,1/16W 1 R4411 ERJ3GEYJ20 M 2.Z OHM, J,1/16W 1 R4411 ERJ3GEYJ20 M 2.Z OH				_	
R4230,3					
1					
R4238 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4252, ERJ3GEYJ323 M 82KOHM,J,1/16W 1 R4255 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4255 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4265, ERJ3GEYJ332 M 1.0KOHM,J,1/16W 1 R4267, ERJ3GEYJ332 M 1.0KOHM,J,1/16W 1 R4260,6 ERJ3GEYJ482 M 6.8KOHM,J,1/16W 2 R4260,6 ERJ3GEYJ482 M 6.8KOHM,J,1/16W 2 R4261 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4266 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4266 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4266 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4267 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4268 ERJ3GEYJ153 M 15KOHM,J,1/16W 1 R4281 ERJ3GEYJ153 M 15KOHM,J,1/16W 1 R4281 ERJ3GEYJ153 M 15KOHM,J,1/16W 1 R4284 ERJ3GEYJ102 M 10KOHM,J,1/16W 1 R4285 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4286 ERJ3GEYJ102 M 12KOHM,J,1/16W 1 R4289 ERJ3GEYJ123 M 12KOHM,J,1/16W 1 R4292 ERJ3GEYJ123 M 12KOHM,J,1/16W 1 R4293 ERJ3GEYJ123 M 10KOHM,J,1/16W 1 R4294 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4295 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4296 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4327, ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4327, ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4327 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4327, ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4327, ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4344,4 ERJ3EKF1301 M 1.3KOHM, 1/16W 1 R4344,4 ERJ3EKF1301 M 1.3KOHM, 1/16W 1 R4344,4 ERJ3EKF1301 M 1.5KOHM, 1/16W 1 R4344,6 ERJ3EKF1301 M 1.5KOHM, 1/16W 1 R4344,7 ERJ3EKF1301 M 1.5KOHM, 1/16W 1 R4344,7 ERJ3EKF1301 M 1.5KOHM, 1/16W 1 R4344,8 ERJ3EKF1301 M 1.5KOHM, 1/16W 1 R4344,9 ERJ3EKF1301 M 1.5KOHM, 1/16W 1 R4355 ERJ3GEYUROO M 0 OHM, 1/16W 1 R4365 ERJ3GEYDROO M 0 OHM, 1/16W 1 R4375 ERJ3EKF1301 M 1.5KOHM,J,1/10W 1 R4366 ERJ3EKF1301 M 1.5KOHM,J,1/10W 1 R4367 ERJ3EKF1301 M 1.5KOHM,J,1/10W 1 R4368 ERJ3EKF1301 M 1.5KOHM,J,1/10W 1 R4369 ERJ3GEYJ152 M 1.5KOHM,J,1/10W 1 R4369 ERJ3GEYJ152 M 1.5KOHM,J,1/10W 1 R4371 ERJ3EKF1301 M 1.5KOHM,J,1/16W 1 R4382 ERJ3EKF1301 M 1.5KOHM,J,1/16W 1 R4391 ERJ3EKF1301 M 1.5KOHM,J,1/16W 1 R4391 ERJ3EKF1301 M 1.5KOHM,J,1/16W 1 R4392 ERJ3GEYJ302 M 2.2KOHM,J,1/16W 1 R440		ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4252,5	R4237	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
34         R4254         ERJ3GEYJ104         M 10KOHM,J,1/16W         1           R4255         ERJ3GEYJ332         M 3.3KOHM,J,1/16W         1           R4255         ERJ3GEYJ104         M 100KOHM,J,1/16W         2           R4259         ERJ3GEYJ100         M 10 OHM,J,1/16W         1           R4260,6         ERJ3GEYJ473         M 47KOHM,J,1/16W         2           R4264         ERJ3GEYJ473         M 47KOHM,J,1/16W         1           R4264         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4266         ERJ3GEYJ473         M 47KOHM,J,1/16W         1           R4266         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4267         ERJ3GEYJ473         M 47KOHM,J,1/16W         1           R4266         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4281         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4282         ERJ3GEYJ102         M 10KOHM,J,1/16W         1           R4282         ERJ3GEYJ102         M 10KOHM,J,1/16W         1           R4283         ERJ3GEYJ102         M 10KOHM,J,1/16W         1           R4294         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4293	R4238	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4255 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4255,5 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R4260,6 ERJ3GEYJ682 M 6.8KOHM,J,1/16W 2 R4260,6 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4262,6 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4264 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4266 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4269 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4269 ERJ3GEYJ153 M 15KOHM,J,1/16W 1 R4282 ERJ3GEYJ15M M 470 OHM,J,1/16W 1 R4282 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4284 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4289 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4291 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4292 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4293 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4329 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4329 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4327,2 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4339 ERJ3GEYJ301 M 10KOHM,J/16W 1 R4344,4 ERJ3GEYJ301 M 10KOHM,J/16W 1 R4344,4 ERJ3GEYJ301 M 10KOHM,J/16W 1 R4347 ERJ3EKF1501 M 1.3KOHM, 1/16W 2 S R4328 ERJ3GEYJ301 M 10KOHM,J/16W 1 R4347 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4347 ERJ3EKF2201 M 2.2KOHM,J/16W 1 R4351 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4351 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4361 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4361 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4370 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4361 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4371 ERJGGEYJ322 M 2.2KOHM,J/16W 1 R4371 ERJGGEYJ32 M 1.5KOHM,J/16W 1 R4371 ERJGGEYJ32 M 1.5KOHM,J/16W 1 R4383 ERJ3GEYJ303 M 3.3KOHM,J/16W 1 R4393 ERJ3EKF1301 M 1.5KOHM,J/16W 1 R4393 ERJ3EKF1301 M 1.5KOHM,J/16W 1 R4393 ERJ3EKF1301 M 1.5KOHM,J/16W 1 R4393 ERJ3GEYJ303 M 3.3KOHM,J/16W 1 R4393 ERJ3GEYJ303 M 3.3KOHM,J/16W 1 R4393 ERJ3GEYJ303 M 10KOHM,J/16W 1 R4393 ERJ3GEYJ303 M 10KOHM,J/16W 1 R4393 ERJ3GEYJ303 M 10KOHM,J/16W 1 R4393 ERJ3GEYJ303 M 22 COHM,J/16W 1 R4408 ERJ3GEYJ302 M 22 COHM,J/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J/1/16W 1 R4411 ERJ3GEYJ		ERJ3GEYJ823	M 82KOHM,J,1/16W	2	
R4255 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4255,5 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R4260,6 ERJ3GEYJ682 M 6.8KOHM,J,1/16W 2 R4260,6 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4262,6 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4264 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4266 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4269 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4269 ERJ3GEYJ153 M 15KOHM,J,1/16W 1 R4282 ERJ3GEYJ15M M 470 OHM,J,1/16W 1 R4282 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4284 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4289 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4291 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4292 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4293 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4329 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4329 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4327,2 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4339 ERJ3GEYJ301 M 10KOHM,J/16W 1 R4344,4 ERJ3GEYJ301 M 10KOHM,J/16W 1 R4344,4 ERJ3GEYJ301 M 10KOHM,J/16W 1 R4347 ERJ3EKF1501 M 1.3KOHM, 1/16W 2 S R4328 ERJ3GEYJ301 M 10KOHM,J/16W 1 R4347 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4347 ERJ3EKF2201 M 2.2KOHM,J/16W 1 R4351 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4351 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4361 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4361 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4370 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4361 ERJ3EKF1501 M 1.5KOHM,J/16W 1 R4371 ERJGGEYJ322 M 2.2KOHM,J/16W 1 R4371 ERJGGEYJ32 M 1.5KOHM,J/16W 1 R4371 ERJGGEYJ32 M 1.5KOHM,J/16W 1 R4383 ERJ3GEYJ303 M 3.3KOHM,J/16W 1 R4393 ERJ3EKF1301 M 1.5KOHM,J/16W 1 R4393 ERJ3EKF1301 M 1.5KOHM,J/16W 1 R4393 ERJ3EKF1301 M 1.5KOHM,J/16W 1 R4393 ERJ3GEYJ303 M 3.3KOHM,J/16W 1 R4393 ERJ3GEYJ303 M 3.3KOHM,J/16W 1 R4393 ERJ3GEYJ303 M 10KOHM,J/16W 1 R4393 ERJ3GEYJ303 M 10KOHM,J/16W 1 R4393 ERJ3GEYJ303 M 10KOHM,J/16W 1 R4393 ERJ3GEYJ303 M 22 COHM,J/16W 1 R4408 ERJ3GEYJ302 M 22 COHM,J/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J/1/16W 1 R4411 ERJ3GEYJ		ERJ3GEYJ103	M 10KOHM.J.1/16W	1	
R4256,5 ERJ3GEYJ104 M 100KOHM,J,1/16W 1 R4260,6 ERJ3GEYJ682 M 6.8KOHM,J,1/16W 2 1 R4260,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 1 R4262,6 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4266 ERJ3GEYJ3103 M 10KOHM,J,1/16W 1 R4266 ERJ3GEYJ3103 M 10KOHM,J,1/16W 1 R4266 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4266 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4269 ERJ3GEYJ153 M 15KOHM,J,1/16W 1 R4269 ERJ3GEYJ153 M 15KOHM,J,1/16W 1 R4281 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4282 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4284 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4284 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4289 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4291 ERJ3GEYJ123 M 12KOHM,J,1/16W 1 R4292 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4292 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4322 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4322 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4323 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4324 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4325 ERJ3GEY100 M 0 0HM, 1/16W 1 R4326 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4327 ERJ3GEY100 M 150 0HM, 1/16W 1 R4328 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4344, 4 ERJ3EKF1301 M 1.3KOHM, 1/16W 1 R4344, 5 ERJ3EKF1801 M 1.3KOHM, 1/16W 1 R4345 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4346 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4351 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4358 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4359 ERJ3EKF1801 M 1.5KOHM,J,1/10W 1 R4351 ERJ3EKF1801 M 1.5KOHM,J,1/10W 1 R4353 ERJ3GEYR000 M 0 0HM, 1/16W 1 R4354 ERJ3EKF1801 M 1.8KOHM,J,1/16W 1 R4355 ERJ3GEY0R00 M 0 0HM,J,1/16W 1 R4357 ERJ3GEYOR00 M 0 0HM,J,1/16W 1 R4365 ERJ3GEY0R00 M 0 0HM,J,1/16W 1 R4370 ERJ3GEYDY00 M 0 0HM,J/16W 1 R4371 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4373 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4379 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4370 ERJ3GEYDY00 M 0 0HM,J/16W 1 R4371 ERJ6GEYJ152 M 1.5KOHM,J/1/16W 1 R4378 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4379 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4371 ERJ3GEYJ202 M 2.2KOHM,J,1/16W 1 R4388,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4398 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4399 ERJ3GEYJ200 M 20 OHM,J,1/16W 1 R4409 ERJ3GEYJ200 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ200 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ200 M 22 OHM,J,1/16W 1					
7         R4259         ERJ3GEYJ100         M 10 OHM, J, 1/16W         1           R4260,6         ERJ3GEYJ4682         M 6.8KOHM, J, 1/16W         2           R4262,6         ERJ3GEYJ473         M 47KOHM, J, 1/16W         1           R4264         ERJ3GEYJ332         M 3.3KOHM, J, 1/16W         1           R4266         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4267,6         ERJ3GEYJ153         M 15KOHM, J, 1/16W         1           R4269         ERJ3GEYJ153         M 15KOHM, J, 1/16W         1           R4281         ERJ3GEYJ471         M 470 OHM, 1/16W         1           R4284         ERJ3GEYJ0102         M 1KOHM, J, 1/16W         1           R4284         ERJ3GEYJ021         M 240 OHM, J, 1/16W         1           R4286         ERJ3GEYJ221         M 240 OHM, J, 1/16W         1           R4291         ERJ3GEYJ022         M 1KOHM, J, 1/16W         1           R4292         ERJ3GEYJ102         M 1KOHM, J, 1/16W         1           R43292         ERJ3GEYJ002         M 1KOHM, J, 1/16W         1           R43292         ERJ3GEYJ01         M 1KOHM, J, 1/16W         1           R43293         ERJ3GEKY103         M 13KOHM, 1/16W         1      <				_	
R4260,6 ERJ3GEYJ682 M 6.8KOHM,J,1/16W 2 1 R4266,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4266 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4267,6 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4267,6 ERJ3GEYJ153 M 15KOHM,J,1/16W 1 R4268 ERJ3GEYJ153 M 15KOHM,J,1/16W 1 R4281 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4282 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4284 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R4286 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R4289 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R4289 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R4292 ERJ3GEYJ02 M 1KOHM,J,1/16W 1 R4292 ERJ3GEYJ02 M 1KOHM,J,1/16W 1 R4292 ERJ3GEYJ00 M 0 OHM, J,1/16W 1 R4392 ERJ3GEYJ00 M 10 OHM, J/16W 1 R4327,2 ERJ3GEYJ10 M 10 OHM, J/16W 1 R4327,2 ERJ3GEYJ00 M 0 OHM, J/16W 1 R4339 ERJ3GEYJ391 M 390 OHM,J,1/16W 1 R4339 ERJ3GEYJ391 M 10KOHM, J/16W 1 R43446 ERJ3EKF1301 M 1.8KOHM, J/16W 1 R4347 ERJ3EKF1301 M 1.8KOHM, J/16W 1 R4347 ERJ3EKF1301 M 1.8KOHM, J/16W 1 R4347 ERJ3EKF201 M 2.2KOHM, J/16W 1 R4351 ERJ3EKF1501 M 1.8KOHM, J/16W 1 R4351 ERJ3EKF1501 M 1.8KOHM, J/16W 1 R4351 ERJ3EKF1500 M 1.8KOHM, J/16W 1 R4351 ERJ3EKF1501 M 2.2KOHM, J/16W 1 R4353 ERJ3GEYJ152 M 1.5KOHM, J/16W 1 R4361 ERJ3GEYJ152 M 1.5KOHM, J/16W 1 R4375 ERJ3GEYO00 M 0 0 OHM, 1/16W 1 R4375 ERJ3GEYJ020 M 2.2KOHM, J/1/10W 1 R4375 ERJ3GEYJ031 M 10KOHM, J/16W 1 R4375 ERJ3GEYJ032 M 2.2KOHM, J/1/16W 1 R4383 ERJ3GEYJ102 M 12.0HM, J/1/16W 1 R4393 ERJ3GEYJ102 M 10KOHM, J/1/16W 1 R4393 ERJ3GEYJ103 M 10KOHM, J/1/16W 1 R4393 ERJ3GEYJ103 M 10KOHM, J/1/16W 1 R4393 ERJ3GEYJ103 M 10KOHM, J/1/16W 1 R4408 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4408 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J/1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J/1/16W 1	7			-	
R4260,6 ERJ3GEYJ682 M 6.8KOHM,J,1/16W 2 1 R4266,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4266 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4267,6 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4267,6 ERJ3GEYJ153 M 15KOHM,J,1/16W 1 R4268 ERJ3GEYJ153 M 15KOHM,J,1/16W 1 R4281 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4282 ERJ3GEYJ471 M 470 OHM,J,1/16W 1 R4284 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R4286 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R4289 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R4289 ERJ3GEYJ221 M 220 OHM,J,1/16W 1 R4292 ERJ3GEYJ02 M 1KOHM,J,1/16W 1 R4292 ERJ3GEYJ02 M 1KOHM,J,1/16W 1 R4292 ERJ3GEYJ00 M 0 OHM, J,1/16W 1 R4392 ERJ3GEYJ00 M 10 OHM, J/16W 1 R4327,2 ERJ3GEYJ10 M 10 OHM, J/16W 1 R4327,2 ERJ3GEYJ00 M 0 OHM, J/16W 1 R4339 ERJ3GEYJ391 M 390 OHM,J,1/16W 1 R4339 ERJ3GEYJ391 M 10KOHM, J/16W 1 R43446 ERJ3EKF1301 M 1.8KOHM, J/16W 1 R4347 ERJ3EKF1301 M 1.8KOHM, J/16W 1 R4347 ERJ3EKF1301 M 1.8KOHM, J/16W 1 R4347 ERJ3EKF201 M 2.2KOHM, J/16W 1 R4351 ERJ3EKF1501 M 1.8KOHM, J/16W 1 R4351 ERJ3EKF1501 M 1.8KOHM, J/16W 1 R4351 ERJ3EKF1500 M 1.8KOHM, J/16W 1 R4351 ERJ3EKF1501 M 2.2KOHM, J/16W 1 R4353 ERJ3GEYJ152 M 1.5KOHM, J/16W 1 R4361 ERJ3GEYJ152 M 1.5KOHM, J/16W 1 R4375 ERJ3GEYO00 M 0 0 OHM, 1/16W 1 R4375 ERJ3GEYJ020 M 2.2KOHM, J/1/10W 1 R4375 ERJ3GEYJ031 M 10KOHM, J/16W 1 R4375 ERJ3GEYJ032 M 2.2KOHM, J/1/16W 1 R4383 ERJ3GEYJ102 M 12.0HM, J/1/16W 1 R4393 ERJ3GEYJ102 M 10KOHM, J/1/16W 1 R4393 ERJ3GEYJ103 M 10KOHM, J/1/16W 1 R4393 ERJ3GEYJ103 M 10KOHM, J/1/16W 1 R4393 ERJ3GEYJ103 M 10KOHM, J/1/16W 1 R4408 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4408 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J/1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J/1/16W 1	R4259	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
1				2	
33         R4264         ERJ3GEYJ332         M 10KOHM, J, 1/16W         1           R4266         ERJ3GEYJ473         M 10KOHM, J, 1/16W         1           R4267,6         ERJ3GEYJ473         M 47KOHM, J, 1/16W         2           8         R4269         ERJ3GEYJ473         M 47KOHM, J, 1/16W         1           R4281         ERJ3GEYJ162         M 15KOHM, J, 1/16W         1           R4282         ERJ3GEYJ471         M 470 OHM, J, 1/16W         1           R4284         ERJ3GEYJ221         M 1KOHM, J, 1/16W         1           R4285         ERJ3GEYJ241         M 240 OHM, J, 1/16W         1           R4289         ERJ3GEYJ221         M 12KOHM, J, 1/16W         1           R4291         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4292         ERJ3GEYJ102         M 1KOHM, J, 1/16W         1           R4327, Z         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4327, Z         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4327, Z         ERJ3GEYJ103         M 150 OHM, 1/16W         1           R4327, Z         ERJ3EKF1500         M 150 OHM, 1/16W         1           R4346         ERJ3EKF1501         M 1.5KOHM, 1/16W <t< td=""><td></td><td></td><td> </td><td></td><td></td></t<>					
R4264         ERJ3GEYJ332         M 3.3KOHM,J,1/16W         1           R4266         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4267,6         ERJ3GEYJ473         M 47KOHM,J,1/16W         1           R4267,6         ERJ3GEYJ473         M 47KOHM,J,1/16W         1           R4269         ERJ3GEYJ153         M 15KOHM,J,1/16W         1           R4281         ERJ3GEYJ101         M 17KOHM,J,1/16W         1           R4284         ERJ3GEYJ211         M 20 OHM,J,1/16W         1           R4286         ERJ3GEYJ221         M 220 OHM,J,1/16W         1           R4291         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4292         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4292         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4322         ERJ3GEYDR00         M 0 OHM, 1/16W         1           R4322         ERJ3GEYDR00         M 10 OHM, 1/16W         1           R4324         ERJ3GEYJ301         M 1.3KOHM, 1/16W         1           R4339         ERJ3GEYJ301         M 1.3KOHM, 1/16W         1           R4344, 4         ERJ3EKF1801         M 1.8KOHM, 1/16W         1           R43340         ERJ3EKF18		ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4266					
R4267,6					
8         R4269         ERJ3GEYJ153         M 15KOHM, J,1/16W         1           R4281         ERJ3GEYD471         M 470 OHM, J,1/16W         1           R4284         ERJ3GEYJ471         M 470 OHM, J,1/16W         1           R4284         ERJ3GEYJ102         M 1KOHM, J,1/16W         1           R4284         ERJ3GEYJ221         M 220 OHM, J,1/16W         1           R4289         ERJ3GEYJ123         M 12KOHM, J,1/16W         1           R4291         ERJ3GEYJ103         M 10KOHM, J,1/16W         1           R4292         ERJ3GEYJ103         M 10KOHM, J,1/16W         1           R4298         ERJ3GEYJ102         M 1KOHM, J,1/16W         1           R4322         ERJ3GEYJ102         M 160 OHM, 1/16W         1           R4322         ERJ3GEYJ102         M 150 OHM, 1/16W         1           R4329         ERJ3GEYJ30         M 150 OHM, 1/16W         1           R4329         ERJ3EKF1501         M 160HM, 1/16W         1           R4346					
R4281 ERJ3GEYOROO M O OHM, 1/16W 1 R4282 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4284 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4286 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R4289 ERJ3GEYJ213 M 220 OHM, J, 1/16W 1 R4291 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4292 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4292 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4322 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4322 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4324 ERJ3GEYJ00 M 150 OHM, 1/16W 1 R4325 ERJ3GEYJ00 M 150 OHM, 1/16W 1 R4339 ERJ3GEYJ391 M 390 OHM, J, 1/16W 1 R43439 ERJ3GEYJ391 M 1.3KOHM, 1/16W 1 R4344 ERJ3EKF1301 M 1.3KOHM, 1/16W 1 R4345 ERJ3EKF1001 M 1KOHM, 1/16W 1 R4347 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4347 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4351 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4358 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4359 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4359 ERJ3EKF201 M 2.2KOHM, 1/16W 1 R4359 ERJ3EKF201 M 2.2KOHM, 1/16W 1 R4351 ERJ3GEYJ152 M 1.5KOHM, J, 1/10W 1 R4358 ERJ3GEYJ152 M 1.5KOHM, J, 1/10W 1 R4359 ERJ3GEYGR00 M 0 OHM, 1/16W 1 R4351 ERJ3GEYJ152 M 1.5KOHM, J, 1/10W 1 R4358 ERJ3GEYJ152 M 1.5KOHM, J, 1/10W 1 R4359 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4367 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4370 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4371 ERJ3GEYJ222 M 2.2KOHM, J, 1/10W 1 R4379, 8 ERJ3GEYGRO0 M 0 OHM, 1/16W 1 R4379 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4383 ERJ3GEYJ332 M 3.3KOHM, J, 1/16W 1 R4384 ERJ3GEYJ102 M 1.5KOHM, J, 1/16W 1 R4385 ERJ3GEYJ102 M 1.5KOHM, J, 1/16W 1 R4388 ERJ3GEYJ102 M 1.5KOHM, J, 1/16W 1 R4389 ERJ3GEYJ102 M 1.5KOHM, J, 1/16W 1 R4391 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4388, 8 ERJ3GEYJ102 M 1.0KOHM, J, 1/16W 1 R4391 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4408 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4416 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4416 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4421 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4422 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4423 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4421 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4421 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1		ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4281 ERJ3GEYOROO M O OHM, 1/16W 1 R4282 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4284 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4286 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R4289 ERJ3GEYJ213 M 220 OHM, J, 1/16W 1 R4291 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4292 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4292 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4322 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4322 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4324 ERJ3GEYJ00 M 150 OHM, 1/16W 1 R4325 ERJ3GEYJ00 M 150 OHM, 1/16W 1 R4339 ERJ3GEYJ391 M 390 OHM, J, 1/16W 1 R43439 ERJ3GEYJ391 M 1.3KOHM, 1/16W 1 R4344 ERJ3EKF1301 M 1.3KOHM, 1/16W 1 R4345 ERJ3EKF1001 M 1KOHM, 1/16W 1 R4347 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4347 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4351 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4358 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4359 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4359 ERJ3EKF201 M 2.2KOHM, 1/16W 1 R4359 ERJ3EKF201 M 2.2KOHM, 1/16W 1 R4351 ERJ3GEYJ152 M 1.5KOHM, J, 1/10W 1 R4358 ERJ3GEYJ152 M 1.5KOHM, J, 1/10W 1 R4359 ERJ3GEYGR00 M 0 OHM, 1/16W 1 R4351 ERJ3GEYJ152 M 1.5KOHM, J, 1/10W 1 R4358 ERJ3GEYJ152 M 1.5KOHM, J, 1/10W 1 R4359 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4367 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4370 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4371 ERJ3GEYJ222 M 2.2KOHM, J, 1/10W 1 R4379, 8 ERJ3GEYGRO0 M 0 OHM, 1/16W 1 R4379 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4383 ERJ3GEYJ332 M 3.3KOHM, J, 1/16W 1 R4384 ERJ3GEYJ102 M 1.5KOHM, J, 1/16W 1 R4385 ERJ3GEYJ102 M 1.5KOHM, J, 1/16W 1 R4388 ERJ3GEYJ102 M 1.5KOHM, J, 1/16W 1 R4389 ERJ3GEYJ102 M 1.5KOHM, J, 1/16W 1 R4391 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4388, 8 ERJ3GEYJ102 M 1.0KOHM, J, 1/16W 1 R4391 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4408 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4416 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4416 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4421 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4422 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4423 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4421 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1 R4421 ERJ3GEYJ200 M 2.2 OHM, J, 1/16W 1	<u> </u>	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R4282 ERJ3GEYJ471 M 470 OHM, J, 1/16W 1 R4284 ERJ3GEYJ210 M 1KOHM, J, 1/16W 1 R4286 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R4287 ERJ3GEYJ221 M 240 OHM, J, 1/16W 1 R4291 ERJ3GEYJ123 M 12KOHM, J, 1/16W 1 R4292 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4298 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4322 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4322 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4322 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4322 ERJ3GEYJ103 M 10KOHM, 1/16W 1 R4323 ERJ3GEYJ301 M 10KOHM, 1/16W 1 R4324 ERJ3GEYJ301 M 10KOHM, 1/16W 1 R43439 ERJ3GEYJ301 M 10KOHM, 1/16W 1 R4344 ERJ3EKF1301 M 10KOHM, 1/16W 1 R4345 ERJ3EKF1301 M 10KOHM, 1/16W 1 R4346 ERJ3EKF1301 M 10KOHM, 1/16W 1 R4358 ERJ3EKF1301 M 10KOHM, 1/16W 1 R4359 ERJ3EKF1301 M 10KOHM, 1/16W 1 R4361 ERJ3EKF1301 M 10KOHM, 1/16W 1 R4363 ERJ3EYJ3CY M 10KOHM, 1/16W 1 R4370 ERJ3GEYOROO M 00HM, 1/16W 1 R4371 ERJ3GEYJ322 M 20KOHM, 1/16W 1 R4373 ERJ3GEYJ322 M 30KOHM, J, 1/10W 1 R4374 ERJ3GEYJ322 M 30KOHM, J, 1/16W 1 R4375 ERJ3GEYJ322 M 30KOHM, J, 1/16W 1 R4379 ERJ3GEYJ322 M 30KOHM, J, 1/16W 1 R4382 ERJ3EKF1600 M 10KOHM, 1/16W 1 R4383 ERJ3EYJ102 M 10KOHM, J, 1/16W 1 R4384 ERJ3EKF1711 M 13.7 OHM, 1/16W 1 R4385 ERJ3GEYJ102 M 10KOHM, J, 1/16W 1 R4389 ERJ3GEYJ102 M 10KOHM, J, 1/16W 1 R4408 ERJ3EKF1711 M 13.7 OHM, 1/16W 1 R4410 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4412 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1				_	
R4284 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4286 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R4289 ERJ3GEYJ221 M 240 OHM, J, 1/16W 1 R4289 ERJ3GEYJ123 M 12KOHM, J, 1/16W 1 R4292 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4298 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4292 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4322 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4329 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4339 ERJ3GEYJ391 M 390 OHM, J, 1/16W 1 R4339 ERJ3GEYJ391 M 390 OHM, J, 1/16W 1 R4344 ERJ3EKF1301 M 1.3KOHM, 1/16W 1 R4347 ERJ3EKF1301 M 1.8KOHM, 1/16W 1 R4347 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4347 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4345 ERJ3EKF1801 M 1.5KOHM, 1/16W 1 R4351 ERJ3EKF1801 M 1.5KOHM, 1/16W 1 R4355 ERJ3EKF1801 M 1.5KOHM, J, 1/10W 2 7 R4358 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R4359 ERJ3EKF201 M 2.2KOHM, J, 1/10W 1 R4359 ERJ3EKF201 M 1.5KOHM, J, 1/10W 1 R4359 ERJ3EKF201 M 1.5KOHM, J, 1/10W 1 R4350 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4371 ERJ3GEYJ322 M 2.2KOHM, J, 1/10W 1 R4375 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4371 ERJ3GEYJ322 M 2.2KOHM, J, 1/10W 1 R4375 ERJ3GEYJ332 M 3.3KOHM, J, 1/10W 1 R4375 ERJ3GEYJ303 M 3.3KOHM, J, 1/16W 1 R4383 ERJ3GEYJ303 M 3.3KOHM, J, 1/16W 1 R4390 ERJ3GEYJ303 M 3.3KOHM, J, 1/16W 1 R4391 ERJ3GEYJ303 M 10KOHM, J, 1/16W 1 R4392 ERJ3GEYJ303 M 10KOHM, J, 1/16W 1 R4393 ERJ3GEYJ100 M 10 OHM, 1/16W 1 R4394 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4395 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4409 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4414 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4416 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4416 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4422 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4423 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4426 EXB36V20J RESISTOR ARRAY 1 R4426 EXB36V20J RESISTOR ARRAY 1					
R4286 ERJ3GEYJ221 M 220 OHM, J, 1/16W 1 R4289 ERJ3GEYJ123 M 12KOHM, J, 1/16W 1 R4291 ERJ3GEYJ123 M 12KOHM, J, 1/16W 1 R4292 ERJ3GEYJ103 M 1KOHM, J, 1/16W 1 R4292 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4322 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4329 ERJ3GEYJ103 M 150 OHM, 1/16W 1 R4329 ERJ3GEYJ103 M 150 OHM, 1/16W 1 R4329 ERJ3EKF1500 M 150 OHM, 1/16W 1 R4339 ERJ3GEYJ391 M 390 OHM, J, 1/16W 1 R43439 ERJ3EKF1301 M 1.3KOHM, 1/16W 1 R4347 ERJ3EKF1001 M 1KOHM, 1/16W 1 R4347 ERJ3EKF1001 M 1KOHM, 1/16W 1 R4347 ERJ3EKF1001 M 1.8KOHM, 1/16W 1 R4346 ERJ3EKF1001 M 1.8KOHM, 1/16W 1 R4356, 5 ERJ3EKF1801 M 1.5KOHM, 1/16W 2 R4356 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4356 ERJ3EKF1501 M 1.5KOHM, J, 1/10W 2 R4356 ERJ3GEYJ152 M 1.5KOHM, J, 1/10W 1 R4359 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4361 ERJ6EYJ152 M 1.5KOHM, J, 1/10W 1 R4361 ERJ6GEYJ152 M 1.5KOHM, J, 1/10W 1 R4361 ERJ3EKF000 M 0 OHM, 1/16W 1 R4370 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4371 ERJ3EKF1001 M 0 OHM, 1/16W 1 R4371 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4371 ERJ3GEYJ222 M 2.2KOHM, J, 1/10W 1 R4373 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4374 ERJ3GEYJ222 M 2.2KOHM, J, 1/10W 1 R4375 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4376 ERJ3GEYJ302 M 3.3KOHM, J, 1/16W 1 R4377 ERJ3GEYJ220 M 2.2KOHM, J, 1/16W 1 R4378 ERJ3GEYJ303 M 1.0KOHM, J, 1/16W 1 R4383 ERJ3GEYJ303 M 3.3KOHM, J, 1/16W 1 R4394 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4395 ERJ3GEYJ200 M 20 OHM, J, 1/16W 1 R4409 ERJ3EKF1711 M 17.4 OHM, J, 1/16W 1 R4409 ERJ3EKF1771 M 13.7 OHM, 1/16W 1 R4401 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4422 ERJ3GEYJ220 RESISTOR ARRAY 1 R4426 EXB36V220J RESISTOR ARRAY 1 R4426 EXB3GY220J RESISTOR ARRAY 1			·		
R4289 ERJ3GEYJ241 M 240 OHM, J, 1/16W 1 R4291 ERJ3GEYJ123 M 12KOHM, J, 1/16W 1 R4292 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4298 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4322 ERJ3GEYJ100 M 0 OHM, 1/16W 1 R4327,2 ERJ3GEYDROO M 0 OHM, 1/16W 2 8 R4329 ERJ3GEYJ391 M 390 OHM, 1/16W 1 R4339 ERJ3GEYJ391 M 390 OHM, J, 1/16W 1 R4344,4 ERJ3EKF1301 M 1.3KOHM, 1/16W 2 S R4345 ERJ3EKF1301 M 1.8KOHM, 1/16W 1 R4346 ERJ3EKF1001 M 1.8KOHM, 1/16W 1 R4347,5 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4351 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4358 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R4358 ERJ6GEYJ52 M 1.5KOHM, J, 1/10W 1 R4359 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4361 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4361 ERJ6GEYJ52 M 1.5KOHM, J, 1/10W 1 R4367 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4370 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R4371 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R4379, 8 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4379, 8 ERJ3GEYJ222 M 2.2KOHM, J, 1/10W 1 R4379, 8 ERJ3GEYJ222 M 2.2KOHM, J, 1/16W 1 R4382 ERJ3GEYJ222 M 2.2KOHM, J, 1/16W 1 R4383 ERJ3GEYJ220 M 3.3KOHM, J, 1/16W 1 R4384 ERJ3GEYJ220 M 3.3KOHM, J, 1/16W 1 R4385 ERJ3GEYJ220 M 1.5KOHM, J, 1/16W 1 R4386 ERJ3GEYJ220 M 1.5KOHM, J, 1/16W 1 R4387 ERJ3GEYJ220 M 1.5KOHM, J, 1/16W 1 R4388 ERJ3GEYJ220 M 1.5KOHM, J, 1/16W 1 R4389 ERJ3GEYJ220 M 1.5KOHM, J, 1/16W 1 R4381 ERJ3GEYJ220 M 2.2 OHM, J, 1/16W 1 R4488 ERJ3GEYJ220 M 2.2 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 2.2 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 2.2 OHM, J, 1/16W 1 R4422 ERJ3GEYJ220 M 2.2 OHM, J, 1/16W 1 R4423 ERJ3GEYJ220 M 2.2 OHM, J, 1/16W 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1					
R4291 ERJ3GEYJ123 M 12KOHM,J,1/16W 1 R4292 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4298 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4322 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4327,2 ERJ3GEYOR00 M 0 OHM, 1/16W 2 8 R4329 ERJ3GEYJ391 M 390 OHM,J,1/16W 1 R4339 ERJ3GEYJ391 M 390 OHM,J,1/16W 1 R4344,4 ERJ3EKF1301 M 1.3KOHM, 1/16W 2 5 R4346 ERJ3EKF1001 M 1KOHM, 1/16W 1 R4347 ERJ3EKF201 M 2.2KOHM, 1/16W 2 0 R4351 ERJ3EKF1801 M 1.5KOHM, 1/16W 2 0 R4355 ERJ3GEYJ371 M 470 OHM,J,1/10W 1 R4358 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R4359 ERJ3EKF201 M 2.2KOHM, 1/16W 1 R4359 ERJ3EKF201 M 2.2KOHM, 1/16W 1 R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4370 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4371 ERJ6GEYJ222 M 3.3KOHM,J,1/16W 1 R4379,8 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4382 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4383 ERJ3GEYJ20 M 1KOHM,J,1/16W 1 R4384 ERJ3GEYJ20 M 1KOHM,J,1/16W 1 R4385 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4381 ERJ3GEYJ20 M 2.2KOHM,J,1/16W 1 R4382 ERJ3GEYJ20 M 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				1	
R4292 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4298 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R43212 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4327, 2 ERJ3GEYOROO M 150 OHM, 1/16W 1 R4329 ERJ3GEYJ391 M 390 OHM, J, 1/16W 1 R4339 ERJ3GEYJ391 M 390 OHM, J, 1/16W 1 R4344, 4 ERJ3EKF1301 M 1.3KOHM, 1/16W 1 R4346 ERJ3EKF1001 M 1KOHM, 1/16W 1 R4347 ERJ3EKF201 M 2.2KOHM, 1/16W 1 R4349, 5 ERJ3EKF1801 M 1.5KOHM, 1/16W 1 R4345 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4356, 5 ERJ6GEYJ471 M 470 OHM, J, 1/10W 2 R4358 ERJ6GEYJ52 M 1.5KOHM, J, 1/10W 1 R4365 ERJ3EKF2001 M 2.2KOHM, 1/16W 1 R4365 ERJ3EKF2001 M 2.2KOHM, 1/16W 1 R4365 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4367 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4370 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R4372 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4373 ERJ3GEYJ322 M 3.3KOHM, J, 1/10W 1 R4374 ERJ3GEYJ022 M 2.2KOHM, J, 1/16W 1 R4375 ERJ3GEYJ022 M 3.3KOHM, J, 1/16W 1 R4379, 8 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4388, 8 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4388 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4388 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4389 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4399 ERJ3GEYJ200 M 22 OHM, J, 1/16W 1 R4408 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4412 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1				_	
R4298 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4322 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4327, 2 ERJ3GEYOROO M 150 OHM, 1/16W 2 R4329 ERJ3GEKF1500 M 150 OHM, 1/16W 1 R4339 ERJ3GEYJ391 M 390 OHM, J, 1/16W 1 R4344, 4 ERJ3EKF1301 M 1.3KOHM, 1/16W 2 S R4346 ERJ3EKF1001 M 1KOHM, 1/16W 1 R4347 ERJ3EKF1001 M 1.8KOHM, 1/16W 1 R4347 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4349, 5 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4345 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4351 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4358 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R4358 ERJ6GEYJ52 M 1.5KOHM, J, 1/10W 1 R4359 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4361 ERJ6GEYJ52 M 1.5KOHM, J, 1/10W 1 R4361 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4370 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R4375 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4379, 8 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4379, 8 ERJ3GEYJ102 M 1.6KOHM, J, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4384 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4388, 8 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4392 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4408 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4412 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4413 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1				_	
R4322 ERJ3GEYOROO M O OHM, 1/16W 1 R4327,2 ERJ3GEYOROO M O OHM, 1/16W 2 R4329 ERJ3EKF1500 M 150 OHM, 1/16W 1 R4339 ERJ3EKF1501 M 150 OHM, 1/16W 1 R4344,4 ERJ3EKF1301 M 1.3KOHM, 1/16W 2 S R4346 ERJ3EKF1301 M 1.3KOHM, 1/16W 1 R4347 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4347 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4349,5 ERJ3EKF1801 M 1.8KOHM, 1/16W 1 R4351 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4358 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R4359 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4361 ERJ3GEYOROO M 0.0HM, 1/16W 1 R4361 ERJ3GEYOROO M 0.0HM, 1/16W 1 R4367 ERJ3GEYOROO M 0.0HM, 1/16W 1 R4370 ERJ3GEYOROO M 0.0HM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R4371 ERJ6GEYJ322 M 3.3KOHM, J, 1/16W 1 R4379,8 ERJ3GEYOROO M 0.0HM, 1/16W 1 R4383 ERJ3GEYOROO M 0.0HM, 1/16W 1 R4384 ERJ3GEYOROO M 0.0HM, 1/16W 1 R4385 ERJ3GEYOROO M 0.0HM, 1/16W 1 R4388 ERJ3GEYJ102 M 1.0HM, 1/16W 1 R4389 ERJ3EKF1600 M 1.0HM, 1/16W 1 R4389 ERJ3EKF1600 M 1.0HM, 1/16W 1 R4380 ERJ3EKF1600 M 1.0HM, 1/16W 1 R4381 ERJ3GEYJ102 M 1.0HM, 1/16W 1 R4382 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3GEYJ102 M 1.0HM, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4412 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1					
R4327,2 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4339 ERJ3GEYJ391 M 390 OHM,J,1/16W 1 R4339 ERJ3GEYJ391 M 1.3KOHM, 1/16W 2 S R4346 ERJ3EKF1301 M 1.3KOHM, 1/16W 1 R4347 ERJ3EKF201 M 2.2KOHM, 1/16W 1 R4349,5 ERJ3EKF1801 M 1.8KOHM, 1/16W 2 O R4351 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4356,5 ERJ6GEYJ471 M 470 OHM,J,1/10W 2 7 R4358 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4365 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4367 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4370 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4371 ERJ6GEYJ322 M 2.2KOHM,J,1/10W 1 R4371 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4371 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4375 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4383 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4384 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4385 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4388 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4399 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1					
8					
R4329 ERJ3EKF1500 M 150 OHM, 1/16W 1 R4339 ERJ3GEYJ391 M 390 OHM, J,1/16W 1 R4344,4 ERJ3EKF1301 M 1.3KOHM, 1/16W 2 S R4346 ERJ3EKF1001 M 1KOHM, 1/16W 1 R4347 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4347 ERJ3EKF1801 M 1.8KOHM, 1/16W 2 O R4351 ERJ3EKF1801 M 1.5KOHM, 1/16W 1 R4356,5 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R4359 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4361 ERJ6GEYJ152 M 1.5KOHM, J,1/10W 1 R4365 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4367 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4370 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R4379, 8 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4379, 8 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4379, 8 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4379, 8 ERJ3GEYJ332 M 3.3KOHM, J,1/16W 1 R4382 ERJ3GEYJ332 M 3.3KOHM, J,1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4384 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4389 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4381 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4389 ERJ3EKF1741 M 13.7 OHM, 1/16W 1 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1		ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4339 ERJ3GEYJ391 M 390 OHM, J, 1/16W 1 R4344, 4 ERJ3EKF1301 M 1.3KOHM, 1/16W 2 S R4346 ERJ3EKF1001 M 1KOHM, 1/16W 1 R4347 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4349, 5 ERJ3EKF1801 M 1.8KOHM, 1/16W 2 0 R4351 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4356, 5 ERJ6GEYJ471 M 470 OHM, J, 1/10W 2 7 R4358 ERJ6GEYJ152 M 1.5KOHM, J, 1/10W 1 R4359 ERJ3EKF2201 M 2.2KOHM, J, 1/10W 1 R4361 ERJ6GEYJ152 M 1.5KOHM, J, 1/10W 1 R4365 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4367 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4370 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R4375 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4379, 8 ERJ3GEYJ332 M 3.3KOHM, J, 1/16W 2 0 R4382 ERJ3GEYJ332 M 3.3KOHM, J, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4384 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4389 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4389 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4408 ERJ3EKF1741 M 13.7 OHM, 1/16W 1 R4408 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4410 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1		PD.T2 PP P1 500	M 150 OUM 1/16W	1	
R4344,4 ERJ3EKF1301 M 1.3KOHM, 1/16W 2  R4346 ERJ3EKF1001 M 1KOHM, 1/16W 1  R4347 ERJ3EKF2201 M 2.2KOHM, 1/16W 1  R4349,5 ERJ3EKF1801 M 1.5KOHM, 1/16W 2  R4351 ERJ3EKF1501 M 1.5KOHM, 1/16W 1  R4356,5 ERJ6GEYJ471 M 470 OHM,J,1/10W 2  R4358 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1  R4359 ERJ3EKF2201 M 2.2KOHM, 1/16W 1  R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1  R4365 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4370 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1  R4372 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4373 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4374 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4375 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4383 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 2  0  R4388 ERJ3GEYJ102 M 1KOHM,J,1/16W 1  R4389 ERJ3EKF1600 M 160 OHM, 1/16W 1  R4389 ERJ3EKF1711 M 13.7 OHM, 1/16W 1  R4389 ERJ3EKF1711 M 13.7 OHM, 1/16W 1  R4408 ERJ3EKF1741 M 17.4 OHM, J,1/16W 1  R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1  R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1  R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1  R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1  R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1  R4422 ERB38V220J RESISTOR ARRAY 1  R4426 EXB38V220J RESISTOR ARRAY 1  R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1			· · · · · · · · · · · · · · · · · · ·	_	
5       R4346       ERJ3EKF1001       M 1KOHM, 1/16W       1         R4347       ERJ3EKF2201       M 2.2KOHM, 1/16W       1         R4349,5       ERJ3EKF1801       M 1.8KOHM, 1/16W       2         0       M 1.5KOHM, 1/16W       1         R4351       ERJ3EKF1501       M 1.5KOHM, 1/16W       1         R4355,5       ERJ6GEYJ471       M 470 OHM, J, 1/10W       1         R4358       ERJ6GEYJ152       M 1.5KOHM, J, 1/10W       1         R4359       ERJ3EKF2201       M 2.2KOHM, 1/16W       1         R4361       ERJ6GEYJ152       M 1.5KOHM, J, 1/10W       1         R4365       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4367       ERJ3GEY0R00       M 0 OHM, 1/16W       1         R4371       ERJ3GEYJ202       M 2.2KOHM, J, 1/10W       1         R4371       ERJ3GEYJ332       M 3.3KOHM, J, 1/16W       1         R4379,8       ERJ3GEYJ332       M 3.3KOHM, J, 1/16W       1         R4382       ERJ3GEYJ102       M 1KOHM, J, 1/16W       1         R4388,8       ERJ3GEYJ200       M 0 OHM, 1/16W       1         R4391       ERJ3GEYJ220       M 22 OHM, J, 1/16W       1         R4408       ERJ3GEYJ220 <td></td> <td></td> <td></td> <td></td> <td></td>					
R4347 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4349,5 ERJ3EKF1801 M 1.8KOHM, 1/16W 2 0 R4351 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4356,5 ERJ6GEYJ471 M 470 OHM, J, 1/10W 2 7 R4358 ERJ6GEYJ152 M 1.5KOHM, J, 1/10W 1 R4361 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4365 ERJ3GEYJ152 M 1.5KOHM, J, 1/10W 1 R4366 ERJ3GEYJ152 M 1.5KOHM, J, 1/10W 1 R4367 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4370 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R4375 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4378 ERJ3GEYJ222 M 3.3KOHM, J, 1/16W 2 0 R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4384 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4392 ERJ3EKF1741 M 13.7 OHM, 1/16W 1 R4392 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1		ERJ3EKF1301	M 1.3KOHM, 1/16W		
R4349,5 ERJ3EKF1801 M 1.8KOHM, 1/16W 2 0 R4351 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4356,5 ERJ6GEYJ471 M 470 OHM,J,1/10W 2 7 R4358 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4359 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4365 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4370 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4372 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4373 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4374 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4375 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4388,8 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 2 0 R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4384 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	R4346	ERJ3EKF1001	M 1KOHM, 1/16W	1	
0 R4351 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4356,5 ERJ6GEYJ471 M 470 OHM,J,1/10W 2 R4358 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4359 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4365 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4367 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4370 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4375 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4378 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4379,8 ERJ3GEYJ322 M 3.3KOHM,J,1/16W 2 0 R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4384,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	R4347	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4351 ERJ3EKF1501 M 1.5KOHM, 1/16W 1 R4356,5 ERJ6GEYJ471 M 470 OHM,J,1/10W 2 R4358 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4359 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4365 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4370 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4375 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4375 ERJ3GEYJ222 M 2.2KOHM,J,1/10W 1 R4375 ERJ3GEYJ222 M 3.3KOHM,J,1/16W 1 R4379,8 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 2 0 R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4388,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4388,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R44392 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	R4349,5	ERJ3EKF1801	M 1.8KOHM, 1/16W	2	
R4356,5 ERJ6GEYJ471 M 470 OHM,J,1/10W 2 R4358 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4365 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4367 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4370 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4375 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4375 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4378 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4382 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 2 0 R4388 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4388,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4389 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4408 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	0				
7 R4358 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4365 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4367 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4370 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4375 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4375 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4378 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4382 ERJ3EKF16OO M 16O OHM, 1/16W 1 R4388 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4388 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R43891 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4408 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	R4351	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	
R4358 ERJGGEYJ152 M 1.5KOHM, J,1/10W 1 R4359 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4361 ERJGGEYJ152 M 1.5KOHM, J,1/10W 1 R4365 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4367 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4370 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM, J,1/10W 1 R4375 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4375 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4383 ERJ3GEYJ332 M 3.3KOHM, J,1/16W 2 R4388 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4388 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4389 ERJ3GEYJ103 M 1OHM, 1/16W 1 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM, J,1/16W 1	1_	ERJ6GEYJ471	M 470 OHM,J,1/10W	2	
R4359 ERJ3EKF2201 M 2.2KOHM, 1/16W 1 R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4365 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4367 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4370 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4375 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4375 ERJ3GEYOR00 M 0 OHM, 1/16W 2 R4382 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 2 R4388 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4388 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4389 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4492 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4408 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4410 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	-	ED TECENTIES	M 1 EVOUM T 1/10W	1	
R4361 ERJ6GEYJ152 M 1.5KOHM,J,1/10W 1 R4365 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4367 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4370 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4375 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4379,8 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 2 0 R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4388 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4388 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4389 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4389 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4408 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4409 ERJ3GEYJ200 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1			· · · · · · · · · · · · · · · · · · ·		
R4365 ERJ3GEYOROO M O OHM, 1/16W 1 R4367 ERJ3GEYOROO M O OHM, 1/16W 1 R4370 ERJ3GEYOROO M O OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4375 ERJ3GEYOROO M O OHM, 1/16W 1 R4375, ERJ3GEYOROO M O OHM, 1/16W 1 R4382 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4388,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 9 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1					
R4367 ERJ3GEYOROO M O OHM, 1/16W 1 R4370 ERJ3GEYOROO M O OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4375 ERJ3GEYOROO M O OHM, 1/16W 1 R4379,8 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 2 R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4388,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 2 R43891 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4408 ERJ3EKF1371 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1					
R4370 ERJ3GEYOROO M O OHM, 1/16W 1 R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4375 ERJ3GEYOROO M O OHM, 1/16W 1 R4379,8 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 2 0 R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4388,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4392 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ200 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1					
R4371 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R4375 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4379,8 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 2 0 R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4388,8 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1				<b>—</b>	
R4375 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4379,8 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 2 0 R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4388,8 ERJ3GEYOR00 M 0 OHM, 1/16W 2 9 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4408 ERJ3EKF1371 M 17.4 OHM, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1				_	
R4379,8 ERJ3GEYJ332 M 3.3KOHM,J,1/16W 2 0 R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4388,8 ERJ3GEYOR00 M 0 OHM, 1/16W 2 9 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4492 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1					
0 R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4388,8 ERJ3GEY0R00 M 0 OHM, 1/16W 2 9 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM, J,1/16W 1					
R4382 ERJ3EKF1600 M 160 OHM, 1/16W 1 R4383 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4388,8 ERJ3GEYOR00 M 0 OHM, 1/16W 2 9 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	1.	ERJ3GEYJ332	m 3.3KOHM,J,1/16W	2	
R4383 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4388,8 ERJ3GEY0R00 M 0 OHM, 1/16W 2 9 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1		ERJ3EKF1600	M 160 OHM, 1/16W	1	
R4388,8 ERJ3GEY0R00 M 0 OHM, 1/16W 2 9 R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1				<u> </u>	
R4391 ERJ3EKF1371 M 13.7 OHM, 1/16W 1 R4392 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	R4388,8			_	
R4392 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1					
R4408 ERJ3EKF1741 M 17.4 OHM, 1/16W 1 R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1					
R4409 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1					
R4411 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1				_	
R4414 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1				_	
R4416 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	R4411	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4421 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1		ERJ3GEYJ220	1	1	
R4423 EXB38V220J RESISTOR ARRAY 1 R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	R4416	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4426 EXB38V220J RESISTOR ARRAY 1 R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	R4421	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4427 ERJ3GEYJ220 M 22 OHM,J,1/16W 1	R4423	EXB38V220J	RESISTOR ARRAY	1	
	R4426	EXB38V220J	RESISTOR ARRAY	1	
R4428 EXB38V220J RESISTOR ARRAY 1	R4427	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R4428	EXB38V220J	RESISTOR ARRAY	1	

Ref.	PX50U / TH-50PX50U	Part Name &	Pcs	Remarks
No. R4433,3	EXB38V220J	Description RESISTOR ARRAY	2	
R4433,3 4 R4435-	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
37	D1HG5608A002	NETWORK RESISTER	2	
2 R4443		RESISTOR ARRAY	1	
R4444	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4445-	ERJ3GEYJ560	M 56 OHM, J, 1/16W	3	
47	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
9 R4450-	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
54 R4456,5	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
7 R4458,5	ERJ3EKF3302	M 33KOHM, 1/16W	2	
9				
R4460	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4461,6 2	ERJ3EKF2202	M 22KOHM, 1/16W	2	
R4463		M61.9KOHM, 1/16W	1	
R4464	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4465	ERJ3EKF6192	M61.9KOHM, 1/16W	1	
R4466	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4469	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4471	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4472	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R4473	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4474	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4480	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4481	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4482,8 3 R4484	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
	ERJ3GEYJ331	M 330 OHM, J, 1/16W	2	
R4485,8	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4487 R4488,8	ERJ3GEYJ105 ERJ3GEYJ102	M 1MOHM,J,1/16W M 1KOHM,J,1/16W	2	
9 R4490,9	ERJ3EKF1800	M 180 OHM, 1/16W	2	
1		M 330 OHM,J,1/16W	2	
3 R4494		M 22KOHM,J,1/16W	1	
R4495,9	ERJ3GEYJ473	M 47KOHM, J, 1/16W	2	
6 R4497,9		M 470 OHM,J,1/16W	2	
8 R4516		M 100 OHM, J, 1/16W	1	
R4522	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4524	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4527	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R4528	ERJ3EKF1800	M 180 OHM, 1/16W	1	
R4529	ERJ3EKF2001	M 2KOHM, 1/16W	1	
R4530	ERJ3EKF4302	M 43KOHM, 1/16W	1	
R4531,3	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4533- 37	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4540,4	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4543,4 4	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4545,4	ERJ3GEYJ330	M 33 OHM,J,1/16W	2	
R4547- 50	EXB2HV680J	RESISTOR ARRAY	4	
R4551,5 2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4557	ERJ3GEYJ750	M 75 OHM,J,1/16W	1	
R4558	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4559	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	
R4560,6 1	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R4562	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R4564-	TAJAAH0680JV	M 68 OHM,J,1/16W	3	
66	L			

No.   Description   R4569   EXB38V680J   RESISTOR ARRAY   1   R4571   EXB38V680J   RESISTOR ARRAY   1   R4571   EXB38V680J   RESISTOR ARRAY   1   R4571,7   EXB38V680J   RESISTOR ARRAY   1   R4572,7   ERJ3EKF3002   M 30KOHM, 1/16W   2   3   3   3   3   3   3   3   3   3	Ref.	Part No.	Part Name &	Pcs	Remarks
R4570		rait No.		res	Kemarks
RA571 RX338V600J RESISTOR ARRAY 1 1 R4572.7 ERJ3GENTORO M 0 OHM, 1/16W 2 3 7 R4575.7 ERJ3GENTORO M 0 OHM, 1/16W 3 R4575.7 ERJ3GENTORO M 0 OHM, 1/16W 2 9 R4576.7 ERJ3GENTORO M 0 OHM, 1/16W 2 9 R4576.7 ERJ3GENTORO M 0 OHM, 1/16W 5 8 R4590 TAJAAHO101JV M 100 OHM, 1/16W 1 R4592 ERJ3GENTORO M 0 OHM, 1/16W 1 R4592 ERJ3GENTORO M 0 OHM, 1/16W 1 R4594 ERJ3GENTORO M 0 OHM, 1/16W 1 R4594 ERJ3GENTORO M 0 OHM, 1/16W 1 R4596 ERJ3GENTORO M 0 OHM, 1/16W 1 R4597 ERJ3GENTORO M 0 OHM, 1/16W 1 R4596 ERJ3GENTORO M 0 OHM, 1/16W 1 R4602 ERJ3GENTORO M 0 OHM, 1/16W 1 R4602 ERJ3GENTORO M 0 OHM, 1/16W 1 R4602 ERJ3GENTORO M 82 OHM, 1/16W 1 R4602 ERJ3GENTORO M 82 OHM, 1/16W 1 R4602 ERJ3GENTORO M 0 OHM, 1/16W 1 R4603 ERJ3GENTORO M 0 OHM, 1/16W 1 R4603 ERJ3GENTORO M 0 OHM, 1/16W 1 R4630 ERJ3GENTORO M 0 OHM, 1/16W 1 R4631 ERJ3GENTORO M 0 OHM, 1/16W 1 R4651 ERJ3GENTORO M 0 OHM, 1/16W 1 R4652 ERJ3GENTORO M 0 OHM, 1/16W 1 R4653 ERJ3GENTORO M 0 OHM, 1/16W 1 R4658 ERJ3GENTORO M 0 OHM, 1/16W 1 R4658 ERJ3GENTORO M 0 OHM, 1/16W 1 R4668 ERJ3GENTORO M 0 OHM, 1/16W 1 R4769 ERJ3GENTORO M 0 OHM, 1/16W 1 R4769 ERJ3GENTORO M 0 OHM	R4569	EXB38V680J	RESISTOR ARRAY	1	
R4572,7	R4570	EXB2HV680J	RESISTOR ARRAY	1	
3	R4571	EXB38V680J	RESISTOR ARRAY	1	
R4575-		ERJ3EKF3002	M 30KOHM, 1/16W	2	
R4578,7 ERJ3EKF1741 M 17.4 OHM, 1/16W 2		ERJ3GEY0R00	M 0 OHM, 1/16W	3	
9         R4581- 858         ERJ3GEY0ROO         M O OHM, 1/16W         5           858         R4590         TAJAAHO10JJV         M 100 OHM, J, 1/16W         1           R4592         RAJGEYJEJO3         M 20 OHM, J, 1/16W         1           R4593         TAJAAHO10JJV         M 100 OHM, J, 1/16W         1           R4594         RBJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4597         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4602         RBJ3GEYDROO         M 0 OHM, J, 1/16W         1           R4602         RBJ3GEYJB2O         M 2 OHM, J, 1/16W         1           R4603         RBJ3GEYJB2O         M 82 OHM, J, 1/16W         1           R4603         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4623-         ERJ3GEYJ103         M 10KOHM, J, 1/16W         1           R4623-         ERJ3GEYJ233         M 22KOHM, J, 1/16W         1           R4630         ERJ3GEYJ233         M 22KOHM, J, 1/16W         1           R4631         ERJ3GEYJ223         M 22KOHM, J, 1/16W         1           R4632         ERJ3GEYJ223         M 22KOHM, J, 1/16W         1           R4634         ERJ3GEYJ20         M 22 OHM, J, 1/16W         1		ER.T3EKF1741	M 17.4 OHM. 1/16W	2	
### ### ### ### ### ### ### ### ### ##	9		·		
R4592 ERJ3GEYJ820 M 82 OHM, J, 1/16W 1 R4593 TAJAANO101JV M 100 OHM, J, 1/16W 1 R4596 ERJ3GEYJ330 M 10KOHM, J, 1/16W 1 R4597 ERJ3GEYJ330 M 33 OHM, J, 1/16W 1 R4597 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4597 ERJ3GEYBROO M 0 OHM, 1/16W 1 R4600 ERJ3GEYBROO M 0 OHM, 1/16W 1 R4602 ERJ3GEYBROO M 0 OHM, 1/16W 1 R4603 ERJ3GEYJ151 M 150 OHM, J, 1/16W 1 R4603 ERJ3GEYJ151 M 150 OHM, J, 1/16W 1 R4603 ERJ3GEYJ151 M 150 OHM, J, 1/16W 1 R4624 EXB3SW820J RESISTOR ARRAY 3 R4624 EXB3GEYJ103 M 10KOHM, J, 1/16W 1 R4630 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4631 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4632 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4633 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4634 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4635 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4636 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4637 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4638 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4652 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4652 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4652 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4653 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4654 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4656 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4670 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4709 ERJ3GEYJ103 M 10KOHM, J,	85				
R4593 TAJAAHO101JV M 100 OHM,J,1/16W 1 R4594 REJJGEYJ103 M 10KOHM,J,1/16W 1 R4597 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4597 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4600 REJJGEYDROO M 0 OHM, 1/16W 1 R4602 ERJJGEYDROO M 0 OHM,J,16W 1 R4603- ERJJGEYJ820 M 82 OHM,J,1/16W 1 R4603- ERJJGEYJ820 M 82 OHM,J,1/16W 1 R4604 REJJGEYDROO M 0 OHM,J,1/16W 1 R4603- ERJJGEYJ151 M 150 OHM,J,1/16W 1 R4624 EKB38V820J RESISTOR ARRAY 3 R4626 REJJGEYJ103 M 10KOHM,J,1/16W 1 R4630 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4631 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4632, BRJJGEYJ103 M 10KOHM,J,1/16W 1 R4633 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4634 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4635 ERJJGEYJ223 M 22KOHM,J,1/16W 1 R4636 ERJJGEYJ223 M 22KOHM,J,1/16W 1 R4637 4 ERJJGEYDROO M 0 OHM, 1/16W 2 4 R4643,4 ERJJGEYDROO M 0 OHM, 1/16W 1 R4651 ERJJGEYDROO M 0 OHM, 1/16W 1 R4652 ERJJGEYJ821 M 82 OHM,J,1/16W 1 R4653 ERJJGEYDROO M 0 OHM, 1/16W 1 R4654 ERJJGEYDROO M 0 OHM, 1/16W 1 R4655 ERJJGEYDROO M 0 OHM, 1/16W 1 R4656 ERJJGEYDROO M 0 OHM, 1/16W 1 R4656 ERJJGEYDROO M 0 OHM, 1/16W 1 R4657 ERJJGEYDROO M 0 OHM, 1/16W 1 R4658 ERJJGEYDROO M 0 OHM, 1/16W 1 R4666 ERJJGEYDROO M 0 OHM, 1/16W 1 R4666 ERJJGEYDROO M 0 OHM, 1/16W 1 R4667 ERJJGEYDROO M 0 OHM, 1/16W 1 R4668 ERJJGEYDROO M 0 OHM, 1/16W 1 R4668 ERJJGEYDROO M 0 OHM, 1/16W 1 R4669 ERJJGEYDROO M 0 OHM, 1/16W 1 R4670 ERJJGEYDROO M 0 OHM, 1/16W 1 R4670 ERJJGEYDROO M 0 OHM, 1/16W 1 R4670 ERJJGEYDROO M 0 OHM, 1/16W 1 R4706 ERJJGEYDROO M 0 OHM, 1/16W 1 R4707 ERJJGEYDROO M 0 OHM, 1/16W 1 R4708 ERJJGEYDROO M 0 OHM, 1/16W 1 R4709 ERJJGEYDROO M 0 OHM, 1/16W 1					
R4594 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4596 RBJ3GEYJ303 M 30 OHM, J, 1/16W 1 R4600 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4601 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4602 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4602 ERJ3GEY1820 M 82 OHM, J, 1/16W 1 R4603 ERJ3GEYJ151 M 150 OHM, J, 1/16W 1 R4624 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4625 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4630 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4630 ERJ3GEYJ123 M 22KOHM, J, 1/16W 1 R4630 ERJ3GEYJ123 M 22KOHM, J, 1/16W 1 R4634 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4636 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4637 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4638 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4639 A EXE2HV680J RESISTOR ARRAY 2 R4639 A EXE2HV680J RESISTOR ARRAY 2 R4651 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4652 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4653 ERJ3GEYJ03 M 0 OHM, 1/16W 1 R4653 ERJ3GEYJ03 M 10KOHM, J, 1/16W 1 R4653 ERJ3GEYJ03 M 0 OHM, 1/16W 1 R4665 ERJ3GEYJ03 M 10KOHM, J, 1/16W 1 R4665 ERJ3GEYJ03 M 10KOHM, J, 1/16W 1 R4665 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4666 ERJ3GEYJ03 M 10KOHM, J, 1/16W 1 R4667 FRJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 FRJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R46707 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4685 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4704 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4705 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4706 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4707 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYD103 M 10KOHM, J, 1/16W 1 R4709 ERJ3GEYD100 M 0 0HM, 1/16W 1					
R4596 ERJ3GEYJ330 M 33 OHM, J, 1/16W 1 R4597 ERJ3GEYQ103 M 10KOHM, J, 1/16W 1 R4600 ERJ3GEYQ100 M 0 OHM, 1/16W 1 R4601 ERJ3GEYQ100 M 0 OHM, 1/16W 1 R4602 ERJ3GEYQ101 M 52 OHM, J, 1/16W 1 R4603 ERJ3GEYJ151 M 150 OHM, J, 1/16W 1 R4604 ERJ3GEYJ151 M 150 OHM, J, 1/16W 1 R4623 ERJ3GEYJ151 M 150 OHM, J, 1/16W 1 R4624 EKB38V820J RESTSTOR ARRAY 3 R4627 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4630 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4632 ERJ3GEYJ103 M 22KOHM, J, 1/16W 1 R4638 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4638 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4638 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4636 ERJ3GEYJ220 M 22 KOHM, J, 1/16W 1 R4637 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4638 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4651 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4652 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4655 ERJ3GEYJ220 M 20 OHM, J, 1/16W 1 R4656 ERJ3GEYJ220 M 0 OHM, 1/16W 1 R4657 ERJ3GEYJ03 M 10KOHM, J, 1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4656 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4657 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R46658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R46658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4670 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4704 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4705 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4706 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4707 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4709 ERJ3GEYJ103 M 10KOHM, J, 1/16					
R4597 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4600 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4603- ERJ3GEYOROO M 0 OHM, 1/16W 1 R4603- ERJ3GEYJ000 M 0 OHM, 1/16W 1 R4603- ERJ3GEYJ1820 M 82 OHM, J,1/16W 1 R4624- EXB38V820J RESISTOR ARRAY 3 R4627 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4630 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4630 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4638 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4639 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4638 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4639 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4634 EXEZHV680J RESISTOR ARRAY 2 0 RESISTOR ARRAY 2 0 RESISTOR ARRAY 3 R4636 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4637 EXEZHV680J M 10KOHM, J, 1/16W 1 R4643, 4 ERJ3GEYJ03 M 10KOHM, J, 1/16W 1 R4651 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4652 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4655 ERJ3GEYJ821 M 820 OHM, J, 1/16W 1 R4656 ERJ3GEYJ821 M 820 OHM, J, 1/16W 1 R4657 ERJ3GEYV800 M 0 OHM, 1/16W 3 S5 R4657 ERJ3GEYJ03 M 10KOHM, J, 1/16W 1 R4656 ERJ3GEYJ03 M 10KOHM, J, 1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4676, 7 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4676, ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4678 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4678 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4684 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4687 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4688 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4689 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4689 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4709 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1					
R4600 ERJ3GEYOROO M O OHM, 1/16W 1 R4602 ERJ3GEYJ820 M 82 OHM, 1/16W 1 R4603- ERJ3GEYJ820 M 82 OHM, 1/16W 1 R4623- ERJ3GEYJ151 M 150 OHM, J,1/16W 1 R4624- EXB38V820J RESISTOR ARRAY 3 26 R4627 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4630 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4630, R213GEYJ223 M 22KOHM, J, 1/16W 1 R4632, R213GEYJ223 M 22KOHM, J, 1/16W 1 R4638 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4638 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4638 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4638 ERJ3GEYJ220 M 22KOHM, J, 1/16W 1 R4638 ERJ3GEYJ20 M 10KOHM, J, 1/16W 1 R4639 ERJ3GEYJ20 M 20 OHM, J, 1/16W 1 R4651 ERJ3GEYJ220 M 20 OHM, J, 1/16W 1 R4652 ERJ3GEYJ220 M 20 OHM, J, 1/16W 1 R4653 ERJ3GEYJ821 M 820 OHM, J, 1/16W 1 R4654 ERJ3GEYJ821 M 820 OHM, J, 1/16W 1 R4655 ERJ3GEYJ821 M 10KOHM, J, 1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4676, 7 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4676 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4678 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4680 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4706 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4709 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4709 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4751, 5 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4751, 5 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4752 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4753 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4754 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1					
R4602 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4603- ERJ3GEYJ820 M 82 OHM, J, 1/16W 20 22 R4623 ERJ3GEYJ151 M 150 OHM, J, 1/16W 1 R4624- EXB38V820J RESISTOR ARRAY 3 26 R4627 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4630 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4630 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4638 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4639, 4 EXB2HV680J RESISTOR ARRAY 2 0 R4643, 4 ERJ3GEYJ223 M 20KOHM, J, 1/16W 1 R4651 ERJ3GEYJ220 M 22 CHM, J, 1/16W 1 R4652 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4653 ERJ3GEYJ220 M 20 OHM, 1/16W 1 R4654 ERJ3GEYJ821 M 820 OHM, 1/16W 3 S55 R4657 ERJ3GEYJ821 M 820 OHM, J, 1/16W 1 R4658 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R4659 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R4650 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R4656 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4657 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4656 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4657 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4659 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4650 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4659 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4650 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4708 ERJ3EKF4303 M 10KOHM, J, 1/16W 1 R4756 ERJ3EKF4300 M 180 OHM, 1/16W 1 R4757 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4758 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1					
R4603- ERJ3GEYJ820 M 82 OHM, J, 1/16W 20 R4624- EXB38V820J RESISTOR ARRAY 3 R4627- ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4630 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4630 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4636 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4637 A ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4638 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4639 A ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4639 A ERJ3GEYJ223 M 22KOHM, J, 1/16W 1 R4634 A ERD2HV680J RESISTOR ARRAY 2 0 R4643, A ERD2HV680J RESISTOR ARRAY 2 0 R4643, A ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4651 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4652 ERJ3GEYJ221 M 820 OHM, J, 1/16W 1 R4653- ERJ3GEYJ22 M 820 OHM, J, 1/16W 1 R4654 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4655 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R4656 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4670 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4671 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4672 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4673 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4674 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4675 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4678 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4679 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4670 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4706 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4707 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4709 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1					
22					
R4624- EXB38V820J RESISTOR ARRAY 26  R4627 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4630 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4632, 3 ERJ3GEYJ223 M 22KOHM, J, 1/16W 2  3 R4636 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1  R4638 ERJ3GEYJ223 M 22KOHM, J, 1/16W 1  R4639, 4 EXB2HV680J RESISTOR ARRAY 2 0 R4643, 4 ERJ3GEYJ200 M 10KOHM, J, 1/16W 1  R4651 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1  R4651 ERJ3GEYJ220 M 20 OHM, J, 1/16W 1  R4651 ERJ3GEYJ220 M 20 OHM, J, 1/16W 1  R4651 ERJ3GEYJ220 M 00 OHM, 1/16W 1  R4652 ERJ3GEYJ210 M 00 OHM, 1/16W 1  R4655 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1  R4665 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4666 ERJ3GEYJ222 M 2.2KOHM, J, 1/16W 1  R4667 F ERJ3GEYJ103 M 10KOHM, J, 1/16W 2  1  R4676 F ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4676, 7 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4676, 7 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2  8  R4674 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4698 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4749 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4749 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4749 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4758 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4759 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4758 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4759 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4759 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4759 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4757 ERJ3GEYJ303 M 10KOHM, J, 1/16W 1  R4757 ERJ3GEYJ303 M 10KOHM, J, 1/16W 1  R4758 ERJ3GEYJ303 M 10KOHM, J, 1/16W 1  R4759 ERJ3GEYJ303 M 10KOHM, J, 1/16W 1  R4761, 6 ERJ3GEYJ303 M 10KOHM,	22				
26 R4627 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4632,3 ERJ3GEYJ223 M 22KOHM,J,1/16W 2 3 R4636 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4638 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4639,4 EXB2HV680J RESISTOR ARRAY 2 0 R4643,4 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4650 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4651 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4652 ERJ3GEYJ220 M 0 OHM, 1/16W 3 SERVER SERJ3GEYJ20 M 0 OHM, 1/16W 1 R4653 ERJ3GEYJ21 M 820 OHM,J,1/16W 1 R4655 ERJ3GEYJ20 M 0 OHM,J,1/16W 1 R4656 ERJ3GEYJ20 M 0 OHM,J,1/16W 1 R4656 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4656 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4666 ERJ3GEYJ22 M 2.2KOHM,J,1/16W 1 R4667 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 8 R4674 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 8 R4678 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4668 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4668 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4676,7 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4687 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4688 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4689 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4680 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4681 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4682 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4684 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4685 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4704 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4705 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4706 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4707 ERJ3GEYSROO M 0 OHM, 1/16W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4751, 5 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4751, 5 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4751 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1					
R4630 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4632,3 ERJ3GEYJ223 M 22KOHM,J,1/16W 2 R4636 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4638 ERJ3GEYJ223 M 22KOHM,J,1/16W 1 R4638 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4639,4 EXD2HV680J RESISTOR ARRAY 2 0 R4643,4 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4651 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4651 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4652 ERJ3GEYJ21 M 820 OHM,J,1/16W 1 R4653 ERJ3GEYJ21 M 820 OHM,J,1/16W 1 R4654 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4656 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4656 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4660,6 ERJ3GEYJ222 M 2.2KOHM,J,1/16W 1 R4667,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4667,7 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4667,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4667,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4668,8 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4669 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4684 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4685 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4704 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4709 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4759 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4750 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM,J,1/16W 1		EXB38V820J	RESISTOR ARRAY	3	
R4632,3	R4627	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
3 R4636 ERJJGEYJ223 M 22KOHM,J,1/16W 1 R4638 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4639,4 EXB2HV680J RESISTOR ARRAY 2 R54643,4 ERJJGEYOROO M 0 OHM, 1/16W 1 R4651 ERJJGEYJ820 M 22 OHM,J,1/16W 1 R4651 ERJJGEYOROO M 0 OHM, 1/16W 1 R4653 ERJJGEYJ821 M 820 OHM,J,1/16W 1 R4655 ERJJGEYJ821 M 820 OHM,J,1/16W 1 R4656 ERJJGEYJ104 M 10KOHM,J,1/16W 1 R4656 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4660,6 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4666 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4667,6 ERJJGEYJ103 M 10KOHM,J,1/16W 2 R4668 ERJJGEYJ103 M 10KOHM,J,1/16W 2 R4668,8 ERJJGEYJ474 M 470KOHM,J,1/16W 1 R4686 ERJJGEYJ474 M 470KOHM,J,1/16W 1 R4686 ERJJGEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4686 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4686 ERJJGEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJJGEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4690 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4704 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4708 ERJJGEYJ103 M 10KOHM,J,1/16W 1 R4751,5 ERJJEKF8010 M 0 OHM, 1/16W 1 R4751,5 ERJJEKF8010 M 0 OHM, 1/16W 1 R4751,5 ERJJEKF8010 M 0 OHM, 1/16W 1 R4751,5 ERJJEKF2702V M27.0KOHM, 1/16W 1 R4757 ERJJEKF2702V M27.0KOHM, 1/16W 1 R4758 TAJARHO1010V M 100 OHM,J,1/16W 1 R4759 ERJJEKF2702V M27.0KOHM,J,1/16W 1 R	R4630	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4638 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4639, 4 EXB2HV680J RESISTOR ARRAY 2 R4643, 4 ERJ3GEY0R00 M 0 OHM, 1/16W 2 R4651 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4651 ERJ3GEYJ821 M 820 OHM, 1/16W 1 R4653 ERJ3GEYJ821 M 820 OHM, 1/16W 1 R4653 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R4655 ERJ3GEYJ104 M 10KOHM, J, 1/16W 1 R4665 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4666, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4667 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4668 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4668 ERJ3GEYJ220 M 20 OHM, 1/16W 1 R4686 ERJ3GEYJ200 M 20 OHM, 1/16W 1 R4686 ERJ3GEYJ00 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ00 M 10KOHM, J, 1/16W 1 R4687 ERJ3GEYJ00 M 10KOHM, J, 1/16W 1 R4688 ERJ3GEYJ00 M 10KOHM, J, 1/16W 1 R4689 ERJ3GEYJ00 M 10KOHM, J, 1/16W 1 R4690 ERJ3GEYJ00 M 10KOHM, J, 1/16W 1 R4706 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4706 ERJ3GEYJ00 M 10KOHM, J, 1/16W 1 R4706 ERJ3GEYJ00 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4708 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4708 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4708 ERJ3GEYD00 M 0 OHM, 1/16W 1 R4709 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4750 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4756 ERJ3EKF100 M 10KOHM, J, 1/16W 1 R4756 ERJ3EKF100 M 0 OHM, 1/16W 1 R4757 ERJ3EKF100 M 0 OHM, 1/16W 1 R4759 A ERJ3EKF100 M 0 OHM, 1/16W 1 R4759 A ERJ3EKF100 M 0 OHM, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3EKF100 M 0 OHM, 1/16W 1 R4758 ERJ3EKF100 M 0 OHM, 1/16W 1 R4759 A ERJ3EKF100 M 0 OHM, 1/16W 1 R4759 A ERJ3EKJ100 M 0 OHM, 1/16W 1 R4756 ERJ3GEYJ103 M 0 OHM, 1/16W 1 R4757 ERJ3EKF100 M 0 OHM, 1/16W 1 R4758 ERJ3EKJ100 M 0 OHM, 1/16W 1		ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
R4639,4 EXB2HV680J RESISTOR ARRAY 0	R4636	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4639,4 EXB2HV680J RESISTOR ARRAY 0	R4638	ERJ3GEYJ103		1	
4 R4650 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4651 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4653 ERJ3GEYOROO M 0 OHM, J, 1/16W 1 R4653 ERJ3GEYOROO M 0 OHM, J, 1/16W 3 S5 R4657 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R4668 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4660, 6 ERJ3GEYJ222 M 2.2KOHM, J, 1/16W 1 R4666 ERJ3GEYJ222 M 2.2KOHM, J, 1/16W 1 R4667, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667, 7 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R46674 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R46682 ERJ3GEYJ220 M 22 OHM, J, 1/16W 2 R46684 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4682 B ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4684 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4704 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4705 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4708 ERJ3GEYJ00 M 0 OHM, 1/16W 1 R4708 ERJ3GEYDROO M 0 OHM, 1/16W 1 R4749 ERJ3GEYDROO M 0 OHM, 1/16W 1 R4749 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4750 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4756 ERJ3GEYJ03 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 ERJ3GEYJ03 M 10KOHM, J, 1/16W 1 R4756 ERJ3GEYJ03 M 10KOHM, J, 1/16W 1	_	EXB2HV680J		2	
R4651 ERJ3GEYUROO M 0 OHM, 1/16W 1 R4652 ERJ3GEYJ821 M 820 OHM, J,1/16W 1 R4653 - ERJ3GEYUROO M 0 OHM, 1/16W 3 55 R4657 ERJ3GEYJ104 M 100KOHM, J, 1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4666 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4667, 7 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4668 ERJ3GEYJ220 M 2.2KOHM, J, 1/16W 1 R4668 ERJ3GEYJ20 M 470KOHM, J, 1/16W 1 R4688 ERJ3GEYJ20 M 22 OHM, J, 1/16W 1 R4688 ERJ3GEYJ20 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4708 ERJ3GEYDROO M 0 OHM, 1/16W 1 R4708 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4708 ERJ3GEYBF151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4102 M 43KOHM, 1/16W 1 R4751, 5 ERJ3EKF1800 M 43KOHM, 1/16W 1 R4751, 5 ERJ3EKF1800 M 0 OHM, 1/16W 1 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAHO10JV M 100 OHM, 1/16W 1 R4759, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1		ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4652 ERJ3GEYJ821 M 820 OHM, J,1/16W 1 R4653 - ERJ3GEYOROO M 0 OHM, 1/16W 3 S5 R4657 ERJ3GEYJ104 M 100KOHM, J,1/16W 1 R4658 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4660,6 ERJ3GEYJ222 M 2.2KOHM, J,1/16W 1 R4667,6 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 R4667,6 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4667,6 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 R4667,7 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 R4668 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4668,8 ERJ3GEYJ220 M 22 OHM, J,1/16W 1 R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2 R4684 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4685 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4680 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4700 ERJ3GEYJ102 M 4.7KOHM, J,1/16W 1 R4700 ERJ3GEYJ102 M 10KOHM, J,1/16W 1 R4708 - ERJ3GEYJ102 M 10KOHM, J,1/16W 1 R4708 - ERJ3GEYJ102 M 10KOHM, J,1/16W 1 R4708 - ERJ3GEYJ102 M 10KOHM, J,1/16W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 40 47 R4748 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4751,5 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4751 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4758 TAJAAHO101JV M 100 OHM, J,1/16W 1 R4758 TAJAAHO101JV M 100 OHM, J,1/16W 1 R4758 TAJAAHO101JV M 100 OHM, J,1/16W 1 R4758 ERJ3GEYJ103 M 47KOHM, J,1/16W 1 R4759,6 ERJ3GEYJ103 M 47KOHM, J,1/16W 1 R4751 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4756 ERJ3GEYJ103 M 47KOHM, J,1/16W 1 R4757 ERJ3GEYJ103 M 47KOHM, J,1/16W 1 R4758 TAJAAHO101JV M 100 OHM, J,1/16W 1 R4759 ERJ3GEYJ103 M 47KOHM, J,1/16W 1 R4765 ERJ3GEYJ103 M 47KOHM, J,1/16W 1 R4766 ERJ3GEYJ103 M 47KOHM, J,1/16W 1 R4767 ERJ3GEYJ100 M 0 OHM, J/16W 1	R4650	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4653-	R4651	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
55         R4657         ERJ3GEYJ104         M 100KOHM,J,1/16W         1           R4658         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4660,6         ERJ3GEYOR00         M 0 OHM, 1/16W         2           R4666         ERJ3GEYJ222         M 2.2KOHM,J,1/16W         1           R4667,6         ERJ3GEYJ103         M 10KOHM,J,1/16W         2           R4674         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4676,7         ERJ3GEYJ474         M 470KOHM,J,1/16W         1           R4678         ERJ3GEYJ220         M 22 OHM,J,1/16W         1           R4684         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4684         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4686         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4686         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4690         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4708         ERJ3GEYJ102         M 1KOHM,J,1/16W         1           R4708         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4708         ERJ3GEYJ103         M 10KOHM,J,1/16W         1           R4748	R4652	ERJ3GEYJ821	M 820 OHM, J, 1/16W	1	
R4658 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4660,6 ERJ3GEY0R00 M 0 OHM, 1/16W 2 R4666 ERJ3GEYJ222 M 2.2KOHM, J, 1/16W 1 R4667,6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R46674 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R46676,7 ERJ3GEYJ474 M 470KOHM, J, 1/16W 2 R46678 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2 R4684 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R4686 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4706 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/10W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, 1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4751 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4756 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4759 ERJ3GEYJ473 M 47KOHM, J, 1/16W 1 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4766 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1		ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4660,6 ERJ3GEYUR00 M 0 OHM, 1/16W 2 R4666 ERJ3GEYJ222 M 2.2KOHM,J,1/16W 1 R4667,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4674 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4676,7 ERJ3GEYJ474 M 470KOHM,J,1/16W 2 R4678 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2 R4684 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4704 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4705 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4706 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ6GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ6GEYOR00 M 0 OHM, 1/16W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 40 47 R4748 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4754 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 10 OHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4758 ERJ3GEYJ103 M 47KOHM,J,1/16W 2 R4750 ERJ3GEYJ103 M 47KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4758 ERJ3GEYJ103 M 47KOHM,J,1/16W 2 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4766 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4767 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1	R4657	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
1	R4658	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4667,6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2  R4674 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4676,7 ERJ3GEYJ474 M 470KOHM, J, 1/16W 2  R4678 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1  R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2  R4684 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4685 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1  R4686 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1  R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4703 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4704 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1  R4705 ERJ3GEYOR00 M 0 OHM, 1/16W 1  R4748 ERJ6GEY0R00 M 0 OHM, 1/10W 40  47  R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1  R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1  R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1  R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 1  R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1  R4755 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1  R4759, 6 ERJ3GEYJ103 M 47KOHM, J, 1/16W 2  R4761, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1  R4765 ERJ3GEYJ392 M 3.9KOHM, J, 1/16W 1  R4767 ERJ3GEYOR00 M 0 OHM, 1/16W 1	R4660,6 1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
8 R4674 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4676,7 ERJ3GEYJ220 M 22 OHM,J,1/16W 2 R4678 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2 3 R4684 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4704 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4705 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/10W 40 R7 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4758 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1	R4666	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R4676,7 ERJ3GEYJ474 M 470KOHM,J,1/16W 2 7 R4678 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2 3 R4684 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4704 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/16W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 40 47 R4748 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 2 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1	-	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4676,7 ERJ3GEYJ474 M 470KOHM,J,1/16W 2 7 R4678 ERJ3GEYJ220 M 22 OHM,J,1/16W 1 R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2 3 R4684 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1 R4686 ERJ3GEYJ473 M 10KOHM,J,1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4704 ERJ3GEYJ102 M 1KOHM,J,1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/16W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 40 47 R4748 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4755 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 2 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1	R4674	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4678 ERJ3GEYJ220 M 22 OHM, J, 1/16W 1 R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2 3 R4684 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R4686 ERJ3GEYJ000 M 0 OHM, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4706 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/10W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/10W 1 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF4801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 1 R4751,5 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4759, 6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4761, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1	R4676,7			2	
R4682,8 ERJ3EKF1741 M 17.4 OHM, 1/16W 2  R4684 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  R4685 ERJ3GEYJ472 M 4.7KOHM,J,1/16W 1  R4686 ERJ3GEYDR00 M 0 OHM, 1/16W 1  R4690 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  R4703 ERJ3GEYJ102 M 1KOHM,J,1/16W 1  R4706 ERJ3GEYOR00 M 0 OHM, 1/16W 1  R4708- ERJ6GEY0R00 M 0 OHM, 1/10W 1  R4708- ERJ6GEY0R00 M 0 OHM, 1/10W 1  R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1  R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1  R4750 ERJ3EKF4800 M 6.8KOHM, 1/16W 1  R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 1  R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1  R4755 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1  R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2  R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2  R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 1  R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 1		ERJ3GEYJ220	M 22 OHM,J.1/16W	1	
R4684 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4685 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R4686 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4706 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R4708- ERJ6GEYOR00 M 0 OHM, 1/10W 40 47 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4755 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R4756 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4759, 6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4761, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4765 ERJ3GEYJ392 M 3.9KOHM, J, 1/16W 1 R4765 ERJ3GEYJ392 M 3.9KOHM, J, 1/16W 1 R4767 ERJ3GEYDR00 M 0 OHM, 1/16W 1	R4682,8				
R4685 ERJ3GEYJ472 M 4.7KOHM, J, 1/16W 1 R4686 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4706 ERJ3GEYOROO M 0 OHM, 1/16W 1 R4708- ERJ6GEYOROO M 0 OHM, 1/10W 40 47 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4750 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4751,5 ERJ3EKF6801 M 6.8KOHM, 1/16W 2 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4755 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAHO101JV M 100 OHM, J, 1/16W 1 R4759, 6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4761, 6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4765 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4765 ERJ3GEYJ392 M 3.9KOHM, J, 1/16W 1 R4765 ERJ3GEYJ392 M 3.9KOHM, J, 1/16W 1 R4767 ERJ3GEYOROO M 0 OHM, 1/16W 1		ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4686 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4690 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM, J,1/16W 1 R4706 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/10W 40 47 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4750 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4751,5 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 2 2 R4755 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R4756 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J,1/16W 1 R4758 ERJ3GEYJ473 M 47KOHM, J,1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 2 R4765 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4756 ERJ3GEYJ473 M 47KOHM, J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J,1/16W 1 R4758 ERJ3GEYJ473 M 47KOHM, J,1/16W 2 2 R4761,6 ERJ3GEYJ392 M 3.9KOHM, J,1/16W 1 R4765 ERJ3GEYJ392 M 3.9KOHM, J,1/16W 1					
R4690 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4703 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4706 ERJ3GEYOR00 M 0 OHM, 1/16W 1 R4708- ERJ6GEYOR00 M 0 OHM, 1/10W 40 47 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4755 ERJ3GEYJ03 M 10KOHM, J, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 R4761,6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4765 ERJ3GEYJ392 M 3.9KOHM, J, 1/16W 1	R4686				
R4703 ERJ3GEYJ102 M 1KOHM, J, 1/16W 1 R4706 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/10W 40 47 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEYDR00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J, 1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J, 1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM, J, 1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 2 R4765 ERJ3GEYJ103 M 10KOHM, J, 1/16W 2 2 R4765 ERJ3GEYJ392 M 3.9KOHM, J, 1/16W 1 R4767 ERJ3GEYJ392 M 3.9KOHM, J, 1/16W 1 R4767 ERJ3GEYOR00 M 0 OHM, 1/16W 1					
R4706 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4708- ERJ6GEY0R00 M 0 OHM, 1/10W 40 47 R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J,1/16W 1 R4758 ERJ3GEYJ473 M 47KOHM, J,1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1				1	
R4708-		ERJ3GEY0R00		1	
R4748 ERJ6ENF7151 M7.15KOHM, 1/10W 1 R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAH0101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4765 ERJ3GEYJ103 M 3.9KOHM,J,1/16W 1 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEYOR00 M 0 OHM, 1/16W 1				40	
R4749 ERJ3EKF4302 M 43KOHM, 1/16W 1 R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1		ERJ6ENE7151	M7.15КОНМ 1/10Ы	1	
R4750 ERJ3EKF6801 M 6.8KOHM, 1/16W 1 R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2 R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEYOR00 M 0 OHM, 1/16W 1		1			
R4751,5 ERJ3EKF1800 M 180 OHM, 1/16W 2  R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1  R4756 ERJ3GEY0R00 M 0 OHM, 1/16W 1  R4757 ERJ3GEYJ103 M 10KOHM, J,1/16W 1  R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1  R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2  0  R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2  2  R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1  R4767 ERJ3GEY0R00 M 0 OHM, 1/16W 1					
R4754 ERJ3EKF2702V M27.0KOHM, 1/16W 1 R4756 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEY0R00 M 0 OHM, 1/16W 1	R4751,5				
R4756 ERJ3GEY0R00 M 0 OHM, 1/16W 1 R4757 ERJ3GEYJ103 M 10KOHM, J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM, J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM, J,1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM, J,1/16W 2 2 R4765 ERJ3GEYJ392 M 3.9KOHM, J,1/16W 1 R4767 ERJ3GEY0R00 M 0 OHM, 1/16W 1		PD.T3PPP277077	M27 OKOUM 1/16ta	1	
R4757 ERJ3GEYJ103 M 10KOHM,J,1/16W 1 R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEY0R00 M 0 OHM, 1/16W 1					
R4758 TAJAAH0101JV M 100 OHM,J,1/16W 1 R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEY0R00 M 0 OHM, 1/16W 1					
R4759,6 ERJ3GEYJ473 M 47KOHM,J,1/16W 2 0 R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEY0R00 M 0 OHM, 1/16W 1					
R4761,6 ERJ3GEYJ103 M 10KOHM,J,1/16W 2 R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEY0R00 M 0 OHM, 1/16W 1	R4759,6				
R4765 ERJ3GEYJ392 M 3.9KOHM,J,1/16W 1 R4767 ERJ3GEY0R00 M 0 OHM, 1/16W 1	R4761,6	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
		ERJ3GEYJ392	M 3.9KOHM,J,1/16W	1	
R4771 TAJAAH0101JV M 100 OHM,J,1/16W 1	R4767	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R4771	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	

Ref. No. R4775				
R4775	Part No.	Part Name &	Pcs	Remarks
		Description		
	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4780- 87	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
R5601	ERJ6ENF4532	M4.53KOHM, 1/10W	1	
R5603	ERJ6ENF2550	M 255 OHM, 1/10W	1	
R5605	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R5606	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5607	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R5609	ERJ6ENF1871	M1.87KOHM, 1/10W	1	
R5610	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R5611	ERJ6ENF8202	M 82KOHM, 1/10W	1	
R5612	ERJ6ENF1652	M16.5KOHM, 1/10W	1	
R5615,1	ERJ6GEYJ223	M 22KOHM, J, 1/10W	2	
R5617,1	ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
8 R5619	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R5620	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R5621	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R5623,2	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
4		M 0 0MM, 1, 10M		
R5625- 27	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	3	
R5630	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5632	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5633	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R5634	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5635	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R5637,3 8	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R5639	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5640	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R5641	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5642	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5643	ERJ6GEYJ681	M 680 OHM,J,1/10W	1	
R5644	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5645,4	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R5647	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R5648	ERJ6GEYJ392	M 3.9KOHM, J, 1/10W	1	
R5649	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R5650	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R5651	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5653-	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
56	ED TOORY TATO			
R5657,5	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	2	
8		·		
8 R5659	ERJ6ENF4700	M 470 OHM, 1/10W	1	
8 R5659 R5660	ERJ6ENF4700 ERJ6GEY0R00	M 470 OHM, 1/10W M 0 OHM, 1/10W	1	
8 R5659 R5660 R5662	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W	1	
8 R5659 R5660	ERJ6ENF4700 ERJ6GEY0R00	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W	1 1 1	
8 R5659 R5660 R5662 R5670	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W	1 1 1 1	
8 R5659 R5660 R5662 R5670	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W	1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ471	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 470 OHM, J,1/10W	1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W	1 1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ103 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 470 OHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W	1 1 1 1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W	1 1 1 1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 470 OHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W	1 1 1 1 1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692 R5693 R5694,9	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 470 OHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 33KOHM,J,1/10W	1 1 1 1 1 1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692 R5693 R5694,9	ERJ6ENF4700 ERJ6GEYORO0 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 0 OHM, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 10KOHM, J, 1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 2	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692 R5693 R5694,95 R5696	ERJ6ENF4700 ERJ6GEYORO0 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 10KOHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 1KOHM, J, 1/10W M 1KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W	1 1 1 1 1 1 1 1 1 1 1 2	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692 R5693 R5694,9 5 R5696 R5801	ERJ6ENF4700 ERJ6GEYOR00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 15KOHM, J,1/10W M 15KOHM, J,1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W	1 1 1 1 1 1 1 1 1 1 1 2	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692 R5693 R5694,9 5 R5696 R5801 R5802	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 0 OHM, 1/10W M 1KOHM, J,1/10W M 15KOHM, J,1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 2.5KOHM, J,1/10W M 910 OHM, 1/10W M 2.2KOHM, 1/10W	1 1 1 1 1 1 1 1 1 1 1 2	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5693 R5694,9 5 R5696 R5801 R5802 R5803	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEYUR00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 0 OHM, 1/10W M 1KOHM, J,1/10W M 15KOHM, J,1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 2.5KOHM, J,1/10W M 2.2KOHM, 1/10W M 2.74KOHM, 1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692 R5693 R5694,95 S R5696 R5801 R5802 R5803 R5804 R5805	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEYUR00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 1KOHM, J,1/10W M 1KOHM, J,1/10W M 10KOHM, J,1/10W M 2.2KOHM, J,1/10W M 2.2KOHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692 R5693 R5694,9 5 R5696 R5801 R5802 R5803 R5804 R5805-08	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6ENF9100 ERJ6ENF2202 ERJ6ENF2741 ERJ6GEY0R00 ERJ6GEYJ222	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 470 OHM, J,1/10W M 10KOHM, J,1/10W M 1KOHM, J,1/10W M 15KOHM, J,1/10W M 10KOHM, J,1/10W M 2.5KOHM, J,1/10W M 2.2KOHM, 1/10W M 2.74KOHM, 1/10W M 0 OHM, 1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692 R5693 R5694,95 S R5696 R5801 R5802 R5803 R5804 R5805-08 R5809	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6ENF2100 ERJ6ENF2202 ERJ6ENF2741 ERJ6GEYJ222 ERJ6GEYJ222	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 2.2KOHM, J,1/10W M 2.2KOHM, 1/10W M 0 OHM, 1/10W M 2.2KOHM, 1/10W M 2.2KOHM, 1/10W M 2.2KOHM, J,1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692 R5693 R5694,95 S801 R5802 R5801 R5802 R5803 R5804 R5805-08	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6ENF9100 ERJ6ENF2202 ERJ6ENF2741 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 15KOHM, J,1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 2.2KOHM, 1/10W M 2.2KOHM, 1/10W M 2.2KOHM, 1/10W M 4.7KOHM, J,1/10W M 4.7KOHM, J,1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692 R5693 R5694,95 S801 R5802 R5803 R5804 R5805-08 R5809 R5809 R5809 R5812 R5815	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ471 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6ENF9100 ERJ6ENF2202 ERJ6ENF2741 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ472 ERJ6GEYJ472 ERJ6GEYJ223 ERJ6GEYJ223	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 15KOHM, J,1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 2.2KOHM, J,1/10W M 2.2KOHM, 1/10W M 2.2KOHM, 1/10W M 4.7KOHM, J,1/10W M 4.7KOHM, J,1/10W M 2.2KOHM, J,1/10W M 390 OHM, 1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692 R5693 R5694,9 5 R5696 R5801 R5802 R5803 R5804 R5805-08 R5805-08 R5809 R5812 R5815 R5819 R5820 R5822-	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6ENF2100 ERJ6ENF2202 ERJ6ENF2741 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ472 ERJ6GEYJ472 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ2941	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 15KOHM, J,1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 2.2KOHM, J,1/10W M 2.2KOHM, 1/10W M 2.2KOHM, J,1/10W M 4.7KOHM, J,1/10W M 4.7KOHM, J,1/10W M 390 OHM, 1/10W M 390 OHM, J,1/10W M 390 OHM, 1/10W M 390 OHM, 1/10W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
8 R5659 R5660 R5662 R5670 R5672 R5675 R5676 R5679 R5680 R5692 R5693 R5694,9 5 R5801 R5802 R5803 R5804 R5805-08 R5805-08 R5809 R5809 R5812 R5815 R5819 R5820	ERJ6ENF4700 ERJ6GEY0R00 ERJ6GEY0R00 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ102 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ103 ERJ6GEYJ152 ERJ6ENF2100 ERJ6ENF2202 ERJ6ENF2741 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ472 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6GEYJ223 ERJ6ENF3900 ERJ6ENF2941 ERX3FJSR22D	M 470 OHM, 1/10W M 0 OHM, 1/10W M 0 OHM, 1/10W M 10KOHM, J,1/10W M 15KOHM, J,1/10W M 15KOHM, J,1/10W M 10KOHM, J,1/10W M 10KOHM, J,1/10W M 2.2KOHM, J,1/10W M 2.2KOHM, 1/10W M 2.2KOHM, J,1/10W M 4.7KOHM, J,1/10W M 2.2KOHM, J,1/10W M 390 OHM, 1/10W M 2.9KOHM, J,1/10W M 390 OHM, 1/10W M 2.94KOHM, J,1/10W M 2.94KOHM, J, 3W	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

7.6	D 37.			
Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description	_	
R6000-	ERJ14YJ5R6U	M 6.20HM, 1/4W	4	
03		/		
R6012	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6013	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6014,1	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
5				
R6020,2	ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
1				
R6032	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6033	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6034,3	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
5				
R6040-	ERJ6GEYJ151	M 150 OHM, J, 1/10W	4	
43				
R6047,4	ERJ6GEYJ151	M 150 OHM, J, 1/10W	2	
8				
R6052	ERJ6ENF1182	M11.8KOHM, 1/10W	1	
R6053-	ERJ6GEYJ151	M 150 OHM, J, 1/10W	6	
58	EKOOGETOTST	M 130 OHM, 0, 1/10W	ľ	
R6060	EXB38V470J	RESISTOR ARRAY	1	
		RESISTOR ARRAY		
R6061	EXB38V472J		1	
R6062	EXB38V470J	RESISTOR ARRAY	1	
R6063	EXB38V472J	RESISTOR ARRAY	1	
R6064,6	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
5				
R6066	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6067,6	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	2	
8				
R6069	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6070,7	ERJ6ENF3902	M 39KOHM, 1/10W	2	
1				
R6072	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R6073,7	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
4			-	
R6075,7	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	2	
6	Littorollollo	1 2 1 2 KOMM / O / 1 / 1 O W	~	
R6079	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6080	ERJ6GEYJ474	M 470KOHM, J, 1/10W	1	
R6081,8	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
	ED T1 437 T1 F 0 T7	M 15 OTH T 1/4W		
R6100- 05	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
		v 100 orne 7 1/10m	-	
R6124	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6125	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6126,2	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
7				
R6137-	ERJ6ENF6802	M 68KOHM, 1/10W	3	
39				
R6140-	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
45				
R6176	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6177	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6178,7	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
9				
R6190,9	ERX2FJSR22D	M0.22 OHM, J, 2W	2	
1				
R6195,9	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
6				
R6197,9	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
8				
R6199	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6200	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	1	
R6202	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	1	
R6210	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6211,1	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
2			-	
R6213	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6214,1	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
5				
R6216,1	ERJ6GEYJ101	м 100 онм .т 1/10ы	2	
7	TYOOGETOTOT	M 100 OHM,J,1/10W		
R6219	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6221	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R6223	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R6225	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R6227	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
R6228	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6229	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
	-	•		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6233,3 4	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6235	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6236,3	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6238,3	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6241	ERJ6ENF6982 ERJ6ENF1182	M69.8KOHM, 1/10W	1	
R6241	ERJ6ENF1182 ERJ6ENF4701	M11.8KOHM, 1/10W M 4.7KOHM, 1/10W	1	
R6243	ERJ6ENF3832	M38.3KOHM, 1/10W	1	
R6244	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6245	ERJ6ENF6981	M6.98KOHM, 1/10W	1	
R6246	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
8	ERF15ZJ181	W 180 OHM, 15W	2	
R6249	ERJ6ENF1182	M11.8KOHM, 1/10W	1	
R6250,5	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6252	ERF15ZJ181	W 180 OHM, 15W	1	
R6253 R6254	ERJ6GEYJ101 ERJ6GEYJ100	M 100 OHM,J,1/10W M 10 OHM,J,1/10W	1	
R6255	ERJ6GEYJ103	M 10 OHM, J, 1/10W	1	
R6257,5	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6261	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6263	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6264	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6265 R6266	ERJ6GEYJ103 ERJ6GEYJ470	M 10KOHM,J,1/10W M 47 OHM,J,1/10W	1	
R6267,6	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6269	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6270	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6271,7 2	ERG2FJS101D	M 100 OHM, J, 2W	2	
R6274	ERG1FJS103D	M 10KOHM, J, 1W	1	
R6275 R6276-	ERG2FJS123D ERJ6GEYJ223	M 12KOHM, J, 2W M 22KOHM,J,1/10W	3	
78 R6280	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6281	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6282- 84	ERJ6GEYJ273	M 27KOHM,J,1/10W	3	
R6291	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6292	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6293	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R6298	EXB38V470J	RESISTOR ARRAY	1	
R6299 R6361-	EXB38V472J ERJ6GEYJ151	M 150 OHM, J, 1/10W	1 4	
64 R6367,6	ERJ6GEYJ151	M 150 OHM, J, 1/10W	2	
8 R6375-	ERJ6ENF6802	M 68KOHM, 1/10W	3	
77				
R6378 R6379	ERJ6ENF6202 ERJ6GEYJ563	M 62KOHM, 1/10W M 56KOHM,J,1/10W	1	
R6382,8	ERX12SJ1R2	M 1.2 OHM, J,1/2W	2	
R6385	ERJ6GEYJ681	M 680 OHM,J,1/10W	1	
R6386	ERJ6GEYJ272	M 2.7KOHM, J, 1/10W	1	
R6387	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6388	ERG2FJS563D	M 56KOHM, J, 2W	1	
R6390 R6411,1	ERJ6GEY0R00 ERX2FJSR22D	M 0 OHM, 1/10W M0.22 OHM, J, 2W	2	
2 R6415	EXB38V470J	RESISTOR ARRAY	1	
R6415	EXB38V470J	RESISTOR ARRAY	1	
R6417	EXB38V470J	RESISTOR ARRAY	1	
R6418	EXB38V472J	RESISTOR ARRAY	1	
R6419	EXB38V470J	RESISTOR ARRAY RESISTOR ARRAY	1	

Ref. No. No. Description   Remarks No. No. No. Poscription   Ref421   EXB38V470J   RESISTOR ARRAY   1   Ref422   EXB38V470J   RESISTOR ARRAY   1   Ref429.3   ERJ6GEVJ102   M   ROHM, J, 1/10W   2   Ref331   ERJ6GEVJ102   M   ROHM, J, 1/10W   2   Ref331   ERJ6GEVJ102   M   ROHM, J, 1/10W   1   Ref431   REJ6GEVJ102   M   2.2 KOHM, J, 1/10W   1   Ref433   ERJ6GEVJ103   M   10KOHM, J, 1/10W   1   Ref439   ERJ6GEVJ103   M   10KOHM, J, 1/10W   1   Ref439   ERJ6GEVJ472   M   4.7 KOHM, J, 1/10W   1   Ref440   ERJ6GEVJ472   M   4.7 KOHM, J, 1/10W   1   Ref440   ERJGGEVJ472   M   4.7 KOHM, J, 1/10W   1   Ref440   ERJ6GEVJ472   M   4.7 KOHM, J, 1/10W   1   Ref441   ERJ14VJ203U   M   20KOHM, 1/2W   1   Ref450   ERJ6GEVJ472   M   4.7 KOHM, J, 1/10W   1   Ref451   ERJ6GEVJ472   M   4.7 KOHM, J, 1/10W   1   Ref451   ERJ6GEVJ472   M   4.7 KOHM, J, 1/10W   1   Ref452   ERJ6GEVJ472   M   4.7 KOHM, J, 1/10W   1   Ref455   ERJGGEVJ472   M   4.7 KOHM, J, 1/10W   1   Ref455   ERJGGEVJ471   M   470 OHM, J, 1/10W   1   Ref456   ERJ6GEVJ472   M   4.7 KOHM, J, 1/10W   1   Ref456   ERJ6GEVJ101   M   100 OHM, J, 1/10W   1   Ref456   ERJGGEVJ102   M   1 KOHM, J, 1/10W   1   Ref466   ERJ6GEVJ103   M   10KOHM, J, 1/10W   1   Ref467   ERJ6GEVJ103   M   10KOHM, J, 1/10W   1   Ref467   ERJ6GEVJ103   M   10KOHM, J, 1/10W   1   Ref470   ERJ6GEVJ103   M   10KOHM, J, 1/10W   1   Ref580   ERJ6GEVJ103   M   10KOHM, J, 1/10W   1   Ref580   ERJ6GEVJ103   M   10KOHM, J, 1/10W   1   Ref580   ERJ6GEVJ103   M   10KOHM				-	
R6421 EXB38V470J RESISTOR ARRAY 1 R6422 EXB38V470J RESISTOR ARRAY 1 R6422 EXB38V470J RESISTOR ARRAY 1 R6422,		Part No.		Pcs	Remarks
R6422 EXB38V472J RESISTOR ARRAY 1 R6423, 3 ERJ6GEYJ102 M IKOHM, J, 1/10W 2 R6431, 3 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6433, 3 ERJ6GEYJ122 M 2.2KOHM, J, 1/10W 1 R6434, 3 ERJ6GEYJ152 M 1.5KOHM, J, 1/10W 1 R6437, 3 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6437, 3 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6437, 3 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6439 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R6440 ERJ6GEYJ471 M 4.7KOHM, J, 1/10W 1 R6440 ERJ6GEYJ471 M 4.7KOHM, J, 1/10W 1 R6441 ERJ6GEYJ471 M 4.7KOHM, J, 1/10W 1 R6445 ERJ6GEYJ471 M 4.7KOHM, J, 1/10W 1 R6450 ERJ6GEYJ471 M 4.7KOHM, J, 1/10W 1 R6451 ERJ6GEYJ471 M 4.7KOHM, J, 1/10W 1 R6452 ERJ6GEYJ471 M 4.7KOHM, J, 1/10W 1 R6453 ERJ6GEYJ471 M 4.7KOHM, J, 1/10W 1 R6454 ERJ6GEYJ471 M 4.7KOHM, J, 1/10W 1 R6455 ERJ6GEYJ471 M 1.00 OHM, J, 1/10W 1 R6456 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6457 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6468 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6462 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6463 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6464 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6466 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6467 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6468 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6469 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6460 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6462 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6463 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6464 ERJ6GEYJ102 M 1OO OHM, J, 1/10W 1 R6466 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6468 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6470 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6471, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6472 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6473 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6474 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6475 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6476 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6477 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6478 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6479 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W		EXB38V470J		1	
0         R6431, 3         ERJ6GEYJ103         M 10KOHM, J, 1/10W         2           24         2         2         M 10KOHM, J, 1/10W         1           R6433, 3         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R6436, 3         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R6437, 3         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R6439         ERJ6ENF7501         M 7.5KOHM, 1/10W         1           R6440         ERJ6GEYJ471         M 4.7KOHM, J, 1/10W         1           R6441         ERJ6GEYJ471         M 4.7KOHM, J, 1/10W         1           R6445         ERJ6GEYJ471         M 4.7KOHM, J, 1/10W         1           R6450         ERJ6GEYJ472         M 4.7KOHM, J, 1/10W         1           R6450         ERJ6GEYJ471         M 470 OHM, J, 1/10W         1           R6451         ERJ6GEYJ472         M 4.7KOHM, J, 1/10W         1           R6452         ERJ6GEYJ472         M 4.7KOHM, J, 1/10W         1           R6454         ERJ6GEYJ010         M 10KOHM, J, 1/10W         1           R6455         ERJ6GEYJ010         M 10KOHM, J, 1/10W         1           R6456         ERJ6GEYJ102         M 1KOHM, J, 1/10W         1 <td></td> <td></td> <td></td> <td></td> <td></td>					
R6431,3	R6429,3	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
2	-	TD 76 GTW 71 02	* 10moms 7 1/10m	_	
R6434,3	_	EK06GEY0103	M IUKOHM,J,I/IUW	4	
55         R6436         ERJ6GEYJ103         M 10KOHM, J,1/10W         1           86437,3         ERJ6ENF3902         M 39KOHM, 1/10W         2           8         R6439         ERJ6ENF7501         M 7.5KOHM, 1/10W         1           86440         ERJ6GEYJ472         M 4.7KOHM, J,1/10W         1           86441         ERJ14YJ203U         M 20KOHM, 1/2W         1           86444-         ERJ6GEYJ471         M 470 OHM, J,1/10W         1           86450         ERJ6GEYJ472         M 4.7KOHM, J,1/10W         1           86451         ERJ6GEYJ472         M 4.7KOHM, J,1/10W         1           86452,5         ERJ6GEYJ472         M 4.7KOHM, J,1/10W         1           86454         ERJ6GEYJ471         M 4.7KOHM, J,1/10W         1           86455         ERJ6GEYJ472         M 4.7KOHM, J,1/10W         1           86455         ERJ6GEYJ401         M 16KOHM, J,1/10W         1           86458         ERJ6GEYJ102         M 1KOHM, J,1/10W         1           86459         ERJ6GEYJ101         M 100 OHM, J,1/10W         1           86461         ERJ6GEYJ102         M 1KOHM, J,1/10W         1           86462         ERJ6GEYJ103         M 100 OHM, J,1/10W         1	R6433	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6436 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6437,3 ERJ6ENF3902 M 39KOHM, 1/10W 2 R6439 ERJ6ENF7501 M 7.5KOHM, 1/10W 1 R6440 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6441 ERJ14YJ203U M 20KOHM, 1/2W 1 R6441 ERJ14YJ203U M 20KOHM, 1/2W 1 R6444 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R6440 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6441 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6451 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6452 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R6453 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6454 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6455 ERJ14YJ163U M 16KOHM,J,1/10W 1 R6456 ERJ6GEYJ472 M 1.7KOHM,J,1/10W 1 R6459 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6461 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6461 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6464 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R6465 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM,J,1/10W 1 R6466 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6466 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6468 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6469 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6461 ERJ6GEYJ102 M 1.8KOHM,J,1/10W 1 R6462 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6463 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6464 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6466 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6468 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6471 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6471 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6472 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6473 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6474 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6475 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6476 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6477 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6478 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6479 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6471 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6472 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6473 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6474 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R658		ERJ6GEYJ152	M 1.5KOHM,J,1/10W	2	
R6439 ERJ6ENP7501 M 7.5KOHM, 1/10W 1 R6440 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R6441 ERJ14YJ203U M 20KOHM, 1/2W 1 R6444- ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R6444- ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R64450 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R6450 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R6451 ERJ5GEYJ472 M 4.7KOHM, J,1/10W 1 R6455 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R6455 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R6455 ERJ14YJ163U M 16KOHM, J,1/4W 1 R6455 ERJ14YJ163U M 16KOHM, J,1/4W 1 R6459 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R6462 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6463 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R6466 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R6466 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6466 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6466 ERJ6GEYJ122 M 2.2KOHM, J,1/10W 1 R6466 ERJ6GEYJ122 M 1.8KOHM, J,1/10W 1 R6466 ERJ6GEYJ122 M 1.8KOHM, J,1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J,1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J,1/10W 1 R6466 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6466 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6468 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6469 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6478 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6478 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6478 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6581 ERJ6GEYJ103 M 10	R6436	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6449 ERJ6ENF7501 M 7.5KOHM, 1/10W 1 R6440 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R6441 ERJ14YJ203U M 20KOHM, 1/2W 1 R6441 ERJ16GEYJ471 M 470 OHM, J,1/10W 5 48 R6449 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R6450 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R6451 ERJ6GEYJ471 M 470 OHM, J,1/10W 1 R6452,5 ERJ6GEYJ471 M 4.7KOHM, J,1/10W 1 R6454 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R6455 ERJ16GEYJ472 M 4.7KOHM, J,1/10W 1 R6455 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R6458 ERJ6GEYJ472 M 4.7KOHM, J,1/10W 1 R6459 ERJ6GEYJ101 M 16KOHM, J,1/10W 1 R6459 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R6462 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6463 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R6464 ERJ6GEYJ102 M 1.8KOHM, J,1/10W 1 R6465 ERJ6GEYJ102 M 1.8KOHM, J,1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J,1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J,1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6468 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6467 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6471 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6471 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6471 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6471 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6472 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6473 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6474 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6475 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6476 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6477 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6478 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6585 ERJ6GEYJ103 M 10KOHM, J,1/10W 1		ERJ6ENF3902	м 39конм, 1/10W	2	
R6440 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6441 ERJ14YJ203U M 20KOHM, J/2W 1 R6444- ERJ6GEYJ471 M 470 OHM,J,1/10W 5 R6449 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6450 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6451 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6452,5 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R6455 ERJ6GEYJ471 M 4.7KOHM,J,1/10W 1 R6455 ERJ6GEYJ471 M 16KOHM,J,1/10W 1 R6458 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6459 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6462 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6463 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6464 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6465 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6466 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6467 ERJ6GEYJ103 M 1.8KOHM,J,1/10W 1 R6468 ERJ6GEYJ103 M 1.8KOHM,J,1/10W 1 R6469 ERJ6GEYJ103 M 1.8KOHM,J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6470 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6470 ERJ6GEYJ100 M 150 OHM,J,1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R65861 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R65874 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R65874 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R65881 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R65881 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R66003- ERJ6GEYJ101 M 100 OHM,J,1/10W 3		ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R6441 ERJ14YJ203U M 20KOHM, 1/2W 1 R6444- ERJ6GEYJ471 M 470 OHM, J, 1/10W 5 48 R6449 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R6450 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R6451 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R6451 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R6452 ERJ6GEYJ471 M 470 OHM, J, 1/10W 2 3 R6454 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R6455 ERJ14YJ163U M 16KOHM, J, 1/10W 1 R6455 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6456 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6450 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6450 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6462 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6463 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R6464 ERJ6GEYJ122 M 1.8KOHM, J, 1/10W 1 R6465 ERJ6GEYJ122 M 1.8KOHM, J, 1/10W 1 R6466 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6468 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6467 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6470 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6470 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6471 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6471 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6472 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6473 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6474 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6475 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6476 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6477 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6488 ERJ8GEYJ101 M 10KOHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1					
### R6449	R6441	ERJ14YJ203U		1	
R6449 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6451 ERJ6GEYJ471 M 470 OHM,J,1/10W 1 R6451 ERJ6GEYJ471 M 4.7KOHM,J,1/10W 1 R6451 ERJ6GEYJ471 M 4.7KOHM,J,1/10W 1 R6452 ERJ6GEYJ471 M 4.7KOHM,J,1/10W 2 R6454 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6455 ERJ14YJ163U M 16KOHM,J,1/10W 1 R6455 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6458 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6450 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6460 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6462 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R6463 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R6464 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R6465 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R6466 ERJ6GEYJ103 M 1.8KOHM,J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6468 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6469 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6469 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6469 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6471,7 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 2 R6473 ERJ6GEYJ104 M 100 OHM,J,1/10W 1 R6475 ERJ6GEYJ105 M 1KOHM,J,1/10W 1 R6476 ERJ6GEYJ100 M 1KOHM,J,1/10W 1 R6477 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6478 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6478 ERJ6GEYJ100 M 10O OHM,J,1/10W 1 R6479 ERJ6GEYJ101 M 10O OHM,J,1/10W 1 R6478 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6478 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6478 ERJ6GEYJ100 M 15 OHM,J,1/10W 1 R6478 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1		ERJ6GEYJ471	M 470 OHM,J,1/10W	5	
R6450 ERJ6GEYJ471 M 470 OHM, J, 1/10W 1 R6451 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R6452,5 ERJ6GEYJ471 M 470 OHM, J, 1/10W 2 R6454 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R6455 ERJ14YJ163U M 16KOHM, J, 1/4W 1 R6458 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6459 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6450 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6462 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6463 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R64645 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R6465 ERJ6GEYJ222 M 12KOHM, J, 1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6466 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6466 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6471, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6473, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6477 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6477 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6478 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6478 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6573 ERJ6GEYJ100 M 15 OHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585, 8 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R65860 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R65874 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R65885, 8 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R65860 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R65860 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1		ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6452,5 ERJ6GEYJ471 M 470 OHM,J,1/10W 2 R6454 ERJ6GEYJ472 M 4.7KOHM,J,1/10W 1 R6455 ERJ14YJ163U M 16KOHM, J,1/4W 1 R6458 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6459 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6460 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6462 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6464 ERJ6GEYJ102 M 100 OHM,J,1/10W 1 R6465 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6466 ERJ6GEYJ122 M 22KOHM,J,1/10W 1 R6465 ERJ6GEYJ182 M 1.8KOHM,J,1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM,J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6468 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6471,7 ERJ6GEYJ102 M 1KOHM,J,1/10W 2 2 R6473,7 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6475 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6476 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6477 ERJ6GEYJ104 M 100 OHM,J,1/10W 1 R6477 ERJ6GEYJ105 M 10KOHM,J,1/10W 1 R6478- ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6478- ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6478- ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6581- ERJ14YJ150U M 15 OHM, J,1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6565 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1	R6450	ERJ6GEYJ471		1	
R6454 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R6455 ERJ14YJ163U M 16KOHM, J, 1/10W 1 R6458 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6459 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6460 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6462 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6463 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R6464 ERJ6GEYJ122 M 1.8KOHM, J, 1/10W 1 R6465 ERJ6GEYJ122 M 2.2KOHM, J, 1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6466 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6471 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6471 FRJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6472 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6473, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 R6473, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6475 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6477 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6478- ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6478- ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6478- ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J, 1/10W 1 R6552 ERJ14YJ150U M 15 OHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6575 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R65860 - ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6587 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6588 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6580 - ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6580 - ERJ6GEYJ103 M 10KOHM, J, 1/10W 1	R6451	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6454 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R6455 ERJ14YJ163U M 16KOHM, J, 1/4W 1 R6458 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6459 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6460 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6461 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6461 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6462 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6463 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R6464 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6465 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6468 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6471, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 2 R6473, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6477 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6478 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6479 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM, J, 1/10W 6 R6470 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6471 PERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6475 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6476 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6478 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6585 ERJ14YJ150U M 15 OHM, J, 1/4W 6 06 R6525 ERJ14YJ150U M 15 OHM, J, 1/4W 6 06 R6526 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585, 8 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585, 8 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6601, 0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603 ERJ6GEYJ101 M 100 OHM, J, 1/10W 3	_	ERJ6GEYJ471	M 470 OHM, J, 1/10W	2	
R6455 ERJ14YJ163U M 16KOHM, J,1/4W 1 R6458 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R6459 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6460 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R6462 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6462 ERJ6GEYJ123 M 22KOHM, J,1/10W 1 R6463 ERJ6GEYJ223 M 22KOHM, J,1/10W 1 R6464 ERJ6GEYJ182 M 1.8KOHM, J,1/10W 1 R6465 ERJ6GEYJ182 M 1.8KOHM, J,1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6468 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6469 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R6471, 7 ERJ6GEYJ102 M 1KOHM, J,1/10W 2 R6475 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R6475 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R6476 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6477 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6478- ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6479 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6470 ERJ6GEYJ103 M 10KOHM, J,1/10W 6 R6475 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6475 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6476 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6477 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6478- ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6478- ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6578- ERJ14YJ150U M 15 OHM, J,1/10W 6 R6525- ERJ14YJ150U M 15 OHM, J,1/4W 6 R6525- ERJ14YJ150U M 15 OHM, J,1/10W 1 R6551 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R6585, 8 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R66003- ERJ6GEYJ101 M 100 OHM, J,1/10W 1	-	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6458 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6459 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6460 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6461 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6462 ERJ6GEYJ102 M 12KOHM, J, 1/10W 1 R6463 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R6464 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6465 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6466 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6468 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 R6471, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 R6473, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 R6475 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 R6476 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6477 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6478 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6478 ERJ6GEYJ101 RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501 ERJ14YJ150U M 15 OHM, J, 1/4W 6 06 R6525 ERJ14YJ150U M 15 OHM, J, 1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6564 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6565 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6565 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585, 8 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585, 8 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R66503 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1					
R6460 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6461 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6462 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6463 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R6464 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6465 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6466 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6468 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 2 R6471, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 R6475 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 R6476 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6477 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6478- ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6478- ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 6 R6488 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J, 1/14W 6 R6525- ERJ14YJ150U M 15 OHM, J, 1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6563 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6564 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6565 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6563 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6564 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6565 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6565 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6568 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6569 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6563 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6564 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6565 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6566 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6567 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6568 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6569 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6560 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1					
R6461 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6462 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6463 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R6464 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6465 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6468 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6471, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 R6473, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 R6475 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6477 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6478- ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6478- ERJ6GEYJ101 M 100 OHM, J, 1/10W 6 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J, 1/4W 6 R6551 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6563 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6564 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6582 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6583 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6584 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6586 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6587 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6588 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6589 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6580 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6580 ERJ6GEYJ103 M 10KOHM, J, 1/10W 2 R66003- ERJ6GEYJ101 M 100 OHM, J, 1/10W 3	R6459	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6462 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6463 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R6464 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6465 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6467 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6468 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6471, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 R6473, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 R6475 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6477 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6478- ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6478- ERJ6GEYJ101 M 100 OHM, J, 1/10W 6 R3 R6484 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J, 1/4W 6 R6551 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6563 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6564 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6582 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6583 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6584 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585, 8 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6586 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6587 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6588 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6589 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6580 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6580 ERJ6GEYJ103 M 10KOHM, J, 1/10W 2 R6600 - ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6600 - ERJ6GEYJ101 M 100 OHM, J, 1/10W 3	R6460	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6463 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R6464 ERJ6GEYJ182 M 1.8KOHM,J,1/10W 1 R6465 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM,J,1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM,J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6468 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 2 R6473,7 ERJ6GEYJ102 M 1KOHM,J,1/10W 2 4 R6475 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6477 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6478- ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6484 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J,1/4W 6 06 R6552- ERJ14YJ150U M 15 OHM, J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6563 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6564 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 10 OHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R66003- ERJ6GEYJ101 M 100 OHM,J,1/10W 3	R6461	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6464 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6465 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM, J, 1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6468 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6471, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 2 R6473, 7 ERJ6GEYJ102 M 1KOHM, J, 1/10W 2 4 R6475 ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6477 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6478- ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6478- ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 6 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J, 1/4W 6 06 R6525- ERJ14YJ150U M 15 OHM, J, 1/4W 6 30 R6561 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585, 8 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585, 8 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585, 8 ERJ6GEYJ101 M 100 OHM, J, 1/10W 2 R6601, 0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM, J, 1/10W 3	R6462	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6465 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R6466 ERJ6GEYJ182 M 1.8KOHM,J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6468 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6469 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6471,7 ERJ6GEYJ102 M 1KOHM,J,1/10W 2 2 R6473,7 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R6475 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6477 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6478- ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6484 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J,1/4W 6 06 R6525- ERJ14YJ150U M 15 OHM, J,1/4W 6 30 R6561 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3	R6463	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6466 ERJ6GEYJ182 M 1.8KOHM,J,1/10W 1 R6467 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6468 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6469 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6471,7 ERJ6GEYJ102 M 1KOHM,J,1/10W 2 2 R6473,7 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R6475 ERJ6GEYJ102 M 1KOHM,F,1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6477 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6478 ERJ6GEYJ101 M 100 OHM,J,1/10W 6 83 R6484 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501 ERJ14YJ150U M 15 OHM, J,1/4W 6 06 R6525 ERJ14YJ150U M 15 OHM, J,1/4W 6 30 R6561 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603 ERJ6GEYJ101 M 100 OHM,J,1/10W 3			· .		
R6467 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6468 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6469 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6471,7 ERJ6GEYJ102 M 1KOHM,J,1/10W 2 R6473,7 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 2 R6475 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM,F,1/10W 1 R6477 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6478 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 6 83 R6484 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J,1/4W 6 06 R6525- ERJ14YJ150U M 15 OHM, J,1/4W 6 30 R6561 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R66003- ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6601- ERJ6GEYJ101 M 100 OHM,J,1/10W 3		<b>†</b>		<del>                                     </del>	
R6468         ERJ6GEYJ101         M 100 OHM, J, 1/10W         1           R6469         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R6470         ERJ6GEYJ101         M 100 OHM, J, 1/10W         1           R6471,7         ERJ6GEYJ102         M 1KOHM, J, 1/10W         2           2         R6473,7         ERJ6GEYJ222         M 2.2KOHM, J, 1/10W         1           R6475         ERJ6GEYJ102         M 1KOHM, F, 1/10W         1           R6476         ERJ6GEYJ102         M 1KOHM, J, 1/10W         1           R6477         ERJ6GEYJ101         M 100 OHM, J, 1/10W         1           R6478-         ERJ6GEYJ222         M 2.2KOHM, J, 1/10W         1           R6484         EXB38V470J         RESISTOR ARRAY         1           R6488         EXB38V470J         RESISTOR ARRAY         1           R6501-         ERJ14YJ150U         M 15 OHM, J, 1/4W         6           06         R6525-         ERJ14YJ150U         M 15 OHM, J, 1/10W         1           R6561         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R6562         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R6573         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1					
R6469 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6470 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6471,7 ERJ6GEYJ102 M 1KOHM,J,1/10W 2 R6473,7 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 2 R6475 ERJ6GEYJ102 M 1KOHM,F,1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6477 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6478 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 6 83 R6484 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J,1/4W 6 R6525- ERJ14YJ150U M 15 OHM, J,1/4W 6 R6561 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6569 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R66003- ERX3FJS2R2D M 2.2 OHM, J, 3W 2					
R6470         ERJ6GEYJ101         M 100 OHM, J, 1/10W         1           R6471,7         ERJ6GEYJ102         M 1KOHM, J, 1/10W         2           2         R6473,7         ERJ6GEYJ222         M 2.2KOHM, J, 1/10W         2           4         ERJ6GEYJ103         M 10KOHM, F, 1/10W         1           R6475         ERJ6GEYJ102         M 1KOHM, J, 1/10W         1           R6476         ERJ6GEYJ101         M 100 OHM, J, 1/10W         1           R6477         ERJ6GEYJ102         M 100 OHM, J, 1/10W         1           R6478-         ERJ6GEYJ222         M 2.2KOHM, J, 1/10W         6           83         R6484         EXB38V470J         RESISTOR ARRAY         1           R6488         EXB38V470J         RESISTOR ARRAY         1           R6501-         ERJ14YJ150U         M 15 OHM, J, 1/4W         6           06         R6525-         ERJ14YJ150U         M 15 OHM, J, 1/10W         1           R6561         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R6562         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R6573         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R6574         ERJ6GEYJ103         M 10KOHM, J, 1/10W					
R6471,7 ERJ6GEYJ102 M 1KOHM,J,1/10W 2 R6473,7 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 2 R6475 ERJ6GEYF103 M 10KOHM,F,1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6477 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6478- ERJ6GEYJ222 M 2.2KOHM,J,1/10W 6 83 R6484 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J,1/4W 6 06 R6525- ERJ14YJ150U M 15 OHM, J,1/4W 6 30 R6561 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3					
2 R6473,7 ERJ6GEYJ222 M 2.2KOHM,J,1/10W 2 4 R6475 ERJ6GEYF103 M 10KOHM,F,1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6477 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6478- ERJ6GEYJ222 M 2.2KOHM,J,1/10W 6 83 R6484 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J,1/4W 6 06 R6525- ERJ14YJ150U M 15 OHM, J,1/4W 6 30 R6561 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 6 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3					
4 R6475 ERJ6GEYF103 M 10KOHM,F,1/10W 1 R6476 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R6477 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R6478- ERJ6GEYJ222 M 2.2KOHM,J,1/10W 6 83 R6484 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J,1/4W 6 R6525- ERJ14YJ150U M 15 OHM, J,1/4W 6 30 R6561 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6569 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3	2				
R6476 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R6477 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6478- ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 6 83 R6484 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J, 1/4W 6 06 R6525- ERJ14YJ150U M 15 OHM, J, 1/4W 6 30 R6561 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585,8 ERJ6GEYJ101 M 10O OHM, J, 1/10W 1 R6585,8 ERJ6GEYJ101 M 10O OHM, J, 1/10W 2 C R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM, J, 1/10W 3		ERJ6GEYJ222	M 2.2KOHM,J,1/10W	2	
R6477 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R6478- ERJ6GEYJ222 M 2.2KOHM, J, 1/10W 6 83 R6484 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J, 1/4W 6 R6525- ERJ14YJ150U M 15 OHM, J, 1/4W 6 30 R6561 ERJ6GEYJ100 M 10 OHM, J, 1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R6585, 8 ERJ6GEYJ101 M 100 OHM, J, 1/10W 2 R6601, 0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM, J, 1/10W 3	R6475	ERJ6GEYF103	M 10KOHM, F, 1/10W	1	
R6478-       ERJ6GEYJ222       M 2.2KOHM,J,1/10W       6         83       R6484       EXB38V470J       RESISTOR ARRAY       1         R6488       EXB38V470J       RESISTOR ARRAY       1         R6501-       ERJ14YJ150U       M 15 OHM, J,1/4W       6         06       ERJ6525-       ERJ14YJ150U       M 15 OHM, J,1/4W       6         30       M 10 OHM,J,1/10W       1         R6561       ERJ6GEYJ100       M 10 OHM,J,1/10W       1         R6562       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R6563-       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R6573       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R6574       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R6581       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R6585,8       ERJ6GEYJ101       M 100 OHM,J,1/10W       2         6       R6601,0       ERX3FJS2R2D       M 2.2 OHM, J, 3W       2         2       R6603-       ERJ6GEYJ101       M 100 OHM,J,1/10W       3	R6476	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
83 R6484 EXB38V470J RESISTOR ARRAY 1 R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J,1/4W 6 R6525- ERJ14YJ150U M 15 OHM, J,1/4W 6 30 R6561 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6569 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 R6680, ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R6680, ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R6680, ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3				-	
R6488 EXB38V470J RESISTOR ARRAY 1 R6501- ERJ14YJ150U M 15 OHM, J,1/4W 6 R6525- ERJ14YJ150U M 15 OHM, J,1/4W 6 30 R6561 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6569 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 G R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3		ERJ6GEYJ222	M 2.2KOHM,J,1/10W	6	
R6501- ERJ14YJ150U M 15 OHM, J,1/4W 6   R6525- ERJ14YJ150U M 15 OHM, J,1/4W 6   30	R6484	EXB38V470J	RESISTOR ARRAY	1	
06 R6525- ERJ14YJ150U M 15 OHM, J,1/4W 6 30 R6561 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6569 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3	R6488	EXB38V470J	RESISTOR ARRAY	1	
30  R6561 ERJ6GEYJ100 M 10 OHM,J,1/10W 1  R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R6569 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R6573 ERJ6GEYJ100 M 10 OHM,J,1/10W 1  R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 2  G  R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2  R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3		ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6561 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6569 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 6 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3		ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6562 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6569 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 6 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3		ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6569 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6573 ERJ6GEYJ100 M 10 OHM,J,1/10W 1 R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 6 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3					
R6574 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 6 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3		ERJ6GEYJ103		1	
R6581 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 6 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3	R6573	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6585,8 ERJ6GEYJ101 M 100 OHM,J,1/10W 2 6 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3			M 10KOHM, J, 1/10W	1	
6 R6601,0 ERX3FJS2R2D M 2.2 OHM, J, 3W 2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3					
2 R6603- ERJ6GEYJ101 M 100 OHM,J,1/10W 3		ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6603- ERJ6GEYJ101 M 100 OHM, J, 1/10W 3		ERX3FJS2R2D	M 2.2 OHM, J, 3W	2	
<u> </u>	R6603-	ERJ6GEYJ101	M 100 OHM,J,1/10W	3	
R6611 ERJ6GEYJ151 M 150 OHM, J, 1/10W 1		ERJ6GEYJ151	M 150 OHM.J.1/10W	1	
R6612 ERJ6GEYJ104 M 100KOHM,J,1/10W 1		<b>†</b>			
R6613 ERJ6GEY0R00 M 0 OHM, 1/10W 1		<b>†</b>			
R6614 ERJ6ENF1801 M 1.8KOHM, 1/10W 1	R6614	ERJ6ENF1801		1	
R6615,1 ERJ6GEYJ102 M 1KOHM,J,1/10W 2		ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R6617 ERJ6GEYJ470 M 47 OHM,J,1/10W 1		ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6618 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1		<b>†</b>			
R6619,2 ERJ6GEYJ105 M 1MOHM,J,1/10W 2	R6619,2	<b> </b>		2	
0 R6621 ERJ6GEYJ680 M 68 OHM,J,1/10W 1		ERJ6GEYJ680	M 68 OHM,J,1/10W	1	
R6622 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1	R6622	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	

Ref.	Part No.	Part Name &	Pcs	Remarks
No. R6625-	ERJ6GEYJ470	Description M 47 OHM,J,1/10W	8	
32	28000210170	17 0111707171011	Ľ	
R6662	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6664	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6667	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6668 R6669	ERJ6GEYJ100 ERJ6GEYJ101	M 10 OHM,J,1/10W M 100 OHM,J,1/10W	1	
R6671	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6674	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6675	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6686,8 7	ERJ14YJ5R6U	M 6.20HM, 1/4W	2	
R6696-	ERJ14YJ5R6U	M 6.20HM, 1/4W	4	
R6711	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6712 R6713	ERJ6GEYJ470 ERJ6GEYJ103	M 47 OHM,J,1/10W M 10KOHM,J,1/10W	1	
R6716-	ERJ6GEYJ100	M 10 OHM, J, 1/10W	6	
21 R6735-	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
37				
R6738	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6739	ERJ6GEYJ202	M 2KOHM, J, 1/10W	1	
R6740 R6741	ERJ6GEYJ203 ERJ6GEYJ222	M 20KOHM, J, 1/10W	1	
R6741	ERJ6GEYJ222 ERJ6GEYJ470	M 2.2KOHM, J, 1/10W M 47 OHM, J, 1/10W	1	
R6743	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6744,4	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	2	
5				
R6746 R6747,4 8	ERJ6GEYJ100 ERJ6GEYJ103	M 10 OHM,J,1/10W M 10KOHM,J,1/10W	2	
R6751- 53	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	3	
R6755	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6756	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6757	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6758	ERJ6GEYJ104	30 100TOTTO T 1 /10TT	1 1	
		M 100KOHM, J, 1/10W		
R6759	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6759 R6760	ERJ6GEYJ100 ERJ6GEYJ471	M 10 OHM,J,1/10W M 470 OHM,J,1/10W	1	
R6759 R6760 R6761	ERJ6GEYJ100	M 10 OHM,J,1/10W M 470 OHM,J,1/10W M 10KOHM,J,1/10W	1	
R6759 R6760	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ103	M 10 OHM,J,1/10W M 470 OHM,J,1/10W	1 1 1	
R6759 R6760 R6761 R6762 R6763,6	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W	1 1 1	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807-	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W	1 1 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103	M 10 OHM,J,1/10W M 470 OHM,J,1/10W M 10KOHM,J,1/10W M 100 OHM, J, 1W M 220KOHM,J,1/10W M 56KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W	1 1 1 2 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807-09	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104	M 10 OHM,J,1/10W M 470 OHM,J,1/10W M 10KOHM,J,1/10W M 100 OHM, J, 1W M 220KOHM,J,1/10W M 56KOHM,J,1/10W	1 1 1 2 2 1 3	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807-09 R6810	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ103	M 10 OHM,J,1/10W M 470 OHM,J,1/10W M 10KOHM,J,1/10W M 100 OHM, J, 1W M 220KOHM,J,1/10W M 56KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W M 10KOHM,J,1/10W	1 1 1 2 2 1 3	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807-09 R6810 R6823 R6824 R6825,2	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ103 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ472 ERJ6GEYJ103	M 10 OHM,J,1/10W M 470 OHM,J,1/10W M 10KOHM,J,1/10W M 100 OHM, J, 1W M 220KOHM,J,1/10W M 56KOHM,J,1/10W M 10KOHM,J,1/10W	1 1 1 2 2 1 3 1 1 1	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807-09 R6810 R6823 R6824 R6825,2 6 R6827	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ472 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 4.7KOHM, J, 1/10W	1 1 1 2 2 2 1 3 1 1 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807-09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 40KOHM, J, 1/10W M 470 OHM, J, 1W M 100KOHM, J, 1W	1 1 1 1 2 2 2 1 3 1 1 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807- 09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 40KOHM, J, 1/10W M 40KOHM, J, 1/10W M 40KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/2W M 10KOHM, J, 1/10W	1 1 1 1 2 2 2 1 3 1 1 1 2 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807-09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 40KOHM, J, 1/10W M 470 OHM, J, 1W M 100KOHM, J, 1W	1 1 1 1 2 2 2 1 3 1 1 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807- 09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830 R6831,3	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 40KOHM, J, 1/10W M 40KOHM, J, 1/10W M 40KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/2W M 10KOHM, J, 1/10W	1 1 1 1 2 2 2 1 3 1 1 1 2 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807-09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830 R6831,3 2	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERG1FJS471D ERJ12YJ104U ERJ6GEYJ103 ERJ6GEYJ103	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W	1 1 1 2 2 1 3 1 1 1 2 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807- 09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830 R6830 R6831,3 2 R6833 R6834 R6834 R6835,3 6	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ472 ERJ6GEYJ103 ERG1FJS471D ERJ12YJ104U ERJ6GEYJ103 ERJ6ENF1203 ERJ6ENF5101 ERJ12YJ1R0	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7 KOHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 5.1 KOHM, J, 1/2W	1 1 1 1 2 2 1 3 1 1 1 2 1 2 1 2 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807- 09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830 R6831,3 2 R6833 R6834 R6835,3 6 R6837	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERG1FJS471D ERJ12YJ104U ERJ6GEYJ103 ERJ6ENF5101 ERJ6ENF5101 ERJ12YJ1R0 ERJ6GEYJ104	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7 KOHM, J, 1/10W M 470 OHM, J, 1/2W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/2W M 10KOHM, J, 1/10W	1 1 1 1 2 2 1 3 1 1 1 2 1 2 1 2 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807- 09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830 R6831,3 2 R6833 R6834 R6835,3 6 R6837 R6838	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERG1FJS471D ERJ12YJ104U ERJ6GEYJ103 ERJ6ENF1203 ERJ6ENF5201 ERJ6ENF12203	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7 KOHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/2W M 10KOHM, J, 1/10W M 1.3 KOHM, J, 1/2W M 100KOHM, J, 1/10W M 1.0 KOHM, J, 1/10W M 3.3 KOHM, J, 1/10W M 3.3 KOHM, J, 1/10W	1 1 1 1 2 2 1 3 1 1 1 2 1 2 1 2 1 2 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807- 09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830 R6831,3 2 R6833 R6834 R6835,3 6 R6837	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERG1FJS471D ERJ12YJ104U ERJ6GEYJ103 ERJ6ENF5101 ERJ6ENF5101 ERJ12YJ1R0 ERJ6GEYJ104	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7 KOHM, J, 1/10W M 470 OHM, J, 1/2W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/2W M 10KOHM, J, 1/10W	1 1 1 1 2 2 1 3 1 1 1 2 1 2 1 2 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807- 09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830 R6831,3 2 R6831,3 2 R6833 R6834 R6835,3 6 R6837 R6838 R6839 R6840,4	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERG1FJS471D ERJ12YJ104U ERJ6GEYJ103 ERJ6ENF12203 ERJ6ENF5101 ERJ12YJ1R0 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/2W M 10KOHM, J, 1/2W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 3.3KOHM, J, 1/10W M 3.3KOHM, J, 1/10W M 3.3KOHM, J, 1/10W C 220 OHM, J, 1/2W	1 1 1 1 2 2 1 1 1 2 1 2 1 2 1 1 2 1 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807-09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830 R6831,3 2 R6833 R6834 R6835,3 6 R6837 R6838 R6839 R6839 R6840,4	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERG1FJS471D ERJ12YJ104U ERJ6GEYJ103 ERJ6ENF5203 ERJ6ENF5201 ERJ6ENF1432 ERJ6ENF5101 ERJ12YJ1R0 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ222	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 10KOHM, J, 1/10W M 20KOHM, J, 1/10W M 10KOHM, J, 1/2W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 220KOHM, 1/10W M 5.1KOHM, 1/10W M 5.1KOHM, J, 1/2W M 100KOHM, J, 1/10W M 3.3KOHM, J, 1/10W M 3.3KOHM, J, 1/10W M 2.2KOHM, J, 1/10W M 2.2KOHM, J, 1/10W	1 1 1 1 2 2 1 1 1 2 1 2 1 2 1 1 2 1 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807-09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830 R6831,3 2 R6833 R6834 R6835,3 6 R6837 R6838 R6839 R6840,4 1 R6842	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERG1FJS471D ERJ12YJ104U ERJ6GEYJ103 ERJ6ENF1203 ERJ6ENF1203 ERJ6ENF1203 ERJ6ENF1203 ERJ6ENF1432 ERJ6ENF5101 ERJ12YJ1R0 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7KOHM, J, 1/W M 4.7KOHM, J, 1/10W M 10KOHM, J, 1/10W M 220KOHM, 1/10W M 1.3KOHM, 1/10W M 1.3KOHM, J, 1/10W M 1.0KOHM, J, 1/10W M 1.54KOHM, J, 1/10W	1 1 1 1 2 2 1 3 1 1 1 2 1 2 1 1 2 1 1 2 1 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 S6806 R6807-09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830 R6831,3 2 R6833 R6834 R6835,3 6 R6837 R6838 R6839 R6840,4 1 R6842 R6843 R6844 R6845	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ472 ERJ6GEYJ103 ERG1FJS471D ERJ12YJ104U ERJ6GEYJ103 ERJ6ENF2203 ERJ6ENF5101 ERJ12YJ1R0 ERJ6GEYJ104 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10HM, J, 1/10W M 10HM, J, 1/2W M 10OKOHM, J, 1/10W M 10HM, J, 1/10W M 10HM, J, 1/10W M 154KOHM, J, 1/10W M 154KOHM, 1/10W M 10HM, 1/10W M 10HM, 1/10W M 10HM, 1/10W M 122KOHM, 1/10W M 10HM, J, 1/10W M 10HM, J, 1/10W M 10HM, J, 1/10W	1 1 1 1 2 2 1 1 2 1 2 1 1 2 1 1 2 1 1 2 1 1 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 5 R6806 R6807-09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830 R6831,3 2 R6833 R6834 R6835,3 6 R6837 R6838 R6839 R6840,4 1 R6842 R6843 R6844 R6845 R6846	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ472 ERJ6GEYJ472 ERJ6GEYJ103 ERG1FJS471D ERJ12YJ104U ERJ6GEYJ103 ERJ6ENF5101 ERJ12YJ1R0 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ104 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ882D ERX3FJS8R2D	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 4.7KOHM, J, 1/10W M 10KOHM, J, 1/10W M 220KOHM, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10KOHM, J, 1/10W M 1.5 1KOHM, 1/10W M 1.1 OHM, J, 1/2W M 100KOHM, J, 1/10W M 2.2KOHM, J, 1/10W M 2.2KOHM, J, 1/10W M 0.1 OHM, 1/10W M 1.5 4KOHM, 1/10W M 1.5 4KOHM, 1/10W M 2.2 4KOHM, J, 1/10W M 2.2 4KOHM, J, 1/10W M 3.3 5 OHM, J, 1/10W M 3.2 OHM, J, 1W M 8.2 OHM, J, 1W	1 1 1 1 2 2 1 1 2 1 2 1 1 2 1 1 2 1 1 2 1 1 1 2	
R6759 R6760 R6761 R6762 R6763,6 4 R6804,0 S6806 R6807-09 R6810 R6823 R6824 R6825,2 6 R6827 R6828,2 9 R6830 R6831,3 2 R6833 R6834 R6835,3 6 R6837 R6838 R6839 R6840,4 1 R6842 R6843 R6844 R6845	ERJ6GEYJ100 ERJ6GEYJ471 ERJ6GEYJ471 ERJ6GEYJ103 ERG1FJS101D ERJ6GEYJ224 ERJ6GEYJ563 ERJ6GEYJ103 ERJ6GEYJ104 ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ103 ERX1FJS8R2D ERJ6GEYJ472 ERJ6GEYJ103 ERG1FJS471D ERJ12YJ104U ERJ6GEYJ103 ERJ6ENF2203 ERJ6ENF5101 ERJ12YJ1R0 ERJ6GEYJ104 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222 ERJ6GEYJ222	M 10 OHM, J, 1/10W M 470 OHM, J, 1/10W M 10KOHM, J, 1/10W M 100 OHM, J, 1/W M 220KOHM, J, 1/10W M 56KOHM, J, 1/10W M 10KOHM, J, 1/10W M 10HM, J, 1/10W M 10HM, J, 1/2W M 10OKOHM, J, 1/10W M 10HM, J, 1/10W M 10HM, J, 1/10W M 154KOHM, J, 1/10W M 154KOHM, 1/10W M 10HM, 1/10W M 10HM, 1/10W M 10HM, 1/10W M 122KOHM, 1/10W M 10HM, J, 1/10W M 10HM, J, 1/10W M 10HM, J, 1/10W	1 1 1 1 2 2 1 1 2 1 2 1 1 2 1 1 2 1 1 2 1 1 1 2	

Ref.	Part No.	Part Name &	Pcs	Remarks
No. R6851	ERJ6GEYJ103	Description M 10KOHM,J,1/10W	1	
R6852	ERG2FJS101D	M 100 OHM, J, 2W	1	
R6853	ERJ12YJ153U	M 15KOHM, 1/2W	1	
R6854	ERJ14YJ433U	M 43KOHM, 1/2W	1	
R6855	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R6856	ERJ6ENF6202	M 62KOHM, 1/10W	1	
R6857,5	ERJ6ENF2491	M2.49KOHM, 1/10W	2	
R6859	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6860	ERX3FJS8R2D	M 8.2 OHM, J, 3W	1	
R6861	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6862	ERJ6GEYJ153	M 15KOHM, J, 1/10W	1	
R6863	ERJ6GEYJ123	M 12KOHM, J, 1/10W	1	
R6864	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6866 R6867	ERJ6GEYJ332 ERJ6GEYJ102	M 3.3KOHM,J,1/10W M 1KOHM,J,1/10W	1	
R6869	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R6870	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6871	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6872,7	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
3				
R6874	ERJ6GEYJ563	M 56KOHM, J, 1/10W	1	
R6876	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6886	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6901- 06	ERJ6GEYJ221	M 220 OHM,J,1/10W	6	
R6907,0	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6909	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6910	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6911	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6912	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6921- 26	ERJ6GEYJ221	M 220 OHM,J,1/10W	6	
R6927-	ERJ6GEYJ103	M 10KOHM, J, 1/10W	4	
R6931,3	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R7101	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7102	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R7104	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R7107	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R7109	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7111	ERJ12YJ2R2 ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7113 R7115	ERJ12YJ2R2	M 2.2 OHM, J,1/2W M 2.2 OHM, J,1/2W	1	
R7116,1	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
7 R7123	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R7127	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7131	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7133	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R7134- 37	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7138- 40	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
R7141- 46	EXB38V102J	RESISTOR ARRAY	6	
R7159- 64	EXB38V470J	RESISTOR ARRAY	6	
R7171	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7184,8 5	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7186	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R7187 R7205,0	ERJ6GEYJ104 ERJ12YJ2R2	M 100KOHM,J,1/10W M 2.2 OHM, J,1/2W	2	
6				
R7208	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R7210,1 1	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R7215	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7225	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7227	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7230	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7235	TAJAAH0101JV	M 100 OHM,J,1/16W	1	

(50U / TH-42I	PX50U / TH-50PX50L	J		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7238	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R7244	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7250	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7251	TAJAAH0101JV		1	
R7252-	EXB38V102J	M 100 OHM, J, 1/16W RESISTOR ARRAY	4	
55	EABSOVIUZU	RESISION ARRAI	*	
R7256	TA.TAAHO101.TV	M 100 OHM,J,1/16W	1	
R7257-		RESISTOR ARRAY	4	
60	EADSOVIUZU	REDIDION ARRAI	-	
R7262	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7263		M 0 OHM, J, 1/2W	1	
R7266		M 2.2 OHM, J,1/2W	1	
R7267			1	
	TAJAAH0101JV	M 100 OHM, J, 1/16W		
R7268	ERJ12Y0R00	M 0 OHM, J, 1/2W	1	
R7270,7	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7274,7	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
1_	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
7 R7280,8	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
1 R7282,8	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
3 R7288,8	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
9		RESISTOR ARRAY	2	
1			6	
99		RESISTOR ARRAY		
2		M 0 OHM, 1/10W	2	
R7303-		RESISTOR ARRAY	8	
40		M 0 OHM, 1/16W	4	
R7341,4 2	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R7343	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R7345,4 6	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R7347	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7354,5		M 100 OHM,J,1/16W	2	
R7360,6	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	2	
1 R7364,6	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	2	
F7366,6	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
7 R7373,7	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R7377,7	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	2	
8 R7381,8	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	2	
2 R7383,8	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
4 R7385	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7386	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R7387	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R7392- 99	EXB38V102J	RESISTOR ARRAY	8	
R7401	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7404	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7405-	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
08 R7409-	TAJAAH0470JV	M 47 OHM,J,1/16W	4	
12 R7413-	EXB38V470J	RESISTOR ARRAY	8	
20				
R7444	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7446	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R7460,6	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
	l	l		

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	rait no.	Description	res	Remarks
R7464,6 5	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	2	
R7468,6	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	2	
R7470,7	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R7472	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7477,7	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R7481,8	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	2	
R7485,8	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	2	
R7487,8	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R7490	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R7491	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R7492- 99	EXB38V102J	RESISTOR ARRAY	8	
R7502	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7503	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R7504	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7506	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7507,0	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7509	ERJ12Y0R00	M 0 OHM,J, 1/2W	1	
R7511	ERJ12Y0R00	M 0 OHM,J, 1/2W	1	
R7514	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7516	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7517	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7522,2	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7525	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7527	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7528	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7530	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7532	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7533	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R7534- 41	EXB38V102J	RESISTOR ARRAY	8	
R7542-	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
R7546,4	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7550-	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7554,5	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
R7556-	EXB38V470J	RESISTOR ARRAY	8	
R7564	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R7566	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7568	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7569 R7592,9	TAJAAH0101JV ERJ3GEYJ103	M 100 OHM,J,1/16W M 10KOHM,J,1/16W	1 2	
3			_	
R7604	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R7605	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R7606	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R7607	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R7609	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7611	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7613	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7615	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7616,1	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R7624	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R7628	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7632	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7634	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R7637- 42	EXB38V470J	RESISTOR ARRAY	6	
R7643- 46	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7647-	TAJAAH0470JV	M 47 OHM, J, 1/16W	3	
	I	1	<u> </u>	<u> </u>

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	FAIC NO.	Description	FCS	Remarks
R7650- 55	EXB38V102J	RESISTOR ARRAY	6	
R7677	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7680	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7685	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7686	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R7687	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R8137	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
R8140,4 1	ERJ3EKF1001	M 1KOHM, 1/16W	2	
R8144- 47	D1HG5608A002	NETWORK RESISTER	4	
R8148,4 9	D1HG3908A002	NETWORK RESISTER	2	
R8150- 62	ERJ2GEJ390	M 39 OHM, J,0.063W	13	
R8163- 66	ERJ2GEJ560	M 56 OHM, J,0.063W	4	
R8200- 03	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	4	
R8206	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	1	
R8207	ERJ2GEJ561	M 60 OHM, J,0.063W	1	
R8208	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8209	ERJ2GEJ273	M 27KOHM ,J,0.063W	1	
R8210	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8211	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8215	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8216	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8217	ERJ2GEJ561	M 60 OHM, J,0.063W	1	
R8218	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8219	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
R8220	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8221	ERJ3GEYJ391	M 390 OHM,J,1/16W	1	
R8222	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8223	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8224	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8228	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8229	ERJ2GEJ222	м 2.2КОНМ,	1	
R8230	ERJ2GEJ102	J,0.063W M 1KOHM, J,0.063W	1	
R8231	ERJ2GE0R00	M 0.0 OHM,	1	
R8232	ERJ2GEJ272	J,0.063W M 2.7KOHM,	1	
R8233	TAJAAH0101JV	J,0.063W M 100 OHM,J,1/16W	1	
R8234	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8237	ERJ3GEYJ150	M 15 OHM, J, 1/16W	1	
R8240	ERJ2GEJ222	м 2.2КОНМ,	1	
R8241	ERJ2GEJ102	J,0.063W	1	
R8241	TAJAAH0101JV	M 1KOHM, J,0.063W M 100 OHM,J,1/16W	1	
R8242 R8243	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R8244	ERJ3GEYJ150	M 15 OHM,J,1/16W	1	
R8245,4	ERJ2GEJ392	м 3.9КОНМ,	2	
6 R8248	ERJ2GEJ272	J,0.063W M 2.7KOHM,	1	
R8250	ERJ2GEJ222	J,0.063W M 2.2KOHM,	1	
R8251	ERJ2GEJ122	J,0.063W M 1.2KOHM,	1	
R8258	ERJ2GE0R00	J,0.063W M 0.0 ОНМ, J,0.063W	1	
R8262- 65	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8266,6	ERJ2GEJ821	м 820 ОНМ,	2	
7 R8268,6	ERJ3GEYJ471	J,0.063W M 470 OHM,J,1/16W	2	
9 R8270	ERJ2GEJ221	M 220 OHM,	1	
	l	J,0.063W		

Ref.	Part No.	Part Name & Description	Pcs	Remarks
R8272	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8273,7	ERJ3GEYJ560	M 56 OHM, J, 1/16W	2	
R8275	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R8276	ERJ2GEJ183	M 18KOHM ,J,0.063W	1	
R8277	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R8278	ERJ3EKF1201	M 1.2KOHM, 1/16W	1	
R8279,8	ERJ2GEJ102	м 1конм, ј,0.063w	2	
R8281	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8282- 84	ERJ2GEJ102	M 1KOHM, J,0.063W	3	
R8285	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8286	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8287	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8288	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8289,9 0	ERJ2GEJ103	м 10конм, J,0.063W	2	
R8291	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8292	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8293	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8297	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8300	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8301	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8303	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8304,0 5	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8306	EXB38V472J	RESISTOR ARRAY	1	
R8307	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8313	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8314,1 5	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R8316- 18	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
R8322- 36	ERJ2GEJ101	M 100 OHM, J,0.063W	15	
R8339	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8341	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8343	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8345	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8347	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
R8349	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R8351	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8354	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8355	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8356,5	ERJ2GEJ390	м 39 ОНМ, J,0.063W	2	
R8358	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8370	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8372	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	1	
R8373- 79	ERJ2GEJ560	м 56 ОНМ, Ј,0.063W	7	
	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8383	D1HG5608A002	NETWORK RESISTER	1	
R8384	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8385	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8386	D1HG5608A002	NETWORK RESISTER	1	
R8387	EXB38V560J	RESISTOR ARRAY	1	
R8388	D1HG5608A002	NETWORK RESISTER	1	
R8390	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
-		•		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8391	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8392	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8393,9	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
<u>4</u> R8395	EXB38V560J	RESISTOR ARRAY	1	
R8396-	ERJ2GEJ560	M 56 OHM, J,0.063W	3	
98				
R8399	EXB2HV223JV	NETWORK RESISTER	1	
R8407,0 8	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8409,1 0	EXB38V560J	RESISTOR ARRAY	2	
R8411,1 2	ERJ2GEJ392	M 3.9KOHM, J,0.063W	2	
R8414	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8415	EXB38V560J	RESISTOR ARRAY	1	
R8416	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8419	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8420	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8421	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8422,2	ERJ2GEJ472	м 4.7конм, J,0.063W	2	
R8435	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8436	ERJ3EKF4992	M 49.9KOHM, 1/16W	1	
R8460	ERJ2GE0R00	м 0.0 ОНМ, J,0.063W	1	
R8464,6	EXB2HV104JV	RESISTOR ARRAY	2	
R8467	D1HG1008A002	NETWORK RESISTER	1	
R8468	ERJ2GE0R00	м 0.0 ОНМ, J,0.063W	1	
R8470	ERJ2GE0R00	м 0.0 ОНМ, J,0.063W	1	
R8471,7 2	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R8474	D1HG1008A002	NETWORK RESISTER	1	
R8475	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8476	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8477	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8478	ERJ3EKF5601	M 5.6KOHM, 1/16W	1	
R8479,8 0	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8481	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8483- 87	ERJ2GEJ560	M 56 OHM, J,0.063W	5	
R8488	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8489	ERJ2GEJ101	м 100 ОНМ, J,0.063W	1	
R8491-	ERJ2GEJ101	M 100 OHM,	4	
94 R8495	ERJ2GE0R00	J,0.063W м 0.0 онм,	1	
R8497,9	ERJ2GE0R00	J,0.063W M 0.0 OHM,	2	
8 R8500	ERJ2GE0R00	J,0.063W M 0.0 ОНМ,	1	
		J,0.063W		
R8501	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8503	ERJ2GEJ562 ERJ2GEJ103	M 5.6KOHM, J, 0.063W	2	
R8504,0 5	ERUZGEU1U3	M 10KOHM, J,0.063W		
R8507	ERJ2GEJ562	M 5.6KOHM, J, 0.063W	1	
R8508,0 9	ERJ2GEJ203	M 20KOHM, J, 0.063W	2	
R8510	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8511	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8512- 18	ERJ2GEJ103	M 10KOHM, J,0.063W	7	
R8519	ERJ2GEJ392	м 3.9конм, J,0.063W	1	
D0524	ERJ2GEJ222	M 2.2KOHM,	1	
R8524				

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	Part No.	Description	PCS	Remarks
R8525,2	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8527	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8528-	ERJ2GEJ103	м 10конм, J,0.063w	3	
R8531	EXB38V560J	RESISTOR ARRAY	1	
R8532-	ERJ2GEJ560	M 56 OHM, J,0.063W	4	
35	ED TOGE T1 02	W 10FOUNT T 0 063W	-1	
R8536 R8537	ERJ2GEJ103 ERJ2GE0R00	M 10KOHM, J,0.063W M 0.0 OHM,	1	
10337	ZKO Z OZ OKO O	J,0.063W	_	
R8538	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8539	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8540	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8541- 47	ERJ2GEJ560	M 56 OHM, J,0.063W	7	
R8548	ERJ2GE0R00	M 0.0 OHM,	1	
R8551	ERJ2GEJ103	J,0.063W M 10KOHM, J,0.063W	1	
R8552	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8554- 56	ERJ2GEJ560	м 56 ОНМ, J,0.063W	3	
R8557	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8558	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8559	EXB38V560J	RESISTOR ARRAY	1	
R8560,6	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8562	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
R8564	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8565 R8566,6	ERJ2GEJ103 ERJ2GEJ560	M 10KOHM, J,0.063W M 56 OHM, J,0.063W	2	
7				
R8568,6	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8570- 73	ERJ2GEJ560	M 56 OHM, J,0.063W	4	
R8574	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8575 02	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R8575	ERJ3GEYJ181	M 180 OHM,J,1/16W	1	
R8576- 80	ERJ2GEJ330	M 33 OHM, J,0.063W	5	
R8582- 95	ERJ2GEJ330	м 33 Онм, J,0.063W	14	
R8596,9	D1HG33080001	NETWORK RESISTER	2	
R8598-	D1HG5608A002	NETWORK RESISTER	3	
R8601	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8602	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8605- 15	ERJ2GEJ103	м 10конм, ј,0.063w	11	
R8617	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8629	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8630,3 1	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8632- 37	ERJ2GEJ560	M 56 OHM, J,0.063W	6	
R8640	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8641	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8643,4 4	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8645,4 6	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8647	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8648,4 9	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8650	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8651	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8652	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
R8653	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

		1		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ERJ2GE0R00	M 0.0 OHM,	2	
5		J,0.063W		
R8656	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8657	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R8658	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8659	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8661	ERJ2GE0R00	м 0.0 ОНМ,	1	
		J,0.063W		
R8665	D1HG1218A002	NETWORK RESISTER	1	
R8666	ERJ2GE0R00	м 0.0 ОНМ,	1	
		J,0.063W		
R8668	ERJ2GE0R00	M 0.0 OHM,	1	
20050		J,0.063W	-	
R8670	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8673	D1HG1218A002	NETWORK RESISTER	1	
	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	ERJ3EKF3901		1	
		M 3.9KOHM, 1/16W	1	
	ERJ3EKF1303	M 130KOHM, 1/16W		
R8686,8	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
9		50 Sim, 0,0.003W	-	
	ERJ2GEJ333	м 33КОНМ, J,0.063W	1	
	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
	ERJ3EKF5102	M51.0KOHM, 1/16W	1	
	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	ERJ3EKF5102	M51.0KOHM, 1/16W	1	
	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8698	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8700	ERJ2GEJ472		1	
K6/00	ERUZGEU4/Z	M 4.7KOHM, J,0.063W	_	
R8702	ERJ2GEJ101	м 100 онм,	1	
		J,0.063W	_	
R8703	ERJ2GEJ472	м 4.7КОНМ,	1	
		J,0.063W		
R8704	ERJ2GEJ101	м 100 ОНМ,	1	
		J,0.063W		
R8705	ERJ2GEJ222	M 2.2KOHM,	1	
		J,0.063W		
R8706	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8707	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8708	ERJ2GEJ222	M 2.2KOHM,	1	
		J,0.063W		
	ERJ3EKF8872	M88.7KOHM, 1/16W	1	
	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8711	ERJ2GEJ222	M 2.2KOHM,	1	
D0710	ED 1005 1450	J, 0.063W		
R8712	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8713,1	ERJ2GE0R00	M 0.0 OHM,	2	
4	_NU2GEURUU	J,0.063W	4	
	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	ERJ2GE0R00	M 0.0 OHM,	2	
0		J,0.063W	_	
	ERJ2GE0R00	м 0.0 онм,	4	
25		J,0.063W		
R8727	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8731	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8733	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	
R8734	ERJ2GE0R00	м 0.0 ОНМ,	1	
		J,0.063W		
R8735	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8736	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R8737	ERJ2GE0R00	м 0.0 ОНМ,	1	
		J,0.063W		
R8738	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R8741	ERJ3EKF8872	M88.7KOHM, 1/16W	1	
R8748	ERJ2GE0R00	м 0.0 онм,	1	
		J,0.063W		
	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	

		TH-37	FASUU	/ TH-42PX50U / TH-
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8755-	ERJ2GE0R00	м 0.0 ОНМ,	4	
58		J,0.063W	_	
R8765 R8770	ERJ3GEY0R00 ERJ2GE0R00	M 0 OHM, 1/16W M 0.0 OHM,	1	
	ING I GIONO	J,0.063W	_	
R8774	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8776	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8777	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8778,7	ERJ2GE0R00	M 0.0 OHM,	2	
R8780,8	ERJ2GEJ103	J,0.063W М 10КОНМ, J,0.063W	2	
R8782- 87	EXB38VR000	RESISTOR ARRAY	6	
R8788	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	1	
R8790	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R8791	ERJ2GEJ152	M 1.5KOHM, J,0.063W	1	
R8792,9	ERJ2GE0R00	м 0.0 ОНМ,	2	
88795-	ERJ2GE0R00	J,0.063W М 0.0 ОНМ,	4	
98 R8799-	ERJ2GEJ103	J,0.063W M 10KOHM, J,0.063W	4	
02				
R8817,1		M 47KOHM, J, 0.063W	2	
R9000,0 1	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9003	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9006	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9007 R9009	ERJ3GEYJ102 ERJ3GEYJ103	M 1KOHM,J,1/16W M 10KOHM,J,1/16W	1	
R9010	EXB2HV272JV	RESISTOR ARRAY	1	
R9012	EXB2HV272JV	RESISTOR ARRAY	1	
R9013	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9015- 18	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R9019	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9020,2 1	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9022	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9023	ERJ6ENF1601	M 1.6KOHM, 1/10W	1	
R9024	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9026	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9028	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9029,3	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9031,3 2	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9033,3	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9035,3	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R9039	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9040	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R9041	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9042 R9043,4	ERJ3GEYJ102 TAJAAH0101JV	M 1KOHM,J,1/16W M 100 OHM,J,1/16W	2	
P9045	FD.T3@FV.T100	м 1конм т 1/1 <i>с</i> м	1	
R9045 R9046	ERJ3GEYJ102 ERJ3GEYJ123	M 1KOHM,J,1/16W M 12KOHM,J,1/16W	1	
R9047-	TAJAAH0101JV	M 100 OHM, J, 1/16W	4	
50 R9052	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	1
R9053	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9054,5	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	2	
R9056,5	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9058,5	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
9 R9060-	TAJAAH0101JV	M 100 OHM,J,1/16W	8	
67 R9068-	ERJ3GEYJ103	M 10KOHM,J,1/16W	5	
72				

300 / TH-42F	PX50U / TH-50PX50U	<u>J</u>		
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9073	EXB2HV470JV	RESISTOR ARRAY	1	
R9074	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9075	EXB2HV470JV	RESISTOR ARRAY	1	
R9076	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9077-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
79	TD 72 GTV 7002	M 000000 7 1/160	-	
R9080 R9081	ERJ3GEYJ223 ERJ3GEYJ103	M 22KOHM, J, 1/16W	1	
R9081-	TAJAAH0101JV	M 10KOHM,J,1/16W M 100 OHM,J,1/16W	8	
89	1110111111010101	100 0111/0/1/1011		
R9090	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9091,9	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
2				
R9093 R9094	ERJ3GEYJ473 ERJ6GEY0R00	M 47KOHM, J, 1/16W	1	
R9095-	ERJ3GEYJ103	M 0 OHM, 1/10W M 10KOHM,J,1/16W	4	
98		201101111,0,2,2011	-	
R9102-	TAJAAH0101JV	M 100 OHM,J,1/16W	3	
04				
R9105	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9107- 09	ERJ3GEYJ393	M 39KOHM,J,1/16W	3	
	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
2				
R9113	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9114-	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
16 R9117,1	EXB38VR000	RESISTOR ARRAY	2	
8	EXESOVROOO	REDIDION ARRAI		
R9119	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9120,2	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
1				
R9122- 24	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
6		, , , ,		
_	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
8	TD T2 GTV T1 02	* 10mom* 7 1/16m		
R9130 R9131-	ERJ3GEYJ103 ERJ3GEYJ472	M 10KOHM,J,1/16W M 4.7KOHM,J,1/16W	3	
33	EROSGEIO472	M 4.7KOIM, 0, 1/10W		
R9134-	TAJAAH0101JV	M 100 OHM,J,1/16W	3	
36				
R9137	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9140- 42	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9145-	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
47				
	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
1 D0162 6	ED TOCEVIECO	M E CVOUM T 1/16W	2	
R9162,6 3	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W		
R9164,6	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
5				
R9200-	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
02 R9204	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R9205,0	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
6				
R9210	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9300- 04	D1HG33080001	NETWORK RESISTER	5	
R9305	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9306,0	D1HG33080001	NETWORK RESISTER	2	
7				
R9308	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9309	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9313- 16	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9318,1	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
9		, ,		
R9321	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9323	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1 -	
R9324- 28	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
	l	I		

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
R9329	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9330-	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
33		4 4 /4 /	_	
R9335,3	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9337	ED TERMET 101	M 1 170UM 1/10W	1	
	ERJ6ENF1101	M 1.1KOHM, 1/10W		
R9338	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
R9339- 42	ERJ6ENF1001	M 1KOHM, 1/10W	4	
R9500-	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
03	EROSGEIOIOS	M TOROIM, 0, 1/10W	*	
R9505-	TAJAAH0101JV	M 100 OHM,J,1/16W	6	
10				
R9511	EXB2HV272JV	RESISTOR ARRAY	1	
R9512	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9513	EXB2HV272JV	RESISTOR ARRAY	1	
R9515	EXB2HV272JV	RESISTOR ARRAY	1	
R9516,1	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
7	Likeselles	1 1010111/0/1/1011	-	
R9518	EXB2HV470JV	RESISTOR ARRAY	1	
R9519-	EXB38V470J	RESISTOR ARRAY	3	
21				
R9522,2	EXB2HV470JV	RESISTOR ARRAY	2	
3				
R9524-	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
26				
R9527	EXB38V470J	RESISTOR ARRAY	1	
R9528,2	TAJAAH0470JV	M 47 OHM,J,1/16W	2	
9				
R9530	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9532	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9534	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9536	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R9537,3	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
8			_	
R9540	ERJ3GEYJ304V	M 300KOHM, J, 1/16W	1	
R9543	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9547	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9700	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9702-	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
04	ED TCENET 001	M 1KOHM, 1/10W	2	
R9706,0	ERJ6ENF1001	M IKOHM, I/IUW	4	
R9708	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9709	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9714	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9716,1	ERJL14KJ33M	M 33 OHM, J,1/4W	2	
7	FKOTI-KO33M	M 33 OHM, U,1/4W		
R9718	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9719	ERJ6ENF1742	M17.4KOHM, 1/10W	1	
R9720	ERJ6ENF6342	M6.34KOHM, 1/10W	1	
R9721	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9722,2	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
3			~	
R9724	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R9725	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9726,2	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
7			_	
R9728,2	ERJ6ENF2002	M 20KOHM, 1/10W	2	
9				
R9738,3	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
9				
R9740-	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
42	1		<u> </u>	
R9800	EXB38V470J	RESISTOR ARRAY	1	
R9801-	EXB38V470J EXB2HV470JV	RESISTOR ARRAY	4	
R9801- 04	EXB2HV470JV	RESISTOR ARRAY	4	
R9801- 04 R9805-				
R9801- 04 R9805- 07	EXB2HV470JV EXB38V470J	RESISTOR ARRAY	3	
R9801- 04 R9805-	EXB2HV470JV	RESISTOR ARRAY	4	
R9801- 04 R9805- 07 R9808,0	EXB2HV470JV EXB38V470J	RESISTOR ARRAY RESISTOR ARRAY M 22 OHM, J, 1/16W	3	
R9801- 04 R9805- 07 R9808,0 9	EXB2HV470JV  EXB38V470J  ERJ3GEYJ220  ERJ3GEYJ472	RESISTOR ARRAY RESISTOR ARRAY M 22 OHM,J,1/16W M 4.7KOHM,J,1/16W	3 2	
R9801- 04 R9805- 07 R9808,0 9 R9810	EXB2HV470JV  EXB38V470J  ERJ3GEYJ220  ERJ3GEYJ472  ERJ3GEYJ103	RESISTOR ARRAY RESISTOR ARRAY M 22 OHM,J,1/16W M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W	4 3 2	
R9801- 04 R9805- 07 R9808,0 9 R9810 R9811	EXB2HV470JV  EXB38V470J  ERJ3GEYJ220  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEYJ104	RESISTOR ARRAY  RESISTOR ARRAY  M 22 OHM,J,1/16W  M 4.7KOHM,J,1/16W  M 10KOHM,J,1/16W	4 3 2 1 1	
R9801- 04 R9805- 07 R9808,0 9 R9810 R9811 R9812	EXB2HV470JV  EXB38V470J  ERJ3GEYJ220  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEYJ104  ERJ3GEYJ472	RESISTOR ARRAY  RESISTOR ARRAY  M 22 OHM, J, 1/16W  M 4.7KOHM, J, 1/16W  M 10KOHM, J, 1/16W  M 100KOHM, J, 1/16W  M 4.7KOHM, J, 1/16W	4 3 2 1 1 1	
R9801- 04 R9805- 07 R9808,0 9 R9810 R9811	EXB2HV470JV  EXB38V470J  ERJ3GEYJ220  ERJ3GEYJ472  ERJ3GEYJ103  ERJ3GEYJ104	RESISTOR ARRAY  RESISTOR ARRAY  M 22 OHM,J,1/16W  M 4.7KOHM,J,1/16W  M 10KOHM,J,1/16W	4 3 2 1 1	

No. R9816,1 ER. 7 R9818,1 EXI 9 R9820,2 ER. 1 R9822,2 EXI 3		Part Name & Description M 22 OHM,J,1/16W	Pcs 2	Remarks
R9816,1 ERG 7 R9818,1 EXI 9 R9820,2 ERG 1 R9822,2 EXI 3			2	
7 R9818,1 EXI 9 R9820,2 ERI 1 R9822,2 EXI 3		M 22 OHM, 0, 1/16W	2	
9 R9820,2 ERG 1 R9822,2 EXI 3	B2HV470JV			I
R9820,2 ER 1 R9822,2 EX 3		RESISTOR ARRAY	2	
1 R9822,2 EXI 3				
3	J3GEYJ220	M 22 OHM,J,1/16W	2	
	B2HV470JV	RESISTOR ARRAY	2	
R9824   ER				
		M 10KOHM, J, 1/16W	1	
	JAAH0470JV B38V470J	M 47 OHM,J,1/16W RESISTOR ARRAY	1	
		M 47 OHM, J, 1/16W	1	
<del>                                     </del>	B2HV470JV	RESISTOR ARRAY	1	
R9900 ER	J3GEYJ472	M 4.7KOHM,J,1/16W	1	
	J3GEYJ103	M 10KOHM,J,1/16W	1	
H		M 100KOHM, J, 1/16W	1	
		M 4.7KOHM,J,1/16W M 10KOHM,J,1/16W	1	
	J3GEYJ104	M 100KOHM, J, 1/16W	1	
	B2HV470JV	RESISTOR ARRAY	1	
R9907 ER	J3GEYJ220	M 22 OHM,J,1/16W	1	
	B38V470J	RESISTOR ARRAY	2	
9 B0010 1 EB	T2 (III) T2 C C	M 22 OFF T 1/107	•	
R9910,1 ER	J3GEYJ220	M 22 OHM,J,1/16W	2	
R9912 EX	B2HV470JV	RESISTOR ARRAY	1	
R9913 ER	J3GEYJ220	M 22 OHM,J,1/16W	1	
	B38V470J	RESISTOR ARRAY	1	
R9915,1 ER	J3GEYJ220	M 22 OHM,J,1/16W	2	
	B2HV470JV	RESISTOR ARRAY	6	
22				
R9923 ER	J3GEYJ103	M 10KOHM,J,1/16W	1	
DW0E10 DW	3.4.C.0.1360.F.mv7	DEMOGO DEGETIVED	1	
RM2510 PN2	A4601M05TV	REMOCO RECEIVER	1	
RTL TN	AG146	CIRCUIT BOARD DT	1	PAVCA A
RTL TN	PA3598AC	CIRCUIT BOARD H	1	Δ
RTL TN	PA3620	CIRCUIT BOARD PA	1	Δ
	PA3621AB	CIRCUIT BOARD Z	1	A
	PA3625AD	CIRCUIT BOARD DG	1	<u> </u>
<del> </del>	PA3626 PA3561	CIRCUIT BOARD DV CIRCUIT BOARD C1	1	<u> </u>
	PA3562	CIRCUIT BOARD C2	1	Δ
	PA3563	CIRCUIT BOARD C3	1	<u></u>
RTL TN	PA3564	CIRCUIT BOARD C4	1	Δ
RTL TN	PA3565	CIRCUIT BOARD C5	1	Δ
<del> </del>	PA3566	CIRCUIT BOARD C6	1	PAVCA A
<b>—</b>	TNP010YCS	CIRCUIT BOARD D	1	<u> </u>
	XMM564MEK PA3643AC	CIRCUIT BOARD P CIRCUIT BOARD PB	1	<u>A</u>
h + + -	PA3567	CIRCUIT BOARD SC	1	Δ
	PA3220AB	CIRCUIT BOARD SD	1	<u></u>
	PA3559	CIRCUIT BOARD SS2	1	<u>^</u>
	PA3568	CIRCUIT BOARD SS	1	<u> </u>
	PA3560 PA3219AB	CIRCUIT BOARD SS3 CIRCUIT BOARD SU	1	<u> </u>
	PA3219AB PA3603	CIRCUIT BOARD K	1	<u>A</u>
	PA3604	CIRCUIT BOARD S	1	Δ
	KA03AA0193	3P CONNECTOR	1	
S2 K1	KA02AA0193	2P CONNECTOR	1	
SC2 K1	KA06AA0192	6P CONNECTOR	1	
	KA20AA0008	20P CONNECTOR	1	
	KA03AA0193	3P CONNECTOR	1	
SC41,42 K1	ML80BA0001	80P CONNECTOR	2	
	KA10A00431	10P CONNECTOR	2	
SC90 K1	KA06AA0192	6P CONNECTOR	1	
SD1-D4 K1	MN96B00004	96P CONNECTOR	4	
	KA10B00209	10P CONNECTOR	1	
	*** 0.5 * 0.1 0.0	7 D CONNECTOR	-	
SS11 K1	KA07AA0192	7P CONNECTOR	1	

Ref.			771 7500	/ IN-42F X300 / IN-
MCI.	Part No.	Part Name &	Pcs	Remarks
No.		Description		
SS20,21	K1KA07A00170	7P CONNECTOR	2	
SS22,23	K1KB07AA0087	7P CONNECTOR	2	
			_	
SS34	K1KA03AA0193	3P CONNECTOR	1	
SS35	K1KA10AA0194	10P CONNECTOR	1	
SS42	K1KA10AA0194	10P CONNECTOR	1	
SS44	K1KA20AA0009	20P CONNECTOR	1	
			+	
SS51-56	K1MN13B00020	13P CONNECTOR	6	
SU1-U4	K1MN96B00004	96P CONNECTOR	4	
SU45	K1KA10B00209	10P CONNECTOR	1	
			1	
GT70 F 0 0	707100300170	GILLE GO THEO THE	+ -	
SW2500	K0F122A00172	SWITCREMOTE	1	
		CONTROLH		
SW3751-	EVQ11G05R	SWITCH	5	
55				
T6801	ETS28AU2S9AC	SWITCHING	1	
10001		TRANSFORMER	-	
mc000	PMG12MD1003D		+ -	
T6802	ETS13TB199AP	SWITCHING	1	
		TRANSFORMER	+	
		1		
TU8200	ENGD6302DF	TUNER	1	Δ
VR6250	EVMEASA00B14	CONTROL 10KOHMB	1	
		0.3W	*	
TVD C C C C	EXP(E2 C3 00=1 :		+ -	
VR6602	EVMEASA00B14		1	
		0.3W	+	
VR6801	EVMEASA00B14	CONTROL 10KOHMB	1	
		0.3W		
X4001	TSSA101	CRYSTAL	1	
X4002	H0J400400017	CRYSTAL	1	
		+	+	
X4004	Н0J270500087	CRYSTAL	1	
X8005	н0J270500061	CRYSTAL	1	
X8200	ној250500050	CRYSTAL	1	
			+	
X9000	H2D2705A0004	CRYSTAL	1	
X9200	ној200500038	CRYSTAL	1	
XF8200	J0C4405B0004	LC FILTER	1	
			+	
XF8201	J0C4405B0006	LC FILTER	1	
XF8202	J0C4405B0005	LC FILTER	1	
Z2	K1KA05AA0192	5P CONNECTOR	1	
Z50	K1MN35A00013		1	
250	KIMMSSAUUUIS	35P CONNECTOR	+ -	
ZA5001	K4CD01000011	TERMINAL	1	
ZA5003	TESA169	SHIELD CLIP	1	
ZA5601-	K9ZZ00000424	CONNECTOR	4	
04	K32200000424	CONNECTOR	*	
	F07700000404	CONNECTOR	+ 4	
ZA5801-	K9ZZ00000424	CONNECTOR	4	
04			+	
ZA6101-	K4CD01000013	TERMINAL	3	
	I		1	
03			+	
ZA6401-	K4CD01000013	TERMINAL	3	
	K4CD01000013	TERMINAL	3	
ZA6401-	K4CD01000013	TERMINAL TERMINAL	3 5	
ZA6401- 03				
ZA6401- 03 ZA7101-				
ZA6401- 03 ZA7101- 05	K4CD01000013	TERMINAL	5	
ZA6401- 03 ZA7101- 05 ZA7201-	K4CD01000013	TERMINAL	5	
ZA6401- 03 ZA7101- 05 ZA7201- 05	K4CD01000013	TERMINAL TERMINAL	5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05	K4CD01000013 K4CD01000013 K4CD01000013	TERMINAL TERMINAL	5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401-	K4CD01000013	TERMINAL TERMINAL	5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05	K4CD01000013 K4CD01000013 K4CD01000013	TERMINAL TERMINAL TERMINAL	5 5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05 ZA7501-	K4CD01000013 K4CD01000013 K4CD01000013	TERMINAL TERMINAL	5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05 ZA7501- 05	K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	TERMINAL TERMINAL TERMINAL TERMINAL	5 5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05 ZA7501- 05 ZA7601-	K4CD01000013 K4CD01000013 K4CD01000013	TERMINAL TERMINAL TERMINAL	5 5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05 ZA7501- 05 ZA7601- 05	K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL	5 5 5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05 ZA7501- 05 ZA7601-	K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	TERMINAL TERMINAL TERMINAL TERMINAL	5 5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05 ZA7501- 05 ZA7601- 05	K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL	5 5 5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05 ZA7501- 05 ZA7601- 05 ZA7601-	K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL	5 5 5 5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05 ZA7501- 05 ZA7601- 05 ZA9001 ZA9002-	K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL	5 5 5 5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05 ZA7501- 05 ZA7601- 05 ZA9001 ZA9002- 06	K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL	5 5 5 5 5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05 ZA7501- 05 ZA7601- 05 ZA9001 ZA9002-	K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL	5 5 5 5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05 ZA7501- 05 ZA7601- 05 ZA9001 ZA9002- 06	K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL	5 5 5 5 5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7401- 05 ZA7501- 05 ZA7601- 05 ZA9001 ZA9002- 06	K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013	TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL TERMINAL	5 5 5 5 5 5	
ZA6401- 03 ZA7101- 05 ZA7201- 05 ZA7301- 05 ZA7501- 05 ZA7501- 05 ZA7601- 05 ZA9001 ZA9002- 06	K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD01000013  K4CD010000179	TERMINAL	5 5 5 5 5 1 5 5 1 5 1	

Ref. No.	Part No.	Part Name &	Pcs	Remarks
	RA362MSV7T	Description ARRESTOR	2	Δ
			<b>–</b>	<u> </u>
C301	RR3AD681KP	CERAMIC CAPACITOR	1	
C302	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C303	KZE1E470P	ELECTROLYTIC	1	
C305	PC.T2VC1U101.T	CAPACITOR C 100PF, J, 50V	1	
C305	ECJ2XC1H101J TBB224K5	CERAMIC CHIP	1	
	12211110	CAPACITOR	_	
C332	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C335	TEB104K5	CERAMIC CHIP CAPACITOR	1	
C341	RR3AD332K	CERAMIC CAPACITOR	1	
C352	TCR474K2A	CERAMIC CHIP CAPACITOR	1	
C353	KMQ220901Z	ELECTROLYTIC CAPACITOR	1	
C354	TEB104K5	CERAMIC CHIP CAPACITOR	1	
C355	TCR474K2A	CERAMIC CHIP CAPACITOR	1	
C356	TAB104K2E	CERAMIC CHIP CAPACITOR	1	
C359	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C360,61	KMQ220901Z	ELECTROLYTIC CAPACITOR	2	
C363,64	RR3DD221K	CERAMIC CAPACITOR	2	
C366	KZE2A331L	ELECTROLYTIC CAPACITOR	1	
C369	TAB104K2E	CERAMIC CHIP CAPACITOR	1	
C374,75	RR3DD221K	CERAMIC CAPACITOR	2	
C401	KZE1E470	ELECTROLYTIC	1	
C410	ECWH8183HVB	CAPACITOR PLASTIC FILM	1	
		CAPACITOR	l _	
C411 C412	ECJ3YB1E475K	C 4.7UF, K, 25V CERAMIC CHIP	1	
	TBB105K1 KZE1E272	CAPACITOR	1	
C451 C452		CAPACITOR  ELECTROLYTIC		
	KZE1E821L	CAPACITOR	1	
C454,55 C457	ECJ3YB1E475K KZE1E821L	C 4.7UF, K, 25V ELECTROLYTIC	1	
		CAPACITOR		
C458	ECJ3YB1E475K KZE1E821L	C 4.7UF, K, 25V ELECTROLYTIC	1	
C459	V7E1E971F	CAPACITOR	1	
C460	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C461	KZE1E471L	ELECTROLYTIC CAPACITOR	1	
C462	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C463	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C464	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C465	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C466-69	ECJ2FB1H104K	C 0.1UF, K, 50V	4	
C471	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C472	KZE1E470	CAPACITOR	1	
C501	KMQ2W161K	ELECTROLYTIC CAPACITOR	1	
C502	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C503	TBB106K1A	CERAMIC CHIP CAPACITOR	1	
C507	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C512	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C551	KZE1E471L	ELECTROLYTIC CAPACITOR	1	
	TBB475K1	CERAMIC CHIP	1	
C553	1864/381	CAPACITOR		

Ref.	Part No.	Part Name &	Pcs	Remarks
No.	Part No.	Description	PCS	Remarks
C556	KZE1A471	ELECTROLYTIC CAPACITOR	1	
C557,58	ECJ2FB1H104K	C 0.1UF, K, 50V	2	
C559	CD221K	CERAMIC CAPACITOR	1	Δ
C560	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C562	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C563	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C601	ECQU2A105ML	PLASTIC FILM	1	Δ
C603,04	CD221K	CAPACITOR CERAMIC CAPACITOR	2	Δ
C606	ECQU2A224ML	PLASTIC FILM	1	<u> </u>
	_	CAPACITOR		
C610,11	MMXC2W105K	PLASTIC FILM CAPACITOR	2	
	ECKD3A102KBP	C 1000PF, K, 1KV	2	
C622	ECQE6104KF	P 0.1UF, K,630V	1	
C623,24	KMQ2W221L	ELECTROLYTIC CAPACITOR	2	
C625	TBB474K2	CERAMIC CHIP CAPACITOR	1	
C626	KMQ2W221L	ELECTROLYTIC	1	
C627	ECQE6472B45	CAPACITOR PLASTIC FILM	1	
9666	gp 2 2 4 ==	CAPACITOR	<u> </u>	
C628	CD331K	CERAMIC CAPACITOR	1	Δ
C629	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C630	ECQU2A473MN	P 0.047UF, M,250V	1	$\triangle$
C633	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C634	ECJ2FB1E224K	C 22UF, K, 25V	1	
C701	TBB475K1	CERAMIC CHIP CAPACITOR	1	
C703	TEB104K5	CERAMIC CHIP CAPACITOR	1	
C711	TEB104K2	CERAMIC CHIP	1	
		CAPACITOR		
CNPFC	B2P3-VH-B	CONNECTOR	1	
ZD301,0 2	MA8360	ZENER DIOED	2	
D302	RU1P	DIODE	1	
ZD303	MA8360	ZENER DIOED	1	
7202	PD550113 20	DT0DT	-	
D303	RB550VA-30	DIODE	1	
ZD304-	MA8360	ZENER DIOED	3	
ZD307	MA8330	ZENER DIODE	1	
			<u> </u>	
D307	RB550VA-30	DIODE	1	
D308	ERA91-02	DIODE	1	
ZD308	MA8330	ZENER DIODE	1	
ZD309	MA4051N	ZENER DIODE	1	
ZD310	MA4020	ZENER DIODE	1	
ZD311,1	MA4270N	ZENER DIODE	2	
2				
D332	RB550VA-30	DIODE	1	
D334	RB550VA-30	DIODE	1	
D335	RU1P	DIODE	1	
D337	RU1P	DIODE	1	
D351	FCF06A40	DIODE	1	
D374	MA165	DIODE	1	
D401	RB550VA-30	DIODE	1	
D402	M1FS6	DIODE	1	
70400	DEG 2 4 D	ZENED DIODE	-	
ZD402	PTZ24B	ZENER DIODE	1	
D403	M1FS6	DIODE	1	
			<u> </u>	
ZD403	MA8056	ZENER DIODE	1	
ZD404	MA8360	ZENER DIOED	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D405	M1FS6	DIODE	1	
ZD405- 09	MA8360	ZENER DIOED	5	
ZD410	MA4220N	ZENER DIODE	1	
ZD413	MA4270N	ZENER DIODE	1	
ZD451	1ZB18	ZENER DIODE	1	
D451-54	RB085T60	DIODE	4	
D451-54 D455	M1FS6	DIODE	1	
D456,57	MA111	DIODE	2	
2130,57		22022	_	
Z501	ERZVGAD471	VARISTOR	1	Δ
D504	ERA91-02	DIODE	1	
ZD510	MA8270	ZENER DIODE	1	
		DEMEN DIODE		
D511	ERA91-02	DIODE	1	
D511	MA2S111	DIODE	1	
D515	ERA91-02	DIODE	1	
D516	MA2S111	DIODE	1	
D551	RK49	DIODE	1	
Z601	ERZVGAD751	VARISTOR	1	Δ
D601	MA111	DIODE	1	
ZD601	MA4220N	ZENER DIODE	1	
D602	S1WBA80	DIODE	1	Δ
Z603	ERZVGAD471	VARISTOR	1	$\triangle$
D603	MA111	DIODE	1	
D605	M1F60	DIODE	1	
	RB550VA-30			
D606		DIODE	1	
D607	S3V60	DIODE		
D608,09	RB550VA-30	DIODE	2	
D612	EP01C	DIODE	1	
D613,14	ERA22-10	DIODE	2	
ZD669	MA8220	ZENER DIODE	1	
D796	M7.20111	DIODE	1	
D796	MA2S111	DIODE	1	
IC301	MR4020F2	INTEGRATED CIRCUIT	1	
		THERED ARED CIDCUIT		Δ
IC401	F9222L	INTEGRATED CIRCUIT	1	<u> </u>
	F9222L MIP3E30MP	INTEGRATED CIRCUIT	1	
IC501		INTEGRATED CIRCUIT FERRITE BEAD		
IC501 L301-04	MIP3E30MP EXCELSR35	INTEGRATED CIRCUIT FERRITE BEAD INDUCTOR	4	
L301-04	MIP3E30MP  EXCELSR35  EXCELSA35	INTEGRATED CIRCUIT FERRITE BEAD INDUCTOR BEAD CHOKE	4	
L301-04	MIP3E30MP EXCELSR35	INTEGRATED CIRCUIT FERRITE BEAD INDUCTOR	4	
L301-04 L401,02 L452	MIP3E30MP  EXCELSR35  EXCELSA35	INTEGRATED CIRCUIT FERRITE BEAD INDUCTOR BEAD CHOKE FERRITE BEAD	4	
L301-04 L401,02 L452 L454,55	MIP3E30MP  EXCELSR35  EXCELSA35  EXCELDR35	FERRITE BEAD INDUCTOR BEAD CHOKE FERRITE BEAD INDUCTOR FERRITE BEAD INDUCTOR FERRITE BEAD INDUCTOR	1 4 2 1	
L301-04 L401,02 L452 L454,55	MIP3E30MP  EXCELSR35  EXCELSA35  EXCELDR35	INTEGRATED CIRCUIT  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD	1 4 2 1	
L301-04 L401,02 L452 L454,55 L501 L503	MIP3E30MP  EXCELSR35  EXCELSA35  EXCELDR35  EXCELDR35	INTEGRATED CIRCUIT  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  BEAD CHOKE	1 4 2 1 2	Δ.
L301-04 L401,02 L452 L454,55 L501 L503 L601,02	MIP3E30MP  EXCELSR35  EXCELSR35  EXCELDR35  EXCELDR35  EXCELDR35  EXCELDR35	INTEGRATED CIRCUIT  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR	1 4 2 1 2	Δ.
L301-04 L401,02 L452 L454,55 L501 L503 L601,02 L604	MIP3E30MP  EXCELSR35  EXCELSR35  EXCELDR35  EXCELDR35  EXCELDR35  EXCELDR35  EXCELDR35  EXCELDR35	INTEGRATED CIRCUIT  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  FILTER CHOKE  CHOKE	1 4 2 1 2 1 1 2	<u></u>
L301-04 L401,02 L452 L454,55 L501 L503 L601,02 L604 L606	MIP3E30MP  EXCELSR35  EXCELSR35  EXCELDR35  EXCELDR35  EXCELDR35  EXCELDR35	INTEGRATED CIRCUIT  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  FILTER CHOKE  CHOKE  FILTER CHOKE  FILTER CHOKE  FERRITE BEAD	1 4 2 1 2 1 1	Δ.
L501 L301-04 L401,02 L452 L454,55 L501 L503 L601,02 L604 L606 L607,08 L611	MIP3E30MP  EXCELSR35  EXCELDR35	INTEGRATED CIRCUIT  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FILTER CHOKE  CHOKE  FILTER CHOKE	1 2 1 1 2 1 1	<u></u>
L301-04 L401,02 L454,55 L501 L503 L601,02 L604 L606 L607,08	MIP3E30MP  EXCELSR35  EXCELDR35  EXCELDR35  EXCELDR35  EXCELDR35  EXCELDR35  EXCELDR35  EXCELDR35  EXCELDR35	INTEGRATED CIRCUIT  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FILTER CHOKE  CHOKE  FILTER CHOKE  FILTER CHOKE  FILTER CHOKE  FILTER CHOKE  FILTER CHOKE  FILTER CHOKE	1 2 1 2 1 1 2 1 1 2	<u></u>
L301-04 L401,02 L452 L454,55 L501 L503 L601,02 L604 L606 L607,08	MIP3E30MP  EXCELSR35  EXCELSR35  EXCELDR35   INTEGRATED CIRCUIT  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FILTER CHOKE  CHOKE  FILTER CHOKE  FILTER CHOKE  FERRITE BEAD INDUCTOR  FILTER CHOKE  FILTER CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR	1 4 2 1 1 2 1 1 1 2 1 1 2	<u></u>	
L301-04 L401,02 L452 L454,55 L501 L503 L601,02 L604 L606 L607,08 L611	MIP3E30MP  EXCELSR35  EXCELDR35   INTEGRATED CIRCUIT  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FILTER CHOKE  CHOKE  FILTER CHOKE  FERRITE BEAD INDUCTOR  FILTER CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  CONNECTOR	1 4 2 1 1 2 1 1 2 1 1 1 2	<u></u>	
L301-04 L401,02 L452 L454,55 L501 L503 L601,02 L604 L606 L607,08 L611	MIP3E30MP  EXCELSR35  EXCELSR35  EXCELDR35   INTEGRATED CIRCUIT  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FILTER CHOKE  CHOKE  FILTER CHOKE  FERRITE BEAD INDUCTOR  FILTER CHOKE  CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  CONNECTOR  CONNECTOR	1 2 1 1 1 2 1 1 1 1 1	<u>A</u> <u>A</u> <u>A</u>	
L301-04 L401,02 L452 L454,55 L501 L503 L601,02 L604 L606 L607,08 L611	MIP3E30MP  EXCELSR35  EXCELDR35   INTEGRATED CIRCUIT  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  BEAD CHOKE  FERRITE BEAD INDUCTOR  FILTER CHOKE  CHOKE  FILTER CHOKE  FERRITE BEAD INDUCTOR  FILTER CHOKE  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  FERRITE BEAD INDUCTOR  CONNECTOR	1 4 2 1 1 2 1 1 2 1 1 1 2	<u></u>	

R349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R354,55 ERJ6ENF1303 M 130KOHM, 1/10W 2 R356,57 ERJ14YJ753 M 75KOHM, J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R359 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ683 M 68KOHM, J, 1/2W 1 R365 ERJ3GSYJ332 M 3.3KOHM, J, 1/16W 1 R366 ERJ6ENF4702 M 47KOHM, J, 1/10W 2 R368 ERJ6ENF4702 M 47KOHM, J, 1/10W 3 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 4 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 4 R373-76 ERJ12YJ473 M 47KOHM, J, 1/2W 4 R3881 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R394 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R399-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R400 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R401 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R402 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R403 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R4040 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1					/ IN-42FA300 / IN-
P.23   B3B-PH-KS   CONNECTOR   1	Ref.	Part No.	Part Name &	Pcs	Remarks
P23 B3B-PH-KS CONNECTOR 1 P25 B20B-PHDSS CONNECTOR 1 P30 B5B-PH-KS CONNECTOR 1  Q312 SD209B CONNECTOR 1 Q3132 SD209B TRANSISTOR 1 Q3133 SB1386 TRANSISTOR 1 Q402 SSP766A TRANSISTOR 1 Q402 SSP766A TRANSISTOR 1 Q402 SSP766A TRANSISTOR 1 Q551 HAT1130R FIELD EFFECT 3 TRANSISTOR 1 Q553,54 HAT130R FIELD EFFECT 1 TRANSISTOR 1 Q553,54 HAT130R FIELD EFFECT 2 Q555 SSP709A TRANSISTOR 1 Q601 SSR3302 FIELD EFFECT 1 TRANSISTOR 1 Q602 SSR3302 FIELD EFFECT 1 TRANSISTOR 1 Q603 SSB1386 TRANSISTOR 1 Q603 SSB1386 TRANSISTOR 1 Q604 SSB001A TRANSISTOR 1 Q605 SSR709A TRANSISTOR 1 Q606 SSB001A TRANSISTOR 1 Q807 SSR709A TRANSISTOR 1 Q808 PCSWR27KS METAL PLATE RESISTOR 1 Q808 MPCSWR27KS METAL PLATE 1 R811 ERJGGEYJ473 M 47KOHM, J, 1/10W 1 R812 ERJGGEYJ223 M 2.2 OHM, J, 1/10W 1 R812 ERJGGEYJ223 M 2.2 OHM, J, 1/10W 1 R812 ERJGGEYJ223 M 2.2 OHM, J, 1/2W 1 R821-23 MPCSWR67KS METAL PLATE 3 R821-23 MPCSWR67KS METAL PLATE 3 R821-30 FRU14YJ30 M 10 OHM, J, 1/2W 1 R822-29 ERJGGEYJ103 M 10KOHM, J, 1/2W 1 R8230 ERJ12YJ330 M 33KOHM, J, 1/2W 1 R8404 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R8404 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R8405 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R8406 MPCSWR37S M 55COHM, J, 1/2W 1 R8406 ERGSSU150 M 15 OHM, J, 2W 1 R8406 ERGSSU150 M 15 OHM, J, 2W 1 R8515 ERGGENP1033 M 10 SKOHM, J, 1/2W 1 R8406 ERGSSU150 M 15 OHM, J, 2W 1 R8516 ERGSSU150 M 15 OHM, J, 2W 1 R860 ERGSSU150 M 15 OHM, J, 2W 1	No.		Description		
P25	P12	B10B-PH-KS	CONNECTOR	1	
P25	P23	B3B-PH-KS	CONNECTOR	1	
2332   2512098   TRANSISTOR   1					
Q333				-	
Q333	P30	B5B-PH-KS	CONNECTOR	1	
Q333					
Q40553 HAT1130R FIELD EFFECT 3 Q451-53 HAT1130R FIELD EFFECT 3 Q551 HAT1130R FIELD EFFECT 1 TRANSISTOR Q551 HAT1130R FIELD EFFECT 1 Q553,54 HAT1130R FIELD EFFECT 1 Q553,54 HAT1130R FIELD EFFECT 2 Q555 28B709A TRANSISTOR 1 Q601 28K3302 FIELD EFFECT 1 Q602 2BD2098 TRANSISTOR 1 Q603 2SB1386 TRANSISTOR 1 Q603 2SB1386 TRANSISTOR 1 Q605 2SB709A TRANSISTOR 1 Q606 2SD601A TRANSISTOR 1 Q606 2SD601A TRANSISTOR 1 Q607 EBFECT 1 Q608 EBFECT 1 Q609 EBFECT 1 Q600 EBFECT 1	Q332	2SD2098	TRANSISTOR	1	
Q40553 HAT1130R FIELD EFFECT 3 Q451-53 HAT1130R FIELD EFFECT 3 Q551 HAT1130R FIELD EFFECT 1 TRANSISTOR Q551 HAT1130R FIELD EFFECT 1 Q553,54 HAT1130R FIELD EFFECT 1 Q553,54 HAT1130R FIELD EFFECT 2 Q555 28B709A TRANSISTOR 1 Q601 28K3302 FIELD EFFECT 1 Q602 2BD2098 TRANSISTOR 1 Q603 2SB1386 TRANSISTOR 1 Q603 2SB1386 TRANSISTOR 1 Q605 2SB709A TRANSISTOR 1 Q606 2SD601A TRANSISTOR 1 Q606 2SD601A TRANSISTOR 1 Q607 EBFECT 1 Q608 EBFECT 1 Q609 EBFECT 1 Q600 EBFECT 1	0333	25B1386	TRANSISTOR	1	
Q451-53 HAT1130R FIELD EFFECT TRANSISTOR   1				_	
TRANSISTOR				_	
Q551 HAT1130R FIELD EFFECT TRANSISTOR   1	Q451-53	HAT1130R		3	
TRANSISTOR			TRANSISTOR		
Q553,54 HAT1130R	Q551	HAT1130R	FIELD EFFECT	1	
TRANSISTOR			TRANSISTOR		
TRANSISTOR	0553.54	HAT1130R	FIELD EFFECT	2	
QS55	,			-	
Q601 2SK3302 FIELD EFFECT 1	0555	2007003		1	
TRANSISTOR				<del></del>	
Q602	Q601	2SK3302		1	
Q603			TRANSISTOR		
Q605	Q602	2SD2098	TRANSISTOR	1	
Q605	Q603	2SB1386	TRANSISTOR	1	
R301 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R308 MPC5WR27KS METAL PLATE RESISTOR R311 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R312 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R313 ERJ14YJ100 M 10 OHM, J, 1/4W 1 R314 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R314 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R315 MPC5WR68KS METAL PLATE RESISTOR R320 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R321-23 MPC5WR68KS METAL PLATE RESISTOR R325 ERJ6GEYJ333 M 33KOHM, J, 1/2W 1 R330 ERJ12YJ20 M 22 OHM, J, 1/2W 1 R330 ERJ12YJ20 M 22 OHM, J, 1/2W 1 R340,41 ERJ12YJ33 M 33KOHM, J, 1/2W 1 R341 ERJ12YJ33 M 33KOHM, J, 1/2W 1 R342 ERJ6ENF5620 M 562 OHM, J 1/2W 1 R343 ERJ12YJ33 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ33 M 33KOHM, J, 1/2W 1 R345 ERJ12YJ33 M 33KOHM, J, 1/2W 1 R346, 47 ERJ12YJ20 M 22 OHM, J, 1/2W 1 R347 ERJ12YJ20 M 22 OHM, J, 1/2W 2 R349 ERJ12YJ20 M 22 OHM, J, 1/2W 1 R350-53 ERJ6ENF5192 M61.9KOHM, J, 1/2W 2 R3550-53 ERJ6ENF5192 M 13 OHM, J, 1/2W 1 R356 ERJ6ENF5192 M 13 OHM, J, 1/2W 1 R357 ERJ6ENF5192 M 13 OHM, J, 1/2W 1 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ150 M 15 OHM, J, 2W 1 R366 ERG2SJ150 M 15 OHM, J, 1/2W 1 R366 ERG2SJ160 M 15 OHM, J, 2W 1 R366 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R367 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R368 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R369 FRJ14YJ753 M 75KOHM, J, 1/2W 1 R369 FRJ14YJ753 M 75KOHM, J, 1/2W 1 R369 FRJ14YJ753 M 75KOHM, J, 1/2W 1 R369 ERJ6ENF1052 M 47KOHM, J, 1/10W 2 R373-76 ERJ6EYJ333 M 33KOHM, J, 1/10W 2 R384 ERJ6EYJ333 M 33KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 35KOHM, J, 1/10W 2 R384 ERJ6ENF1052 M 0.5KOHM, J, 1/10W 1 R385 ERJ6ENF1052 M 0.5KOHM, J, 1/10W 1 R386 ERJ6ENF1052 M 0.5KOHM, J, 1/10W 1 R387-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R388 ERJ6ENF1052 M 0.5KOHM, J, 1/10W 1 R389 ERJ6ENF1052 M 0.5KOHM, J, 1/10W 1 R389-99 ERJ14YJ334 M 33KOHM, J, 1/10W 1 R400 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R401 ERJ6GEYJ104 M 0.0KOHM, J, 1/10W 1 R410 ERJ6GEYJ104 M 0.0KOHM, J, 1/10W 1		25B709A	TRANSTSTOR	1	
R301 ERJ6GEYJ473 M 47KOHM,J,1/10W 1 R308 MPC5WR27KS METAL PLATE RESISTOR R311 ERJ6GEYJ2R2 M 2.2 OHM,J,1/10W 1 R312 ERJ6GEYJ2R2 M 2.2 OHM,J,1/10W 1 R313 ERJ14YJ100 M 10 OHM, J,1/4W 1 R314 ERJ6GEYJ2R2 M 2.2 OHM,J,1/10W 1 R314 ERJ6GEYJ2R2 M 2.2 OHM,J,1/10W 1 R316 ERJ14YJ753 M 75KOHM,J,1/2W 1 R320 ERJ14YJ753 M 75KOHM,J,1/10W 1 R321-23 MPC5WR68KS METAL PLATE R231-23 MPC5WR68KS METAL PLATE R231-23 MPC5WR68KS METAL PLATE R325 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R326-29 ERJ6GEYJ333 M 33KOHM,J,1/2W 1 R326-29 ERJ6GEYJ333 M 33KOHM,J,1/2W 1 R330 ERJ12YJ300 M 30 OHM,J, 1/2W 1 R340,41 ERJ12YJ333 M 33KOHM,J, 1/2W 2 R344 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R344 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R344 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R344 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R345 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R346,47 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R346,47 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, J, 1/2W 1 R350-55 ERJ6ENF103 M 130KOHM, J, 1/2W 1 R356,57 ERJ14YJ753 M 75KOHM,J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R362 ERJ6ENF103 M 75KOHM,J, 1/2W 1 R363 ERG2SJ150 M 15 OHM, J, 2W 1 R365 ERJ3GEYJ332 M 3.3KOHM,J, 1/2W 1 R366 ERG2SJ150 M 15 OHM, J, 2W 1 R367 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R368 ERG2SJ150 M 15 OHM, J, 2W 1 R369-71 ERJ6GEYJ823 M 3.3KOHM,J,1/10W 2 R369-71 ERJ6GEYJ823 M 3.3KOHM,J,1/10W 1 R369-71 ERJ6GEYJ833 M 33KOHM,J,1/10W 1 R369-71 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R3836 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R381 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R3836 BRJ6GEYJ333 M 33KOHM,J,1/10W 1 R381 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R381 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R3836 BRJ6GEYJ333 M 33KOHM,J,1/10W 1 R3859,96 ERJ6GEYJ473 M 47KOHM,J,1/10W 1 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R397-99 ERJ14YJ734 M 47KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 33KOHM,J,1/10W 1 R401 ERJ		<u> </u>		-	
R308 MPCSWR27KS METAL PLATE R311 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R312 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R313 ERJ14YJ100 M 10 OHM, J, 1/4W 1 R314 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R314 ERJ6GEYJ2R2 M 7.5 COHM, J, 1/2W 1 R320 ERJ14YJ753 M 7.5 KOHM, J, 1/2W 1 R321-23 MPCSWR68KS METAL PLATE R515TOR R325 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R326-29 ERJ6GEYJ333 M 33KOHM, J, 1/2W 1 R330 ERJ12YJ320 M 2.2 OHM, J, 1/2W 1 R330 ERJ12YJ330 M 30HM, J, 1/2W 1 R340, 41 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R345 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R346, 47 ERJ12YJ320 M 22 OHM, J, 1/2W 1 R346, 47 ERJ12YJ220 M 22 OHM, J, 1/2W 2 R346, 47 ERJ12YJ220 M 22 OHM, J, 1/2W 2 R355, 55 ERJ6ENF6192 M 7.5 KOHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M 7.5 KOHM, J, 1/2W 1 R356, 57 ERJ14YJ753 M 7.5 KOHM, J, 1/2W 1 R356 ERJ2SJ150 M 15 OHM, J, 2W 1 R366 ERG2SJ150 M 15 OHM, J, 1/2W 1 R366 ERG2SJ150 M 15 OHM, J, 2W 1 R366 ERG2SJ150 M 15 OHM, J, 1/2W 1 R366 ERG2SJ150 M 15 OHM, J, 1/2W 1 R367 ERJ3GEYJ323 M 3.3 KOHM, J, 1/10W 1 R369-71 ERJ6GEYJ623 M 6.8 KOHM, J, 1/10W 2 R379 ERJ12YJ753 M 7.5 KOHM, J, 1/2W 4 R379 ERJ12YJ753 M 7.5 KOHM, J, 1/2W 1 R368 ERJ6GEYJ103 M 10 KOHM, J, 1/10W 1 R382, 83 ERJ6GEYJ333 M 3.3 KOHM, J, 1/10W 1 R382, 83 ERJ6GEYJ333 M 3.3 KOHM, J, 1/10W 1 R369-71 ERJ6GEYJ223 M 8.2 KOHM, J, 1/10W 1 R382, 83 ERJ6GEYJ373 M 7.5 KOHM, J, 1/2W 1 R381 ERJ6GEYJ103 M 10 KOHM, J, 1/10W 1 R384-88 ERJ6ENJ103 M 10 KOHM, J, 1/10W 2 R395-99 ERJ14YJ753 M 7.5 KOHM, J, 1/10W 1 R395-99 ERJ14YJ753 M 7.5 KOHM, J, 1/10W 1 R395-99 ERJ14YJ753 M 7.5 KOHM, J, 1/10W 1 R400 ERJ14YJ334 M 30 KOHM, J, 1/10W 1 R400 ERJ14YJ334	<u> </u> Ω606	ZSDenIV	TRANSISTOR	1	
R308 MPCSWR27KS METAL PLATE R311 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R312 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R313 ERJ14YJ100 M 10 OHM, J, 1/4W 1 R314 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R314 ERJ6GEYJ2R2 M 7.5 COHM, J, 1/2W 1 R320 ERJ14YJ753 M 7.5 KOHM, J, 1/2W 1 R321-23 MPCSWR68KS METAL PLATE R515TOR R325 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R326-29 ERJ6GEYJ333 M 33KOHM, J, 1/2W 1 R330 ERJ12YJ320 M 2.2 OHM, J, 1/2W 1 R330 ERJ12YJ330 M 30HM, J, 1/2W 1 R340, 41 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R345 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R346, 47 ERJ12YJ320 M 22 OHM, J, 1/2W 1 R346, 47 ERJ12YJ220 M 22 OHM, J, 1/2W 2 R346, 47 ERJ12YJ220 M 22 OHM, J, 1/2W 2 R355, 55 ERJ6ENF6192 M 7.5 KOHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M 7.5 KOHM, J, 1/2W 1 R356, 57 ERJ14YJ753 M 7.5 KOHM, J, 1/2W 1 R356 ERJ2SJ150 M 15 OHM, J, 2W 1 R366 ERG2SJ150 M 15 OHM, J, 1/2W 1 R366 ERG2SJ150 M 15 OHM, J, 2W 1 R366 ERG2SJ150 M 15 OHM, J, 1/2W 1 R366 ERG2SJ150 M 15 OHM, J, 1/2W 1 R367 ERJ3GEYJ323 M 3.3 KOHM, J, 1/10W 1 R369-71 ERJ6GEYJ623 M 6.8 KOHM, J, 1/10W 2 R379 ERJ12YJ753 M 7.5 KOHM, J, 1/2W 4 R379 ERJ12YJ753 M 7.5 KOHM, J, 1/2W 1 R368 ERJ6GEYJ103 M 10 KOHM, J, 1/10W 1 R382, 83 ERJ6GEYJ333 M 3.3 KOHM, J, 1/10W 1 R382, 83 ERJ6GEYJ333 M 3.3 KOHM, J, 1/10W 1 R369-71 ERJ6GEYJ223 M 8.2 KOHM, J, 1/10W 1 R382, 83 ERJ6GEYJ373 M 7.5 KOHM, J, 1/2W 1 R381 ERJ6GEYJ103 M 10 KOHM, J, 1/10W 1 R384-88 ERJ6ENJ103 M 10 KOHM, J, 1/10W 2 R395-99 ERJ14YJ753 M 7.5 KOHM, J, 1/10W 1 R395-99 ERJ14YJ753 M 7.5 KOHM, J, 1/10W 1 R395-99 ERJ14YJ753 M 7.5 KOHM, J, 1/10W 1 R400 ERJ14YJ334 M 30 KOHM, J, 1/10W 1 R400 ERJ14YJ334					
R308 MPCSWR27KS METAL PLATE R311 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R312 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R313 ERJ14YJ100 M 10 OHM, J, 1/4W 1 R314 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R314 ERJ6GEYJ2R2 M 7.5 COHM, J, 1/2W 1 R320 ERJ14YJ753 M 7.5 KOHM, J, 1/2W 1 R321-23 MPCSWR68KS METAL PLATE R515TOR R325 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R326-29 ERJ6GEYJ333 M 33KOHM, J, 1/2W 1 R330 ERJ12YJ320 M 2.2 OHM, J, 1/2W 1 R330 ERJ12YJ330 M 30HM, J, 1/2W 1 R340, 41 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R345 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R346, 47 ERJ12YJ320 M 22 OHM, J, 1/2W 1 R346, 47 ERJ12YJ220 M 22 OHM, J, 1/2W 2 R346, 47 ERJ12YJ220 M 22 OHM, J, 1/2W 2 R355, 55 ERJ6ENF6192 M 7.5 KOHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M 7.5 KOHM, J, 1/2W 1 R356, 57 ERJ14YJ753 M 7.5 KOHM, J, 1/2W 1 R356 ERJ2SJ150 M 15 OHM, J, 2W 1 R366 ERG2SJ150 M 15 OHM, J, 1/2W 1 R366 ERG2SJ150 M 15 OHM, J, 2W 1 R366 ERG2SJ150 M 15 OHM, J, 1/2W 1 R366 ERG2SJ150 M 15 OHM, J, 2W 1 R367 ERJ3GEYJ323 M 3.3 KOHM, J, 1/10W 1 R369-71 ERJ6GEYJ622 M 6.8 KOHM, J, 1/10W 2 R379 ERJ12YJ753 M 75 KOHM, J, 1/2W 1 R368 ERJ6ENF4702 M 47 KOHM, J, 1/2W 4 R379 ERJ12YJ753 M 75 KOHM, J, 1/2W 1 R368 ERJ6GEYJ103 M 10 KOHM, J, 1/10W 2 R379 ERJ12YJ753 M 75 KOHM, J, 1/2W 1 R369 ERJ6GEYJ103 M 10 KOHM, J, 1/10W 1 R382, 83 ERJ6GEYJ103 M 10 KOHM, J, 1/10W 1 R382, 83 ERJ6GEYJ103 M 10 KOHM, J, 1/10W 1 R382, 83 ERJ6GEYJ103 M 10 KOHM, J, 1/10W 1 R395, 96 ERJ6ENF1052 M 10.5 KOHM, J, 1/10W 1 R395, 96 ERJ6GEYJ103 M 75 KOHM, J, 1/10W 1 R395, 96 ERJ6GEYJ103 M 75 KOHM, J, 1/10W 1 R395, 96 ERJ6GEYJ103 M 75 KOHM, J, 1/10W 1 R400 ERJ14YJ334 M 33	R301	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
RESISTOR R311 ERJ6GEYJ2R2 M 2.2 OHM,J,1/10W 1 R313 ERJ14YJ100 M 10 OHM, J,1/4W 1 R314 ERJ6GEYJ2R2 M 2.2 OHM,J,1/10W 1 R314 ERJ6GEYJ2R2 M 2.2 OHM,J,1/10W 1 R314 ERJ6GEYJ2R2 M 2.2 OHM,J,1/10W 1 R320 ERJ14YJ753 M 75KOHM,J,1/2W 1 R321-23 MPC5WR68KS METAL PLATE RESISTOR R325 ERJ6GEYJ3133 M 33KOHM,J,1/10W 1 R330 ERJ12YJ320 M 22 OHM,J,1/10W 1 R330 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R340,41 ERJ12YJ333 M 33KOHM,J,1/2W 1 R344,41 ERJ12YJ333 M 33KOHM,J,1/2W 1 R345 ERJ12YJ333 M 33KOHM,J,1/2W 1 R346 ERJ12YJ333 M 33KOHM,J,1/2W 1 R347 ERJ12YJ330 M 33 OHM,J,1/2W 1 R348 ERJ12YJ330 M 33 OHM,J,1/2W 1 R349 ERJ12YJ330 M 33 OHM,J,1/2W 1 R346,47 ERJ12YJ333 M 33KOHM,J,1/2W 1 R350-53 ERJ6ENF6192 M 22 OHM,J,1/2W 1 R350-53 ERJ6ENF6192 M 22 OHM,J,1/2W 1 R350-553 ERJ6ENF6192 M 61.9KOHM,J,1/2W 1 R3556,57 ERJ14YJ753 M 75KOHM,J,1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J,1/2W 1 R361 ERJ14YJ753 M 75KOHM,J,1/2W 1 R361 ERJ14YJ753 M 75KOHM,J,1/2W 1 R364 ERG2SJ150 M 15 OHM, J, 2W 1 R365 ERJ6ENF1902 M 68KOHM,J,1/2W 1 R366 ERG2SJ150 M 15 OHM,J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J,1/2W 1 R362 ERJ6ENF1922 M 68KOHM,J,1/2W 1 R363 ERJ6ENF4702 M 47KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM,J,1/10W 1 R369-71 ERJ6ESYJ323 M 33KOHM,J,1/10W 1 R382,83 ERJ6ENF1052 M 0.5KOHM,J,1/10W 2 R384 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R382,83 ERJ6ERYJ333 M 33KOHM,J,1/10W 1 R382,83 ERJ6ERYJ333 M 33KOHM,J,1/10W 1 R384 ERJ6EYJ103 M 10KOHM,J,1/10W 2 R384 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R389-9 ERJ12YJ753 M 75KOHM,J,1/10W 1 R381 ERJ6ESYJ333 M 33KOHM,J,1/10W 1 R382,83 ERJ6ESYJ333 M 33KOHM,J,1/10W 1 R385,83 ERJ6ERYJ333 M 33KOHM,J,1/10W 1 R386 ERJ6ENF1052 M10.5KOHM,J,1/10W 1 R3879-PO ERJ12YJ753 M 75KOHM,J,1/10W 1 R3879-PO ERJ12YJ753 M 75KOHM,J,1/10W 1 R381 ERJ6ESYJ233 M 33KOHM,J,1/10W 1 R382,83 ERJ6ERYJ333 M 33KOHM,J,1/10W 1 R386 ERJ6ENF1052 M10.5KOHM,J,1/10W 1 R3879-PO ERJ14YJ753 M 75KOHM,J,1/10W 1 R3879-PO ERJ14YJ753 M 75KOHM,J,1/10W 1 R386 ERJ6ENF1052 M10.5KOHM,J,1/10W 1 R3879-PO ERJ14YJ753 M 75KOHM,J,1/10W 1 R3886 ERJ6ENF1052 M10.5KOHM,J,1				1	
R311 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R312 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R313 ERJ14YJ100 M 10 OHM, J, 1/10W 1 R314 ERJ6GEYJ2R2 M 2.2 OHM, J, 1/10W 1 R320 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R321-23 MPC5WR68KS METAL PLATE R525 ERJ6GEYJ333 M 33KOHM, J, 1/10W 4 R326-29 ERJ6GEYJ103 M 10KOHM, J, 1/10W 4 R330 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R340, 41 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R344, 41 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R342 ERJ6ENF5620 M 562 OHM, J, 1/2W 1 R343 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R345 ERJ12YJ330 M 33KOHM, J, 1/2W 1 R346, 47 ERJ12YJ330 M 33KOHM, J, 1/2W 1 R345 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R346, 47 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R354, 55 ERJ6ENF6192 M61.9KOHM, 1/10W 2 R356, 57 ERJ14YJ753 M 75KOHM, J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ683 M 68KOHM, J, 1/2W 1 R365 ERJ6GEYJ823 M 33KOHM, J, 1/2W 1 R366, 67 ERJ6GEYJ823 M 33KOHM, J, 1/2W 1 R367 ERJ3GYYJ753 M 75KOHM, J, 1/2W 1 R368 ERJ6GEYJ823 M 33KOHM, J, 1/2W 1 R369-71 ERG6EYJ823 M 82KOHM, J, 1/10W 2 R369-71 ERG6EYJ823 M 82KOHM, J, 1/2W 1 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R381 ERJ6GEYJ332 M 33KOHM, J, 1/2W 1 R382,83 ERG6BYJ823 M 33KOHM, J, 1/2W 1 R382-89 ERJ12YJ473 M 47KOHM, J, 1/2W 1 R383-89 ERJ12YJ473 M 47KOHM, J, 1/2W 1 R384 ERJ6GEYJ393 M 33KOHM, J, 1/2W 1 R386-89 ERJ6ENF1052 M10.5KOHM, J, 1/2W 1 R386-89 ERJ6ENF1052 M10.5KOHM, J, 1/2W 1 R386-89 ERJ6ENF1052 M10.5KOHM, J, 1/2W 1 R406 ERJ6GEYJ223 M 82KOHM, J, 1/10W 1 R382-89 ERJ6ENF1052 M10.5KOHM, J, 1/2W 1 R407 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R408 ERJ6GEYJ223 M 82KOHM, J, 1/2W 1 R409 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R400 ERJ6GYJ223 M 82KOHM, J, 1/2W 1 R401 ERJ3GSYJ103 M 10KOHM, J, 1/2W 1 R402 ERJ6GEYJ223 M 82KOHM, J, 1/2W 1 R403 ERJ6GEYJ223 M 82KOHM, J, 1/2W 1 R404 ERJ6GEYJ223 M 82KOHM, J, 1/2W 1 R406 ERG6GEYJ223 M 82KOHM, J, 1/2W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R411 ERJ6GEYJ104 M 10KOHM, J, 1/4W 1				*	
R312	D211	ED TECENTORS		-	
R313 ERJ14YJ100 M 10 OHM, J,1/4W 1 R314 ERJ6GEYJ2R2 M 2.2 OHM,J,1/10W 1 R320 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R321-23 MPC5WR68KS METAL PLATE 3 R251-23 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R326-29 ERJ6GEYJ103 M 10KOHM,J,1/10W 4 R330 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R339 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R340,41 ERJ12YJ333 M 33KOHM,J, 1/2W 2 R344 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R346 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R347 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R348 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R349 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R346,47 ERJ12YJ320 M 22 OHM,J, 1/2W 1 R350-53 ERJ6ENF6192 M 22 OHM,J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R354,55 ERJ6ENF1303 M 130KOHM, 1/10W 2 R356,57 ERJ14YJ753 M 75KOHM,J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R364 ERG2SJ663 M 68KOHM, J, 2W 1 R365 ERJ6ENF4702 M 47KOHM,J, 1/2W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM,J, 1/10W 2 R366,67 ERJ6GEYJ682 M 6.8KOHM,J, 1/10W 2 R3673-71 ERJ6ENF4702 M 47KOHM,J, 1/2W 1 R369-71 ERJ6EVJ823 M 82KOHM,J,1/10W 2 R369-71 ERJ6EVJ823 M 82KOHM,J,1/10W 1 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R369-71 ERJ6EVJ823 M 82KOHM,J,1/10W 1 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R369-8 ERJ6ENF4702 M 47KOHM,J, 1/2W 1 R369-9 ERJ6EVJ823 M 82KOHM,J,1/10W 1 R373-79 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R384 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R384-8 ERJ6ENF1052 M 10.5KOHM, J, 1/2W 1 R384-8 ERJ6ENF1052 M 10.5KOHM, J, 1/2W 3 R385-8 ERJ6ENF1052 M 10.5KOHM, J, 1/2W 4 R379-9 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R386-89 ERJ6ENF1052 M 10.5KOHM, J, 1/10W 1 R387-99 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R386-89 ERJ6ENF1052 M 10.5KOHM, J, 1/2W 1 R387-99 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R386-89 ERJ6ENF1052 M 10.5KOHM, J, 1/10W 1 R387-99 ERJ14YJ733 M 47KOHM,J, 1/10W 1 R386-89 ERJ6ENF1052 M 10.5KOHM, J, 1/2W 1 R400 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R395-99 ERJ14YJ733 M 47KOHM,J, 1/2W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R408 SG734K271 CHIP RESISTOR H R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 4.7KOHM,J, 1/2W 1	R311	ERJ6GEYJ2R2		1	
R314 ERJ6GEYJ2R2 M 2.2 OHM,J,1/10W 1 R320 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R321-23 MPC5WR68KS METAL PLATE RESISTOR R325 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R326-29 ERJ6GEYJ103 M 10KOHM,J,1/10W 4 R330 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R340,41 ERJ12YJ330 M 33 OHM,J, 1/2W 2 R342 ERJ6ENF5620 M 562 OHM, J, 1/2W 1 R343 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R344 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R346,47 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R346,47 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM,J, 1/2W 1 R354,55 ERJ6ENF1303 M 130KOHM,J, 1/2W 2 R356,57 ERJ14YJ753 M 75KOHM,J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R362 ERJ6ENF6192 M 6.8KOHM,J, 1/2W 1 R363 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R362 ERJ6SYJ332 M 3.3KOHM,J, 1/2W 1 R363 ERJ6SYJ332 M 3.3KOHM,J, 1/2W 1 R364 ERG2SJ683 M 68KOHM,J, 1/2W 1 R365 ERJ3GSYJ332 M 3.3KOHM,J, 1/2W 1 R366 ERJ6GEYJ682 M 6.8KOHM,J, 1/2W 1 R368 ERJ6ENF6192 M 15 OHM, J, 2W 1 R368 ERJ6ENF402 M 4.7KOHM,J, 1/2W 1 R368 ERJ6ENF402 M 4.7KOHM,J, 1/10W 2 R368 ERJ6ENF402 M 4.7KOHM,J, 1/10W 1 R368 ERJ6EYJ6S2 M 75KOHM,J, 1/10W 2 R368 ERJ6ENF402 M 4.7KOHM,J, 1/10W 1 R3869-71 ERJ6GEYJ823 M 82KOHM,J,1/10W 1 R3869-71 ERJ6GEYJ833 M 33KOHM,J,1/10W 2 R3868 ERJ6ENF1052 M 4.7KOHM,J, 1/2W 1 R3868 ERJ6ENF1052 M 0.5KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R384 ERJ6GEYJ333 M 39KOHM,J,1/10W 1 R3859.69 ERJ6GEYJ333 M 39KOHM,J,1/10W 1 R3869-79 ERJ14YJ753 M 75KOHM,J,1/10W 1 R3869-71 ERJ6GEYJ333 M 37KOHM,J,1/10W 1 R3873-76 ERJ14YJ753 M 75KOHM,J,1/10W 1 R3868 ERJ6ENF1052 M 0.5KOHM,J,1/10W 1 R3868 ERJ6ENF1052 M 0.0KOHM,J,1/10W 1 R3868 ERJ6ENF1052 M 0.0KOHM,J,1/10W 1 R3868 ERJ6EYJ3334 M 33KOHM,J,1/10W 1 R400 ERJ34YJ334 M 33KOHM,J,1/10W 1 R410 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 4.7KOHM,J,1/2	R312	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R314 ERJ6GEYJ2R2 M 2.2 OHM,J,1/10W 1 R320 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R321-23 MPC5WR68KS METAL PLATE RESISTOR R325 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R326-29 ERJ6GEYJ103 M 10KOHM,J,1/10W 4 R330 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R340,41 ERJ12YJ330 M 33 OHM,J, 1/2W 2 R342 ERJ6ENF5620 M 562 OHM, J, 1/2W 1 R343 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R344 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R346,47 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R346,47 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM,J, 1/2W 1 R354,55 ERJ6ENF1303 M 130KOHM,J, 1/2W 2 R356,57 ERJ14YJ753 M 75KOHM,J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R362 ERJ6ENF6192 M 6.8KOHM,J, 1/2W 1 R363 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R362 ERJ6SYJ332 M 3.3KOHM,J, 1/2W 1 R363 ERJ6SYJ332 M 3.3KOHM,J, 1/2W 1 R364 ERG2SJ683 M 68KOHM,J, 1/2W 1 R365 ERJ3GSYJ332 M 3.3KOHM,J, 1/2W 1 R366 ERJ6GEYJ682 M 6.8KOHM,J, 1/2W 1 R368 ERJ6ENF6192 M 15 OHM, J, 2W 1 R368 ERJ6ENF402 M 4.7KOHM,J, 1/2W 1 R368 ERJ6ENF402 M 4.7KOHM,J, 1/10W 2 R368 ERJ6ENF402 M 4.7KOHM,J, 1/10W 1 R368 ERJ6EYJ6S2 M 75KOHM,J, 1/10W 2 R368 ERJ6ENF402 M 4.7KOHM,J, 1/10W 1 R3869-71 ERJ6GEYJ823 M 82KOHM,J,1/10W 1 R3869-71 ERJ6GEYJ833 M 33KOHM,J,1/10W 2 R3868 ERJ6ENF1052 M 4.7KOHM,J, 1/2W 1 R3868 ERJ6ENF1052 M 0.5KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R384 ERJ6GEYJ333 M 39KOHM,J,1/10W 1 R3859.69 ERJ6GEYJ333 M 39KOHM,J,1/10W 1 R3869-79 ERJ14YJ753 M 75KOHM,J,1/10W 1 R3869-71 ERJ6GEYJ333 M 37KOHM,J,1/10W 1 R3873-76 ERJ14YJ753 M 75KOHM,J,1/10W 1 R3868 ERJ6ENF1052 M 0.5KOHM,J,1/10W 1 R3868 ERJ6ENF1052 M 0.0KOHM,J,1/10W 1 R3868 ERJ6ENF1052 M 0.0KOHM,J,1/10W 1 R3868 ERJ6EYJ3334 M 33KOHM,J,1/10W 1 R400 ERJ34YJ334 M 33KOHM,J,1/10W 1 R410 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 4.7KOHM,J,1/2	R313	ERJ14YJ100	M 10 OHM, J,1/4W	1	
R320 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R321-23 MPC5WR68KS METAL PLATE RESISTOR R325 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R326-29 ERJ6GEYJ103 M 10KOHM,J,1/10W 4 R330 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R339 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R344 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R346 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R347 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R348 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R349 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM,J, 1/2W 1 R3550-53 ERJ6ENF1303 M 130KOHM,J, 1/2W 2 R356,57 ERJ14YJ753 M 75KOHM,J, 1/2W 2 R356 ERJ2SJ150 M 15 OHM, J, 2W 1 R356 ERG2SJ150 M 15 OHM,J, 2W 1 R360 ERG2SJ150 M 15 OHM,J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R366,67 ERJ6ENF4702 M 6.8KOHM,J,1/10W 2 R366,67 ERJ6ENF4702 M 47KOHM,J,1/10W 2 R368 ERG2SJ150 M 15 OHM,J, 1/2W 1 R369 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R360 ERG2SJ150 M 15 OHM,J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R364 ERG2SJ683 M 68KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM,J,1/10W 2 R369 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R369 ERJ6ENF4702 M 47KOHM,J, 1/10W 2 R369 ERJ14YJ753 M 75KOHM,J, 1/10W 2 R369 ERJ14YJ753 M 75KOHM,J, 1/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM,J,1/10W 1 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R381 ERJ6EYJ103 M 10KOHM,J, 1/2W 1 R382,83 ERJ6EYJ333 M 33KOHM,J,1/10W 1 R389-99 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM,J, 1/2W 1 R389-99 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R380-99 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R399-99 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R400 ERJ6EYJ103 M 10KOHM,J, 1/10W 1 R400 ERJ6EYJ103 M 10KOHM,J, 1/10W 1 R400 ERJ6EYJ103 M 22KOHM,J,J/10W 1 R400 ERJ6EYJ103 M 22KOHM,J,J/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J, 1/2W 1	D314	FP.T6GFV.T2P2		1	
R321-23 MPC5WR68KS METAL PLATE RESISTOR R325 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R326-29 ERJ6GEYJ103 M 10KOHM, J, 1/10W 4 R330 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R340, 41 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R340, 41 ERJ12YJ333 M 33KOHM, J, 1/2W 2 R342 ERJ6ENF5620 M 562 OHM, J, 1/2W 1 R343 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R346, 47 ERJ12YJ320 M 22 OHM, J, 1/2W 1 R346, 47 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, J, 1/2W 1 R356, 57 ERJ14YJ753 M 75KOHM, J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ63 M 68KOHM, J, 1/2W 1 R366, 67 ERJ6ENF4702 M 6.8KOHM, J, 1/2W 1 R366, 67 ERJ6EVJ682 M 6.8KOHM, J, 1/10W 2 R368 ERJ3GSYJ332 M 3.3KOHM, J, 1/10W 1 R369-71 ERJ6GEYJ623 M 62KOHM, J, 1/2W 1 R369 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R369 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R369 ERJ3GSYJ332 M 3.3KOHM, J, 1/10W 1 R369-71 ERJ6GEYJ623 M 6.8KOHM, J, 1/2W 1 R381 ERJ6ENF4702 M 47KOHM, J, 1/2W 4 R379-79 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R383-88-89 ERJ6ENF1052 M 10.5KOHM, J, 1/10W 1 R386-89 ERJ6GEYJ133 M 75KOHM, J, 1/10W 1 R387-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R388-89 ERJ6ENF1052 M 10.5KOHM, J, 1/10W 1 R389-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R389-99 ERJ6ENF1052 M 10.5KOHM, J, 1/10W 1 R399-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R399-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R399-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R400 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R400 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R400 ERJ6GEYJ23 M 22KOHM, J, 1/10W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/2W 1					
RESISTOR  R326				1	
R325	R321-23	MPC5WR68KS	METAL PLATE	3	
R326-29 ERJ6GEYJ103 M 10KOHN, J, 1/10W 4 R330 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R340, 41 ERJ12YJ333 M 33 OHM, J, 1/2W 2 R342 ERJ6ENF5620 M 562 OHM, 1/10W 1 R343 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R346 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R346 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R347 ERJ12YJ20 M 22 OHM, J, 1/2W 2 R349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R354,55 ERJ6ENF1303 M 130KOHM, 1/10W 2 R356,57 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R359 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ350 M 15 OHM, J, 2W 1 R365 ERJ3GSYJ332 M 3.3KOHM, J, 1/10W 2 R3664 ERG2SJ50 M 68KOHM, J, 2W 1 R367 ERJ6GEYJ683 M 68KOHM, J, 2W 1 R368 ERJ6ENF4702 M 47KOHM, J, 1/10W 2 R369-71 ERJ6GEYJ823 M 82KOHM, J, 1/10W 2 R369-71 ERJ6GEYJ833 M 75KOHM, J, 1/2W 4 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 4 R373-76 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R382-83 ERJ6ENF4702 M 47KOHM, J, 1/10W 1 R384-89 ERJ6GEYJ333 M 38KOHM, J, 1/10W 1 R385-89 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R394 ERJ6GEYJ333 M 39KOHM, J, 1/10W 1 R395-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R395-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R406 ERJ6GEYJ33 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ332 M 33KOHM, J, 1/10W 1 R408 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R408 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R409 ERJ14YJ332 M 33KOHM, J, 1/10W 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R411 ERJ6GEYJ104 M 400KOHM, J, 1/2W 1			RESISTOR		
R330 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R339 ERJ12YJ330 M 33 OHM, J, 1/2W 2 R340,41 ERJ12YJ333 M 33KOHM, J, 1/2W 2 R342 ERJ6ENF5620 M 562 OHM, 1/10W 1 R343 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R346,47 ERJ12YJ220 M 22 OHM, J, 1/2W 2 R349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R350,53 ERJ6ENF6192 M61.9KOHM, J/10W 4 R354,55 ERJ6ENF1303 M 130KOHM, J, 1/2W 2 R356,57 ERJ14YJ753 M 75KOHM, J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ50 M 15 OHM, J, 2W 1 R366,67 ERJ6EYJ682 M 6.8KOHM, J, 2W 1 R368 ERJ3GSYJ332 M 3.3KOHM, J, 1/10W 2 R368 ERJ6ENF4702 M 47KOHM, J, 1/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM, J, 1/2W 4 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 4 R373-76 ERJ12YJ473 M 47KOHM, J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM, J, 1/2W 1 R382,83 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R382,83 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R384 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R385-89 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R3895 PRJ14YJ753 M 75KOHM, J, 1/10W 1 R3895 PRJ14YJ753 M 75KOHM, J, 1/10W 1 R3896 ERJ6ESFJ1333 M 33KOHM, J, 1/10W 1 R3891 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R3892 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R3894 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R3995-96 ERJ6ESFJ133 M 33KOHM, J, 1/10W 1 R3997-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R3995-96 ERJ6ESFJ103 M 10KOHM, J, 1/10W 1 R3997-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R405 ERJ6ESYJ103 M 10KOHM, J, 1/10W 1 R406 ERJ6ESYJ103 M 10KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, J, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R400 ERJ14YJ332 M 33KOHM, J, 1/2W 1 R411 ERJ6ESYJ104 M 100KOHM, J, 1/10W 1 R411 ERJ6ESYJ104 M 100KOHM, J, 1/10W 1	R325	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R330 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R339 ERJ12YJ330 M 33 OHM, J, 1/2W 2 R340,41 ERJ12YJ333 M 33KOHM, J, 1/2W 2 R342 ERJ6ENF5620 M 562 OHM, 1/10W 1 R343 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R346,47 ERJ12YJ220 M 22 OHM, J, 1/2W 2 R349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R350,53 ERJ6ENF6192 M61.9KOHM, J/10W 4 R354,55 ERJ6ENF1303 M 130KOHM, J, 1/2W 2 R356,57 ERJ14YJ753 M 75KOHM, J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ50 M 15 OHM, J, 2W 1 R366,67 ERJ6EYJ682 M 6.8KOHM, J, 2W 1 R368 ERJ3GSYJ332 M 3.3KOHM, J, 1/10W 2 R368 ERJ6ENF4702 M 47KOHM, J, 1/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM, J, 1/2W 4 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 4 R373-76 ERJ12YJ473 M 47KOHM, J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM, J, 1/2W 1 R382,83 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R382,83 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R384 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R385-89 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R3895 PRJ14YJ753 M 75KOHM, J, 1/10W 1 R3895 PRJ14YJ753 M 75KOHM, J, 1/10W 1 R3896 ERJ6ESFJ1333 M 33KOHM, J, 1/10W 1 R3891 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R3892 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R3894 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R3995-96 ERJ6ESFJ133 M 33KOHM, J, 1/10W 1 R3997-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R3995-96 ERJ6ESFJ103 M 10KOHM, J, 1/10W 1 R3997-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R405 ERJ6ESYJ103 M 10KOHM, J, 1/10W 1 R406 ERJ6ESYJ103 M 10KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, J, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R400 ERJ14YJ332 M 33KOHM, J, 1/2W 1 R411 ERJ6ESYJ104 M 100KOHM, J, 1/10W 1 R411 ERJ6ESYJ104 M 100KOHM, J, 1/10W 1	R326-29	ERJ6GEYJ103	M 10KOHM, J, 1/10W	4	
R339 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R340,41 ERJ12YJ333 M 33KOHM, J, 1/2W 2 R342 ERJ6ENF5620 M 562 OHM, I/10W 1 R343 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R346,47 ERJ12YJ220 M 22 OHM, J, 1/2W 2 R349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, I/10W 4 R354,55 ERJ4YJ753 M 75KOHM, J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R359 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ683 M 68KOHM, J, 1/2W 1 R366,67 ERJ6EYJ682 M 6.8KOHM, J, 1/0W 1 R366,67 ERJ6EYJ682 M 6.8KOHM, J, 1/10W 2 R368 ERJ6ENF4702 M 47KOHM, J, 1/2W 4 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 4 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 4 R373-76 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R3881 ERJ6EYJ1823 M 82KOHM, J, 1/10W 1 R3892,83 ERJ6EYJ333 M 82KOHM, J, 1/10W 1 R3894 ERJ6EYJ333 M 75KOHM, J, 1/10W 1 R3894 ERJ6EYJ333 M 33KOHM, J, 1/10W 1 R3894 ERJ6EYJ333 M 33KOHM, J, 1/10W 1 R3894 ERJ6EYJ333 M 33KOHM, J, 1/10W 2 R3994 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R3995,96 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R3995,96 ERJ6EYJ333 M 33KOHM, J, 1/10W 1 R3994 ERJ6EYJ333 M 33KOHM, J, 1/10W 1 R3995,96 ERJ6EYJ333 M 75KOHM, J, 1/10W 1 R3997-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R400 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R401 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R402 ERJ6EYJ223 M 22KOHM, J, 1/10W 1 R403 ERJ6EYJ103 M 33KOHM, J, 1/10W 1 R406 ERJ6EYJ103 M 33KOHM, J, 1/10W 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6EYJ104 M 100KOHM, J, 1/10W 1 R411 ERJ6EYJ104 M 100KOHM, J, 1/10W 1			·	-	
R340,41 ERJ12YJ333 M 33KOHM,J, 1/2W 2 R342 ERJ6ENF5620 M 562 OHM, 1/10W 1 R343 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R344 ERJ12YJ330 M 33 KOHM,J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R346,47 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R354,55 ERJ6ENF1303 M 130KOHM,J, 1/2W 2 R356,57 ERJ14YJ753 M 75KOHM,J, 1/2W 2 R359 ERG2SJ150 M 15 OHM,J, 2W 1 R360 ERG2SJ150 M 15 OHM,J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R366 ERG2SJ150 M 15 OHM,J, 2W 1 R366 ERG2SJ150 M 15 OHM,J, 2W 1 R366 ERJ3GSYJ332 M 33KOHM,J,1/16W 1 R367 ERJ6EYJ682 M 6.8KOHM,J, 1/2W 1 R368 ERJ6ENF4702 M 47KOHM,J, 1/0W 1 R369-71 ERJ6EYJ823 M 82KOHM,J,1/10W 1 R379 ERJ12YJ473 M 47KOHM,J, 1/2W 1 R381 ERJ6EYJ103 M 10KOHM,J, 1/2W 1 R382,83 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R384 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R386-89 ERJ2ENF1052 M10.5KOHM,J,1/10W 1 R3894 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R3894 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R3894 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R3895,96 ERJ16ENF1052 M10.5KOHM,J,1/10W 2 R3994 ERJ16EYJ103 M 10KOHM,J,1/10W 1 R3995-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R3997-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R400 ERJ14YJ334 M 33KOHM,J,1/10W 1 R400 ERJ14YJ334 M 33KOHM,J,1/10W 1 R400 ERJ14YJ332 M 33KOHM,J,1/10W 1 R400 ERJ14YJ332 M 33KOHM,J,1/10W 1 R410 ERJ14YJ332 M 33KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1					
R342 ERJ6ENF5620 M 562 OHM, 1/10W 1 R343 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R346, 47 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, J, 1/0W 4 R354,55 ERJ6ENF1303 M 130KOHM, J, 1/2W 2 R356,57 ERJ14YJ753 M 75KOHM, J, 1/2W 2 R359 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R362 ERG2SJ50 M 15 OHM, J, 2W 1 R363 ERG2SJ350 M 15 OHM, J, 2W 1 R364 ERG2SJ683 M 68KOHM, J, 1/2W 1 R365 ERJ3GSYJ332 M 3.3KOHM, J, 1/10W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM, J, 1/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM, J, 1/10W 1 R379 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R381 ERJ6GEYJ103 M 175KOHM, J, 1/2W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R384 ERJ6GEYJ103 M 175KOHM, J, 1/10W 1 R385 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R386-89 ERJ6ENF1052 M 47KOHM, J, 1/10W 1 R3892,83 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R3894 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R3894 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R3895,96 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R3997-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R400 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R401 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R402 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R403 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R404 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1	R339	ERJ12YJ330		1	
R343 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R346, 47 ERJ12YJ220 M 22 OHM, J, 1/2W 2 R349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R356, 57 ERJ14YJ753 M 75KOHM, J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ683 M 68KOHM, J, 1/2W 1 R365 ERJ3GSYJ332 M 3.3KOHM, J, 1/10W 1 R366 ERJ3GSYJ332 M 3.3KOHM, J, 1/10W 2 R368 ERJ6EYJ682 M 6.8KOHM, J, 2W 1 R369-71 ERJ6GEYJ682 M 47KOHM, J, 1/2W 1 R369-71 ERJ6GEYJ733 M 75KOHM, J, 1/2W 1 R369-71 ERJ6GEYJ733 M 75KOHM, J, 1/2W 1 R369-71 ERJ6GEYJ823 M 82KOHM, J, 1/10W 1 R369-71 ERJ6GEYJ833 M 75KOHM, J, 1/2W 1 R379 ERJ12YJ473 M 75KOHM, J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R384 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R385-96 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395-96 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R395-99 ERJ14YJ753 M 75KOHM, 1/10W 1 R395-99 ERJ14YJ753 M 75KOHM, 1/10W 1 R396-99 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM, 1/10W 1 R395-96 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM, 1/10W 1 R395-96 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 33KOHM, J, 1/10W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1	R340,41	ERJ12YJ333	M 33KOHM, J, 1/2W	2	
R343 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R344 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM, J, 1/2W 1 R346, 47 ERJ12YJ220 M 22 OHM, J, 1/2W 2 R349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R356, 57 ERJ14YJ753 M 75KOHM, J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ683 M 68KOHM, J, 1/2W 1 R365 ERJ3GSYJ332 M 3.3KOHM, J, 1/10W 1 R366 ERJ3GSYJ332 M 3.3KOHM, J, 1/10W 2 R368 ERJ6EYJ682 M 6.8KOHM, J, 2W 1 R369-71 ERJ6GEYJ682 M 47KOHM, J, 1/2W 1 R369-71 ERJ6GEYJ733 M 75KOHM, J, 1/2W 1 R369-71 ERJ6GEYJ733 M 75KOHM, J, 1/2W 1 R369-71 ERJ6GEYJ823 M 82KOHM, J, 1/10W 1 R369-71 ERJ6GEYJ833 M 75KOHM, J, 1/2W 1 R379 ERJ12YJ473 M 75KOHM, J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R384 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R385-96 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395-96 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R395-99 ERJ14YJ753 M 75KOHM, 1/10W 1 R395-99 ERJ14YJ753 M 75KOHM, 1/10W 1 R396-99 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM, 1/10W 1 R395-96 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM, 1/10W 1 R395-96 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 33KOHM, J, 1/10W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1	R342	ERJ6ENF5620	M 562 OHM, 1/10W	1	
R344 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R345 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R346,47 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R354,55 ERJ6ENF1303 M 130KOHM,J, 1/2W 2 R356,57 ERJ14YJ753 M 75KOHM,J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R366 ERG2SJ150 M 15 OHM, J, 2W 1 R366 ERJ34YJ753 M 75KOHM,J, 1/2W 1 R366 ERJ3GSYJ332 M 3.3KOHM,J,1/16W 1 R366 ERJ3GSYJ332 M 3.3KOHM,J,1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM, 1/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM,J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R384 ERJ6GEYJ333 M 39KOHM,J,1/10W 2 R386-89 ERJ6GEYJ333 M 39KOHM,J,1/10W 1 R3879 ERJ12YJ473 M 47KOHM,J,1/10W 2 R3894 ERJ6GEYJ333 M 39KOHM,J,1/10W 2 R3895,96 ERJ6GEYJ333 M 39KOHM,J,1/10W 1 R3997-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R3997-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R3997-99 ERJ14YJ753 M 39KOHM,J,1/10W 1 R3997-99 ERJ14YJ753 M 39KOHM,J,1/10W 1 R3997-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R400 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R402 ERJ6GEYJ233 M 33KOHM,J,1/10W 1 R403 ERJ6GEYJ233 M 33KOHM,J,1/10W 1 R4040 ERJ6GEYJ233 M 33KOHM,J,1/10W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 4.7KOHM,J,1/2W 1		<del> </del>		1	
R345 ERJ12YJ333 M 33KOHM,J, 1/2W 1 R346,47 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R354,55 ERJ6ENF1303 M 130KOHM, 1/10W 2 R356,57 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R359 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R364 ERG2SJ683 M 66KOHM,J, 1/2W 1 R365 ERJ3GSYJ332 M 3.3KOHM,J,1/16W 1 R366,67 ERJ6EYJ682 M 6.8KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM,J,1/10W 2 R369-71 ERJ6GEYJ823 M 82KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM,J,1/2W 1 R3881 ERJ6EFYJ823 M 82KOHM,J,1/10W 2 R3884 ERJ6EFYJ333 M 75KOHM,J,1/10W 1 R389-83 ERJ6EYJ333 M 33KOHM,J,1/10W 2 R3894 ERJ6EYJ103 M 10KOHM,J,1/10W 1 R3894 ERJ6EYJ333 M 39KOHM,J,1/10W 1 R395,96 ERJ6EYJ473 M 47KOHM, 1/10W 1 R399-99 ERJ14YJ753 M 75KOHM,J,1/10W 2 R394 ERJ6EYJ333 M 33KOHM,J,1/10W 1 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R399-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R400 ERJ6EYJ223 M 22KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R402 ERJ6EYJ233 M 22KOHM,J,1/10W 1 R403 ERJ6GEYJ233 M 22KOHM,J,1/10W 1 R404 ERJ6GEYJ233 M 22KOHM,J,1/10W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, J,2/W 1 R408 EG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1					
R346,47 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R349 ERJ12YJ220 M 22 OHM,J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R354,55 ERJ6ENF1303 M 130KOHM, 1/10W 2 R356,57 ERJ14YJ753 M 75KOHM,J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R362 ERG2SJ150 M 15 OHM, J, 2W 1 R3636 ERG2SJ150 M 15 OHM, J, 2W 1 R364 ERG2SJ150 M 15 OHM, J, 2W 1 R365 ERJ34YJ753 M 75KOHM,J, 1/2W 1 R366 ERJ4YJ753 M 75KOHM,J, 1/2W 1 R366 ERJ6ENF4702 M 47KOHM,J,1/16W 1 R366,67 ERJ6EYJ823 M 82KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM,J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R384 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ14YJ753 M 75KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R400 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R402 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R403 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R4040 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 33KOHM, J,1/4W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1					
R349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R354,55 ERJ6ENF1303 M 130KOHM, 1/10W 2 R356,57 ERJ14YJ753 M 75KOHM, J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ683 M 68KOHM, J, 2W 1 R365 ERJ3GSYJ332 M 3.3KOHM, J, 1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM, J, 1/10W 2 R368 ERJ6ENF4702 M 47KOHM, J, 1/10W 2 R369-71 ERJ6GEYJ823 M 82KOHM, J, 1/10W 3 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM, J, 1/2W 4 R381 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 2 R384 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R395,96 ERJ6ENF1052 M10.5KOHM, J/10W 1 R395,96 ERJ6ENF1052 M10.5KOHM, J/10W 1 R397-99 ERJ14YJ753 M 75KOHM, J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM, J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R402 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R403 ERJ6ENF1052 M10.5KOHM, J/10W 1 R4040 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, J/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R412 ERJ14YJ472 M 4.7KOHM, J, 1/2W 1	R345	ERJ12YJ333	M 33KOHM,J, 1/2W	1	
R349 ERJ12YJ220 M 22 OHM, J, 1/2W 1 R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R354,55 ERJ6ENF1303 M 130KOHM, 1/10W 2 R356,57 ERJ14YJ753 M 75KOHM, J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ683 M 68KOHM, J, 2W 1 R365 ERJ3GSYJ332 M 3.3KOHM, J, 1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM, J, 1/10W 2 R368 ERJ6ENF4702 M 47KOHM, J, 1/10W 2 R369-71 ERJ6GEYJ823 M 82KOHM, J, 1/10W 3 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM, J, 1/2W 4 R381 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 2 R384 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, J, 1/10W 1 R395,96 ERJ6ENF1052 M10.5KOHM, J/10W 1 R395,96 ERJ6ENF1052 M10.5KOHM, J/10W 1 R397-99 ERJ14YJ753 M 75KOHM, J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM, J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R402 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R403 ERJ6ENF1052 M10.5KOHM, J/10W 1 R4040 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, J/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R412 ERJ14YJ472 M 4.7KOHM, J, 1/2W 1	R346,47	ERJ12YJ220	M 22 OHM, J, 1/2W	2	
R350-53 ERJ6ENF6192 M61.9KOHM, 1/10W 4 R354,55 ERJ6ENF1303 M 130KOHM, 1/10W 2 R356,57 ERJ14YJ753 M 75KOHM,J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R359 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R364 ERG2SJ683 M 68KOHM,J, 1/2W 1 R365 ERJ3GSYJ332 M 3.3KOHM,J,1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J,1/10W 1 R3881 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R3882,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R3884 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 R384 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395-96 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM,J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R405 MPC5WR39KS METAL PLATE RESISTOR R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, J,1/10W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1	R349	ERJ12YJ220		1	
R354,55 ERJ6ENF1303 M 130KOHM, 1/10W 2 R356,57 ERJ14YJ753 M 75KOHM,J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R359 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R364 ERG2SJ683 M 68KOHM,J, 1/2W 1 R365 ERJ3GSYJ332 M 3.3KOHM,J,1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM, 1/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM,J, 1/2W 1 R3881 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R3882,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R384 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R386-89 ERJ6GEYJ333 M 39KOHM,J,1/10W 1 R386-89 ERJ6ENF1052 M 10.5KOHM, 1/10W 1 R395,96 ERJ6EYJ473 M 47KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R395-96 ERJ6EYJ473 M 47KOHM,J,1/10W 1 R395-96 ERJ6EYJ473 M 47KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R400 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R400 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R402 ERJ14YJ334 M 330KOHM, 1/2W 1 R403 ERJ6GEYJ233 M 33KOHM, J,1/4W 1 R404 ERJ14YJ334 M 330KOHM, J,1/4W 1 R408 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 4.7KOHM,J, 1/2W 1			· ·	<del>                                     </del>	
R356,57 ERJ14YJ753 M 75KOHM,J, 1/2W 2 R358 ERG2SJ150 M 15 OHM, J, 2W 1 R359 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R364 ERG2SJ683 M 68KOHM,J, 1/2W 1 R365 ERJ3GSYJ332 M 3.3KOHM,J,1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J,1/2W 1 R3891 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R3882,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R3884 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R3886-89 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R379 ERJ12YJ473 M 47KOHM,J,1/10W 1 R3895,96 ERJ6GEYJ333 M 37KOHM,J,1/10W 2 R3894 ERJ6GEYJ333 M 37KOHM,J,1/10W 1 R395,96 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R402 ERJ6EYJ223 M 22KOHM,J,1/10W 1 R403 ERJ6GEYJ233 M 33KOHM,J,1/10W 1 R4040 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R405 MPC5WR39KS METAL PLATE RESISTOR R406 ERJ6GEYJ233 M 33KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1		-		-	
R358 ERG2SJ150 M 15 OHM, J, 2W 1 R359 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ683 M 68KOHM, J, 1/2W 1 R365 ERJ3GSYJ332 M 3.3KOHM, J, 1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM, J, 1/10W 2 R368 ERJ6ENF4702 M 47KOHM, J, 1/10W 3 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM, J, 1/2W 1 R3881 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R3882,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 2 R3884 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R3886-89 ERJ6GEYJ333 M 37KOHM, J, 1/10W 1 R3895,96 ERJ6ENF1052 M 10.5KOHM, 1/10W 1 R395,96 ERJ6EYJ473 M 47KOHM, J, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM, J, 1/10W 2 R397-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R397-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R401 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R400 ERJ6EYJ223 M 22KOHM, J, 1/10W 1 R401 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R400 ERJ6GEYJ233 M 33KOHM, J, 1/2W 1 R401 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R400 ERJ14YJ334 M 330KOHM, 1/2W 1 R401 ERJ14YJ334 M 330KOHM, 1/2W 1 R400 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R411 ERJ6GEYJ104 M 4.7KOHM, J, 1/2W 1	R354,55	ERJ6ENF1303	M 130KOHM, 1/10W	2	
R359 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R364 ERG2SJ683 M 68KOHM,J, 1/16W 1 R365 ERJ3GSYJ332 M 3.3KOHM,J,1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J,1/2W 4 R379 ERJ12YJ473 M 47KOHM,J,1/2W 1 R3881 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R3882,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R3884 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R3884 ERJ6GEYJ339 M 39KOHM,J,1/10W 1 R3886-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6GEYJ473 M 47KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/10W 2 R402 ERJ6EYJ223 M 22KOHM,J,1/10W 1 R403 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R4040 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 4.7KOHM,J, 1/2W 1	R356,57	ERJ14YJ753	M 75KOHM,J, 1/2W	2	
R359 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R364 ERG2SJ683 M 68KOHM,J, 1/16W 1 R365 ERJ3GSYJ332 M 3.3KOHM,J,1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J,1/2W 4 R379 ERJ12YJ473 M 47KOHM,J,1/2W 1 R3881 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R3882,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R3884 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R3884 ERJ6GEYJ339 M 39KOHM,J,1/10W 1 R3886-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6GEYJ473 M 47KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/10W 2 R402 ERJ6EYJ223 M 22KOHM,J,1/10W 1 R403 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R4040 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 4.7KOHM,J, 1/2W 1	R358	ERG2SJ150	M 15 OHM. J. 2W	1	
R360 ERG2SJ150 M 15 OHM, J, 2W 1 R361 ERJ14YJ753 M 75KOHM, J, 1/2W 1 R364 ERG2SJ683 M 68KOHM, J, 2W 1 R365 ERJ3GSYJ332 M 3.3KOHM, J, 1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM, J, 1/10W 2 R368 ERJ6ENF4702 M 47KOHM, 1/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM, J, 1/10W 3 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM, J, 1/2W 1 R3881 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R3882,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 2 R3884 ERJ6GEYJ333 M 33KOHM, J, 1/10W 1 R3886-89 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R3895,96 ERJ6EYJ473 M 47KOHM, J, 1/10W 1 R3997-99 ERJ14YJ753 M 75KOHM, J, 1/10W 2 R397-99 ERJ14YJ753 M 75KOHM, J, 1/10W 2 R397-99 ERJ14YJ753 M 75KOHM, J, 1/10W 1 R401 ERJ3GSYJ103 M 10KOHM, J, 1/16W 1 R400 ERJ6EYJ223 M 22KOHM, J, 1/10W 1 R401 ERJ3GSYJ103 M 10KOHM, J, 1/10W 1 R406 ERJ6EYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1				_	
R361 ERJ14YJ753 M 75KOHM,J, 1/2W 1 R364 ERG2SJ683 M 68KOHM, J, 2W 1 R365 ERJ3GSYJ332 M 3.3KOHM,J,1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM, 1/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM,J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM,J,1/10W 2 R384 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R3884 ERJ6GEYJ333 M 33KOHM,J,1/10W 1 R388-89 ERJ6GEYJ393 M 10KOHM,J,1/10W 1 R3895,86 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R3994 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R3995,96 ERJ6GEYJ373 M 47KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/16W 1 R400 ERJ6EYJ223 M 22KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/10W 1 R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1				_	
R364 ERG2SJ683 M 68KOHM, J, 2W 1 R365 ERJ3GSYJ332 M 3.3KOHM,J,1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM, J/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM,J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R384 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R386-89 ERJ6EYJ393 M 10.5KOHM, J/1/0W 1 R395,96 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R3995,96 ERJ6GEYJ373 M 47KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/16W 1 R400 ERJ6EYJ223 M 22KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 22KOHM,J,1/10W 1 R406 ERJ6EYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1	K360	ERG2SJ150	M 15 OHM, J, 2W	1	
R365 ERJ3GSYJ332 M 3.3KOHM,J,1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM, 1/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM,J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R384 ERJ6GEYJ333 M 39KOHM,J,1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6ENF1052 M10.5KOHM, 1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/16W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1	R361	ERJ14YJ753	M 75KOHM,J, 1/2W	1	
R365 ERJ3GSYJ332 M 3.3KOHM,J,1/16W 1 R366,67 ERJ6GEYJ682 M 6.8KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM, 1/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM,J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R384 ERJ6GEYJ333 M 39KOHM,J,1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6ENF1052 M10.5KOHM, 1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/16W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1	R364	ERG2SJ683	M 68KOHM, J, 2W	1	
R366,67 ERJ6GEYJ682 M 6.8KOHM,J,1/10W 2 R368 ERJ6ENF4702 M 47KOHM, 1/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM,J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R384 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6ENF3052 M10.5KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1	R365	ERJ3GSYJ332		1	
R368 ERJ6ENF4702 M 47KOHM, 1/10W 1 R369-71 ERJ6GEYJ823 M 82KOHM,J,1/10W 3 R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM,J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R384 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6ENF1052 M10.5KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 47KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1				-	
R369-71 ERJ6GEYJ823 M 82KOHM, J, 1/10W 3 R373-76 ERJ14YJ753 M 75KOHM, J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM, J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 2 R384 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R3994 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R3995,96 ERJ6ENF1052 M10.5KOHM, J, 1/10W 2 R397-99 ERJ14YJ753 M 47KOHM, J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM, J, 1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, J, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R412 ERJ14YJ472 M 4.7KOHM, J, 1/2W 1					
R373-76 ERJ14YJ753 M 75KOHM,J, 1/2W 4 R379 ERJ12YJ473 M 47KOHM,J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R384 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R399-99 ERJ14YJ753 M 47KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J,1/10W 1 R401 ERJ3GSYJ103 M 10KOHM,J,1/16W 1 R405 MPC5WR39KS METAL PLATE RESISTOR R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1		ERJ6ENF4702	M 47KOHM, 1/10W	1	
R379 ERJ12YJ473 M 47KOHM, J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 2 R384 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6GEYJ473 M 47KOHM, J, 1/10W 2 R397-99 ERJ14YJ753 M 75KOHM, J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM, J, 1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R412 ERJ14YJ472 M 4.7KOHM, J, 1/2W 1	R369-71	ERJ6GEYJ823	M 82KOHM, J, 1/10W	3	
R379 ERJ12YJ473 M 47KOHM, J, 1/2W 1 R381 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 2 R384 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6GEYJ473 M 47KOHM, J, 1/10W 2 R397-99 ERJ14YJ753 M 75KOHM, J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM, J, 1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R412 ERJ14YJ472 M 4.7KOHM, J, 1/2W 1	R373-76	ERJ14YJ753	M 75KOHM,J, 1/2W	4	
R381 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R382,83 ERJ6GEYJ333 M 33KOHM, J, 1/10W 2 R384 ERJ6GEYJ393 M 39KOHM, J, 1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6GEYJ473 M 47KOHM, J, 1/10W 2 R397-99 ERJ14YJ753 M 75KOHM, J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM, J, 1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/2W 1 R412 ERJ14YJ472 M 4.7KOHM, J, 1/2W 1	R379	ERJ12YJ473		1	
R382,83 ERJ6GEYJ333 M 33KOHM,J,1/10W 2 R384 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6GEYJ473 M 47KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM,J,1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1		<u> </u>			
R384 ERJ6GEYJ393 M 39KOHM, J,1/10W 1 R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6GEYJ473 M 47KOHM, J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM, J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM, J,1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM, J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM, J, 1/2W 1			<del> </del>	<del>                                     </del>	
R386-89 ERJ6ENF1052 M10.5KOHM, 1/10W 4 R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6GEYJ473 M 47KOHM, J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM,J,1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1	R382,83	ERJ6GEYJ333	M 33KOHM, J, 1/10W	2	
R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6GEYJ473 M 47KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM,J,1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1	R384	ERJ6GEYJ393	M 39KOHM, J, 1/10W	1	
R394 ERJ6ENF1052 M10.5KOHM, 1/10W 1 R395,96 ERJ6GEYJ473 M 47KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM,J,1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1	R386-89	ERJ6ENF1052	M10.5KOHM, 1/10W	4	
R395,96 ERJ6GEYJ473 M 47KOHM,J,1/10W 2 R397-99 ERJ14YJ753 M 75KOHM,J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM,J,1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1			· ·	_	
R397-99 ERJ14YJ753 M 75KOHM, J, 1/2W 3 R401 ERJ3GSYJ103 M 10KOHM, J, 1/16W 1 R405 MPC5WR39KS METAL PLATE 1 RESISTOR R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R412 ERJ14YJ472 M 4.7KOHM, J, 1/2W 1				<del>                                     </del>	
R401 ERJ3GSYJ103 M 10KOHM, J, 1/16W 1 R405 MPC5WR39KS METAL PLATE 1 R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R412 ERJ14YJ472 M 4.7KOHM, J, 1/2W 1					
R405 MPC5WR39KS METAL PLATE 1 R406 ERJ6GEYJ223 M 22KOHM,J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1	R397-99	ERJ14YJ753	M 75KOHM,J, 1/2W	3	
RESISTOR R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R412 ERJ14YJ472 M 4.7KOHM, J, 1/2W 1	R401	ERJ3GSYJ103	M 10KOHM, J, 1/16W	1	
RESISTOR R406 ERJ6GEYJ223 M 22KOHM, J, 1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J, 1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J, 1/10W 1 R412 ERJ14YJ472 M 4.7KOHM, J, 1/2W 1	R405	MPC5WR39KS	METAL PLATE	1	
R406 ERJ6GEYJ223 M 22KOHM, J,1/10W 1 R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM, J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM, J, 1/2W 1				-	
R407 ERJ14YJ334 M 330KOHM, 1/2W 1 R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1	P406	PD.T6CPV.T222		1	
R408 SG734K271 CHIP RESISTOR 1 R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1				<del>                                     </del>	
R410 ERJ14YJ332 M 33KOHM, J,1/4W 1 R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1					
R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1	R408	SG734K271	CHIP RESISTOR	1	
R411 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1	R410	ERJ14YJ332	M 33KOHM, J,1/4W	1	
R412 ERJ14YJ472 M 4.7KOHM,J, 1/2W 1				1	
R413,14   ERJ14YJ334   M 330KOHM, 1/2W   2			· .		
	R413,14	ERJ14YJ334	M 330KOHM, 1/2W	2	

Ref.   Part No.   Part Name & Description   Pos   Remarks   Description   Pos   Remarks   Description   Pos   Remarks   Ref.   Part No.   Description   Pos   Remarks   Ref.   Part No.	(50U / TH-42I	PX50U / TH-50PX50L	J		
NO.   Description	Ref.	Part No.	Part Name &	Pcs	Remarks
RA26			Description		
RA26	R415,16	ERJ6GEYJ563	M 56KOHM,J,1/10W	2	
RA29-31 REJGGEYJAF7 M 4.7 OHM, J, 1/10W 1 RA55 REJGGEYJAF7 M 4.7 OHM, J, 1/10W 1 RA57 REJGGEYJAF7 M 4.7 OHM, J, 1/10W 1 RA57 REJGGEYJAF7 M 4.7 OHM, J, 1/10W 1 RA57 REJGGEYJAF7 M 4.7 OHM, J, 1/10W 1 RA59 REJGGEYJAF7 M 4.7 OHM, J, 1/10W 1 RA59 REJGGEYJAF7 M 4.7 OHM, J, 1/10W 1 RA60 REZSJ331 METAL OXIDE REJGEYJAF7 M 3.3 XOHM, J, 1/10W 1 RA73, FG REJGGEYJAF7 M 1.0 OKOHM, J, 1/10W 1 RA80 REJGGEYJAF7 M 1.0 OHM, J, 1/10W 1 RA80 REJGESJ551 M 1.0 OHM, J, 1/10W 1 RA81 ERJGENF4302 M 4.3 XOHM, J, 1/10W 1 RA81 REJGENF4302 M 4.3 XOHM, J, 1/10W 1 RA82 REJGGEYJAF7 M 1.0 OHM, J, 1/2W 2 RS500, OP REJIZYJIOO M 1.0 OHM, J, 1/2W 1 RS58 REJGGEYJAF7 M 4.7 XOHM, J, 1/10W 1 RS58 REJGGEYJAF7 M 4.7 XOHM, J, 1/10W 1 RS59 REJIZYJIS1 M 1.5 OHM, J, 1/10W 1 RS62 REJGGEYJAF7 M 4.7 XOHM, J, 1/10W 1 RS62 REJGGEYJAF7 M 4.7 XOHM, J, 1/10W 1 RS62 REJGGEYJAF7 M 4.7 XOHM, J, 1/10W 1 RS64 REJGEYJAF7 M 4.7 XOHM, J, 1/10W 1 RS64 REJGEYJAF7 M 4.7 XOHM, J, 1/10W 1 RS65 REJGGEYJAF7 M 4.7 XOHM, J, 1/10W 1 RS66 REJGGEYJAF7 M 4.7 XOHM, J, 1/10W 1 RS66 REJGEYJAF7 M 4.7 XOHM, J, 1/10W 1 RS66 REJGEYJAF7 M M 1.0 XOHM, J, 1/10W 1 RS66 REJGEYJAF7 M M 1.0 XOHM, J, 1/10W 1 RS66 REJGEYJAF7 M M 1.0 XOHM, J, 1/10W 1 RS66 REJGEYJAF7 M M 1.0 XOHM, J, 1/10W 1 RS66 REJGEYJAF7 M M 1.0 XOHM, J, 1/10W 1 RS66 REJGEYJAF7 M M 1.0 XOHM, J, 1/10W 1 RS67 REJGEYJAF7 M M 1.0 XOHM, J, 1/10W 1 RS68 REJGEYJAF7 M M 1.0 XOHM, J, 1/10W 1 RS69 REJGEYJAF7 M M 1.0 XOHM, J, 1/10W 1 RS69 REJGERFY123 M 1.0 XOHM, J, 1/10W 1 RS61 REJGEYJAF7 M M 1.0 XOHM, J, 1/10W 1 RS62 REJGERFY123 M 1.0 XOHM, J, 1/10W 1 RS63 REJGEYJAF1 M 1.0 XOHM, J, 1/10W 1 RS64 REJZYJSSO M 8.0 XOHM, J, 1/10W 1 RS64 REJZYJSSO M 8.0 XOHM, J, 1/10W 1 RS64 REJZYJSSO M 1.0 XOHM, J, 1/10W 1 RS65 REJGERYJSSO M 1.0 XOHM, J, 1/10W 1 RS64 REJZYJSSO M 1.0 XOHM, J, 1/10W 1 RS65 R					
RA32					
RASS			<u> </u>		
R457,58					
R459					
R460	R457,58		M 47KOHM,J,1/10W	2	
R851STOR R475,76 ERJGGEYJ332 M 3.3KOHM,J,1/10W 1 R480 ERG2SJ561 M 560 OHM, J, JW 1 R480 ERG2SJ561 M 560 OHM, J, JW 1 R480 ERJGENF4302 M 43KOHM, 1/10W 1 R508,09 ERJJGYJ100 M 10 OHM,J, 1/JW 2 R508,09 ERJJGGEYJ473 M 47KOHM,J,1/10W 1 R558 ERJGGEYJ473 M 47KOHM,J,1/10W 1 R551 ERJGGEYJ473 M 47KOHM,J,1/10W 1 R552 ERJGGEYJ473 M 47KOHM,J,1/10W 1 R561 ERJGGEYJ473 M 47KOHM,J,1/10W 1 R562 ERJGGEYJ473 M 47KOHM,J,1/10W 1 R563 ERJGGEYJ473 M 47KOHM,J,1/10W 1 R664 ERJGGEYJ473 M 10KOHM,J,1/10W 1 R6754,65 ERJGGEYJ473 M 10KOHM,J,1/10W 1 R6760 ERJGGEYJ473 M 10KOHM,J,1/10W 1 R602,03 SK150JA WIREWOUND RESISTOR 2 R604,05 ERDSITJ474 C 4.7KOHM,J,1/10W 1 R607 ERJGGEYJ334 M 330KOHM,J,1/10W 1 R608 ERG3FJS820D M 82 OHM,J, 3W 1 R609 ERJGSEYJ334 M 330KOHM,J,1/10W 1 R613,14 ERJGGEYJ154 M 150KOHM,J,1/10W 2 R615-17 MPCSWR2ZKS MRTAL PLATE R620 ERJJZYJ680 M 68 OHM,J, 1/2W 1 R621 ERJJZYJ680 M 68 OHM,J, 1/2W 1 R623 ERJGGEYJ103 M 10KOHM,J,1/10W 1 R624 ERJGGEYJ103 M 10KOHM,J,1/10W 1 R625 ERJGGEYJ103 M 10KOHM,J,1/10W 1 R626 ERJJZYJ151 M 150 OHM,J, 1/2W 1 R627 ERJGEYJ131 M 150 OHM,J, 1/2W 1 R628 ERJGGEYJ103 M 10KOHM,J,1/10W 1 R629 ERJGEYJ103 M 10KOHM,J,1/10W 1 R626 ERJJZYJ151 M 150 OHM,J, 1/2W 1 R627 ERJGEYJ103 M 10KOHM,J,1/10W 1 R628 ERJGEYJ103 M 10KOHM,J,1/10W 1 R629 ERJGEYJ103 M 10KOHM,J,1/10W 1 R630 ERJGEYJ103 M 10KOHM,J,1/10W 1 R631 MPCSWR2ZKS METAL PLATE R632 ERJGEYJ103 M 10KOHM,J,1/10W 1 R634 ERJGEYJ101 M 100 OHM,J,1/10W 1 R636 ERJGEYJ103 M 10KOHM,J,1/10W 1 R637 ERJGEYJ103 M 10KOHM,J,1/10W 1 R638 ERJGEYJ103 M 10KOHM,J,1/10W 1 R639 ERJGEYJ103 M 10KOHM,J,1/10W 1 R630 ERJGEYJ103 M 10KOHM,J,1/10W 1 R631 MPCSWR2ZKS METAL PLATE R638 ERJGEYJ103 M 10KOHM,J,1/10W 1 R644 ERJGEYJ101 M 100 OHM,J,1/10W 1 R646 ERJGEYJ101 M 100 OHM,J,1/10W 1 R659 ERJGEYJ103 M 10KOHM,J,1/10W 1 R640 ER	R459	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R475, 76 RBJGEYJ103 M 3.3KOHM, J, 1/10W 1 R475, 76 RBJGEYJ103 M 10KOHM, J, 2/M 1 R480 RBJGSSY561 M 560 OHM, J, 2/M 1 R481 BBJGENF4302 M 43KOHM, 1/10W 1 R482 RBJGEYJ473 M 47KOHM, J, 1/10W 1 R482 RBJGEYJ473 M 47KOHM, J, 1/10W 1 R508, 09 RBJ12Y1100 M 10 OHM, J, 1/2W 2 RS10 ERJGEYJ473 M 47KOHM, J, 1/10W 1 R550 RBJGEYJ473 M 47KOHM, J, 1/10W 1 R558 RBJGEYJ473 M 47KOHM, J, 1/10W 1 R559 RBJ12Y1151 M 150 OHM, J, 1/2W 1 R561 BBJGEYJ473 M 47KOHM, J, 1/10W 1 R562 BBJGEYJ473 M 47KOHM, J, 1/10W 1 R563 RBJGEYJ473 M 47KOHM, J, 1/10W 1 R664 BBJGGEYJ473 M 47KOHM, J, 1/10W 1 R660 BBJGGEYJ473 M 10KOHM, J, 1/10W 1 R660 BBJGGEYJ34 M 330KOHM, J, 1/2W 2 R660 BBJGGEYJ34 M 330KOHM, J, 1/2W 1 R613, 14 BBJGGEYJ35 M 121KOHM, J, 1/10W 2 R615-17 MPCSWR2ZKS METSTOR BBJGGEYJ36 M 121KOHM, J, 1/2W 1 R612 BBJGEYJ54 M 150KOHM, J, 1/2W 1 R620 BBJTYS820D M 22 OHM, J, 3W 1 R621 BBJJZY151 M 150 OHM, J, 1/2W 1 R622 BBJGGEYJ103 M 10KOHM, J, 1/10W 1 R623 BBJGGEYJ103 M 10KOHM, J, 1/10W 1 R624 BBJGGEYJ103 M 10KOHM, J, 1/10W 1 R625 BBJGGEYJ103 M 10KOHM, J, 1/10W 1 R626 BBJZYY1680 M 68 OHM, J, 1/2W 1 R627 BBJZY17181 M 150 OHM, J, 1/10W 1 R628 BBJGGEYJ103 M 10KOHM, J, 1/10W 1 R629 BBJGGEYJ103 M 10KOHM, J, 1/10W 1 R630 BBJGGEYJ103 M 10KOHM, J, 1/10W 1 R640 BBJGGEYJ154 M 150KOHM, J, 1/10W 1 R641 BBJGGEYJ154 M 150KOHM, J, 1/10W 1 R642 BBJGGEYJ154 M 150KOHM, J, 1/10W 1 R643 BBJGGEYJ154 M 150KOHM, J, 1/10W 1 R644 BBJGGEYJ154 M 150KOHM, J, 1/10W 1 R645 BBJGGEYJ154 M 150KOHM, J, 1/10W 1 R646 BBJGGEYJ154 M 150KOHM, J, 1/10W 1 R647 BBJGGEYJ154 M 150KOHM, J, 1/10W 1 R648 BBJGGEYJ154 M 150KOHM, J, 1/10W 1 R649 BBJGGEYJ154 M 150KOHM, J, 1/10W 1 R6501 MPGCSY SSKOHM M 10WDLE 1	R460	ERG2SJ331	METAL OXIDE	1	
R475,76 ERJGEYJ103 M 10KOHM,J,1/10W 2   R480			RESISTOR		
R480   RG2SJ561   M 560 OHM, J, 2W   1   R481   REJGENF4302   M 43KOHM, J/10W   1   R508,09   REJGEV1010   M 10 OHM, J, 1/10W   1   R508,09   REJGEV1010   M 10 OHM, J, 1/10W   1   R558   REJGEV1013   M 47KOHM, J, 1/10W   1   R559   REJGEV1473   M 47KOHM, J, 1/10W   1   R551   REJGEV1473   M 47KOHM, J, 1/10W   1   R552   REJGEV1473   M 47KOHM, J, 1/10W   1   R553   REJGEV1473   M 47KOHM, J, 1/10W   1   R561   REJGEV1473   M 47KOHM, J, 1/10W   1   R562   REJGEV1473   M 47KOHM, J, 1/10W   1   R563   REJGEV1473   M 47KOHM, J, 1/10W   1   R564   REJGEV1473   M 47KOHM, J, 1/10W   1   R606   REJGEV1473   M 47KOHM, J, 1/10W   1   R607   REJGEV1474   M 47KOHM, J, 1/10W   2   R604   REJGEV1474   M 47KOHM, J, 1/10W   1   R608   REJGEV1103   M 10KOHM, J, 1/10W   1   R609   REJGEV1104   M 1KOHM, J, 1/10W   1   R608   REJGEV1102   M 1KOHM, J, 1/10W   1   R609   REJGEV1103   M 12KOHM, J, 1/10W   1   R609   REJGEV1104   M 150KOHM, J, 1/10W   1   R613,14   REJGEV154   M 150KOHM, J, 1/10W   2   R615-17   MPCSWR22KS   MRTAL PLATE   REJGEV168   R621   REJ12Y151   M 150 OHM, J, 1/10W   1   R622   REJGEV1103   M 10KOHM, J, 1/10W   1   R623   RFJGEV1103   M 10KOHM, J, 1/10W   1   R624   REJGEV1103   M 10KOHM, J, 1/10W   1   R625   REJGEV1103   M 10KOHM, J, 1/10W   1   R626   RFJ12Y151   M 150 OHM, J, 1/10W   1   R627   REJGEV1103   M 10KOHM, J, 1/10W   1   R628   REJGEV1103   M 10KOHM, J, 1/10W   1   R629   RFJGEV1103   M 10KOHM, J, 1/10W   1   R620   REJGEV1103   M 10KOHM, J, 1/10W   1   R621   REJGEV1103   M 10KOHM, J, 1/10W   1   R622   RFJGEV1103   M 10KOHM, J, 1/10W   1   R623   RFJGEV1103   M 10KOHM, J, 1/10W   1   R624   REJGEV1103   M 10KOHM, J, 1/10W   1   R625   REJGEV1103   M 10KOHM, J, 1/10W   1   R626   RFJGEV1103   M 10KOHM, J, 1/10W   1   R627   REJGEV1103   M 10KOHM, J, 1/10W   1   R628   REJGEV1243   M 47KOHM, J, 1/10W   1   R630   RFJGEV1103   M 10KOHM, J, 1/10W   1   R640   RFJGEV1103   M 10KOHM, J, 1/10W   1   R641   RFJGEV1103   M 10KOHM, J, 1/10W   1   R642   RFJGEV1103   M 10KOHM, J, 1/10W   1   R643   RFJGEV1	R473	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R481	R475,76	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R481	R480	ERG2SJ561	M 560 OHM, J, 2W	1	
### ### ### ### ### ### ### ### ### ##				1	
R508,09					
### ### ### ### ### ### ### ### ### ##					
R558 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R559 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R561 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R562 ERJ6GEYJ472 M 4.7KOHM, J, 1/10W 1 R563 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R564,65 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R564,65 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R564,65 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R602,03 SK150JA WIREWOUND RESISTOR 2 R604,05 ERDS1J474 C 4.7KOHM, J, 1/2W 2 R606 ERJ6GEYJ102 M 10KOHM, J, 1/10W 1 R607 ERJ6GEYJ102 M 12HOHM, J, 1/10W 1 R608 ERG3FJS820D M 82 OHM, J, 3W 1 R609-12 ERJ6ERFJ213 M 12HOHM, J, 1/10W 4 R613,14 ERJ6GEYJ154 M 150KOHM, J, 1/10W 2 R615.17 MPCSWR22KS METAL PLATE RESISTOR R618 ERG3FJS820D M 82 OHM, J, 3W 1 R620 ERJ12YJ680 M 68 OHM, J, 1/2W 1 R621 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R622 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R624 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R625 ERJ6CEYJ103 M 10KOHM, J, 1/10W 1 R626 ERJ12YJ680 M 68 OHM, J, 1/2W 1 R627 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R629 ERJ6CEYJ103 M 10KOHM, J, 1/10W 1 R626 ERJ12YJ50 M 60 OHM, J, 1/2W 1 R627 ERJ12YJ51 M 150 OHM, J, 1/2W 1 R628 ERJ6CEYJ103 M 10KOHM, J, 1/10W 1 R629 ERJ6CEYJ103 M 10KOHM, J, 1/10W 1 R630 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R631 MPCSWE2KS METAL PLATE 1 R638 ERJ6CEYJ103 M 10KOHM, J, 1/10W 1 R639 ERJ6CEYJ103 M 10KOHM, J, 1/10W 1 R640 ERJ6CEYJ103 M 10KOHM, J, 1/10W 1 R640 ERJ6CEYJ104 M 150KOHM, J, 1/10W 1 R640 ERJ6CEYJ104 M 150KOHM, J, 1/10W 1 R640 ERJ6CEYJ104 M 150KOHM, J, 1/10W 1 R640 ERJ6CEYJ103 M 10KOHM, J, 1/10W 1 R640 ERJ6CEYJ103 M 10KOHM, J, 1/10W 1 R640 ERJ6CEYJ104 M 150KOHM, J, 1/10W 1 R640 ERJ6CEYJ103 M 10KOHM, J, 1/10W 1 R640 ERJ6CEYJ104 M 150KOHM, J, 1/10W 1 R640 ERJ6CEYJ103 M 10KOHM, J, 1/10W 1 R640 ERJ6CEYJ104 M 150KOHM,					
R559 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R561 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R562 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R563 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R564,65 ERJ6GEYJ473 M 47KOHM, J, 1/10W 1 R564,65 ERJ6GEYJ103 M 10KOHM, J, 1/10W 2 RF601 HUP5K10UJ14 THERMAL RESISTOR 1 R602,03 5K150JA WIREWOUND RESISTOR 2 R604,05 ERDSITJ474 C 4.7KOHM, J, 1/10W 1 R607 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R607 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R607 ERJ6GEYJ34 M 330KOHM, J, 1/10W 1 R608 ERG3FY3820D M 82 OHM, J, 3W 1 R609-12 ERJ6ENF1213 M 121KOHM, J, 1/10W 2 R613,14 ERJ6GEYJ154 M 150KOHM, J, 1/10W 2 R615-17 MPC5WR22KS METAL PLATE RESISTOR R18 ERG3FY3820D M 82 OHM, J, 3W 1 R620 ERJ12YJ680 M 68 OHM, J, 1/2W 1 R621 ERJ12YJ680 M 68 OHM, J, 1/2W 1 R622 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R624 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R625 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R626 ERJ12YJ560 M 68 OHM, J, 1/2W 1 R627 ERJ12YJ51 M 150 OHM, J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R629 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R630 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R631 MPC5WR22KS METAL PLATE RESISTOR 1 R632,33 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R634-37 ERJ6ERY515 M 150 OHM, J, 1/10W 1 R636 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1 R640 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1 R641 MPC5WR22KS METAL PLATE RESISTOR 1 R632-R76GEYJ103 M 10KOHM, J, 1/10W 1 R642 ERJ6GEYJ154 M 50KOHM, J, 1/10W 1 R643 ERJ6GEYJ154 M 50KOHM, J, 1/10W 1 R644 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1 R646 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1 R647 ERJ6ENF5493 M 249KOHM, 1/10W 1 R648 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1 R649 ERJ6ENF5493 M 549KOHM, 1/10W 1 R640 ERJ6ENF5493 M 549KOHM, 1/10W 1 R640 ERJ6ENF3493 M 549KOHM, 1/10W 1 R640 ERJ6ENF5493 M 549KOHM, J, 1/10W 1 R641 ERJ6ENF5493 M 549KOHM, J, 1/10W 1 R642 ERJ6ENF3493 M 549KOHM, J, 1/10W 1 R643 ERJ6ENF3493 M 549KOHM, J, 1/10W 1 R6401 ERJ6ENF5493 M 549KOHM, J, 1/10W 1 R6402 ERJ6ENF3494 M 820KOHM, J, 1/10W 1 R6403 ERJ6ENF3494 M 820KOHM, J, 1/10W 1 R6404 ERJ6ENF5493	R510	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R561	R558	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R562	R559	ERJ12YJ151	M 150 OHM,J, 1/2W	1	
R562	R561	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R563         ERJ6GEYJ473         M 47KOHM, J, 1/10W         1           R564,65         ERJ6GEYJ103         M 10KOHM, J, 1/10W         2           RF601         HUF5K100J14         THERMAL RESISTOR         1           R602,03         SK150JA         WIREWOUND RESISTOR         2           R604,05         ERDSTJ474         C 4.7KOHM, J, 1/10W         1           R606         ERJ6GEYJ102         M 1KOHM, J, 1/10W         1           R607         ERJ6GEYJ334         M 330KOHM, J, 1/10W         1           R608         ERJ6GEYJ34         M 330KOHM, J, 1/10W         1           R608         ERJ6GEYJ154         M 150KOHM, J, 1/10W         4           R613,14         ERJ6GEYJ154         M 150KOHM, J, 1/10W         2           R618         ERG3FJ8820D         M 82 OHM, J, 3W         1           R620         ERJ12YJ580         M 68 OHM, J, 1/2W         1           R621         ERJ12YJ515         M 150 OHM, J, 1/2W         1           R621         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R622         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R624         ERJ12YJ580         M 68 OHM, J, 1/2W         1           R625         E				1	
R564,65 ERJ6GEYJ103 M 10KOHM,J,1/10W 2  RF601 HUF5K100J14 THERMAL RESISTOR 1					
RF601 HUF5K100J14 THERMAL RESISTOR 1			· · · · · · · · · · · · · · · · · · ·		
R602,03 SK150JA WIREWOUND RESISTOR 2 R604,05 ERDSITJ474 C 4.7KOHM, J,1/2W 2 R606 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R607 ERJ6GEYJ334 M 330KOHM,J,1/10W 1 R608 ERG3FJS820D M 82 OHM, J, 3W 1 R613,14 ERJ6GEYJ154 M 150KOHM,J,1/10W 2 R613,14 ERJ6GEYJ154 M 150KOHM,J,1/10W 2 R615-17 MPC5WR22KS METAL PLATE R618 ERG3FJS820D M 82 OHM, J, 3W 1 R620 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R621 ERJ12YJ151 M 150 OHM,J,1/2W 1 R622 ERJ12YJ151 M 150 OHM,J,1/10W 1 R623 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R624 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R625 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R626 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R627 ERJ12YJ151 M 150 OHM,J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R629 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R621 ERJ12YJ690 M 68 OHM,J, 1/2W 1 R622 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R623 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R624 ERJ12YJ651 M 150 OHM,J, 1/2W 1 R627 ERJ12YJ651 M 150 OHM,J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R629 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R629 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R631 MPC5WR22KS METAL PLATE R631,33 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R634-37 ERJ6ENF253 M 255KOHM, 1/10W 1 R640,41 ERJ6ENF253 M 245KOHM, 1/10W 1 R640 ERJ6GEYJ104 M 100 OHM,J,1/10W 1 R640 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R640 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R640 ERJ6GEYJ104 M 150KOHM,J,1/10W 1 R640 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R641 ERJ6ENF2493 M 549KOHM, 1/10W 1 R642 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R643 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R644 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R645 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R646 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R647 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R648 ERJ12YJ690 M 68 OHM,J,1/10W 1 R6503 ERJ12YJ333 M 33KOHM,J,1/2W 1 R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R678 ERJ12YJ151 M 150 OHM,J,1/10W 1 R679 ERJ12YJ333 M 33KOHM,J,1/2W 1 R670 ERJ12YJ333 M 33KOHM,J,1/2W 1 R670 ERJ12YJ333 M 33KOHM,J,1/2W 1 R670 ERJ12YJ333 M 33KOHM,J,1/2W 1 R6701 IXMM564M-C-9 MODULE 1 A MC601 IXMM564M-C-9 MODULE 1 A MC602 IXMM564M-C-9 MODULE 1 A MC603 IXMM564M-E-9 MODULE 1 A MC603 IXMM564M-E-9 MODULE 1 A	K564,65	EKJ6GEYJ103	M 1UKOHM,J,1/10W	2	
R602,03 SK150JA WIREWOUND RESISTOR 2 R604,05 ERDSITJ474 C 4.7KOHM, J,1/2W 2 R606 ERJ6GEYJ102 M 1KOHM,J,1/10W 1 R607 ERJ6GEYJ334 M 330KOHM,J,1/10W 1 R608 ERG3FJS820D M 82 OHM, J, 3W 1 R613,14 ERJ6GEYJ154 M 150KOHM,J,1/10W 2 R613,14 ERJ6GEYJ154 M 150KOHM,J,1/10W 2 R615-17 MPC5WR22KS METAL PLATE R618 ERG3FJS820D M 82 OHM, J, 3W 1 R620 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R621 ERJ12YJ151 M 150 OHM,J,1/2W 1 R622 ERJ12YJ151 M 150 OHM,J,1/10W 1 R623 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R624 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R625 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R626 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R627 ERJ12YJ151 M 150 OHM,J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R629 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R621 ERJ12YJ690 M 68 OHM,J, 1/2W 1 R622 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R623 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R624 ERJ12YJ651 M 150 OHM,J, 1/2W 1 R627 ERJ12YJ651 M 150 OHM,J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R629 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R629 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R631 MPC5WR22KS METAL PLATE R631,33 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R634-37 ERJ6ENF253 M 255KOHM, 1/10W 1 R640,41 ERJ6ENF253 M 245KOHM, 1/10W 1 R640 ERJ6GEYJ104 M 100 OHM,J,1/10W 1 R640 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R640 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R640 ERJ6GEYJ104 M 150KOHM,J,1/10W 1 R640 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R641 ERJ6ENF2493 M 549KOHM, 1/10W 1 R642 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R643 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R644 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R645 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R646 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R647 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R648 ERJ12YJ690 M 68 OHM,J,1/10W 1 R6503 ERJ12YJ333 M 33KOHM,J,1/2W 1 R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R678 ERJ12YJ151 M 150 OHM,J,1/10W 1 R679 ERJ12YJ333 M 33KOHM,J,1/2W 1 R670 ERJ12YJ333 M 33KOHM,J,1/2W 1 R670 ERJ12YJ333 M 33KOHM,J,1/2W 1 R670 ERJ12YJ333 M 33KOHM,J,1/2W 1 R6701 IXMM564M-C-9 MODULE 1 A MC601 IXMM564M-C-9 MODULE 1 A MC602 IXMM564M-C-9 MODULE 1 A MC603 IXMM564M-E-9 MODULE 1 A MC603 IXMM564M-E-9 MODULE 1 A					
R604,05 ERDSITJ474 C 4.7KOHM, J,1/2W 2 R606 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R607 ERJ6GEYJ334 M 330KOHM, J,1/10W 1 R608 ERG3FJSS20D M 82 OHM, J, 3W 1 R609-12 ERJ6ENF1213 M 121KOHM, J,1/10W 4 R613,14 ERJ6GEYJ154 M 150KOHM, J,1/10W 2 R615-17 MCSWR22KS METAL PLATE RESISTOR R618 ERG3FJS820D M 82 OHM, J, 3W 1 R620 ERJ12YJ680 M 68 OHM, J, 3W 1 R621 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R621 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R623 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R624 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R625 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R626 ERJ12YJ680 M 68 OHM, J, 1/2W 1 R627 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R629 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R620 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R621 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R622 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R623 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R624 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R625 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R626 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R627 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R628 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R631 MPC5WR22KS METAL PLATE RESISTOR R632-33 ERJ6GEYJ154 M 150KOHM, J, 1/10W 2 R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 2 R640,41 ERJ6ENF5493 M 249KOHM, 1/10W 1 R641 ERJ6ENF5493 M 249KOHM, 1/10W 1 R642 ERJ6ENF2493 M 249KOHM, 1/10W 1 R643 ERJ6ENF2493 M 249KOHM, 1/10W 1 R644 ERJ6EYJ154 M 150KOHM, J, 1/10W 1 R649 ERJ6EYJ154 M 150KOHM, J, 1/10W 1 R6563-55 ERJ6GEYJ183 M 18KOHM, J, 1/10W 1 R677 ERJ6EYJ103 M 18KOHM, J, 1/10W 1 R678 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R679 ERJ6GEYJ183 M 18KOHM, J, 1/2W 1 R679 ERJ6GEYJ184 M 80DULE 1 A MC301 IXMM564M-B-9 MODULE 1 A MC301 IXMM564M-B-9 MODULE 1 A MC502 IXMM564M-B-9 MODULE 1 A MC603 IXMM564M-B-9 MODULE 1 A	RF601	HUF5K100J14	THERMAL RESISTOR	1	Δ
R604,05 ERDSITJ474 C 4.7KOHM, J,1/2W 2 R606 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R607 ERJ6GEYJ334 M 330KOHM, J,1/10W 1 R608 ERG3FJSS20D M 82 OHM, J, 3W 1 R609-12 ERJ6ENF1213 M 121KOHM, J,1/10W 4 R613,14 ERJ6GEYJ154 M 150KOHM, J,1/10W 2 R615-17 MCSWR22KS METAL PLATE RESISTOR R618 ERG3FJS820D M 82 OHM, J, 3W 1 R620 ERJ12YJ680 M 68 OHM, J, 3W 1 R621 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R621 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R623 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R624 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R625 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R626 ERJ12YJ680 M 68 OHM, J, 1/2W 1 R627 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R629 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R620 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R621 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R622 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R623 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R624 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R625 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R626 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R627 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R628 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R631 MPC5WR22KS METAL PLATE RESISTOR R632-33 ERJ6GEYJ154 M 150KOHM, J, 1/10W 2 R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 2 R640,41 ERJ6ENF5493 M 249KOHM, 1/10W 1 R641 ERJ6ENF5493 M 249KOHM, 1/10W 1 R642 ERJ6ENF2493 M 249KOHM, 1/10W 1 R643 ERJ6ENF2493 M 249KOHM, 1/10W 1 R644 ERJ6EYJ154 M 150KOHM, J, 1/10W 1 R649 ERJ6EYJ154 M 150KOHM, J, 1/10W 1 R6563-55 ERJ6GEYJ183 M 18KOHM, J, 1/10W 1 R677 ERJ6EYJ103 M 18KOHM, J, 1/10W 1 R678 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R679 ERJ6GEYJ183 M 18KOHM, J, 1/2W 1 R679 ERJ6GEYJ184 M 80DULE 1 A MC301 IXMM564M-B-9 MODULE 1 A MC301 IXMM564M-B-9 MODULE 1 A MC502 IXMM564M-B-9 MODULE 1 A MC603 IXMM564M-B-9 MODULE 1 A					
R604,05 ERDSITJ474 C 4.7KOHM, J,1/2W 2 R606 ERJ6GEYJ102 M 1KOHM, J,1/10W 1 R607 ERJ6GEYJ334 M 330KOHM, J,1/10W 1 R608 ERG3FJSS20D M 82 OHM, J, 3W 1 R609-12 ERJ6ENF1213 M 121KOHM, J,1/10W 4 R613,14 ERJ6GEYJ154 M 150KOHM, J,1/10W 2 R615-17 MCSWR22KS METAL PLATE RESISTOR R618 ERG3FJS820D M 82 OHM, J, 3W 1 R620 ERJ12YJ680 M 68 OHM, J, 3W 1 R621 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R621 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R623 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R624 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R625 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R626 ERJ12YJ680 M 68 OHM, J, 1/2W 1 R627 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R629 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R620 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R621 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R622 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R623 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R624 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R625 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R626 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R627 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R628 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R631 MPC5WR22KS METAL PLATE RESISTOR R632-33 ERJ6GEYJ154 M 150KOHM, J, 1/10W 2 R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 2 R640,41 ERJ6ENF5493 M 249KOHM, 1/10W 1 R641 ERJ6ENF5493 M 249KOHM, 1/10W 1 R642 ERJ6ENF2493 M 249KOHM, 1/10W 1 R643 ERJ6ENF2493 M 249KOHM, 1/10W 1 R644 ERJ6EYJ154 M 150KOHM, J, 1/10W 1 R649 ERJ6EYJ154 M 150KOHM, J, 1/10W 1 R6563-55 ERJ6GEYJ183 M 18KOHM, J, 1/10W 1 R677 ERJ6EYJ103 M 18KOHM, J, 1/10W 1 R678 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R679 ERJ6GEYJ183 M 18KOHM, J, 1/2W 1 R679 ERJ6GEYJ184 M 80DULE 1 A MC301 IXMM564M-B-9 MODULE 1 A MC301 IXMM564M-B-9 MODULE 1 A MC502 IXMM564M-B-9 MODULE 1 A MC603 IXMM564M-B-9 MODULE 1 A	R602,03	5K150JA	WIREWOUND RESISTOR	2	
R606 ERJ6GEYJ102 M 1KOHM, J, 1/10W 1 R607 ERJ6GEYJ334 M 330KOHM, J, 1/10W 1 R608 ERG3FJS820D M 82 OHM, J, 3W 1 R613,14 ERJ6GEYJ154 M 150KOHM, J, 1/10W 2 R613,14 ERJ6GEYJ154 M 150KOHM, J, 1/10W 2 R615-17 MPC5WR22KS METAL PLATE RESISTOR R618 ERG3FJS820D M 82 OHM, J, 3W 1 R620 ERJ12YJ680 M 68 OHM, J, 1/2W 1 R621 ERJ12YJ511 M 150 OHM, J, 1/2W 1 R622 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R623 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R624 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R625 ERJ6GEYJ103 M 10KOHM, J, 1/2W 1 R626 ERJ12YJ510 M 68 OHM, J, 1/2W 1 R627 ERJ12YJ151 M 150 OHM, J, 1/10W 1 R628 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R629 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R631 MPC5WR22KS METAL PLATE RESISTOR R632, 33 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1 R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 4 R640,41 ERJ6ENF2553 M 249KOHM, 1/10W 1 R640,41 ERJ6ENF2553 M 249KOHM, 1/10W 1 R640,41 ERJ6ENF2493 M 249KOHM, 1/10W 1 R640,41 ERJ6ENF2493 M 249KOHM, 1/10W 1 R640,41 ERJ6ENF3493 M 549KOHM, 1/10W 1 R640 ERJ6EYJ154 M 150KOHM,J,1/10W 1 R640,41 ERJ6ENF3493 M 549KOHM, 1/10W 1 R640,41 ERJ6ENF3494 M 100 OHM,J,1/10W 1 R640,41 ERJ6ENF3494 M 100 OHM,J,1/10W 1 R640,41 ERJ6ENF3494 M 100 OHM,J,1/10W 1					
R607         ERJ6GEYJ334         M 330KOHM, J, 1/10W         1           R608         ERG3FJS820D         M 82 OHM, J, 3W         1           R609-12         ERJ6ENF1213         M 121KOHM, J, 1/10W         4           R613,14         ERJ6GEYJ154         M 150KOHM, J, 1/10W         2           R615-17         MCCSWR22KS         METAL PLATE         3           R618         ERG3FJS820D         M 68 OHM, J, 1/2W         1           R620         ERJ12YJ580         M 68 OHM, J, 1/2W         1           R621         ERJ12YJ51         M 150 OHM, J, 1/10W         1           R623         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R624         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R625         ERJ6GEYJ103         M 10KOHM, J, 1/2W         1           R626         ERJ12YJ580         M 68 OHM, J, 1/2W         1           R627         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R626         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R630         ERJ6GEYJ163         M 10KOHM, J, 1/10W         1           R631         MC5WR22KS         METAL PLATE         1           R632,33         ERJ6GEYJ164 </td <td></td> <td></td> <td></td> <td></td> <td></td>					
R608 ERG3FJS820D M 82 OHM, J, 3W 1 R609-12 ERJ6ENF1213 M 121KOHM, 1/10W 4 R613,14 ERJ6GEYJ154 M 150KOHM, J,1/10W 2 R615-17 MPC5WR22KS METAL PLATE R615-17 MPC5WR22KS METAL PLATE R618 ERG3FJS820D M 82 OHM, J, 3W 1 R620 ERJ12YJ680 M 68 OHM, J, 1/2W 1 R621 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R623 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R624 ERJ6GEYJ183 M 18KOHM, J,1/10W 1 R625 ERJ6GEYJ103 M 10KOHM, J, 1/2W 1 R626 ERJ12YJ680 M 68 OHM, J, 1/2W 1 R627 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R629 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R629 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R630 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R631 MPC5WR22KS METAL PLATE 1 R631 MPC5WR22KS METAL PLATE 1 R632,33 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1 R632 BRJ6ENF2493 M 249KOHM, 1/10W 1 R640,41 ERJ6ENF2493 M 249KOHM, 1/10W 1 R644 ERJ6ENF2493 M 249KOHM, 1/10W 1 R646 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R646 ERJ6GEYJ103 M 150KOHM, J, 1/10W 1 R646 ERJ6GEYJ104 M 150KOHM, J, 1/10W 1 R646 ERJ6ENF2493 M 249KOHM, 1/10W 1 R647 ERJ6ENF2493 M 249KOHM, 1/10W 1 R648 ERJ6ENF2493 M 249KOHM, 1/10W 1 R649 ERJ6ENF2493 M 249KOHM, 1/10W 1 R649 ERJ6ENF2493 M 249KOHM, 1/10W 1 R649 ERJ6ENF2493 M 150KOHM, J, 1/10W 1 R649 ERJ6ENF2493 M 150KOHM, J, 1/10W 1 R649 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R649 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R649 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R640 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R6503 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R677 ERJ6GEYJ103 M 10KOHM, J, 1/2W 1 R678 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R679 ERJ12YJ151 M 150 OHM, J, 1/2W 1 R6803 ERC12GK185 S 1.8MOHM, K, 1/2W 1 R6803 IXMM564M-B-9 MODULE 1 1 A MC301-02 MP44S1 MODULE 1 1 A MC301-02 MP44S1 MODULE 1 1 A MC601 IXMM564M-G-9 MODULE 1 1 A MC603 IXMM564M-G-9 MODULE 1 1 A MC603 IXMM564M-G-9 MODULE 1 1 A MC604 MP00P5 MODULE 1 1 A					
R609-12 ERJ6ENF1213 M 121KOHM, 1/10W 4  R613,14 ERJ6GYJ154 M 150KOHM,J,1/10W 2  R615-17 MPC5WR22KS METAL PLATE RESISTOR  R618 ERG3FJS820D M 82 OHM, J, 3W 1  R620 ERJ12YJ680 M 68 OHM,J, 1/2W 1  R621 ERJ12YJ511 M 150 OHM,J, 1/2W 1  R622 ERJ6GYJ103 M 10KOHM,J,1/10W 1  R623 ERJ6GYJ103 M 10KOHM,J,1/10W 1  R624 ERJ6GYJ103 M 10KOHM,J,1/10W 1  R625 ERJ6GYJ103 M 10KOHM,J,1/10W 1  R626 ERJ12YJ560 M 68 OHM,J, 1/2W 1  R627 ERJ12YJ151 M 150 OHM,J, 1/2W 1  R628 ERJ6GYJ103 M 10KOHM,J,1/10W 1  R629 ERJ6GYJ103 M 10KOHM,J,1/10W 1  R629 ERJ6GYJ103 M 10KOHM,J,1/10W 1  R629 ERJ6GYJ103 M 10KOHM,J,1/10W 1  R630 ERJ6GYJ103 M 10KOHM,J,1/10W 1  R631 MPC5WR22KS METAL PLATE RESISTOR  R632,33 ERJ6GEYJ154 M 150KOHM,J,1/10W 2  R634-37 ERJ6ENF2493 M 249KOHM, 1/10W 4  R640,41 ERJ6ENF2493 M 249KOHM, 1/10W 1  R640,41 ERJ6ENF2493 M 249KOHM, 1/10W 1  R644 ERJ6ENF2493 M 249KOHM, 1/10W 1  R646 ERJ6EYJ154 M 150KOHM,J,1/10W 1  R647 ERJ6ENF5493 M 549KOHM, 1/10W 1  R648 ERJ6EYJ154 M 150KOHM,J,1/10W 1  R649 ERJ6ENF5493 M 549KOHM, 1/10W 1  R640 ERJ6EYJ154 M 150KOHM,J,1/10W 1  R6618 ERJ12YJ680 M 68 OHM,J, 1/10W 1  R677 ERJ6EYJ183 M 18KOHM,J,1/10W 1  R679 ERJ12YJ151 M 150KOHM,J,1/10W 1  R681.82 ERJ6GEYJ824 M 820KOHM,J,1/10W 1  R683 ERC12GK185 S 1.8MOHM, K,1/2W 1  R681.82 ERJ6GYJ333 M 33KOHM,J, 1/2W 1  R683 ERC12GK185 S 1.8MOHM, K,1/2W 1  R6801 IXMM564M-G-9 MODULE 1 1 A  MC601 MP00P4 MODULE 1 1 A  MC601 MP00P4 MODULE 1 1 A  MC601 MP00P5 MODULE 1 1 A					
R613,14 ERJ6GEYJ154 M 150KOHM,J,1/10W 2 R615-17 MPC5WR22KS METAL PLATE RESISTOR R618 ERG3FJS82DD M 82 OHM, J, 3W 1 R620 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R621 ERJ12YJ151 M 150 OHM,J, 1/10W 1 R622 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R624 ERJ6GEYJ183 M 18KOHM,J,1/10W 1 R625 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R626 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R627 ERJ12YJ151 M 150 OHM,J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R629 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R629 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R630 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R631 MPC5WR22KS METAL PLATE RESISTOR R632,33 ERJ6GEYJ154 M 150KOHM,J,1/10W 2 R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 4 R6363 ERJ6EWJ154 M 150KOHM,J,1/10W 1 R640,41 ERJ6ENF25493 M 249KOHM, 1/10W 1 R640 ERJ6ESYJ101 M 100 OHM,J,1/10W 1 R644 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R646 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R646 ERJ6GEYJ183 M 549KOHM, 1/10W 1 R647 ERJ6ENF5493 M 549KOHM, 1/10W 1 R648 ERJ6ENF5493 M 549KOHM, 1/10W 1 R649 ERJ6ENF5493 M 549KOHM, 1/10W 1 R640,41 ERJ6ESYJ824 M 820KOHM,J,1/10W 1 R653-55 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R648 ERJ6ESYJ824 M 820KOHM,J,1/10W 1 R658-59 ERJ6GEYJ183 M 18KOHM,J,1/10W 1 R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R678 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R681,82 ERJ6ESYJ824 M 820KOHM,J,1/10W 2 R683 ERC12K185 S 1.8MOHM,J,1/2W 1 R683 ERC12GK185 S 1.8MOHM,J,1/2W 1 R683 ERC12GK185 S 1.8MOHM,J,1/2W 1 R6601 MP00P4 MODULE 1	R608	ERG3FJS820D	M 82 OHM, J, 3W	1	
R615-17 MPC5WR22KS METAL PLATE RESISTOR  R618 ERG3FJS82OD M 82 OHM, J, 3W 1  R620 ERJ12YJ68O M 68 OHM, J, 1/2W 1  R621 ERJ12YJ151 M 150 OHM, J, 1/10W 1  R623 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R624 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R625 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R626 ERJ12YJ68O M 68 OHM, J, 1/2W 1  R627 ERJ12YJ151 M 150 OHM, J, 1/2W 1  R628 ERJ6GEYJ103 M 10KOHM, J, 1/2W 1  R629 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R629 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R630 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R631 MPC5WR22KS METAL PLATE RESISTOR  R632, 33 ERJ6GEYJ154 M 150KOHM, J, 1/10W 2  R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 4  R6363 ERJ6ENF2493 M 249KOHM, 1/10W 1  R640, 41 ERJ6ENF2493 M 249KOHM, 1/10W 1  R640 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1  R642 ERJ6ENF2493 M 249KOHM, 1/10W 1  R644 ERJ6GEYJ164 M 150KOHM, J, 1/10W 1  R645 ERJ6ENF5493 M 549KOHM, 1/10W 1  R646 ERJ6GEYJ184 M 150KOHM, J, 1/10W 1  R647 ERJ6ENF2493 M 249KOHM, 1/10W 1  R648 ERJ6ENF2493 M 249KOHM, 1/10W 1  R649 ERJ6ENF2493 M 549KOHM, 1/10W 1  R651-55 ERJ6GEYJ184 M 150KOHM, J, 1/10W 1  R653-55 ERJ6GEYJ183 M 18KOHM, J, 1/10W 1  R677 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R678 ERJ12YJ680 M 68 OHM, J, 1/2W 1  R681, 82 ERJ6GEYJ824 M 820KOHM, J, 1/2W 1  R691 MC601 MP00P4 MODULE 1	R609-12	ERJ6ENF1213	M 121KOHM, 1/10W	4	
R618 ERG3FJS820D M 82 OHM, J, 3W 1  R620 ERJ12YJ680 M 68 OHM, J, 1/2W 1  R621 ERJ12YJ151 M 150 OHM, J, 1/2W 1  R623 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R624 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R625 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R626 ERJ12YJ680 M 68 OHM, J, 1/2W 1  R627 ERJ12YJ151 M 150 OHM, J, 1/2W 1  R628 ERJ6GEYJ103 M 10KOHM, J, 1/2W 1  R629 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R629 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R630 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R631 MPC5WR22KS METAL PLATE ERSISTOR  R632,33 ERJ6GEYJ154 M 150KOHM, J, 1/10W 2  R634-37 ERJ6ENF2493 M 249KOHM, 1/10W 2  R640,41 ERJ6ENF2493 M 249KOHM, 1/10W 1  R640 ERJ6ENF2493 M 249KOHM, 1/10W 1  R644 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1  R646 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1  R646 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1  R647 ERJ6ENF2493 M 249KOHM, 1/10W 1  R648 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1  R649 ERJ6ENF2493 M 549KOHM, J, 1/10W 1  R649 ERJ6ENF2493 M 549KOHM, J, 1/10W 1  R649 ERJ6ENF5493 M 549KOHM, J, 1/10W 1  R649 ERJ6EYJ154 M 150KOHM, J, 1/10W 1  R653-55 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1  R677 ERJ6GEYJ153 M 18KOHM, J, 1/10W 1  R679 ERJ12YJ680 M 68 OHM, J, 1/10W 1  R679 ERJ12YJ680 M 68 OHM, J, 1/2W 1  R681, 82 ERJ6EYJ151 M 150 OHM, J, 1/2W 1  R683 ERC12GK185 S 1.8MOHM, K, 1/2W 1  R681, 82 ERJ6EYJ333 M 33KOHM, J, 1/2W 2  MC301-02 MP44S1 MODULE 1	R613,14	ERJ6GEYJ154	M 150KOHM, J, 1/10W	2	
R618 ERG3FJS820D M 82 OHM, J, 3W 1  R620 ERJ12YJ680 M 68 OHM, J, 1/2W 1  R621 ERJ12YJ511 M 150 OHM, J, 1/2W 1  R623 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R624 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R625 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R626 ERJ12YJ680 M 68 OHM, J, 1/2W 1  R627 ERJ12YJ51 M 150 OHM, J, 1/2W 1  R628 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R629 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R620 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R630 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1  R631 MPC5WR22KS METAL PLATE  R631 MPC5WR22KS METAL PLATE  R632, 33 ERJ6GEYJ154 M 150KOHM, J, 1/10W 2  R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 4  R634-37 ERJ6ENF2493 M 249KOHM, 1/10W 1  R640, 41 ERJ6ENF5493 M 549KOHM, 1/10W 1  R641 ERJ6ENF5493 M 549KOHM, 1/10W 1  R642 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1  R644 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1  R645 ERJ6GEYJ183 M 15KOHM, J, 1/10W 1  R6566 ERJ6GEYJ183 M 15KOHM, J, 1/10W 1  R677 ERJ6GEYJ183 M 18KOHM, J, 1/10W 1  R677 ERJ6GEYJ183 M 18KOHM, J, 1/10W 1  R678 ERJ12YJ680 M 68 OHM, J, 1/2W 1  R679 ERJ12YJ51 M 150 OHM, J, 1/2W 1  R683 ERC12GK185 S 1.8MOHM, K, 1/2W 1  R683 ERC12GK185 S 1.8MOHM, K, 1/2W 1  R6501 MMC501 MMC504 MC504 MODULE 1	R615-17	MPC5WR22KS	METAL PLATE	3	
R620         ERJ12YJ680         M 68 OHM, J, 1/2W         1           R621         ERJ12YJ151         M 150 OHM, J, 1/2W         1           R623         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R624         ERJ6GEYJ183         M 18KOHM, J, 1/10W         1           R625         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R626         ERJ12YJ680         M 68 OHM, J, 1/2W         1           R627         ERJ12YJ151         M 150 OHM, J, 1/10W         1           R628         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R629         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R631         MPC5WR22KS         METAL PLATE         1           R631         MPC5WR22KS         METAL PLATE         1           R632,33         ERJ6GEYJ154         M 150KOHM, J, 1/10W         2           R634-37         ERJ6ENF2493         M 249KOHM, 1/10W         4           R634         ERJ6ENF2493         M 249KOHM, 1/10W         1           R642         ERJ6ENF2493         M 249KOHM, 1/10W         1           R644         ERJ6GEYJ164         M 150KOHM, J, 1/10W         1           R645         ERJ6GEYJ183			RESISTOR		
R620         ERJ12YJ680         M 68 OHM, J, 1/2W         1           R621         ERJ12YJ151         M 150 OHM, J, 1/2W         1           R623         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R624         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R625         ERJ6GEYJ103         M 10KOHM, J, 1/2W         1           R626         ERJ12YJ680         M 68 OHM, J, 1/2W         1           R627         ERJ12YJ151         M 150 OHM, J, 1/10W         1           R628         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R629         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R631         MPC5WR22KS         METAL PLATE         1           R631         MPC5WR22KS         M 25KOHM, J, 1/10W         2           R632,33         ERJ6GEYJ154         M 150KOHM, J, 1/10W         4           R632         ERJ6ENF2493         M 249KOHM, 1/10W         1           R642         ERJ6ENF2493         M 249KOHM	R618	ERG3FJS820D	M 82 OHM, J, 3W	1	
R621 ERJ12YJ151 M 150 OHM,J, 1/2W 1 R623 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R624 ERJ6GEYJ183 M 18KOHM,J,1/10W 1 R625 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R626 ERJ12YJ168 M 10KOHM,J,1/2W 1 R627 ERJ12YJ151 M 150 OHM,J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R629 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R630 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R631 MPC5WR22KS METAL PLATE RESISTOR R632,33 ERJ6GEYJ154 M 150KOHM,J,1/10W 2 R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 4 R638 ERJ6ENF2553 M 255KOHM, 1/10W 1 R640,41 ERJ6ENF5493 M 249KOHM, 1/10W 1 R640 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R646 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R646 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R647 ERJ6ENF5493 M 249KOHM, 1/10W 1 R648 ERJ6ENF2493 M 249KOHM, 1/10W 1 R649 ERJ6ENF2493 M 249KOHM, 1/10W 1 R649 ERJ6ENF2493 M 249KOHM, 1/10W 1 R653-55 ERJ6GEYJ183 M 18KOHM,J,1/10W 1 R653-55 ERJ6GEYJ183 M 18KOHM,J,1/10W 1 R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R679 ERJ12YJ580 M 68 OHM,J, 1/2W 1 R679 ERJ12YJ580 M 68 OHM,J, 1/2W 1 R681,82 ERJ6GEYJ824 M 820KOHM,J,1/10W 2 R683 ERC12GK185 S 1.8MOHM, K,1/2W 1 R681,82 ERJ6GEYJ824 M 820KOHM,J,1/10W 2 R683 ERC12GK185 S 1.8MOHM,K,1/2W 1 R6801 LXMM564M-B-9 MODULE 1 A MC301-02 MP44S1 MODULE 1 A MC301-02 MP44S1 MODULE 1 A MC501 LXMM564M-G-9 MODULE 1 A MC501 LXMM564M-G-9 MODULE 1 A MC501 LXMM564M-G-9 MODULE 1 A MC602 LXMM564M-G-9 MODULE 1 A MC602 LXMM564M-G-9 MODULE 1 A MC603 LXMM564M-G-9 MODULE 1 A	R620	ER.T12Y.T680		1	
R623         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R624         ERJ6GEYJ183         M 18KOHM, J, 1/10W         1           R625         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R626         ERJ12YJ580         M 68 OHM, J, 1/2W         1           R627         ERJ12YJ151         M 150 OHM, J, 1/10W         1           R628         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R629         ERJ6GEYJ473         M 47KOHM, J, 1/10W         1           R630         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R631         MPC5WR22KS         METAL PLATE RESISTOR         1           R632,33         ERJ6GEYJ154         M 150KOHM, J, 1/10W         2           R634-37         ERJ6ENF2553         M 255KOHM, 1/10W         4           R634-37         ERJ6ENF2493         M 249KOHM, 1/10W         1           R640,41         ERJ6ENF2493         M 249KOHM, 1/10W         1           R642         ERJ6ENF2493         M 249KOHM, 1/10W         1           R644         ERJ6GEYJ103         M 150KOHM, J, 1/10W         1           R653-55         ERJ6GEYJ183         M 18KOHM, J, 1/10W         1           R677					
R624       ERJ6GEYJ183       M 18KOHM, J, 1/10W       1         R625       ERJ6GEYJ103       M 10KOHM, J, 1/10W       1         R626       ERJ12YJ680       M 68 OHM, J, 1/2W       1         R627       ERJ12YJ151       M 150 OHM, J, 1/10W       1         R628       ERJ6GEYJ103       M 10KOHM, J, 1/10W       1         R629       ERJ6GEYJ103       M 10KOHM, J, 1/10W       1         R630       ERJ6GEYJ103       M 10KOHM, J, 1/10W       1         R631       MPC5WR22KS       METAL PLATE RESISTOR       1         R632,33       ERJ6GEYJ154       M 150KOHM, J, 1/10W       2         R634-37       ERJ6ENF2493       M 249KOHM, 1/10W       1         R638       ERJ6ENF2493       M 249KOHM, 1/10W       1         R640,41       ERJ6ENF2493       M 249KOHM, 1/10W       1         R644       ERJ6GEYJ154       M 150KOHM, J, 1/10W       1         R644       ERJ6GEYJ154       M 150KOHM, J, 1/10W       1         R646       ERJ6GEYJ183       M 249KOHM, 1/10W       1         R647       ERJ6GEYJ183       M 18KOHM, J, 1/10W       1         R679       ERJ6GEYJ824       M 820KOHM, J, 1/10W       1         R679 <t< td=""><td></td><td></td><td></td><td></td><td></td></t<>					
R625 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R626 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R627 ERJ12YJ151 M 150 OHM,J, 1/2W 1 R628 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R629 ERJ6GEYJ473 M 47KOHM,J,1/10W 1 R630 ERJ6GEYJ473 M 10KOHM,J,1/10W 1 R631 MPC5WR22KS METAL PLATE RESISTOR R632,33 ERJ6GEYJ154 M 150KOHM,J,1/10W 2 R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 4 R638 ERJ6ENF2493 M 249KOHM, 1/10W 1 R640,41 ERJ6ENF5493 M 549KOHM, 1/10W 1 R644 ERJ6ENF2493 M 249KOHM, 1/10W 1 R646 ERJ6ESYJ154 M 150KOHM,J,1/10W 1 R646 ERJ6ESYJ101 M 100 OHM,J,1/10W 1 R646 ERJ6ESYJ101 M 100 OHM,J,1/10W 1 R647 ERJ6ENF2493 M 549KOHM, 1/10W 1 R653-55 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R656-59 ERJ6GEYJ183 M 18KOHM,J,1/10W 1 R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R679 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R681,82 ERJ6GEYJ824 M 820KOHM,J,1/10W 2 R683 ERC12GK185 S 1.8MOHM, K,1/2W 1 R1301,0 ERJ12YJ333 M 33KOHM,J, 1/2W 2 R1301,0 ERJ12YJ333 M 33KOHM,J, 1/2W 1 RC603 IXMM564M-E-9 MODULE 1					
R626         ERJ12YJ680         M 68 OHM, J, 1/2W         1           R627         ERJ12YJ151         M 150 OHM, J, 1/2W         1           R628         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R629         ERJ6GEYJ473         M 47KOHM, J, 1/10W         1           R630         ERJ6GEYJ103         M 10KOHM, J, 1/10W         1           R631         MPC5WR22KS         METAL PLATE RESISTOR         1           R632,33         ERJ6GEYJ154         M 150KOHM, J, 1/10W         2           R634-37         ERJ6ENF2553         M 255KOHM, 1/10W         4           R638         ERJ6ENF2493         M 249KOHM, 1/10W         1           R640,41         ERJ6ENF5493         M 549KOHM, 1/10W         1           R642         ERJ6ENF2493         M 249KOHM, 1/10W         1           R644         ERJ6GEYJ101         M 100 OHM, J, 1/10W         1           R649         ERJ6GEYJ154         M 150KOHM, J, 1/10W         1           R6553-55         ERJ6GEYJ183         M 18KOHM, J, 1/10W         3           R656-59         ERJ6GEYJ824         M 820KOHM, J, 1/2W         1           R679         ERJ12YJ680         M 68 OHM, J, 1/2W         1           R681,82	R624	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R627       ERJ12YJ151       M 150 OHM, J, 1/2W       1         R628       ERJ6GEYJ103       M 10KOHM, J, 1/10W       1         R629       ERJ6GEYJ473       M 47KOHM, J, 1/10W       1         R630       ERJ6GEYJ103       M 10KOHM, J, 1/10W       1         R631       MPC5WR22KS       METAL PLATE RESISTOR       1         R632,33       ERJ6GEYJ154       M 150KOHM, J, 1/10W       2         R634-37       ERJ6ENF2553       M 255KOHM, 1/10W       4         R638       ERJ6ENF2493       M 249KOHM, 1/10W       1         R640,41       ERJ6ENF2493       M 249KOHM, 1/10W       1         R642       ERJ6GEYJ101       M 100 OHM, J, 1/10W       1         R644       ERJ6GEYJ154       M 150KOHM, J, 1/10W       1         R646       ERJ6GEYJ154       M 150KOHM, J, 1/10W       1         R649       ERJ6GEYJ183       M 18KOHM, J, 1/10W       1         R653-55       ERJ6GEYJ183       M 18KOHM, J, 1/10W       1         R677       ERJ6GEYJ103       M 10KOHM, J, 1/2W       1         R678       ERJ12YJ680       M 68 OHM, J, 1/2W       1         R683       ERC12GK185       S 1.8MOHM, J, 1/2W       1         R683	R625	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R628       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R629       ERJ6GEYJ473       M 47KOHM,J,1/10W       1         R630       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R631       MPC5WR22KS       METAL PLATE RESISTOR       1         R632,33       ERJ6GEYJ154       M 150KOHM,J,1/10W       2         R634-37       ERJ6ENF2553       M 255KOHM, 1/10W       4         R638       ERJ6ENF2493       M 249KOHM, 1/10W       1         R640,41       ERJ6ENF5493       M 549KOHM, 1/10W       1         R642       ERJ6ENF2493       M 249KOHM, 1/10W       1         R644       ERJGESYJ101       M 100 OHM,J,1/10W       1         R646       ERJ6GEYJ154       M 150KOHM,J,1/10W       1         R649       ERJ6ENF5493       M 549KOHM, 1/10W       1         R649       ERJ6EYJ183       M 18KOHM,J,1/10W       1         R653-55       ERJ6GEYJ183       M 18KOHM,J,1/10W       1         R677       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R678       ERJ12YJ151       M 150 OHM,J, 1/2W       1         R681,82       ERJ6GEYJ824       M 820KOHM,J,1/10W       2         R683       ERC12GK185	R626	ERJ12YJ680	M 68 OHM,J, 1/2W	1	
R628       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R629       ERJ6GEYJ473       M 47KOHM,J,1/10W       1         R630       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R631       MPC5WR22KS       METAL PLATE RESISTOR       1         R632,33       ERJ6GEYJ154       M 150KOHM,J,1/10W       2         R634-37       ERJ6ENF2553       M 255KOHM, 1/10W       4         R638       ERJ6ENF2493       M 249KOHM, 1/10W       1         R640,41       ERJ6ENF5493       M 549KOHM, 1/10W       1         R642       ERJ6ENF2493       M 249KOHM, 1/10W       1         R644       ERJGESYJ101       M 100 OHM,J,1/10W       1         R646       ERJ6GEYJ154       M 150KOHM,J,1/10W       1         R649       ERJ6ENF5493       M 549KOHM, 1/10W       1         R649       ERJ6EYJ183       M 18KOHM,J,1/10W       1         R653-55       ERJ6GEYJ183       M 18KOHM,J,1/10W       1         R677       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R678       ERJ12YJ151       M 150 OHM,J, 1/2W       1         R681,82       ERJ6GEYJ824       M 820KOHM,J,1/10W       2         R683       ERC12GK185	R627	ERJ12YJ151	M 150 OHM,J, 1/2W	1	
R629 ERJGGEYJ473 M 47KOHM,J,1/10W 1  R630 ERJGGEYJ103 M 10KOHM,J,1/10W 1  R631 MPC5WR22KS METAL PLATE 1  R632,33 ERJGGEYJ154 M 150KOHM,J,1/10W 2  R634-37 ERJGENF2553 M 255KOHM, 1/10W 4  R638 ERJGENF2493 M 249KOHM, 1/10W 1  R640,41 ERJGENF5493 M 549KOHM, 1/10W 1  R642 ERJGENF2493 M 249KOHM, 1/10W 1  R644 ERJGEYJ101 M 100 OHM,J,1/10W 1  R646 ERJGGEYJ154 M 150KOHM,J,1/10W 1  R647 ERJGENF5493 M 549KOHM, 1/10W 1  R648 ERJGEYJ101 M 10W OHM,J,1/10W 1  R649 ERJGEYJ101 M 10W OHM,J,1/10W 1  R653-55 ERJGGEYJ183 M 18KOHM,J,1/10W 3  R656-59 ERJGGEYJ824 M 820KOHM,J,1/10W 4  R677 ERJGGEYJ103 M 10KOHM,J,1/10W 1  R678 ERJ12YJ680 M 68 OHM,J, 1/2W 1  R681,82 ERJGEYJ824 M 820KOHM,J,1/10W 2  R683 ERC12GK185 S 1.8MOHM, K,1/2W 1  R681,82 ERJGGEYJ824 M 820KOHM,J,1/10W 2  R683 ERC12GK185 S 1.8MOHM,K,1/2W 1  R7301,0 ERJ12YJ333 M 33KOHM,J, 1/2W 2  MC301-02 MP44S1 MODULE 2 A  MC303 IXMM564M-B-9 MODULE 1 A  MC401 IXMM564M-F-9 MODULE 1 A  MC501 IXMM564M-G-9 MODULE 1 A  MC602 IXMM564M-G-9 MODULE 1 A  MC603 IXMM564M-E-9 MODULE 1 A  MC603 IXMM564M-E-9 MODULE 1 A  MC604 MP00P5 MODULE 1 A	R628	ERJ6GEYJ103		1	
R630 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R631 MPC5WR22KS METAL PLATE RESISTOR R632,33 ERJ6GEYJ154 M 150KOHM,J,1/10W 2 R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 4 R638 ERJ6ENF2493 M 249KOHM, 1/10W 1 R640,41 ERJ6ENF5493 M 549KOHM, 1/10W 1 R642 ERJ6ENF2493 M 249KOHM, 1/10W 1 R644 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R646 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R649 ERJ6ENF5493 M 549KOHM, 1/10W 1 R653-55 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R653-55 ERJ6GEYJ183 M 18KOHM,J,1/10W 4 R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R678 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R681,82 ERJ6GEYJ824 M 820KOHM,J,1/10W 2 R683 ERC12GK185 S 1.8MOHM,K,1/2W 1 R681,82 ERJ6GEYJ824 M 820KOHM,J,1/10W 2 R683 ERC12GK185 S 1.8MOHM,K,1/2W 1 R6810,0 ERJ12YJ333 M 33KOHM,J, 1/2W 2 MC303 IXMM564M-B-9 MODULE 1 A MC301 IXMM564M-F-9 MODULE 1 A MC501 IXMM564M-G-9 MODULE 1 A MC602 IXMM564M-B-9 MODULE 1 A MC603 IXMM564M-B-9 MODULE 1 A MC603 IXMM564M-B-9 MODULE 1 A MC604 MP00P5 MODULE 1 A				1	
R631 MPC5WR22KS METAL PLATE RESISTOR  R632,33 ERJ6GEYJ154 M 150KOHM,J,1/10W 2  R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 4  R638 ERJ6ENF2493 M 249KOHM, 1/10W 1  R640,41 ERJ6ENF5493 M 549KOHM, 1/10W 1  R642 ERJ6ENF2493 M 249KOHM, 1/10W 1  R644 ERJ6GEYJ101 M 100 OHM,J,1/10W 1  R646 ERJ6GEYJ154 M 150KOHM,J,1/10W 1  R649 ERJ6ENF5493 M 549KOHM, 1/10W 1  R649 ERJ6ENF5493 M 549KOHM, 1/10W 1  R653-55 ERJ6GEYJ183 M 18KOHM,J,1/10W 3  R656-59 ERJ6GEYJ183 M 18KOHM,J,1/10W 4  R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R678 ERJ12YJ680 M 68 OHM,J, 1/2W 1  R681,82 ERJ6GEYJ824 M 820KOHM,J,1/10W 2  R683 ERC12GK185 S 1.8MOHM,K,1/2W 1  R1301,0 ERJ12YJ333 M 33KOHM,J, 1/2W 2  MC303 IXMM564M-B-9 MODULE 1 A  MC401 IXMM564M-F-9 MODULE 1 A  MC602 IXMM564M-G-9 MODULE 1 A  MC603 IXMM564M-B-9 MODULE 1 A  MC603 IXMM564M-B-9 MODULE 1 A  MC603 IXMM564M-B-9 MODULE 1 A  MC604 MP00P5 MODULE 1 A					
RESISTOR  R632,33 ERJ6GEYJ154 M 150KOHM,J,1/10W 2  R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 4  R638 ERJ6ENF2493 M 249KOHM, 1/10W 1  R640,41 ERJ6ENF5493 M 549KOHM, 1/10W 1  R642 ERJ6ENF2493 M 249KOHM, 1/10W 1  R644 ERJGEYJ101 M 100 OHM,J,1/10W 1  R646 ERJ6GEYJ154 M 150KOHM,J,1/10W 1  R649 ERJ6ENF5493 M 549KOHM, 1/10W 1  R653-55 ERJ6GEYJ183 M 18KOHM,J,1/10W 3  R656-59 ERJ6GEYJ183 M 18KOHM,J,1/10W 4  R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1  R678 ERJ12YJ160 M 68 OHM,J,1/10W 1  R679 ERJ12YJ151 M 150 OHM,J, 1/2W 1  R681,82 ERJ6GEYJ824 M 820KOHM,J,1/10W 2  R683 ERC12GK185 S 1.8MOHM,K,1/2W 1  R1301,0 ERJ12YJ333 M 33KOHM,J,1/2W 1  MC303 IXMM564M-B-9 MODULE 1 A  MC303 IXMM564M-F-9 MODULE 1 A  MC401 MC401 MC401 MC504 MODULE 1 A  MC602 IXMM564M-G-9 MODULE 1 A  MC603 IXMM564M-B-9 MODULE 1 A  MC603 IXMM564M-B-9 MODULE 1 A  MC603 IXMM564M-B-9 MODULE 1 A  MC604 MC90P5 MODULE 1 A					
R632,33 ERJ6GEYJ154 M 150KOHM,J,1/10W 2 R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 4 R638 ERJ6ENF2493 M 249KOHM, 1/10W 1 R640,41 ERJ6ENF5493 M 549KOHM, 1/10W 1 R642 ERJ6ENF2493 M 249KOHM, 1/10W 1 R644 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R646 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R649 ERJ6ENF5493 M 549KOHM, 1/10W 1 R653-55 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R656-59 ERJ6GEYJ824 M 820KOHM,J,1/10W 1 R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R678 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R681,82 ERJ6GEYJ824 M 820KOHM,J,1/10W 2 R683 ERC12GK185 S 1.8MOHM,K,1/2W 1 R1301,0 ERJ12YJ333 M 33KOHM,J,1/2W 2 MC303 IXMM564M-B-9 MODULE 2 A MC303 IXMM564M-F-9 MODULE 1 A MC601 MP00P4 MODULE 1 A MC602 IXMM564M-E-9 MODULE 1 A MC603 IXMM564M-E-9 MODULE 1 A MC604 MP00P5 MODULE 1 A MC604 MP00P5 MODULE 1 A	R631	MPC5WR22KS		1	
R634-37 ERJ6ENF2553 M 255KOHM, 1/10W 4 R638 ERJ6ENF2493 M 249KOHM, 1/10W 1 R640,41 ERJ6ENF5493 M 549KOHM, 1/10W 2 R642 ERJ6ENF2493 M 249KOHM, 1/10W 1 R644 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R646 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R649 ERJ6ENF5493 M 549KOHM, 1/10W 1 R653-55 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R656-59 ERJ6GEYJ824 M 820KOHM,J,1/10W 1 R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R678 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R681,82 ERJ6GEYJ824 M 820KOHM,J,1/10W 2 R683 ERC12GK185 S 1.8MOHM,K,1/2W 1 R1301,0 ERJ12YJ333 M 33KOHM,J,1/2W 2  MC303 IXMM564M-B-9 MODULE 2   MC401 IXMM564M-F-9 MODULE 1   MC602 MC603 IXMM564M-E-9 MODULE 1   MC603 IXMM564M-E-9 MODULE 1   MC604 MC90P5 MODULE 1   MC6064 MC90P5 MODULE 1   MC6064 MC90P5 MODULE 1   MC6060 MC600 MC600 MC90P5 MODULE 1   MC600 MC600 MC600 MC600 MC90P5 MC600					
R638					
R640,41       ERJ6ENF5493       M 549KOHM, 1/10W       2         R642       ERJ6ENF2493       M 249KOHM, 1/10W       1         R644       ERJ6GEYJ101       M 100 OHM,J,1/10W       1         R646       ERJ6GEYJ154       M 150KOHM,J,1/10W       1         R649       ERJ6ENF5493       M 549KOHM, 1/10W       1         R653-55       ERJ6GEYJ183       M 18KOHM,J,1/10W       3         R656-59       ERJ6GEYJ824       M 820KOHM,J,1/10W       4         R677       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R678       ERJ12YJ680       M 68 OHM,J,1/2W       1         R679       ERJ12YJ151       M 150 OHM,J, 1/2W       1         R681,82       ERJ6GEYJ824       M 820KOHM,J,1/10W       2         R683       ERC12GK185       S 1.8MOHM,K,1/2W       1         R1301,0       ERJ12YJ333       M 33KOHM,J, 1/2W       2         MC303       IXMM564M-B-9       MODULE       1       A         MC401       IXMM564M-F-9       MODULE       1       A         MC601       MP00P4       MODULE       1       A         MC603       IXMM564M-E-9       MODULE       1       A         MC604	R634-37	ERJ6ENF2553	M 255KOHM, 1/10W	4	
R640,41       ERJ6ENF5493       M 549KOHM, 1/10W       1         R642       ERJ6ENF2493       M 249KOHM, 1/10W       1         R644       ERJ6GEYJ101       M 100 OHM,J,1/10W       1         R646       ERJ6GEYJ154       M 150KOHM,J,1/10W       1         R649       ERJ6ENF5493       M 549KOHM, 1/10W       1         R653-55       ERJ6GEYJ183       M 16KOHM,J,1/10W       3         R676-69       ERJ6GEYJ824       M 820KOHM,J,1/10W       1         R677       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R679       ERJ12YJ680       M 68 OHM,J, 1/2W       1         R681,82       ERJ6GEYJ824       M 820KOHM,J,1/10W       2         R683       ERC12GK185       S 1.8MOHM,K,1/2W       1         R1301,0       ERJ12YJ333       M 33KOHM,J, 1/2W       2         2       MC303       IXMM564M-B-9       MODULE       1       A         MC401       IXMM564M-F-9       MODULE       1       A         MC602       IXMM564M-G-9       MODULE       1       A         MC603       IXMM564M-E-9       MODULE       1       A         MC604       MP00P5       MODULE       1       A <td>R638</td> <td>ERJ6ENF2493</td> <td>M 249KOHM, 1/10W</td> <td>1</td> <td></td>	R638	ERJ6ENF2493	M 249KOHM, 1/10W	1	
R642       ERJ6ENF2493       M 249KOHM, 1/10W       1         R644       ERJ6GEYJ101       M 100 OHM,J,1/10W       1         R646       ERJ6GEYJ154       M 150KOHM,J,1/10W       1         R649       ERJ6ENF5493       M 549KOHM, 1/10W       1         R653-55       ERJ6GEYJ183       M 18KOHM,J,1/10W       3         R656-59       ERJ6GEYJ824       M 820KOHM,J,1/10W       4         R677       ERJ6GEYJ103       M 10KOHM,J,1/10W       1         R678       ERJ12YJ680       M 68 OHM,J, 1/2W       1         R679       ERJ12YJ151       M 150 OHM,J, 1/2W       1         R681,82       ERJ6GEYJ824       M 820KOHM,J,1/10W       2         R683       ERC12GK185       S 1.8MOHM, K,1/2W       1         R1301,0       ERJ12YJ333       M 33KOHM,J, 1/2W       2         MC303       IXMM564M-B-9       MODULE       1       A         MC401       IXMM564M-F-9       MODULE       1       A         MC601       MP00P4       MODULE       1       A         MC603       IXMM564M-E-9       MODULE       1       A         MC604       MP00P5       MODULE       1       A	R640,41	ERJ6ENF5493		2	
R644 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R646 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R649 ERJ6ENF5493 M 549KOHM, 1/10W 1 R653-55 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R656-59 ERJ6GEYJ824 M 820KOHM,J,1/10W 4 R677 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R678 ERJ12YJ680 M 68 OHM,J, 1/2W 1 R679 ERJ12YJ151 M 150 OHM,J, 1/2W 1 R681,82 ERJ6GEYJ824 M 820KOHM,J,1/10W 2 R683 ERC12GK185 S 1.8MOHM, K,1/2W 1 R1301,0 ERJ12YJ333 M 33KOHM,J, 1/2W 2  MC303 IXMM564M-B-9 MODULE 2 A MC401 IXMM564M-F-9 MODULE 1 A MC501 MP00P4 MODULE 1 A MC602 IXMM564M-G-9 MODULE 1 A MC603 IXMM564M-B-9 MODULE 1 A MC604 MP00P5 MODULE 1 A	R642	ERJ6ENF2493		1	
R646       ERJ6GEYJ154       M 150KOHM, J,1/10W       1         R649       ERJ6ENF5493       M 549KOHM, 1/10W       1         R653-55       ERJ6GEYJ183       M 18KOHM, J,1/10W       3         R656-59       ERJ6GEYJ824       M 820KOHM, J,1/10W       4         R677       ERJ6GEYJ103       M 10KOHM, J, 1/10W       1         R678       ERJ12YJ680       M 68 OHM, J, 1/2W       1         R679       ERJ12YJ151       M 150 OHM, J, 1/2W       1         R681,82       ERJ6GEYJ824       M 820KOHM, J, 1/10W       2         R683       ERC12GK185       S 1.8MOHM, K, 1/2W       1         R1301,0       ERJ12YJ333       M 33KOHM, J, 1/2W       2         MC303       IXMM564M-B-9       MODULE       1       A         MC401       IXMM564M-F-9       MODULE       1       A         MC601       MP00P4       MODULE       1       A         MC602       IXMM564M-E-9       MODULE       1       A         MC603       IXMM564M-E-9       MODULE       1       A         MC604       MP00P5       MODULE       1       A					
R649       ERJ6ENF5493       M 549KOHM, 1/10W       1         R653-55       ERJ6GEYJ183       M 18KOHM, J,1/10W       3         R656-59       ERJ6GEYJ824       M 820KOHM, J,1/10W       4         R677       ERJ6GEYJ103       M 10KOHM, J,1/10W       1         R678       ERJ12YJ680       M 68 OHM, J, 1/2W       1         R679       ERJ12YJ151       M 150 OHM, J, 1/2W       1         R681,82       ERJ6GEYJ824       M 820KOHM, J,1/10W       2         R683       ERC12GK185       S 1.8MOHM, K,1/2W       1         R1301,0       ERJ12YJ333       M 33KOHM, J, 1/2W       2         2       MC301-02       MP44S1       MODULE       2       A         MC303       IXMM564M-B-9       MODULE       1       A         MC501       IXMM564M-C-9       MODULE       1       A         MC601       MP00P4       MODULE       1       A         MC603       IXMM564M-E-9       MODULE       1       A         MC604       MP00P5       MODULE       1       A					
R653-55       ERJ6GEYJ183       M 18KOHM, J, 1/10W       3         R656-59       ERJ6GEYJ824       M 820KOHM, J, 1/10W       4         R677       ERJ6GEYJ103       M 10KOHM, J, 1/10W       1         R678       ERJ12YJ680       M 68 OHM, J, 1/2W       1         R679       ERJ12YJ151       M 150 OHM, J, 1/2W       1         R681,82       ERJ6GEYJ824       M 820KOHM, J, 1/10W       2         R683       ERC12GK185       S 1.8MOHM, K, 1/2W       1         R1301,0       ERJ12YJ333       M 33KOHM, J, 1/2W       2         2       MC303       IXMM564M-B-9       MODULE       1       A         MC401       IXMM564M-F-9       MODULE       1       A         MC501       IXMM564M-C-9       MODULE       1       A         MC602       IXMM564M-G-9       MODULE       1       A         MC603       IXMM564M-E-9       MODULE       1       A         MC604       MP00P5       MODULE       1       A					
R656-59       ERJ6GEYJ824       M 820KOHM, J, 1/10W       4         R677       ERJ6GEYJ103       M 10KOHM, J, 1/10W       1         R678       ERJ12YJ680       M 68 OHM, J, 1/2W       1         R679       ERJ12YJ151       M 150 OHM, J, 1/2W       1         R681,82       ERJ6GEYJ824       M 820KOHM, J, 1/10W       2         R683       ERC12GK185       S 1.8MOHM, K, 1/2W       1         R1301,0       ERJ12YJ333       M 33KOHM, J, 1/2W       2         2       MC303       IXMM564M-B-9       MODULE       1       \( \triangle \)         MC401       IXMM564M-F-9       MODULE       1       \( \triangle \)         MC601       MP00P4       MODULE       1       \( \triangle \)         MC602       IXMM564M-G-9       MODULE       1       \( \triangle \)         MC603       IXMM564M-E-9       MODULE       1       \( \triangle \)         MC604       MP00P5       MODULE       1       \( \triangle \)					
R677         ERJ6GEYJ103         M 10K0HM,J,1/10W         1           R678         ERJ12YJ680         M 68 OHM,J, 1/2W         1           R679         ERJ12YJ151         M 150 OHM,J, 1/2W         1           R681,82         ERJ6GEYJ824         M 820KOHM,J,1/10W         2           R683         ERC12GK185         S 1.8MOHM, K,1/2W         1           R1301,0         ERJ12YJ333         M 33KOHM,J, 1/2W         2           2         MC303         IXMM564M-B-9         MODULE         2         A           MC401         IXMM564M-F-9         MODULE         1         A           MC501         IXMM564M-C-9         MODULE         1         A           MC601         MP00P4         MODULE         1         A           MC603         IXMM564M-E-9         MODULE         1         A           MC604         MP00P5         MODULE         1         A					
R678         ERJ12YJ680         M 68 OHM, J, 1/2W         1           R679         ERJ12YJ151         M 150 OHM, J, 1/2W         1           R681,82         ERJ6GEYJ824         M 820KOHM, J, 1/10W         2           R683         ERC12GK185         S 1.8MOHM, K, 1/2W         1           R1301,0         ERJ12YJ333         M 33KOHM, J, 1/2W         2           MC301-02         MP44S1         MODULE         2         \( \triangle \)           MC303         IXMM564M-B-9         MODULE         1         \( \triangle \)           MC401         IXMM564M-F-9         MODULE         1         \( \triangle \)           MC601         MP00P4         MODULE         1         \( \triangle \)           MC602         IXMM564M-G-9         MODULE         1         \( \triangle \)           MC603         IXMM564M-E-9         MODULE         1         \( \triangle \)           MC604         MP00P5         MODULE         1         \( \triangle \)	R656-59	ERJ6GEYJ824	M 820KOHM, J, 1/10W	4	
R679       ERJ12YJ151       M 150 OHM,J, 1/2W       1         R681,82       ERJ6GEYJ824       M 820KOHM,J,1/10W       2         R683       ERC12GK185       S 1.8MOHM, K,1/2W       1         R1301,0       ERJ12YJ333       M 33KOHM,J, 1/2W       2         MC301-02       MP44S1       MODULE       2       A         MC303       IXMM564M-B-9       MODULE       1       A         MC401       IXMM564M-F-9       MODULE       1       A         MC501       IXMM564M-C-9       MODULE       1       A         MC601       MP00P4       MODULE       1       A         MC602       IXMM564M-G-9       MODULE       1       A         MC603       IXMM564M-E-9       MODULE       1       A         MC604       MP00P5       MODULE       1       A	R677	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R679       ERJ12YJ151       M 150 OHM,J, 1/2W       1         R681,82       ERJ6GEYJ824       M 820KOHM,J,1/10W       2         R683       ERC12GK185       S 1.8MOHM, K,1/2W       1         R1301,0       ERJ12YJ333       M 33KOHM,J, 1/2W       2         MC301-02       MP44S1       MODULE       2       A         MC303       IXMM564M-B-9       MODULE       1       A         MC401       IXMM564M-F-9       MODULE       1       A         MC501       IXMM564M-C-9       MODULE       1       A         MC601       MP00P4       MODULE       1       A         MC602       IXMM564M-G-9       MODULE       1       A         MC603       IXMM564M-E-9       MODULE       1       A         MC604       MP00P5       MODULE       1       A	R678	ERJ12YJ680	M 68 OHM,J, 1/2W	1	
R681,82       ERJ6GEYJ824       M 820KOHM,J,1/10W       2         R683       ERC12GK185       S 1.8MOHM, K,1/2W       1         R1301,0       ERJ12YJ333       M 33KOHM,J, 1/2W       2         MC301-02       MP44S1       MODULE       2       \( \triangle \)         MC303       IXMM564M-B-9       MODULE       1       \( \triangle \)         MC401       IXMM564M-F-9       MODULE       1       \( \triangle \)         MC501       IXMM564M-C-9       MODULE       1       \( \triangle \)         MC601       MP00P4       MODULE       1       \( \triangle \)         MC602       IXMM564M-G-9       MODULE       1       \( \triangle \)         MC603       IXMM564M-E-9       MODULE       1       \( \triangle \)         MC604       MP00P5       MODULE       1       \( \triangle \)	R679	ERJ12YJ151		1	
R683     ERC12GK185     S 1.8MOHM, K,1/2W     1       R1301,0     ERJ12YJ333     M 33KOHM,J, 1/2W     2       MC301-02     MP44S1     MODULE     2       MC303     IXMM564M-B-9     MODULE     1     A       MC401     IXMM564M-F-9     MODULE     1     A       MC501     IXMM564M-C-9     MODULE     1     A       MC601     MP00P4     MODULE     1     A       MC602     IXMM564M-G-9     MODULE     1     A       MC603     IXMM564M-E-9     MODULE     1     A       MC604     MP00P5     MODULE     1     A				2	
R1301,0       ERJ12YJ333       M 33KOHM, J, 1/2W       2         MC301-02       MP44S1       MODULE       2       \( \triangle \)         MC303       IXMM564M-B-9       MODULE       1       \( \triangle \)         MC401       IXMM564M-F-9       MODULE       1       \( \triangle \)         MC501       IXMM564M-C-9       MODULE       1       \( \triangle \)         MC601       MP00P4       MODULE       1       \( \triangle \)         MC602       IXMM564M-G-9       MODULE       1       \( \triangle \)         MC603       IXMM564M-E-9       MODULE       1       \( \triangle \)         MC604       MP00P5       MODULE       1       \( \triangle \)					
2  MC301-02 MP44S1 MODULE 2 A  MC303 IXMM564M-B-9 MODULE 1 A  MC401 IXMM564M-F-9 MODULE 1 A  MC501 IXMM564M-C-9 MODULE 1 A  MC601 MP00P4 MODULE 1 A  MC602 IXMM564M-G-9 MODULE 1 A  MC603 IXMM564M-E-9 MODULE 1 A  MC604 MP00P5 MODULE 1 A					
MC301-02 MP44S1 MODULE 2 A  MC303 IXMM564M-B-9 MODULE 1 A  MC401 IXMM564M-F-9 MODULE 1 A  MC501 IXMM564M-C-9 MODULE 1 A  MC601 MP00P4 MODULE 1 A  MC602 IXMM564M-G-9 MODULE 1 A  MC603 IXMM564M-E-9 MODULE 1 A  MC604 MP00P5 MODULE 1 A		EKU1210333	м ээконм, J, 1/2W		
MC303         IXMM564M-B-9         MODULE         1         A           MC401         IXMM564M-F-9         MODULE         1         A           MC501         IXMM564M-C-9         MODULE         1         A           MC601         MP00P4         MODULE         1         A           MC602         IXMM564M-G-9         MODULE         1         A           MC603         IXMM564M-E-9         MODULE         1         A           MC604         MP00P5         MODULE         1         A	<del>-</del>				
MC303         IXMM564M-B-9         MODULE         1         A           MC401         IXMM564M-F-9         MODULE         1         A           MC501         IXMM564M-C-9         MODULE         1         A           MC601         MP00P4         MODULE         1         A           MC602         IXMM564M-G-9         MODULE         1         A           MC603         IXMM564M-E-9         MODULE         1         A           MC604         MP00P5         MODULE         1         A					
MC401         IXMM564M-F-9         MODULE         1         △           MC501         IXMM564M-C-9         MODULE         1         △           MC601         MP00P4         MODULE         1         △           MC602         IXMM564M-G-9         MODULE         1         △           MC603         IXMM564M-E-9         MODULE         1         △           MC604         MP00P5         MODULE         1         △	MC301-02	MP44S1	MODULE	2	
MC501         IXMM564M-C-9         MODULE         1         △           MC601         MP00P4         MODULE         1         △           MC602         IXMM564M-G-9         MODULE         1         △           MC603         IXMM564M-E-9         MODULE         1         △           MC604         MP00P5         MODULE         1         △	MC303	IXMM564M-B-9	MODULE	1	Δ
MC601         MP00P4         MODULE         1         △           MC602         IXMM564M-G-9         MODULE         1         △           MC603         IXMM564M-E-9         MODULE         1         △           MC604         MP00P5         MODULE         1         △	MC401	IXMM564M-F-9	MODULE	1	<u> </u>
MC601         MP00P4         MODULE         1         △           MC602         IXMM564M-G-9         MODULE         1         △           MC603         IXMM564M-E-9         MODULE         1         △           MC604         MP00P5         MODULE         1         △	MC501	IXMM564M-C-9	MODULE	1	Δ
MC602         IXMM564M-G-9         MODULE         1         △           MC603         IXMM564M-E-9         MODULE         1         △           MC604         MP00P5         MODULE         1         △					_
MC603         IXMM564M-E-9         MODULE         1         △           MC604         MP00P5         MODULE         1         △	=				
MC604 MP00P5 MODULE 1 A					
MC701   IXMM564M-D-9   MODULE   1   ⚠			MODULE		
	MC701	IXMM564M-D-9	MODULE	1	<u> </u>

Ref.	Part No.	Part Name &	Pcs	Remarks
No.		Description	<u> </u>	
K601	DG12D1-0	RELAY	1	Δ
K602	DJ12D2-0	RELAY	1	Δ
T301	ETB28BF1Z1AH	TRANSFORMER	1	Δ
T401	ETB57LZ135AD	TRANSFORMER	1	Δ
T501	ETB25KA1A8AD	TRANSFORMER	1	Δ
TH351	PRFCBB471	POSISTOR	1	
VR351,5	EVMEASA01B54	VARIABLE RESISTOR	2	
VR451	EVMEASA01B53	VARIABLE RESISTOR	1	